

C6225587

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225587

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	12 9	88	RW
600	Proof	12 9	88	RW
607	Check Headspace	12 9	88	RW
610	Dis-assemble Gun	12 9	88	RW
612	Magnaflux Barrel Action		12 22 88	RW
	Magnaflux Bolt		1-3-89	RW
615	Rollmark Caliber		12/22/88	MBC
617	Drill and Tap Sight Holes	1 3	88	FB
618	Polish Barrel	12 9	88	WJ
620	Apply Coatings (Barrel Action)		1/16/89	WJ
	Apply Coating (Bolt)			WJ
625	Final Assembly			
	A) Clean inside of Bolt Assembly		1/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/25/89	RW
	C) Inspect Ejector Hole for Chamfer		1/25/89	RW
	D) Oil Firing Pin Ass'y		1/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		25 Feb 89	RW

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	7	7	7			30 Jan 89	JSJ
	G) Safety Off Force	3	3	3			30 Jan 89	JSJ
	H) Trigger Pull Test & Retainability						25 Jan 89	JSJ
	I) Firing Pin Indent	.0205	.0205	.021			30 Jan 89	JSJ
	J) Assemble Stock						2/3/89	RW
	K) Assemble Swivel Studs						8 Feb 89	JSJ
	L) Attach Front and Rear Sight Assemblies						2/3/89	RW
	M) Iron Sight Alignment						2/3/89	RW
	N) Detach Front & Rear Sights & place in numbered container						2/3/89	RW
	O) Attach Scope to Rifle						2/3/89	RW
	P) Detach & Attach Scope 20 Times						6 Feb 89	JSJ
640	Gallery Target & Test	39R	114L				2/7/89	DAH
	A) Time						2/7/89	DAH
	B) Malfunctions						2/7/89	DAH
	C) Pierced Primers						2/7/89	DAH
	D) Optical Clarity of Scope						2/7/89	DAH
645	Inspect for Live Ammo						2/7/89	DAH
655	Final Inspection							
	A) Headspace						8 Feb 89	JSJ
	B) Trigger Pull	2.62	2.62	2.61	2.66	2.64	8 Feb 89	JSJ
	C) Function						8 Feb 89	JSJ
660	Pack						27 Mar 89	JSJ

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6225587

DATE 1-25-89

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.48	2.34	2.31	2.62	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.39	2.33	2.39	2.62	
PULL #3	2.58	2.37	2.34	2.61	
PULL #4	2.46	2.42	2.37	2.66	
PULL #5	2.55	2.44	2.39	2.64	
TOTAL	12.46	11.90	11.78	13.15	
AVG.	2.492	2.380	2.356	2.63	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.26	3.18		
PULL #2	3.30	3.26		
PULL #3	3.33	3.30		
PULL #4	3.33	3.26		
PULL #5	3.31	3.25		
TOTAL	16.53	16.25		
AVG.	3.306	3.250		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.35	4.30		4.14
PULL #2	4.05	4.28		4.18
PULL #3	4.16	4.22		4.22
PULL #4	4.67	4.44		4.28
PULL #5	4.19	4.37		4.21
TOTAL	20.52	21.61		21.03
AVG.	4.104	4.322		4.206

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225587
10 Feb 1989

CENTROIDAL DISTANCES

0 TO	1	.334858
1 TO	2	.147868
1 TO	3	.672795
1 TO	4	.610623
1 TO	5	.268779


+₃⁴ <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .6176
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1702
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .640623
THE AMR FOR THIS RIFLE IS: .8752

10 Feb 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225567

CENTERFIRE PATTERNS # 1

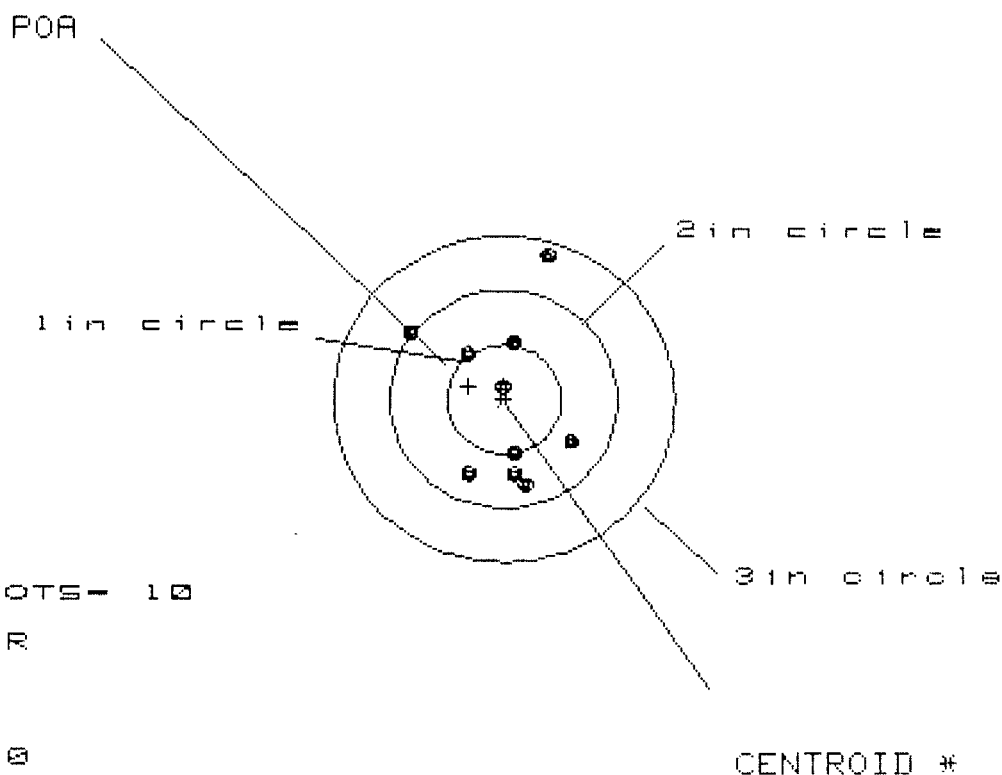

OF SHOTS- 10

IN CIR

1 in - 3

2 in - 8

3 in = 10

HS= 1.432

VS= 2.110


GS= 2.120

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.590	.635	.535
MINIMUM X	:	-.842	-.797	-.367
MAXIMUM Y	:	1.290	.776	.772
MINIMUM Y	:	-.820	-.676	-.579
CENTROID X	:	.313	.268	.368
CENTROID Y	:	-.119	-.263	-.360
POA TO CENTROID in.	:	.335	.376	.515
MIN RADIUS	:	.128	.262	.241
MEAN RADIUS	:	.693	.608	.524
MAX RADIUS	:	1.352	1.113	.773
HORIZONTAL SPREAD	:	1.432	1.432	.902
VERTICAL SPREAD	:	2.110	1.452	1.351
EXTREME SPREAD	:	2.120	1.784	1.354
NUMBER IN ONE INCH CIRCLE =	:	3		
NUMBER IN TWO INCH CIRCLE =	:	8		
NUMBER IN THREE INCH CIRCLE =	:	10		

18 Feb 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225587

CENTERFIRE PATTERNS # 2

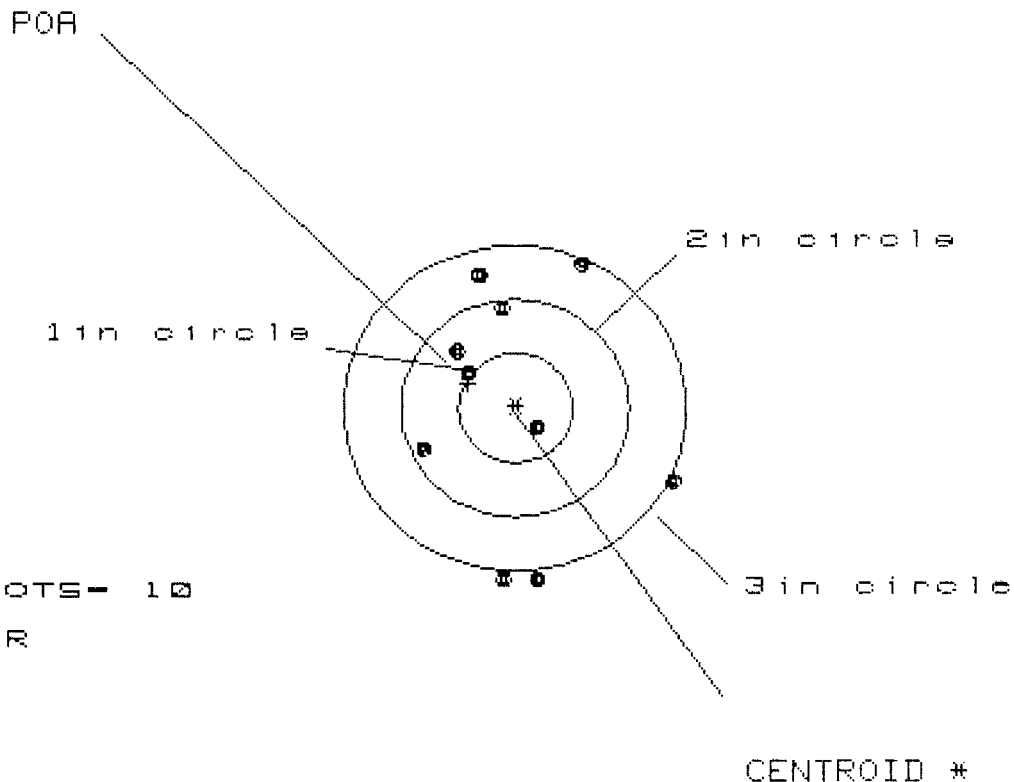

OF SHOTS- 10

IN CIR

1in - 1

2in - 5

3in - 7

HS- 2.175

VS= 2.844

GS= 2.948


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.359	1.343	1.366
MINIMUM X	:	-.816	-.832	-.809
MAXIMUM Y	:	1.277	1.102	.889
MINIMUM Y	:	-1.567	-1.707	-1.044
CENTROID X	:	.414	.430	.407
CENTROID Y	:	-.227	-.052	.161
POA TO CENTROID in.	:	.472	.433	.438
MIN RADIUS	:	.275	.402	.453
MEAN RADIUS	:	1.078	1.001	.876
MAX RADIUS	:	1.574	1.716	1.719
HORIZONTAL SPREAD	:	2.175	2.175	2.175
VERTICAL SPREAD	:	2.844	2.809	1.933
EXTREME SPREAD	:	2.948	2.843	2.528
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		7	

18 Feb 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225587

CENTERFIRE PATTERNS # 3

POA

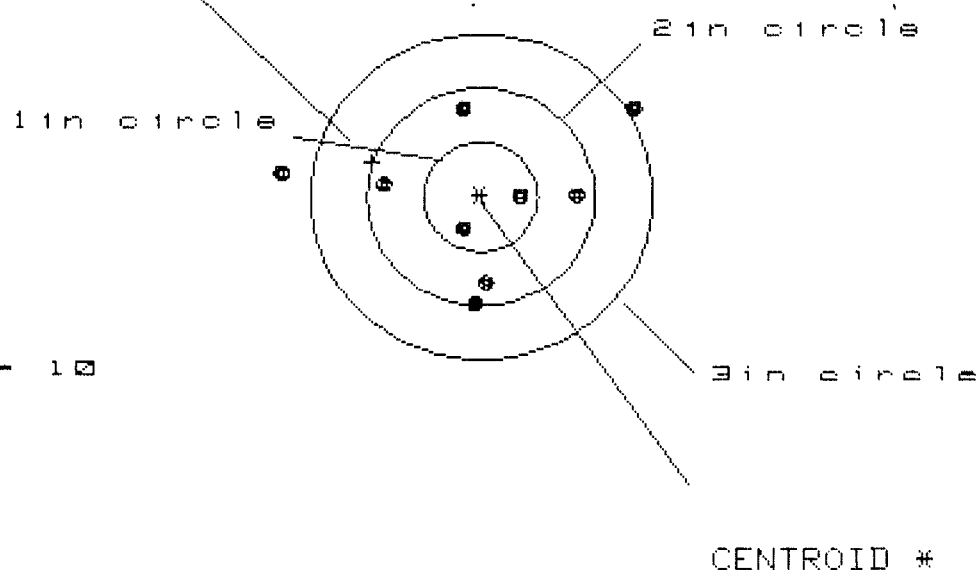

OF SHOTS- 10

IN CIR

1in = 3

2in = 7

3in = 8

HS= 3.066

VS= 1.813

GS= 3.126


PATTERN #	:	3	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.341	1.149	.777
MINIMUM X	:	-1.725	-1.079	-.935
MAXIMUM Y	:	.814	.837	.904
MINIMUM Y	:	-.999	-.976	-.872
CENTROID X	:	.956	1.148	1.004
CENTROID Y	:	-.317	-.340	-.444
POA TO CENTROID in.	:	1.007	1.197	1.098
MIN RADIUS	:	.264	.129	.192
MEAN RADIUS	:	.858	.724	.639
MAX RADIUS	:	1.737	1.422	.962
HORIZONTAL SPREAD	:	3.066	2.228	1.712
VERTICAL SPREAD	:	1.813	1.813	1.776
EXTREME SPREAD	:	3.126	2.339	1.778
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		8	

10 Feb 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C62255B7

CENTERFIRE PATTERNS # 4

POA

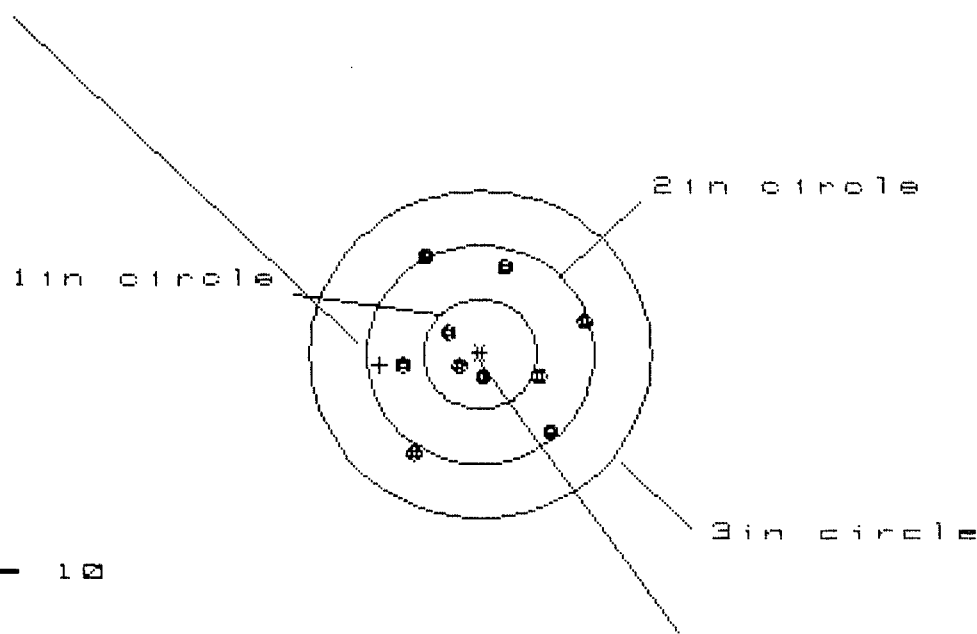

OF SHOTS- 10

IN CIR

1 in - 3

2 in - 8

3 in - 10

HS- 1.624

VS- 1.767

GS- 1.943

CENTROID #


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.936	.867	.797
MINIMUM X	:	-.688	-.757	-.827
MAXIMUM Y	:	.902	.806	.834
MINIMUM Y	:	-.865	-.775	-.674
CENTROID X	:	.883	.952	1.022
CENTROID Y	:	.100	.197	.096
POA TO CENTROID in.	:	.889	.972	1.027
MIN RADIUS	:	.241	.341	.266
MEAN RADIUS	:	.698	.668	.618
MAX RADIUS	:	1.062	.984	.854
HORIZONTAL SPREAD	:	1.624	1.624	1.624
VERTICAL SPREAD	:	1.767	1.581	1.508
EXTREME SPREAD	:	1.943	1.942	1.682
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			8	
NUMBER IN THREE INCH CIRCLE =			10	

18 Feb 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225587

CENTERFIRE PATTERNS # 5

POA

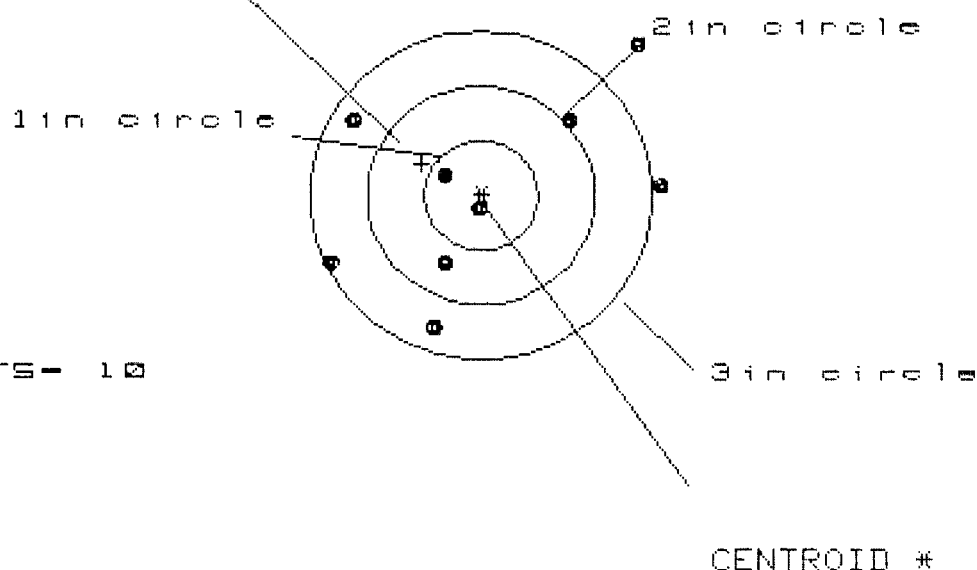

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 4

3 in = 8

HS= 2.878

VS= 2.613

GS= 3.351

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.600	1.755	1.190
MINIMUM X	:	-1.278	-1.123	-.904
MAXIMUM Y	:	1.422	.846	.878
MINIMUM Y	:	-1.191	-1.033	-1.001
CENTROID X	:	.522	.367	.148
CENTROID Y	:	-.288	-.446	-.478
POA TO CENTROID in.	:	.596	.578	.500
MIN RADIUS	:	.122	.142	.363
MEAN RADIUS	:	1.049	.896	.772
MAX RADIUS	:	1.991	1.773	1.479
HORIZONTAL SPREAD	:	2.878	2.878	2.094
VERTICAL SPREAD	:	2.613	1.879	1.879
EXTREME SPREAD	:	3.351	2.962	2.459
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

RC54 BARBER - M24 0051948

M-24

CONTRACT # DAAA21-87-C-0086

3/89

GUN SERIAL # C6275587

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		2-22-90	JP

BARBER - M24 0051949						
op. #	OP. NAME	READINGS				
						DATE INIT
625 cont.	F) Safety On Force	5	5	4 3/4		3/1/90 WB
	G) Safety Off Force	2 1/4	2 1/4	2 1/4		3/1/90 WB
	H) Trigger Pull Test & Retainability					2-22-90 JH
	I) Firing Pin Indent	.0715	.071	.071		3/1/90 WB
	J) Assemble Stock					
	K) Assemble Swivel Studs					3/1/90 WB
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test					2/23/90 DH
	A) Time					2/23/90 DH
	B) Malfunctions					2/23/90 DH
	C) Pierced Primers					2/23/90 DH
	D) Optical Clarity of Scope					2/23/90 DH
645	Inspect for Live Ammo					2/23/90 DH
655	Final Inspection					3/1/90 WB
	A) Headspace					
	B) Trigger Pull	2.49	2.43	2.45	2.49	2.55 7/27/90 WB
	C) Function					3/1/90 WB
660	Pack					

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225587
23 Feb 1990

CENTROIDAL DISTANCES

Ø TO	1	.785514
1 TO	2	1.00215
1 TO	3	.538276
1 TO	4	.599708
1 TO	5	.693675

1 2
+ 3 <----POA
5 +


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.085
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .4066
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .41539
THE AMR FOR THIS RIFLE IS: 1.212

23 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C6225587

CENTERFIRE PATTERNS

1

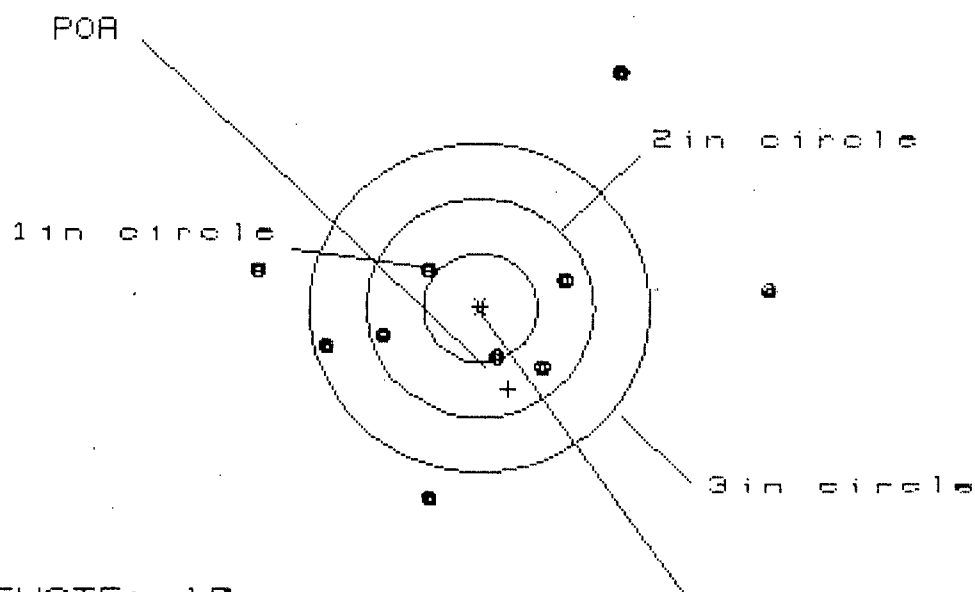

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 6

HS= 4.553

VS= 3.854


GS= 4.556

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.568	1.565	1.214
MINIMUM X	-1.985	-1.700	-1.504
MAXIMUM Y	2.153	2.169	.648
MINIMUM Y	-1.701	-1.685	-1.413
CENTROID X	-.246	-.531	-.727
CENTROID Y	.746	.730	.458
POA TO CENTROID in.	.785	.903	.860
MIN RADIUS	.490	.428	.416
MEAN RADIUS	1.380	1.217	1.003
MAX RADIUS	2.572	2.675	1.622
HORIZONTAL SPREAD	4.553	3.265	2.718
VERTICAL SPREAD	3.854	3.854	2.061
EXTREME SPREAD	4.556	4.245	2.719
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	6		

23 Feb 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C62255B7

CENTERFIRE PATTERNS # 2

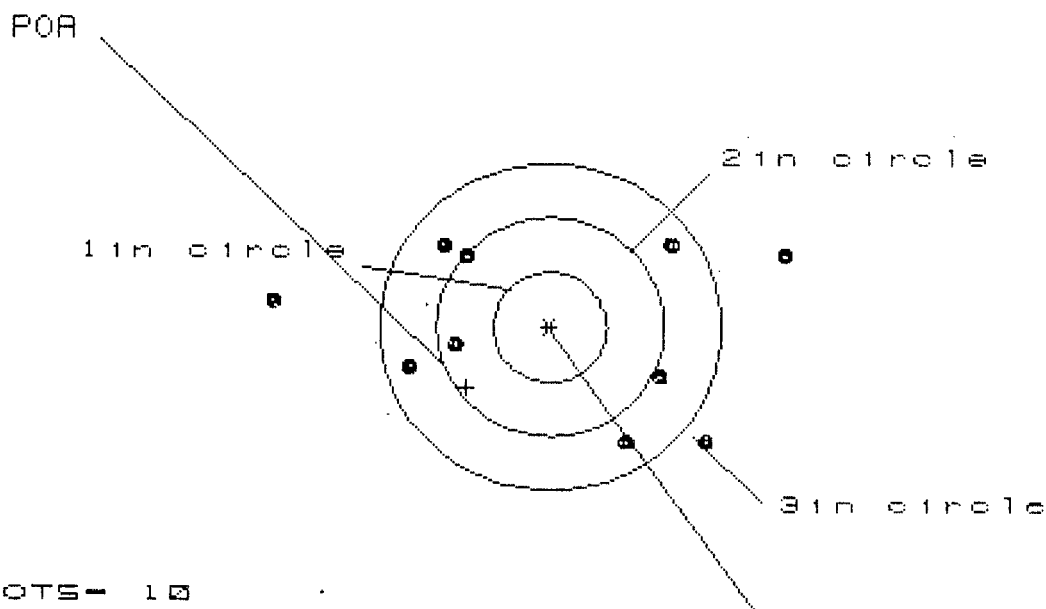

OF SHOTS- 10

IN CIR

1in - 0

2in - 2

3in - 7

HS- 4.442

VS- 1.844

GS- 4.455


CENTROID *

PATTERN #	2	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.043	1.777	1.308
MINIMUM X	-2.399	-1.551	-1.329
MAXIMUM Y	.765	.794	.873
MINIMUM Y	-1.079	-1.050	-.971
CENTROID X	.737	1.003	.781
CENTROID Y	.551	.522	.443
POA TO CENTROID in.	.920	1.131	.898
MIN RADIUS	.867	.843	.905
MEAN RADIUS	1.433	1.315	1.223
MAX RADIUS	2.413	1.885	1.629
HORIZONTAL SPREAD	4.442	3.328	2.637
VERTICAL SPREAD	1.844	1.844	1.844
EXTREME SPREAD	4.455	3.457	2.938
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	2		
NUMBER IN THREE INCH CIRCLE =	7		

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06225587

CENTERFIRE PATTERNS # 3

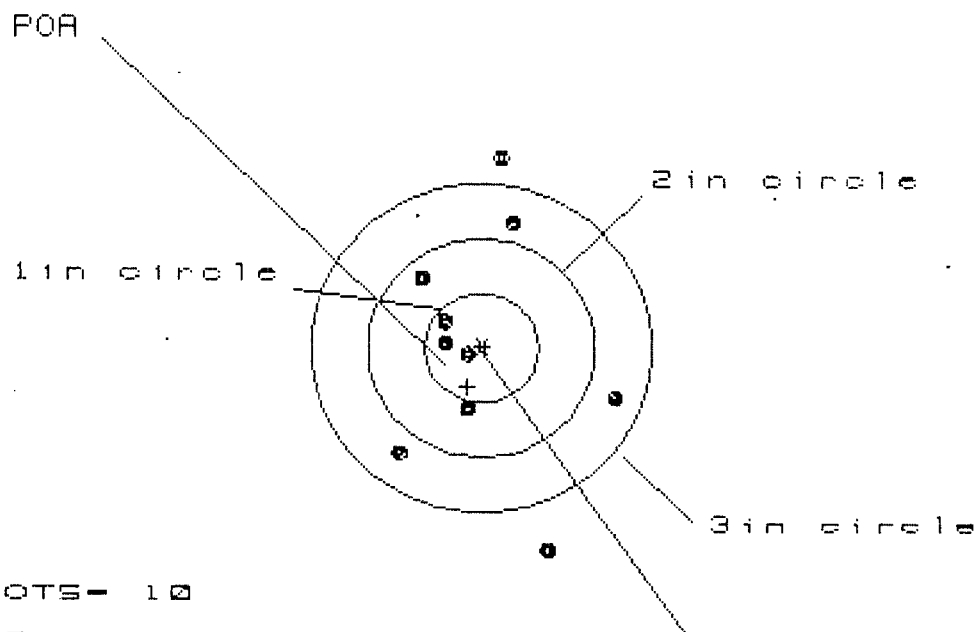

OF SHOTS- 10

IN CIR

1in = 3

2in = 5

3in = 8

HS= 1.948

VS= 3.599

GS= 3.620


CENTROID #

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.190	1.255	1.287
MINIMUM X	:	-.758	-.693	-.661
MAXIMUM Y	:	1.728	1.520	1.134
MINIMUM Y	:	-1.871	-1.167	-.977
CENTROID X	:	.125	.060	.028
CENTROID Y	:	.356	.564	.374
POA TO CENTROID in.	:	.377	.567	.375
MIN RADIUS	:	.129	.259	.067
MEAN RADIUS	:	.972	.844	.722
MAX RADIUS	:	1.959	1.542	1.362
HORIZONTAL SPREAD	:	1.948	1.948	1.948
VERTICAL SPREAD	:	3.599	2.687	2.111
EXTREME SPREAD	:	3.620	2.850	2.372
NUMBER IN ONE INCH CIRCLE =			3	
NUMBER IN TWO INCH CIRCLE =			5	
NUMBER IN THREE INCH CIRCLE =			8	

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06225587

CENTERFIRE PATTERNS # 4

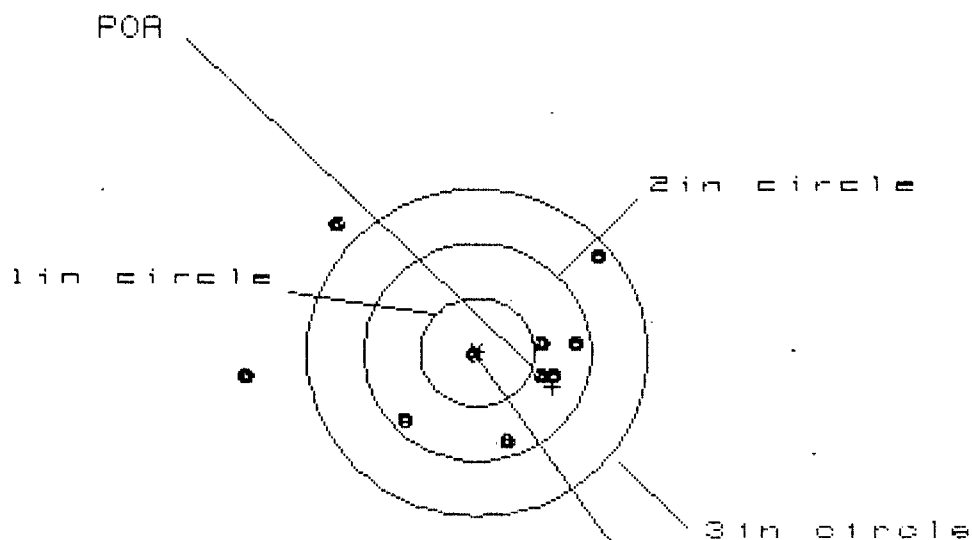

OF SHOTS- 10

IN CIR

1 in - 1

2 in - 7

3 in - 8

HS= 3.040

VS= 1.952

GS= 3.242


CENTROID #

PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.020	.795	.619
MINIMUM X	-2.020	-1.412	-1.001
MAXIMUM Y	1.166	1.139	1.002
MINIMUM Y	-.786	-.813	-.671
CENTROID X	-.663	-.438	-.262
CENTROID Y	.315	.342	.200
POA TO CENTROID in.	.734	.556	.329
MIN RADIUS	.068	.273	.159
MEAN RADIUS	.949	.777	.575
MAX RADIUS	2.034	1.814	1.178
HORIZONTAL SPREAD	3.040	2.207	1.620
VERTICAL SPREAD	1.952	1.952	1.673
EXTREME SPREAD	3.242	2.410	2.213
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	8		

23 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06225587

CENTERFIRE PATTERNS # 5

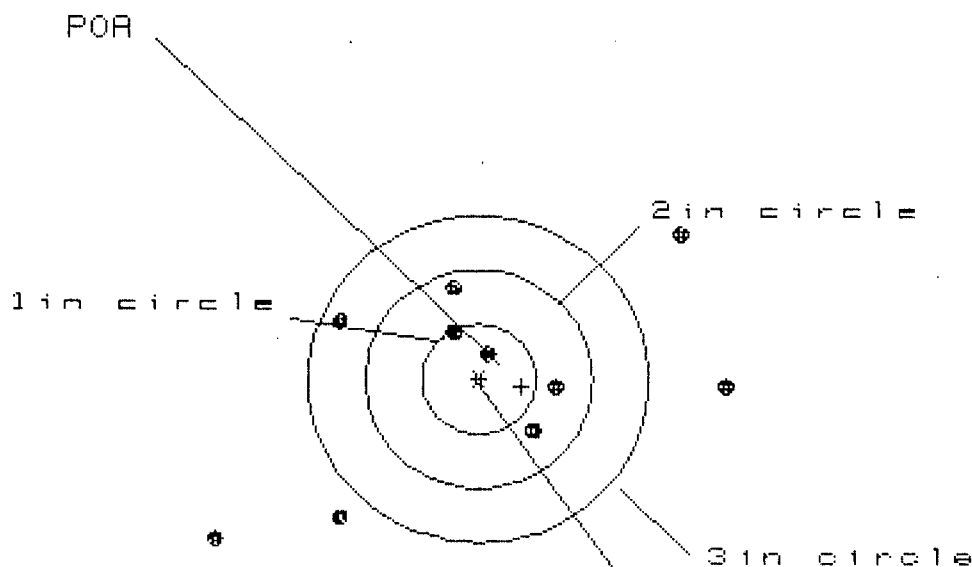

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 5


3 in = 6

HS = 4.507

VS = 2.870

GS = 5.057

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.170	1.910	2.106
MINIMUM X	-2.337	-1.510	-1.314
MAXIMUM Y	1.358	1.190	.804
MINIMUM Y	-1.512	-1.422	-1.273
CENTROID X	-.378	-.118	-.314
CENTROID Y	.065	.233	.084
POA TO CENTROID in.	.383	.261	.325
MIN RADIUS	.233	.181	.198
MEAN RADIUS	1.324	1.129	1.015
MAX RADIUS	2.784	2.074	2.109
HORIZONTAL SPREAD	4.507	3.420	3.420
VERTICAL SPREAD	2.870	2.612	2.077
EXTREME SPREAD	5.057	4.036	3.609
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	6		

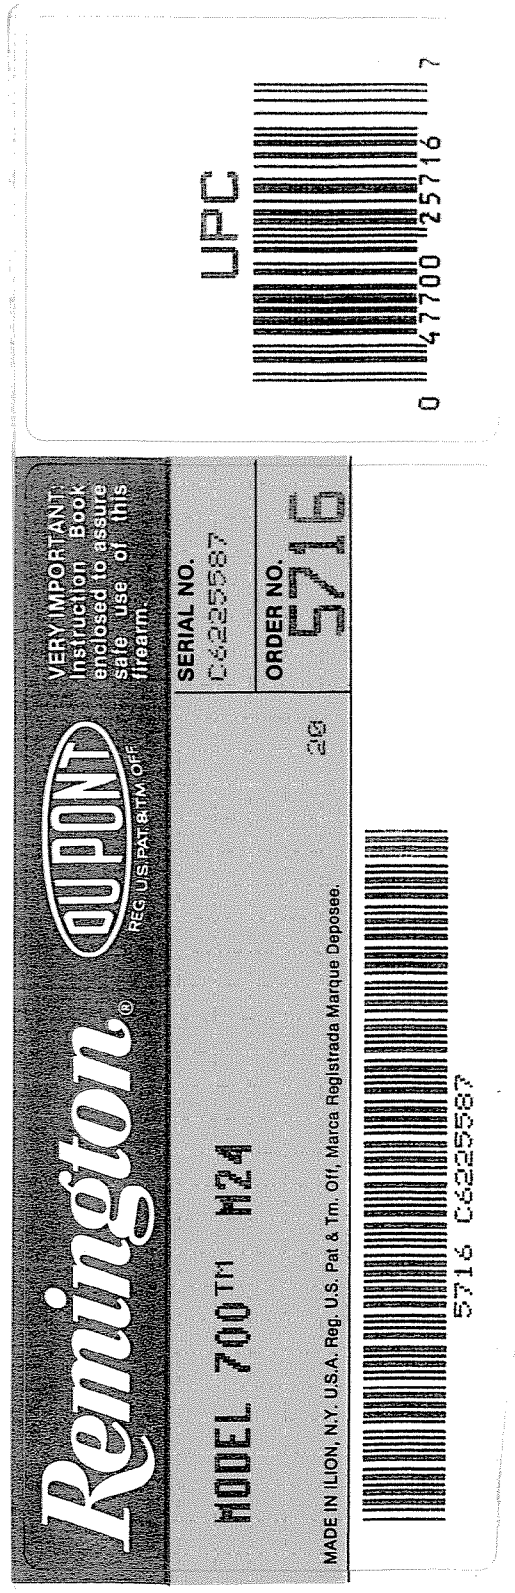

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6225587

DATE 2-22-90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.35	2.22	2.26	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.28	2.26	2.30	
PULL #3	2.27	2.36	2.15	
PULL #4	2.36	2.20	2.22	
PULL #5	2.31	2.10	2.32	
TOTAL	11.57	11.14	11.25	
AVG.	2.314	2.228	2.25	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.27	3.47	
PULL #2	3.38	3.31	
PULL #3	3.34	3.40	
PULL #4	3.28	3.31	
PULL #5	3.32	3.42	
TOTAL	16.59	16.91	
AVG.	3.318	3.382	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.02	4.12		4.12
PULL #2	4.36	4.11		4.34
PULL #3	4.24	4.31		4.37
PULL #4	4.14	4.35		4.29
PULL #5	4.14	4.30		4.32
TOTAL	20.90	21.19		21.44
AVG.	4.18	4.238		4.288

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60																																																																															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60																				
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0																					
1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1																					
2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2																					
3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3	3																					
4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4	4																					
5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5	5																					
6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6	6																					
ONE										TWO										THREE										FOUR										FIVE										SIX										SEVEN										EIGHT									
7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7																					
8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8	8																				
9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9	9															
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60																				
5280																																																																															

GENERAL PURPOSE 0 FIELD

GENERAL PURPOSE 8 FIELD

SUBJECT: WARRANTY REPAIR

DATE:

TYPE EQUIPMENT

MAKE:

MODEL:

SERIAL NUMBER:

DATE OF PURCHASE:

PERSON CONTACTED OR RA NUMBER:

EQUIPMENT PROBLEMS:

POINT OF CONTACT {FORT BENNING, GEORGIA} AND PHONE NUMBER:

George F Richards {404} 545-2865/3201

NOTE: ANY WORK NOT COVERED BY THE WARRANTY WILL NOT BE REIMBURSED WITHOUT PRIOR AUTHORIZATION FROM THE PROCUREMENT DIVISION AT FORT BENNING, GEORGIA

WHEN REPAIR IS COMPLETED, PLEASE RETURN TO:

MAINTENANCE DIVISION, USAIC
ATTN: ATZB-DL-MA-Q
BUILDING 228
FORT BENNING, GEORGIA 31905-5174

BROKEN

No Slings
No D KITS

TRIGGER

Wayne
962 883

8203

STEWART/5-4988-Y03Y
NO. OF PAGES 1
REQUIREMENT CONTROL SYMBOL
CSGLD-1047(R1)

BARBER - M24 0051961

RECEIVING AND ESTIMATING REPORT

COMMENTS

W/LEUPOLD 10X SCOPE

3/89

INITIAL JJM	CUSTOMER ORDER NO.								
DATE RECEIVED 01/17/90	DATE OPENED 01/25/90	DATE CODE B-5 1/89	SERIAL NUMBER C6225587	MODEL AND GRADE 9999 7.62 NATO		ORDER R 90-02891			
ACCESSORIES HARD CASE		SLING STRAP W/STUDS		W/SWIVELS					

FROM:

MAINTENANCE DIVISION USAIC
ATTN ATZB-DL-MA-Q
BLDG 228
FT BENNING GA 31905-5174

SHIP TO:

MAINTENANCE DIVISION USAIC
ATTN ATZB-DL-MA-Q
BLDG 228
FT BENNING GA
31905-5174

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

REPAIR CHARGE	TAX	INSURANCE	UPS	PARCEL POST	TOTAL
---------------	-----	-----------	-----	-------------	-------

GUN CONDITION:

☐ NEW☒ SLIGHTLY WORN☐ VERY WORN☐ MISUSED☐ MARRED

CUSTOMER'S REQUEST

ACTION ROLLOVER - DOWN

REFURBISH

MAIN FAULT

① REPOWDER CONT. BARREL ACTION

② REPOWDER CONT. TRIGGER GUARD ASSY

③ NEW TRIGGER ASSY.

PARTS

NO DEPLOYMENT KIT

NO SLING STRAP

REPAIRMAN KW	PROOF	CLEAN ✓	TEST ✓	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

RD6925 REV. 6/88

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0051961 52000

REC BARBER M24 0051962
AND ESTIMATING REPORT

COMMENTS

ORDER
R 97-11796

INITIAL CUSTOMER ORDER NO.

DATE RECEIVED

06/23/97

DATE OPENED

06/24/97

DATE CODE

SERIAL NUMBER

C6225587

NEW SERIAL NUMBER

MODEL AND GRADE

700 7.62

NATO

ACCESSORIES

FROM:

TRANSPORTATION OFFICER USAIC
ATTN ATZB-LOT-MM
BLDG 280
FORT BENNING GA 31905

SHIP TO:

TRANSPORTATION OFFICER USAIC
ATTN ATZB-LOT-MM
BLDG 280
FORT BENNING GA 31905

CUST NO: 161641 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel
Stock96003
96018Reputer Coat Trigger Guard
Assy, front & rear Sight Bases
Re zinc Scope Base & Swivel
Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

FD6925 REV. 6/96

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0051962 52001

21 DAY TURN - AROUND

*New
Barrel
&
Stock*

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225387

LOG IN DATE: / /

DATE

INIT.

INSPECT & VERIFY:

OP. #

OP. NAME

550

DIS-ASSEMBLE GUN

560 A

RE-BARREL AT CUSTOM SHOP

B

DRILL & TAP

C

POLISH

575

ASSEMBLE

600

PROOF

*6-27-97**AW*

605

CHECK HEADSPACE

*6-27-97**AW*

610

DIS-ASSEMBLE

612

MAGNAFLUX

615

ROLLMARK CALIBER

618

ROTO-BLAST

620

APPLY COATINGS

625 A

FINAL ASSEMBLY

*8-17-97**AW*

B

TRIGGER PULL TEST

C

SAFETY ON FORCE

D

SAFETY OFF FORCE

E

FIRING PIN INDENT

640

TARGET

*8-21-97**JW*

655

FINAL INSPECT

660

PACK

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6225387

DATE REC'D: 6-24-97

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Scope Assy.

☐ SCOPE☐ SCOPE RINGS☐ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☐ FINISH☐ LOOSENESS☐ CLARITY

System's Case

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

BARBER - M24 0051965

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225587
21 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.0408$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.0318$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.0517289$

THE AMR FOR THIS RIFLE IS: 1.035

CENTROIDAL DISTANCES

0	TO	1	.386245
1	TO	2	.139291
1	TO	3	.623837
1	TO	4	.182124
1	TO	5	1.35455

5

3

+

<----POA

4 1 2

BARBER - M24 0051966

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 1

POA TO CENTROID: .386
MIN RADIUS : .084
MEAN RADIUS : 1.014
MAX RADIUS : 1.766
CENTROID X : .084
CENTROID Y : -.377

21 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225587

CENTERFIRE PATTERN # 1

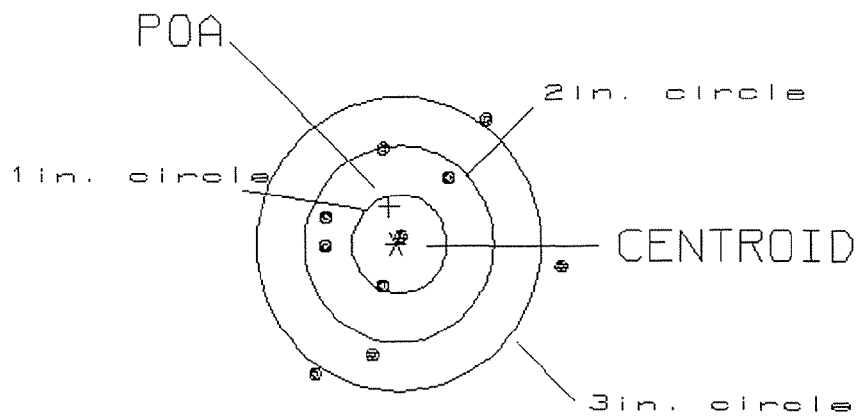

OF SHOTS= 10

IN CIRCLE

HS= 2.68
VS= 2.57
GS= 3.17

1
6
7

BARBER - M24 0051967

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 2

POA TO CENTROID: .370
 MIN RADIUS : .073
 MEAN RADIUS : 1.030
 MAX RADIUS : 2.077
 CENTROID X : .205
 CENTROID Y : -.308

21 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225587

CENTERFIRE PATTERN # 2

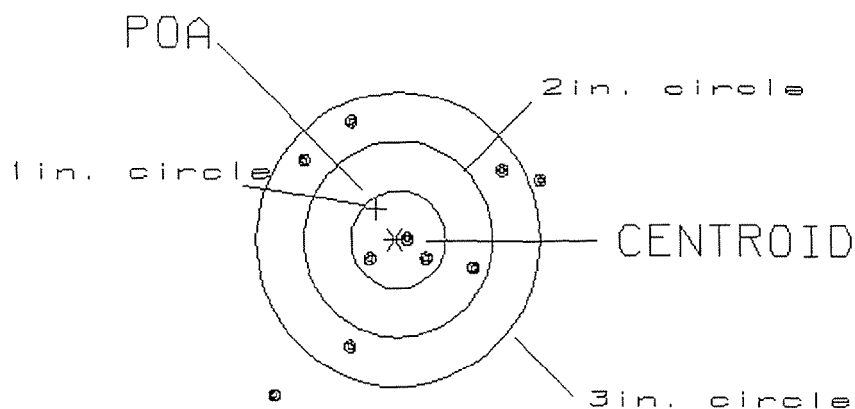

OF SHOTS= 10

IN CIRCLE

HS= 2.78

3

US= 2.81

4

GS= 3.55

8

BARBER - M24 0051968

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3

POA TO CENTROID: .248

MIN RADIUS : .128

MEAN RADIUS : 1.192

MAX RADIUS : 2.647


CENTROID X : -.138

CENTROID Y : .206

21 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225587

CENTERFIRE PATTERN # 3

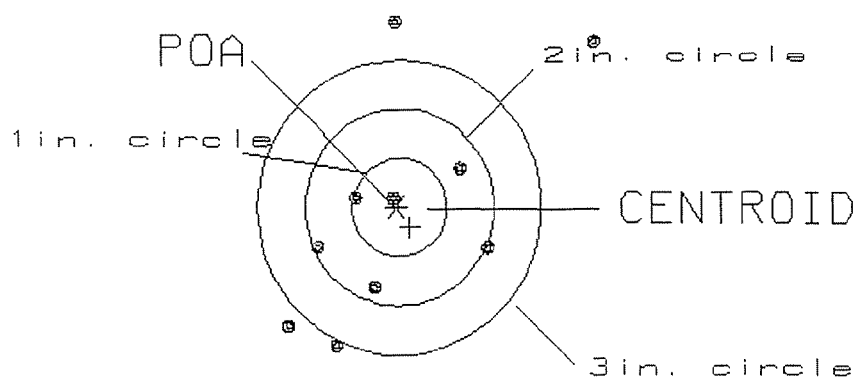

OF SHOTS= 10

IN CIRCLE

HS= 3.15

2

US= 3.33

5

GS= 4.29

6

BARBER - M24 0051969

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 4

POA TO CENTROID: .300
MIN RADIUS : .045
MEAN RADIUS : 1.033
MAX RADIUS : 2.093
CENTROID X : -.076
CENTROID Y : -.290

21 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225587

CENTERFIRE PATTERN # 4

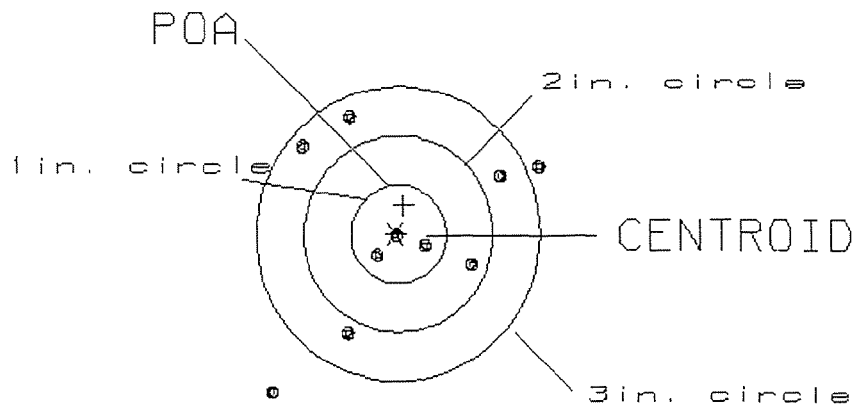

OF SHOTS= 10

IN CIRCLE

HS= 2.80
VS= 2.86
GS= 3.64

3
4
8

BARBER - M24 0051970

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 5

POA TO CENTROID: .969
MIN RADIUS : .520
MEAN RADIUS : .905
MAX RADIUS : 1.335
CENTROID X : -.279
CENTROID Y : .928

21 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225587

CENTERFIRE PATTERN # 5

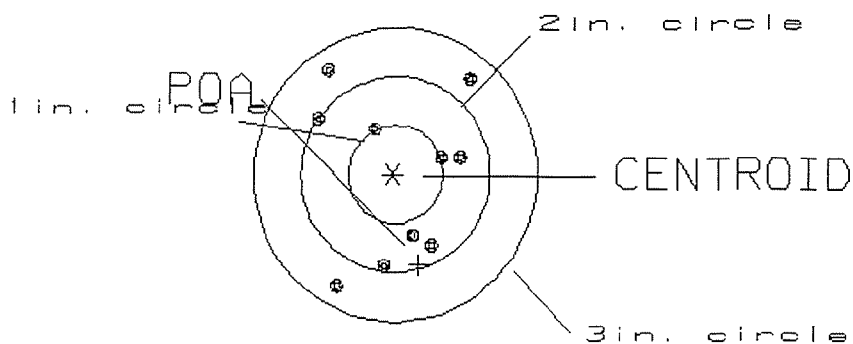

OF SHOTS= 10

IN CIRCLE

HS= 1.58

0

VS= 2.21

6

GS= 2.48

10

MAINTENANCE REQUEST				PAGE NO. <u>1</u>		NO. OF PAGES <u>1</u>		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)							
SECTION I - EQUIPMENT DATA															
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PROPERTY OFFICER: <u>ELLIS E. LEE, JR.</u> CW2, USA PROPERTY BOOK OFFICER							
☐ Work Request ☐ MWO ☒ Warranty Claim		1A. ORGANIZATION <u>HHC 3/5</u>		B. LOCATION <u>FK Bannin, Cal</u>		31905		C. UNIT IDENT CODE <u>W80649</u>							
2. SERIAL NO. <u>N/A</u>		3. NOUN NOMENCLATURE <u>Rifle Stock</u>		4. LINE NO.		5. MODEL <u>M24</u>		6. NATIONAL STOCK NUMBER							
7A. MAINTENANCE ACTIVITY		B. LEVEL		8. UTILIZATION CODE		9A. MCSR ITEM		9B. ERC		9C. PACING ITEM		10. HOURS	11. MILES	12. ROUNDS	13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)								15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)							
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative		☐ 258 Overheating		☐ 790 Out of Adjustment			
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☐ 387 Low Performance		☐ Other			
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)															
<u>M24 sniper weapons - Rear sling will</u> <u>w/locked off stock. STOCK ONLY BEING</u> <u>SHIPPED TO REMINGTON FOR CONTRACT REPAIR.</u> B. REMARKS <u>Component of 66225597</u> <u>POC: CW2 Lee, PRO 3/5 R. B.</u>															
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)															
1. Place a "✓" or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. Block 1A. Enter the name of the organization submitting the request. 6. Block 1B. Enter the unit submitting the request; units overseas enter APO only. 7. Block 1C. Enter the unit identification code of the unit in block 1A. 8. Block 2. Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. Block 3. Enter the noun abbreviation of the item. 10. Block 4. Enter the item line number, if applicable. 11. Block 5. Enter the model number. 12. Block 6. Enter the National Stock Number of the item listed in Block 3. 13. Block 7. Enter the name of the support activity. 14. Block 7A. Enter the symbol of the maintenance category (O, F, H, D, or L). 15. Block 8. Enter the utilization code. 16. Block 9A. Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. Block 9B. Enter the equipment readiness code, if applicable. 18. Block 9C. Enter the word "yes" if the item is a pacing item. 19. Block 10. Enter the hour reading, if applicable. 20. Block 11. Enter the mileage from the odometer, if applicable. 21. Block 12. Enter the total rounds fired, if applicable. 22. Block 13. For turbine engines, enter the number of hot starts. 23. Block 14. Enter a "✓" or "X" in the proper block. 24. Block 15. Enter a "✓" or "X" in the proper block. 25. Block 16. Describe briefly the fault or symptoms needing correction.															
23. SUBMITTED BY <u>[Signature]</u>		24. RECEIVED BY													
JULIAN DATE <u>2211</u>		JULIAN DATE													

DA FORM 2407, AUG 88

EDITION OF MAY 81 MAY BE USED

RECEIPT COPY 1

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0051971

RECEIVED BARBER M24 0051972 PORT

COMMENTS

ORDER

R 99-04746

INITIAL CUSTOMER ORDER NO.

SWS

W/SCOPE & BI-POD

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/11/99

02/17/99

C6225587

700 7.62

NATO

ACCESSORIES

SCOPE MNTS

SCOPE BASE

L/SIGHTS

HARD CASE

FROM:

SHIP TO:

COMMANDER
3D BATTALION 75TH RANGER REGI.
BLDG 2839 ATTN PBO
FT BENNING GA 31905

COMMANDER
3D BATTALION 75TH RANGER REGI.
BLDG 2839 ATTN PBO
FT BENNING GA 31905

CUST NO:063702 C.D.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER NIC

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW☐ LIGHTLY WORN☐ WORN☐ VERY WORN☐ UNREPAIRABLE☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

NEW
BOLT & TEST

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV 7-97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0051972 52011

Govt US

C6225587

W/ Scope, Scope Base, Scope Rings,
Bipod, Hard Case, Swivels, &
Swivel Studs

Date:

DON'T SAY IT - WRITE IT

700
7.62 NATO

LINK SAFETY AHEAD, DON'T BE MISLED, ACCIDENTS DO HAPPEN"

REQUISITION AND INVOICE / SHIPPING DOCUMENT

Form Approved
OMB No. 0704-0246
Expires Oct 31, 1991

Public reporting burden for this collection of information is estimated to average 15 minutes per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0246), Washington, DC 20503.

1. FROM: (Include ZIP Code)		COMMANDER 3rd BN, 75th RANGER REGIMENT ATTN: PRO FT, BENNING, GA 31905		SHEET NO.	NO. OF SHEETS	5. REQUISITION DATE	6. REQUISITION NUMBER				
2. TO: (Include ZIP Code)		Remington Arms Co. Inc. Attn: Fabricated Products Dept 14 HOEFELAR AVE		7. DATE MATERIAL REQUIRED (YYMMDD)			8. PRIORITY				
3. SHIP TO - MARK FOR		Illian NY 18357		12. DATE SHIPPED (YYMMDD) 27 Jan 99			b.				
				13. MODE OF SHIPMENT Registered MAIL			14. BILL OF LADING NUMBER				
				15. AIR MOVEMENT DESIGNATOR OR PORT REFERENCE NO.							
4. APPROPRIATIONS SYMBOL AND SUBHEAD				OBJECT CLASS	EXPENDITURE (From)	ACCOUNT (To)	CHARGEABLE ACTIVITY	BUREAU CONTROL ACTIVITY NO.	BUREAU CONTROL NO.	AMOUNT	
ITEM NO.	FEDERAL STOCK NUMBER, DESCRIPTION, AND CODING OF MATERIEL AND/OR SERVICES				UNIT OF ISSUE	QUANTITY REQUESTED	SUPPLY ACTION	TYPE CONTAINER NOS.	UNIT PRICE	TOTAL COST	
(a)	(b)				(c)	(d)	(e)	(f)	(g)	(h)	(i)
	Sniper Rifle M-24 System										
Signature				None							
DATE											
16. TRANSPORTATION VIA MATS OR MSTs CHARGEABLE TO						17. SPECIAL HANDLING					
18. RECEIPT SHIPMENT UP L M A E N T I O N	ISSUED BY	TOTAL CONTAINERS	TYPE CONTAINER	DESCRIPTION	TOTAL WEIGHT	TOTAL CUBE	19. CONTAINERS RECEIVED EXCEPT AS NOTED QUANTITIES RECEIVED EXCEPT AS NOTED POSTED	DATE (YYMMDD)	BY	SHEET TOTAL	
	CHECKED BY							DATE (YYMMDD)	BY	GRAND TOTAL	
	PACKED BY							DATE (YYMMDD)	BY	20. RECEIVER'S VOUCHER NO.	
	TOTAL										

DD Form 1149, MAR 89

306/080

51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

Previous editions are obsolete.

**U.S.GPO:1993-0-354-017


CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 063499052013

BARBER - M24 0051974

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

ORGANIZATION HHC 3/75 RGR REGT		2. NOMENCLATURE AND MODEL M24 Model 700					
REGISTRATION/SERIAL/NSN C6225587		4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE 26 JAN 99	6. TYPE INSPECTION PMCS
APPLICABLE REFERENCE							
TM NUMBER		TM DATE		TM NUMBER		TM DATE	
COLUMN a - Enter TM item number. COLUMN b - Enter the applicable condition status symbol. COLUMN c - Enter deficiencies and shortcomings.				COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e - Individual ascertaining completed corrective action initial in this column.			
STATUS SYMBOLS							
"X" - Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X" - Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "-" - Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.				DIAGONAL "/" - Indicates a material defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL - Indicates that a completely satisfactory condition exists. FOR AIRCRAFT - Status symbols will be recorded in red.			
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.							
7a. SIGNATURE (Person(s) performing inspection) 		8b. TIME 0900	9a. SIGNATURE (Maintenance Supervisor)		9b. TIME	10. MANHOURS REQUIRED	
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c		CORRECTIVE ACTION d		INITIAL WHEN CORRECTED e	
1	X	Handle broken off bolt assembly					
C 622 5587							

Last Time6/24/97BBL stockH9A-1-27A

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

PAGE NO

NO OF PAGES

REQUIREMENT CONTROL SYMBOL

CSGLD-1047(R1)

SECTION I - CUSTOMER DATA

1a. UIC CUSTOMER

1b. CUSTOMER UNIT NAME

1c. PHONE NO

2a. SAMS-2 UIC/SAMS-I/TDA

2b. UTILIZATION CODE

2c. MCSR

SECTION II - MAINTENANCE ACTIVITY DATA

3a. WORK ORDER NUMBER (WOM)

3b. SHOP

3c. PHONE NO

4a. UIC SUPPORT UNIT

4b. SUPPORT UNIT NAME

SECTION III - EQUIPMENT DATA

5. TYPE MNT REQ CODE

6. ID

7. NSN

15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code)

See DA Pamphlets 738-750 and 738-751

15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code)

See DA Pamphlets 738-750 and 738-751

16. MILES/KILOMETERS/HOURS/ROUNDS

M

K

8. MODEL

9. NOUN

10a. ORG WON/DOC NO

10b. EIC

11. SERIAL NUMBER

12. QTY

13. PD

17. PROJECT CODE (if assigned)

18. ACCOUNT PROCESSING CODE

19. IN WARRANTY? (enter Y or N)

20. ADMIN NO

14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)

21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)

22. LEVEL OF WORK

23. SIGNATURE

24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs)

Broken Bolt

25. REMARKS

W/SCOPE

26. TECHNICAL REFERENCES

SECTION IV - TASK REQUIREMENTS DATA

27a. FILE INPUT ACT CD

27b. TASK NO

27c. ACT CODE

27d. TASK DESCRIPTION

27e. QTY TO BE RPR

27f. WORK CENTER

27g. FAILURE CODE

27h. MH PROJ

27i. MH EXP

SECTION V - PART REQUIREMENTS

28a. FILE INPUT ACT CD

28b. TASK NO

28c. ID NO

28d. NSN OR PART NUMBER

28e. SFX CD

28f. QTY RQD

28g. QTY ISSUED

28h. NMCS CD

28i. FAILURE CODE

28j. STORAGE LOCATION

28k. INITIALS

28l. COST \$

28m. TOTAL MANHOURS

28n. TOTAL MANHOURS COSTS \$

28o. TOTAL PARTS COSTS \$

SECTION VI - COMPLETION DATA

29. QTY RPR

30. QTY CONDEMN

31. QTY NRTS

32. EVAC WON

33. EVAC UNIT NAME

SECTION VII - ACTION SIGNATURES

34a. SUBMITTED BY

35a. ACCEPTED BY

35c. DATE

36a. WORK STARTED BY

37a. INSPECTED BY

38a. PICKED UP BY

34b. DATE

35b. STATUS

35d. TIME

36b. STATUS

36c. DATE

36d. TIME

37b. STATUS

37c. DATE

37d. TIME

38b. STATUS

38c. DATE

38d. TIME

DA FORM 2407, JUL 94

NMP COPY 2

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0051976

M2400052015