

C6225464

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5716**

\*Includes 1 in chamber.



**Remington®**

**DUPONT**  
REG. U.S. PAT. & TM. OFF.

VERY IMPORTANT:  
Instruction Book  
enclosed to assure  
safe use of this  
firearm.

MODEL 700™ M24

SERIAL NO.  
C6225464

ORDER NO.  
5716


Ø1

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off. Marca Registrada Marque Deposee.



5716 C6225464

UPC



0 47700 25716 7



CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225464

| OP. #        | OP. NAME                                                       | READINGS | DATE    | INIT |
|--------------|----------------------------------------------------------------|----------|---------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 4 12     | 89      | RW   |
| 600          | Proof                                                          | 4 12     | 89      | RW   |
| 607          | Check Headspace                                                | 4 12     | 89      | RW   |
| 610          | Dis-assemble Gun                                               | 4 12     | 89      | RW   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 4/13/89 | KCR  |
|              | Magnaflux Bolt                                                 |          | 4/14/89 | KCR  |
| 615          | Rollmark Caliber                                               |          | 4/15/89 | GB   |
| 617          | Drill and Tap Sight Holes                                      | 4 14     | 89      | JB   |
| 618          | Polish Barrel RB                                               | 4 14     | 89      | BT   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 4/20/89 | TSA  |
|              | Apply Coating (Bolt)                                           |          |         |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 5/1/89  | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 5/1/89  | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 5/1/89  | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 5/1/89  | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 5/5/89  | WB   |

| op. #        | BARBER - M24 0061438<br>OP. NAME                            | READINGS  |      |        |      |      | DATE       | INIT |
|--------------|-------------------------------------------------------------|-----------|------|--------|------|------|------------|------|
| 625<br>cont. | F) Safety On Force                                          | 6         | 6    | 6      |      |      | 5/5/89     | JU   |
|              | G) Safety Off Force                                         | 3         | 3    | 3      |      |      | 5/5/89     | JU   |
|              | H) Trigger Pull Test & Retainability                        |           |      |        |      |      | 5/5/89     | WB   |
|              | I) Firing Pin Indent                                        | .021      | .021 | .020.5 |      |      | 5/5/89     | JU   |
|              | J) Assemble Stock                                           |           |      |        |      |      | 5/5/89     | RW   |
|              | K) Assemble Swivel Studs                                    |           |      |        |      |      | 16 May 89  | JS   |
|              | L) Attach Front and Rear Sight Assemblies                   |           |      |        |      |      | 5/5/89     | RW   |
|              | M) Iron Sight Alignment                                     |           |      |        |      |      | 5/5/89     | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |           |      |        |      |      | 5/5/89     | RW   |
|              | O) Attach Scope to Rifle                                    |           |      |        |      |      | 5/5/89     | JU   |
|              | P) Detach & Attach Scope 20 Times                           |           |      |        |      |      | 5/5/89     | JU   |
| 640          | Gallery Target & Test                                       | PI R 71 L |      |        |      |      | 5/9/89     | DH   |
|              | A) Time                                                     |           |      |        |      |      | 5/9/89     | DH   |
|              | B) Malfunctions                                             |           |      |        |      |      | 5/9/89     | DH   |
|              | C) Pierced Primers                                          |           |      |        |      |      | 5/9/89     | DH   |
|              | D) Optical Clarity of Scope                                 |           |      |        |      |      | 5/9/89     | DH   |
| 645          | Inspect for Live Ammo                                       |           |      |        |      |      | 5/9/89     | DH   |
| 655          | Final Inspection                                            |           |      |        |      |      |            |      |
|              | A) Headspace                                                |           |      |        |      |      | 16 May 89  | JS   |
|              | B) Trigger Pull                                             | 2.57      | 2.14 | 2.22   | 2.22 | 2.16 | 16 May 89  | JS   |
|              | C) Function                                                 |           |      |        |      |      | 16 May 89  | JS   |
| 660          | Pack                                                        |           |      |        |      |      | 27 June 89 | JS   |

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6225464DATE 5/5/89TESTER WLB

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |       | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|-------|------------------------------------------------------------------------|
| PULL #1 | 2.39             | 2.15                     | 2.43                           | 2.57  | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.35             | 2.17                     | 2.27                           | 2.14  |                                                                        |
| PULL #3 | 2.38             | 2.20                     | 2.18                           | 2.22  |                                                                        |
| PULL #4 | 2.27             | 2.21                     | 2.40                           | 2.22  |                                                                        |
| PULL #5 | 2.30             | 2.35                     | 2.24                           | 2.16  |                                                                        |
| TOTAL   | 11.69            | 11.08                    | 11.52                          | 11.31 |                                                                        |
| AVG.    | 2.34             | 2.21                     | 2.30                           | 2.262 |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.27             | 3.35                     |  |          |
| PULL #2 | 3.20             | 3.43                     |  |          |
| PULL #3 | 3.26             | 3.34                     |  |          |
| PULL #4 | 3.37             | 3.35                     |  |          |
| PULL #5 | 3.32             | 3.38                     |  |          |
| TOTAL   | 16.42            | 16.85                    |  |          |
| AVG.    | 3.28             | 3.37                     |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.46             | 4.45                     |                                | 4.49                                 |
| PULL #2 | 4.44             | 4.40                     |                                | 4.29                                 |
| PULL #3 | 4.57             | 4.44                     |                                | 4.41                                 |
| PULL #4 | 4.56             | 4.48                     |                                | 4.32                                 |
| PULL #5 | 4.41             | 4.43                     |                                | 4.44                                 |
| TOTAL   | 22.44            | 22.20                    |                                | 21.95                                |
| AVG.    | 4.49             | 4.44                     |                                | 4.39                                 |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # C6225464  
10 May 1989

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .734923 |
| 1 TO | 2 | .781327 |
| 1 TO | 3 | .553003 |
| 1 TO | 4 | .352434 |
| 1 TO | 5 | .712523 |


$\frac{2}{1 \frac{4}{5}}$  (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3394  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.018  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .339877  
THE AMR FOR THIS RIFLE IS: .9338

18 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/08225464

## CENTERFIRE PATTERNS # 1

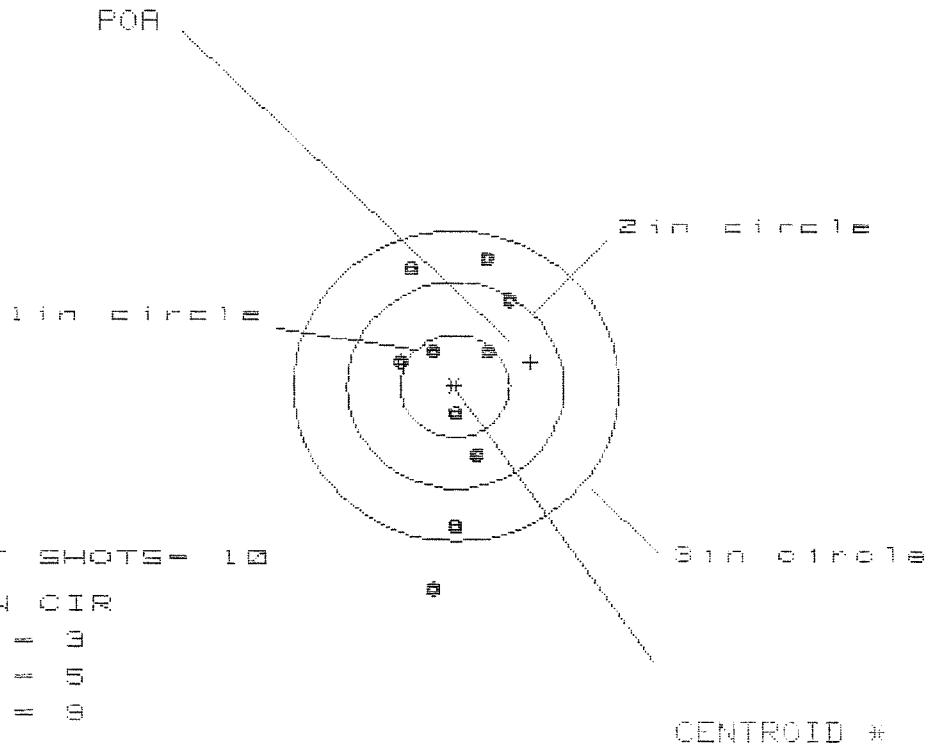

# OF SHOTS= 10

# IN CIR

1 in = 3

2 in = 5

3 in = 9

HS= 1.065

VS= 3.254

GS= 3.296


CENTROID \*

| PATTERN #                   | : | 1      | 2      | 3      |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | .513   | .491   | .487   |
| MINIMUM X                   | : | -.552  | -.574  | -.578  |
| MAXIMUM Y                   | : | 1.285  | 1.066  | .871   |
| MINIMUM Y                   | : | -1.969 | -1.556 | -1.102 |
| CENTROID X                  | : | -.696  | -.674  | -.670  |
| CENTROID Y                  | : | -.236  | -.017  | .178   |
| POR TO CENTROID in.         | : | .734   | .675   | .693   |
| MIN RADIUS                  | : | .292   | .255   | .242   |
| MEAN RADIUS                 | : | .937   | .789   | .676   |
| MAX RADIUS                  | : | 1.979  | 1.557  | 1.109  |
| HORIZONTAL SPREAD           | : | 1.065  | 1.065  | 1.065  |
| VERTICAL SPREAD             | : | 3.254  | 2.622  | 1.973  |
| EXTREME SPREAD              | : | 3.296  | 2.645  | 1.981  |
| NUMBER IN ONE INCH CIRCLE   | = | 3      |        |        |
| NUMBER IN TWO INCH CIRCLE   | = | 5      |        |        |
| NUMBER IN THREE INCH CIRCLE | = | 9      |        |        |

18 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/08225464

## CENTERFIRE PATTERNS # 2

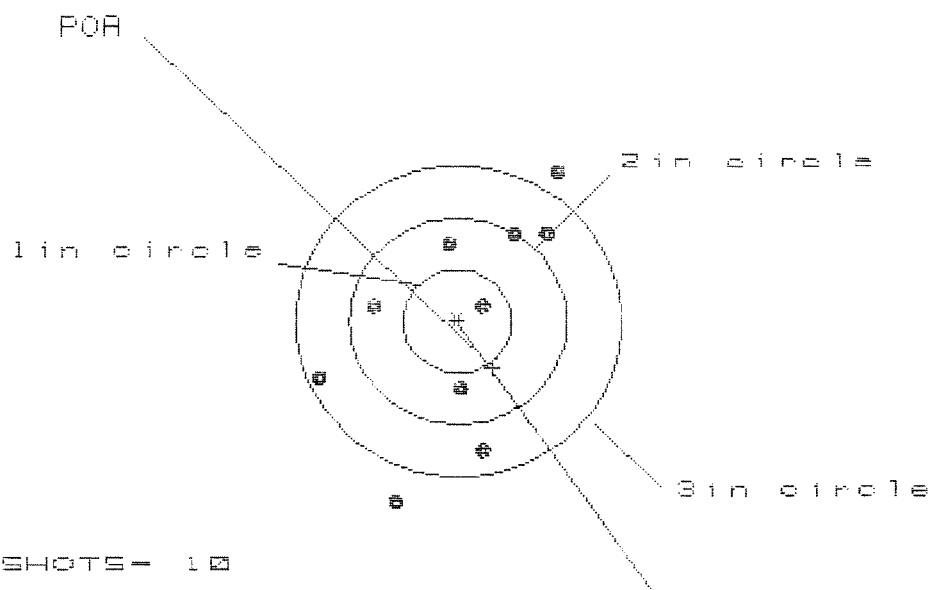

# OF SHOTS- 10

# IN CIR

1 in = 1

2 in = 4

3 in = 8

HS= 2.197

VS= 3.239

GS= 3.558


CENTROID #

| PATTERN #                     | 1      | 2      | 3      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | .919   | .857   | .877   |
| MINIMUM X                     | -1.278 | -1.340 | -1.233 |
| MAXIMUM Y                     | 1.471  | 1.275  | .835   |
| MINIMUM Y                     | -1.768 | -1.398 | -1.239 |
| CENTROID X                    | -.322  | -.260  | -.367  |
| CENTROID Y                    | .450   | .646   | .487   |
| POA TO CENTROID in.           | .553   | .697   | .610   |
| MIN RADIUS                    | .226   | .169   | .256   |
| MEAN RADIUS                   | 1.094  | .983   | .919   |
| MAX RADIUS                    | 1.853  | 1.536  | 1.367  |
| HORIZONTAL SPREAD             | 2.197  | 2.197  | 2.110  |
| VERTICAL SPREAD               | 3.239  | 2.673  | 2.074  |
| EXTREME SPREAD                | 3.558  | 2.989  | 2.539  |
| NUMBER IN ONE INCH CIRCLE =   | 1      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 4      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 8      |        |        |

18 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C8225484

## CENTERFIRE PATTERNS # 3

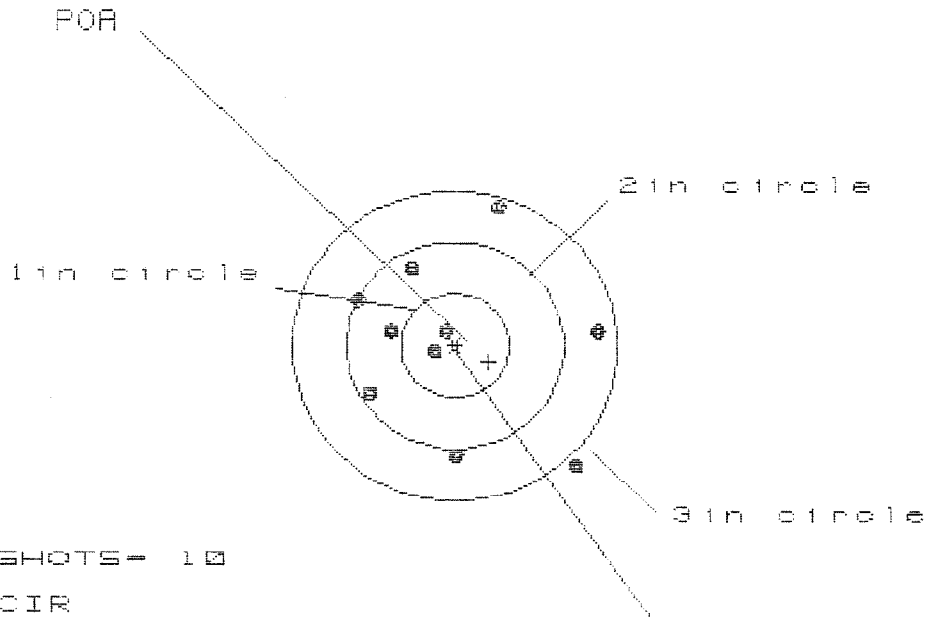

# OF SHOTS= 10

# IN CIR

1in = 2

2in = 6

3in = 8

HS= 2.196

VS= 2.467

GS= 2.578


CENTROID #

| PATTERN #                   | : | 3      |        |        |
|-----------------------------|---|--------|--------|--------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8      |
| MAXIMUM X                   | : | 1.297  | 1.421  | 1.483  |
| MINIMUM X                   | : | -.899  | -.775  | -.713  |
| MAXIMUM Y                   | : | 1.328  | 1.201  | .783   |
| MINIMUM Y                   | : | -1.139 | -1.212 | -1.062 |
| CENTROID X                  | : | -.310  | -.434  | -.496  |
| CENTROID Y                  | : | .160   | .287   | .137   |
| POA TO CENTROID in.         | : | .349   | .521   | .515   |
| MIN RADIUS                  | : | .114   | .070   | .079   |
| MEAN RADIUS                 | : | .895   | .783   | .699   |
| MAX RADIUS                  | : | 1.598  | 1.422  | 1.488  |
| HORIZONTAL SPREAD           | : | 2.196  | 2.196  | 2.196  |
| VERTICAL SPREAD             | : | 2.467  | 2.413  | 1.845  |
| EXTREME SPREAD              | : | 2.578  | 2.434  | 2.216  |
| NUMBER IN ONE INCH CIRCLE   | = |        | 2      |        |
| NUMBER IN TWO INCH CIRCLE   | = |        | 6      |        |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |        |

18 May 1985

FILE:/PATTERNING/CENTERFIRE\_PATT/082254B4

## CENTERFIRE PATTERNS # 4

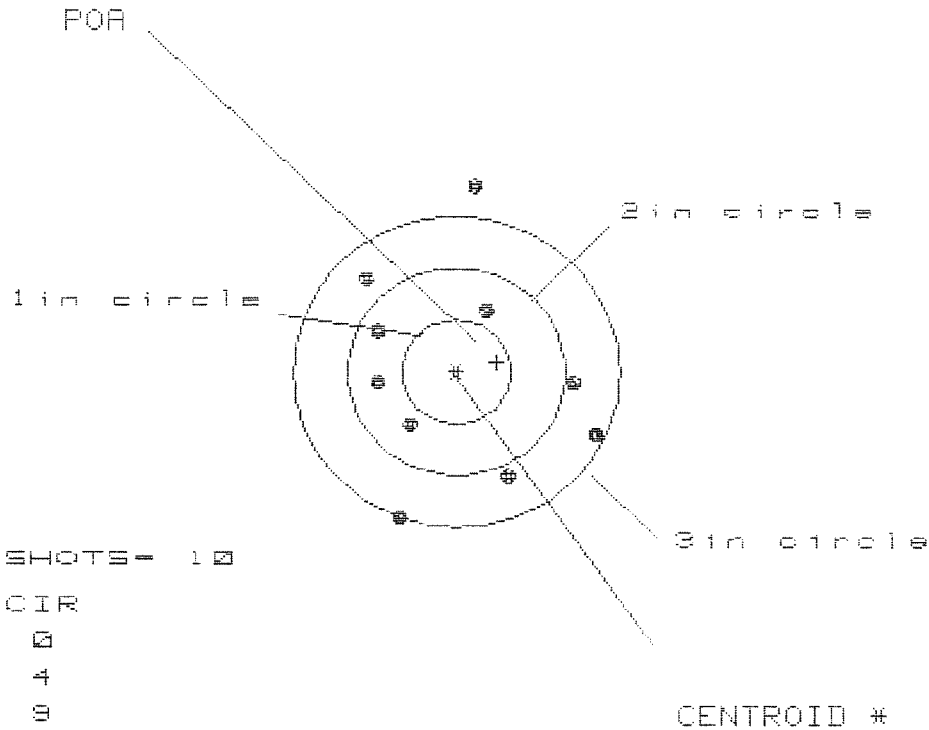

# OF SHOTS= 10

# IN CIR

1 in = 0

2 in = 4

3 in = 9

HS= 2.052

VS= 3.149

GS= 3.233

| PATTERN #                     | 4      |
|-------------------------------|--------|
| SHOTS (BEST OF)               | 10     |
| MAXIMUM X                     | 1.260  |
| MINIMUM X                     | -.792  |
| MAXIMUM Y                     | 1.780  |
| MINIMUM Y                     | -1.369 |
| CENTROID X                    | -.373  |
| CENTROID Y                    | -.095  |
| POA TO CENTROID in.           | .385   |
| MIN RADIUS                    | .671   |
| MEAN RADIUS                   | 1.089  |
| MAX RADIUS                    | 1.789  |
| HORIZONTAL SPREAD             | 2.052  |
| VERTICAL SPREAD               | 3.149  |
| EXTREME SPREAD                | 3.233  |
| NUMBER IN ONE INCH CIRCLE =   | 0      |
| NUMBER IN TWO INCH CIRCLE =   | 4      |
| NUMBER IN THREE INCH CIRCLE = | 9      |

18 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/08225484

## CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS = 10

# IN CIR

1 in = 4

2 in = 9

3 in = 10

HS = 1.881

VS = 1.276

GS = 2.154

CENTROID \*

| PATTERN #                   | : | 5     |       |       |
|-----------------------------|---|-------|-------|-------|
| SHOTS (BEST OF)             | : | 10    | 9     | 8     |
| MAXIMUM X                   | : | 1.040 | .919  | .830  |
| MINIMUM X                   | : | -.841 | -.725 | -.814 |
| MAXIMUM Y                   | : | .417  | .322  | .334  |
| MINIMUM Y                   | : | -.859 | -.360 | -.348 |
| CENTROID X                  | : | .004  | -.112 | -.023 |
| CENTROID Y                  | : | -.369 | -.274 | -.286 |
| POA TO CENTROID in.         | : | .370  | .296  | .287  |
| MIN RADIUS                  | : | .178  | .059  | .096  |
| MEAN RADIUS                 | : | .654  | .551  | .529  |
| MAX RADIUS                  | : | 1.349 | .938  | .848  |
| HORIZONTAL SPREAD           | : | 1.881 | 1.644 | 1.644 |
| VERTICAL SPREAD             | : | 1.276 | .682  | .682  |
| EXTREME SPREAD              | : | 2.154 | 1.653 | 1.645 |
| NUMBER IN ONE INCH CIRCLE   | = |       | 4     |       |
| NUMBER IN TWO INCH CIRCLE   | = |       | 9     |       |
| NUMBER IN THREE INCH CIRCLE | = |       | 10    |       |

|                                  |  |                                                                        |  |            |                           |
|----------------------------------|--|------------------------------------------------------------------------|--|------------|---------------------------|
| Repair Number: <b>RE00018381</b> |  | Serial: C6225464 Model: 700 Center Fire Caliber: 7.62 NATO M-24 (SW'S) |  | Repairman: |                           |
| Verify Repair                    |  |                                                                        |  | Status:    | Closed 12/5/00 8:05:13 AM |

|                                                                                                                                                                                                              |                                                            |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------|
| <b>Address Information</b>                                                                                                                                                                                   |                                                            |
| Customer:                                                                                                                                                                                                    | Received From:                                             |
| Name: <b>COMMANDER</b>                                                                                                                                                                                       | Name: <b>COMMANDER</b>                                     |
| Address 1: <b>HSC 3/10 SFG (A)</b>                                                                                                                                                                           | Address 1: <b>HSC 3/10 SFG (A)</b>                         |
| Address 2: <b>PG Box</b>                                                                                                                                                                                     | Address 2: <b>PG Box</b>                                   |
| City: <b>FORT CARSON</b>                                                                                                                                                                                     | City: <b>FORT CARSON</b>                                   |
| State: <b>CO</b> Zip Code: <b>80913</b> Country: <b>US</b>                                                                                                                                                   | State: <b>CO</b> Zip Code: <b>80913</b> Country: <b>US</b> |
| FPL: <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> <input type="checkbox"/> |                                                            |

|                            |                 |                 |                         |                           |
|----------------------------|-----------------|-----------------|-------------------------|---------------------------|
| <b>Contact / Condition</b> | <b>Problems</b> | <b>Estimate</b> | <b>History / Status</b> | <b>Shipping / Billing</b> |
|----------------------------|-----------------|-----------------|-------------------------|---------------------------|

| <b>Contact Information:</b><br>Phone: <input type="text"/><br>Fax: <input type="text"/><br>Email: <input type="text"/><br>Comments: <input type="text"/> | <b>Received Condition:</b><br>Condition: <input type="text"/><br>Notes: <input type="text"/><br>CSN: <input type="text"/><br>Notes: <input type="text"/> | <b>Accessories Received:</b> <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>1</td> </tr> <tr> <td>A008</td> <td>With Swivel</td> <td>1</td> </tr> <tr> <td>A016</td> <td>Scope Mounts</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>X</td> <td>MUZZLE BRAKE</td> <td>1</td> </tr> </tbody> </table> | Code | Desc | Qty | A007 | With Stud | 1 | A008 | With Swivel | 1 | A016 | Scope Mounts | 1 | A017 | Scope Base | 1 | A026 | Scope | 1 | X | MUZZLE BRAKE | 1 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|-----|------|-----------|---|------|-------------|---|------|--------------|---|------|------------|---|------|-------|---|---|--------------|---|
| Code                                                                                                                                                     | Desc                                                                                                                                                     | Qty                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| A007                                                                                                                                                     | With Stud                                                                                                                                                | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| A008                                                                                                                                                     | With Swivel                                                                                                                                              | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| A016                                                                                                                                                     | Scope Mounts                                                                                                                                             | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| A017                                                                                                                                                     | Scope Base                                                                                                                                               | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| A026                                                                                                                                                     | Scope                                                                                                                                                    | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |
| X                                                                                                                                                        | MUZZLE BRAKE                                                                                                                                             | 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |      |      |     |      |           |   |      |             |   |      |              |   |      |            |   |      |       |   |   |              |   |

|                      |                |              |
|----------------------|----------------|--------------|
| <b>Repair Search</b> | <b>Refresh</b> | <b>Close</b> |
|----------------------|----------------|--------------|

|        |         |         |         |
|--------|---------|---------|---------|
| maglev | 12/5/00 | 9:29 AM | NUM     |
| Start  | In      | N       | SA      |
| XM     | S       | S       | DE      |
| DP     | BY      | Im      |         |
|        |         |         | 9:29 AM |

Number: **C6225464**

Model: **700**



**RE00018381**

*BBL- 96003*

M-24 INSPECTION CHECKLIST  
CONTRACT #: DAAE-20-97-C-242

|                     |                          |           |         |
|---------------------|--------------------------|-----------|---------|
| R & E NUMBER        |                          | 18381     |         |
| SERIAL NUMBER       |                          | C6225464  |         |
| LOG-IN DATE         |                          | 11-30-00  |         |
| INSPECT AND VERIFY: |                          |           |         |
| OPERATION #         | OPERATION NAME           | DATE      | INITIAL |
| 550                 | DIS-ASSEMBLE GUN         | 12-5-00   | CK      |
| 560 A               | RE-BARREL AT CUSTOM SHOP |           |         |
| B                   | DRILL AND TAP            |           |         |
| C                   | POLISH                   |           |         |
| 575                 | ASSEMBLE                 |           |         |
| 600                 | PROOF                    | 12-20-00  | CK      |
| 605                 | CHECK HEADSPACE          | 12-20-00  | CK      |
| 610                 | DIS-ASSEMBLE GUN         |           |         |
| 612                 | MAGNAFLUX                |           |         |
| 615                 | ROLLMARK CALIBER         |           |         |
| 618                 | ROTO-BLAST               |           |         |
| 620                 | APPLY COATINGS           |           |         |
| 625 A               | FINAL ASSEMBLY           |           |         |
| B                   | TRIGGER PULL TEST        |           |         |
| C                   | SAFETY "ON" FORCE        |           |         |
| D                   | SAFETY "OFF" FORCE       |           |         |
| E                   | FIRING PIN INDENT        |           |         |
| 640                 | TARGET                   | 1-15-01   | RW      |
| 655                 | FINAL INSPECT            | 1-30-01   | CK      |
| 660                 | PACK                     |           |         |
|                     |                          |           |         |
|                     |                          | SHIP DATE |         |
| QAR INSPECTION DATE |                          |           |         |

## Final Inspection

Sn: C6225464 DATE REC'D: 11-30-00 DATE RET'D:

AUDITOR: CK

## Item:

## BARREL ASSY.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

## SCOPE ASSY.

- ☒ SCOPE
- ☒ SCOPE RINGS
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☒ SCREWS
- ☒ FINISH
- ☒ LOOSENESS
- ☒ CLARITY

## MISC.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

## Item:

## STOCK ASSY.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

## SYSTEMS CASE

- ☐ SCOPE CASE
- ☐ IRON SIGHTS
- ☐ DEPLOYMENT KIT

## TRIGGER

- ☒ SAFETY OPERATION
- ☒ SET

Comments: \_\_\_\_\_

**BARBER - M24 0061449**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225464  
30 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS:  $-.028$   
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS:  $-.1752$   
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS:  $.177423$

THE AMR FOR THIS RIFLE IS:  $1.14$

**CENTROIDAL DISTANCES**

|      |   |         |
|------|---|---------|
| Ø TO | 1 | .112401 |
| 1 TO | 2 | .19151  |
| 1 TO | 3 | .455518 |
| 1 TO | 4 | .197023 |
| 1 TO | 5 | .525449 |

3 +1 4 <----POA  
2  
5

**BARBER - M24 0061450**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .112  
 MIN RADIUS : .390  
 MEAN RADIUS : 1.176  
 MAX RADIUS : 1.921  
 CENTROID X : .103  
 CENTROID Y : -.045

30 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1.1

CENTERFIRE PATTERN # 1

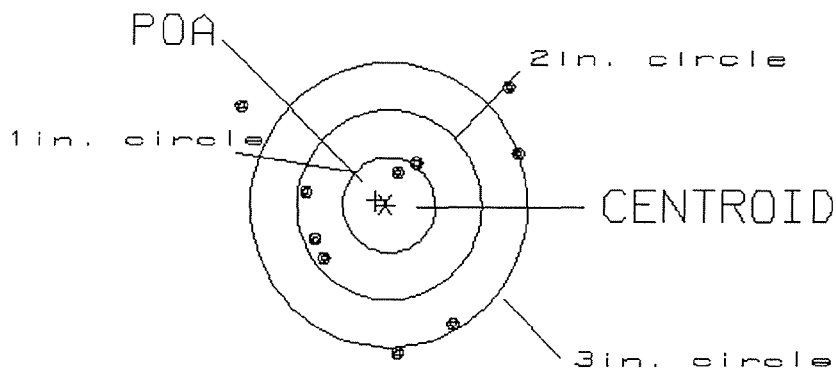

# OF SHOTS= 10

# IN CIRCLE

HS= 3.04

1

VS= 2.74

5

GS= 3.29

6

**BARBER - M24 0061451**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .220

MIN RADIUS : .479

MEAN RADIUS : 1.087


MAX RADIUS : 1.917

CENTROID X : .023

CENTROID Y : -.219

30 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1.1

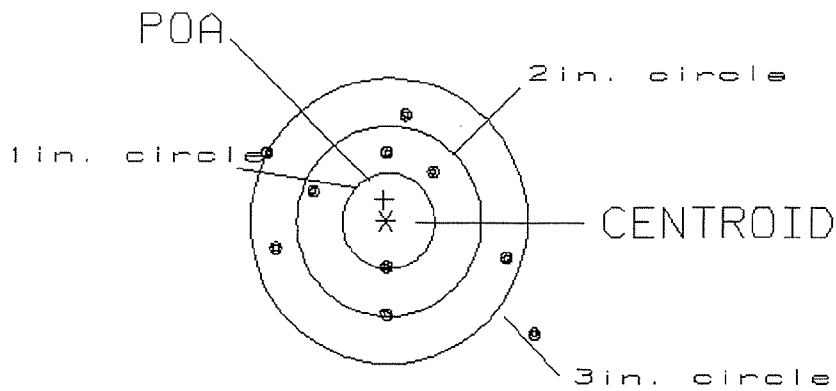**CENTERFIRE PATTERN # 2**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.87

1

VS= 2.21

5

GS= 3.40

9

**BARBER - M24 0061452**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .364

MIN RADIUS : .156

MEAN RADIUS : .701


MAX RADIUS : 1.831

CENTROID X : -.348

CENTROID Y : -.109

30 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1.1

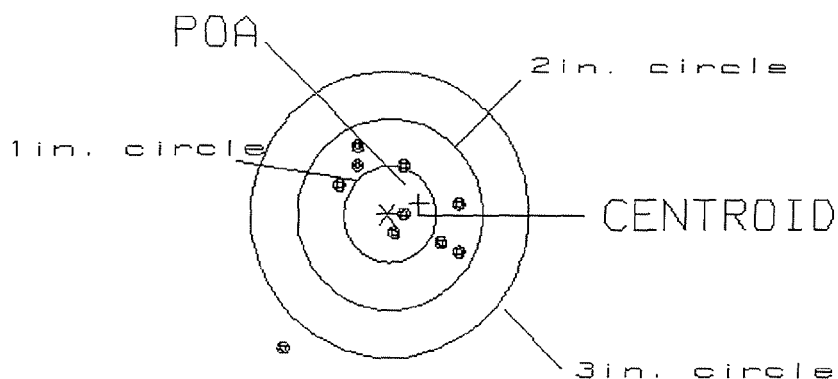**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 1.91

2

VS= 2.12

9

GS= 2.43

9

**BARBER - M24 0061453**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .302  
MIN RADIUS : .562  
MEAN RADIUS : 1.438  
MAX RADIUS : 2.030  
CENTROID X : .300  
CENTROID Y : -.042

30 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1.1

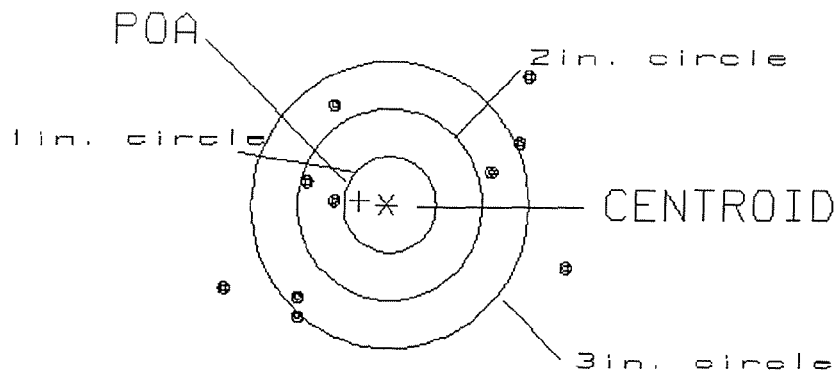**CENTERFIRE PATTERN # 4**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.70

0

VS= 2.53

2

GS= 3.99


5

PATTERN #: ☐ 5 ☐  
 POA TO CENTROID: .510  
 MIN RADIUS : .284  
 MEAN RADIUS : 1.299  
 MAX RADIUS : 3.203  
 CENTROID X : -.218  
 CENTROID Y : -.461

30 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1.1

# CENTERFIRE PATTERN # 5

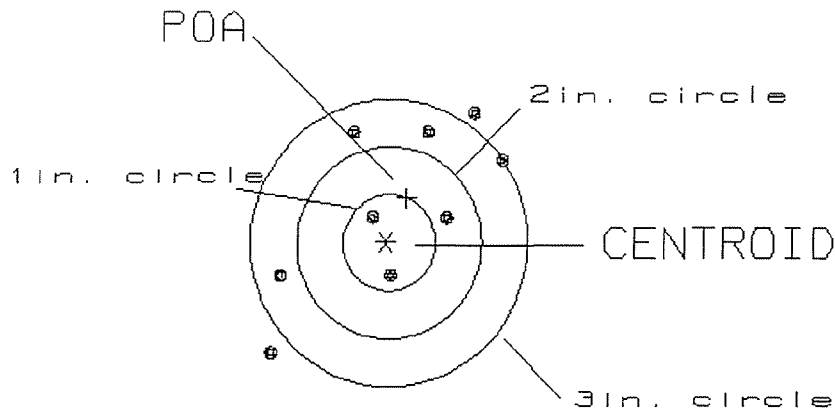

| # OF SHOTS= 10 | # IN CIRCLE |
|----------------|-------------|
| HS= 2.48       | 2           |
| VS= 4.50       | 3           |
| GS= 4.70       | 6           |

**BARBER - M24 0061455**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225464  
29 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1236  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1096  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .165194

THE AMR FOR THIS RIFLE IS: 1.384

**CENTROIDAL DISTANCES**

|        |         |
|--------|---------|
| 0 TO 1 | .115352 |
| 1 TO 2 | .209163 |
| 1 TO 3 | .406212 |
| 1 TO 4 | .256727 |
| 1 TO 5 | .244205 |

5 1+2 <----POA  
4  
3

**BARBER - M24 0061456**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .115  
MIN RADIUS : .671  
MEAN RADIUS : 1.590  
MAX RADIUS : 3.546  
CENTROID X : -.115  
CENTROID Y : .009

29 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1

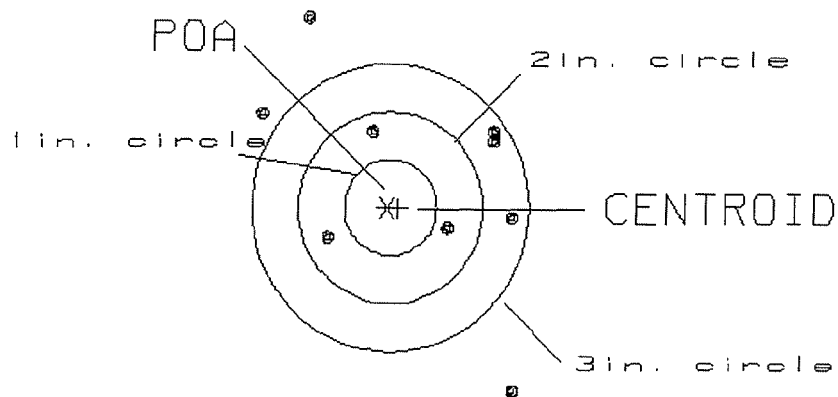**CENTERFIRE PATTERN # 1**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.70

0

VS= 4.64

3

GS= 4.88

6

**BARBER - M24 0061457**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .095  
MIN RADIUS : .313  
MEAN RADIUS : 1.417  
MAX RADIUS : 2.265  
CENTROID X : .092  
CENTROID Y : -.021

29 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1

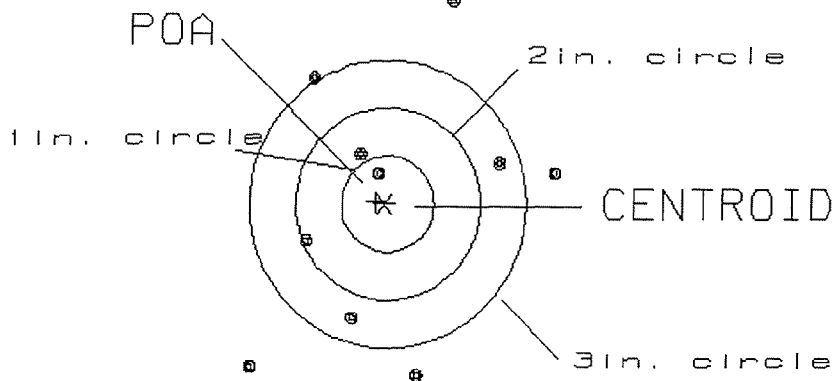**CENTERFIRE PATTERN # 2**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.32

1

VS= 3.94

2

GS= 4.43

5

**BARBER - M24 0061458**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .364

MIN RADIUS : .718

MEAN RADIUS : 1.410


MAX RADIUS : 1.968

CENTROID X : .057

CENTROID Y : -.359

29 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1

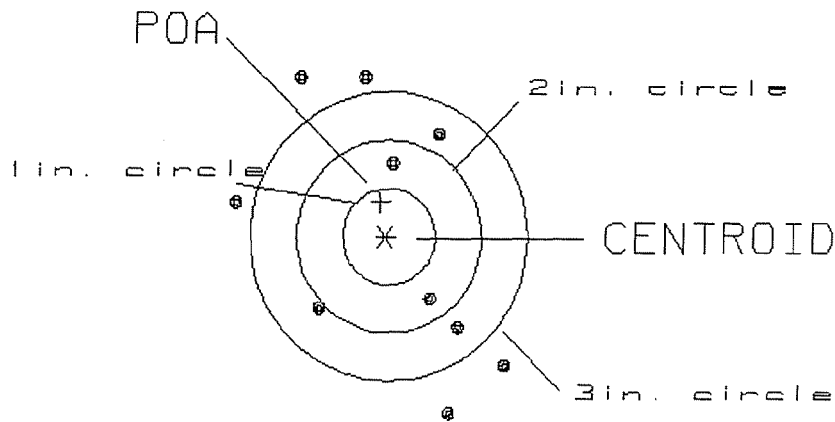**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.88

0

VS= 3.55

2

GS= 3.90


5

PATTERN #: ☐ 4 ☐  
 POA TO CENTROID: .342  
 MIN RADIUS : .343  
 MEAN RADIUS : 1.303  
 MAX RADIUS : 3.066  
 CENTROID X : -.293  
 CENTROID Y : -.176

29 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1

# CENTERFIRE PATTERN # 4

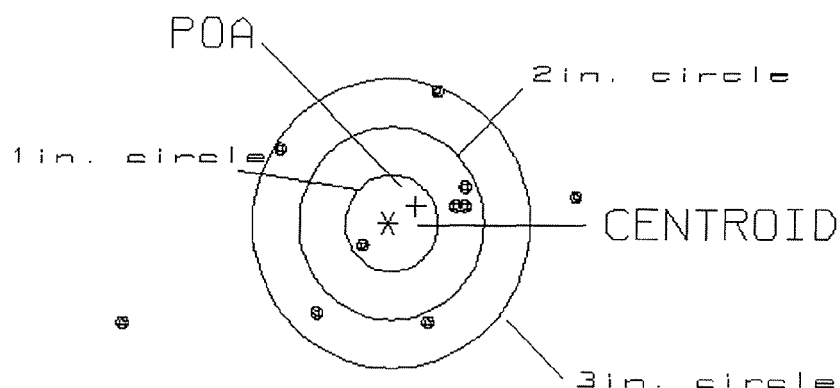

# OF SHOTS= 10

# IN CIRCLE

HS= 4.90  
 VS= 2.42  
 GS= 5.08


1  
 4  
 8

PATTERN #: ☐ 5 ☐  
 POA TO CENTROID: .359  
 MIN RADIUS : .664  
 MEAN RADIUS : 1.200  
 MAX RADIUS : 1.851  
 CENTROID X : -.359  
 CENTROID Y : -.001

29 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1.1

# CENTERFIRE PATTERN # 5

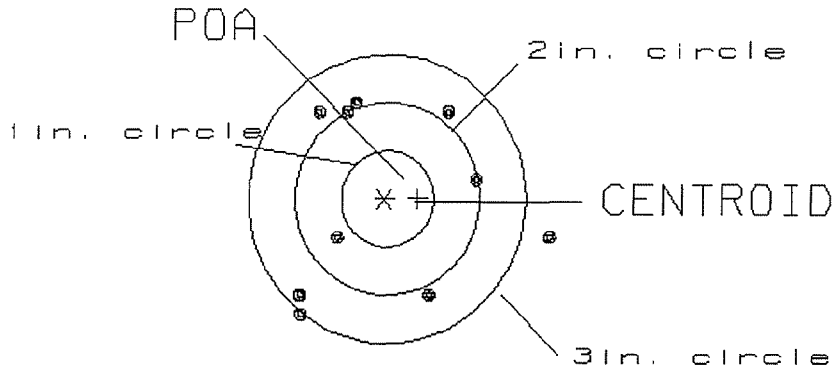

# OF SHOTS= 10

# IN CIRCLE

HS= 2.77  
 VS= 2.26  
 GS= 2.90

0  
 1  
 8

**BARBER - M24 0061461**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225464  
16 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0626  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2568  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .26432

THE AMR FOR THIS RIFLE IS: 1.372

**CENTROIDAL DISTANCES**

|      |   |          |
|------|---|----------|
| 0 TO | 1 | .209057  |
| 1 TO | 2 | .059439  |
| 1 TO | 3 | .419981  |
| 1 TO | 4 | .0940691 |
| 1 TO | 5 | .504147  |

5      +<sup>2</sup>      <----POA  
         4<sup>2</sup>  
         3

**BARBER - M24 0061462**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .209

MIN RADIUS : .729

MEAN RADIUS : 1.365


MAX RADIUS : 2.008

CENTROID X : .108

CENTROID Y : -.179

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1

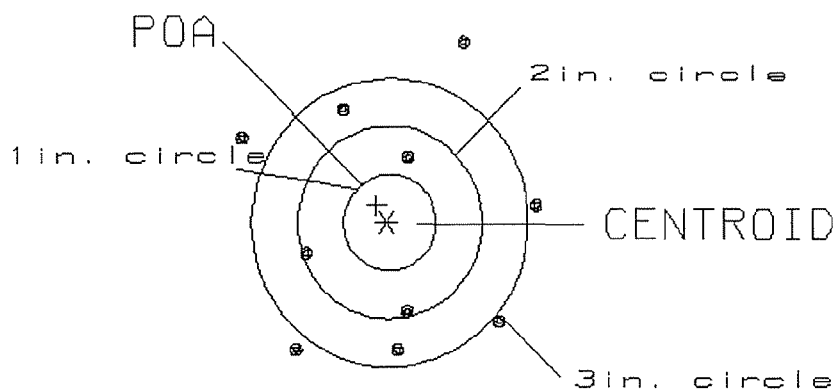**CENTERFIRE PATTERN # 1**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.15

0

VS= 3.17

3

GS= 3.59

5

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .171

MIN RADIUS : .458

MEAN RADIUS : 1.447

MAX RADIUS : 2.636


CENTROID X : .121

CENTROID Y : -.121

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1

## CENTERFIRE PATTERN # 2

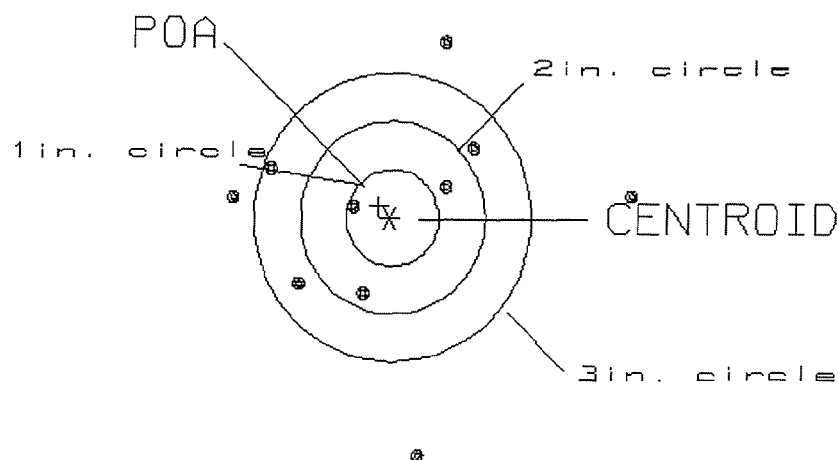

# OF SHOTS= 10

# IN CIRCLE

HS= 4.39

1

VS= 4.26

3

GS= 4.39

6

**BARBER - M24 0061464**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .621

MIN RADIUS : .961

MEAN RADIUS : 1.545


MAX RADIUS : 2.546

CENTROID X : .428

CENTROID Y : -.451

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1

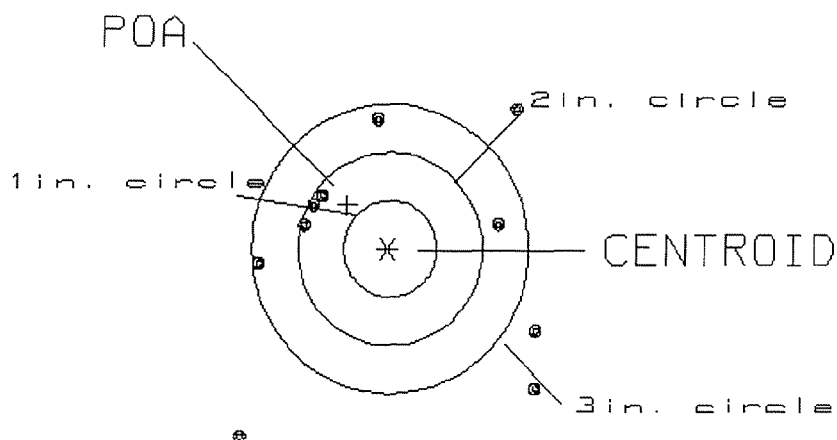**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.26

0

VS= 3.43

3

GS= 4.61

6

**BARBER - M24 0061465**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .247

MIN RADIUS : .396

MEAN RADIUS : .989


MAX RADIUS : 2.163

CENTROID X : .040

CENTROID Y : -.244

15 Jan 2001

FILE:/Hqbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1

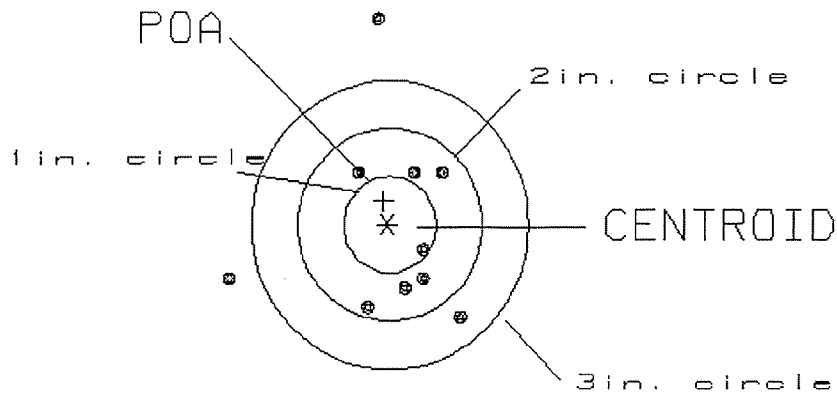**CENTERFIRE PATTERN # 4**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.45

1

VS= 3.09

7

GS= 3.23


8

PATTERN #: ☐ 5 ☐  
 POA TO CENTROID: .480  
 MIN RADIUS : .193  
 MEAN RADIUS : 1.513  
 MAX RADIUS : 3.000  
 CENTROID X : -.384  
 CENTROID Y : -.289

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1.1

# CENTERFIRE PATTERN # 5

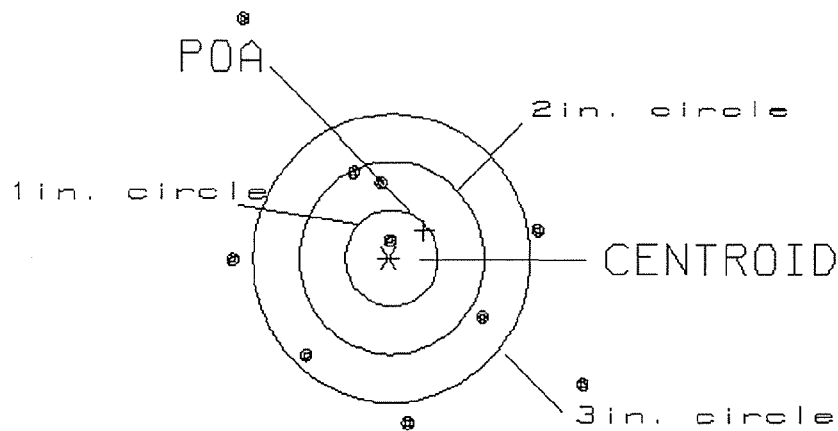

# OF SHOTS= 10

# IN CIRCLE

HS= 3.76  
 VS= 4.28  
 GS= 5.29

1  
 2  
 5

**BARBER - M24 0061467**

Remington Test Lab, Ilion, N.Y.


Centroidal distance calculations for Rifle # c6225464  
10 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.4122  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.3112  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .516483

THE AMR FOR THIS RIFLE IS: 1.58

**CENTROIDAL DISTANCES**

|      |   |         |
|------|---|---------|
| Ø TO | 1 | .467462 |
| 1 TO | 2 | .187003 |
| 1 TO | 3 | .759276 |
| 1 TO | 4 | .554658 |
| 1 TO | 5 | .548293 |

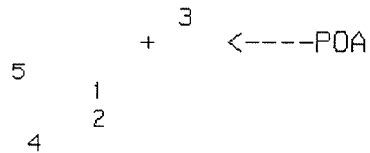


PATTERN #: 1  
POA TO CENTROID: .875  
MIN RADIUS : .214  
MEAN RADIUS : 1.672  
MAX RADIUS : 4.489  
CENTROID X : .809  
CENTROID Y : -.336

10 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1

## CENTERFIRE PATTERN # 1

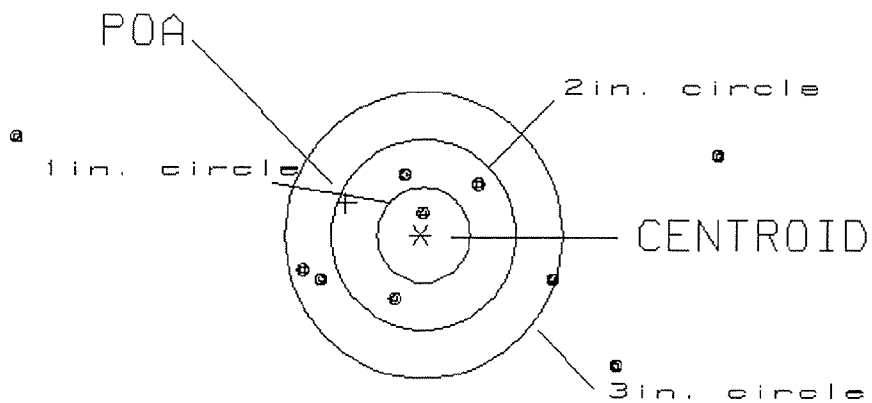

# OF SHOTS= 10

# IN CIRCLE

HS= 7.59

1

VS= 2.42

4

GS= 7.59


7

PATTERN #: ☐ 2 ☐  
 POA TO CENTROID: .612  
 MIN RADIUS : .208  
 MEAN RADIUS : 1.275  
 MAX RADIUS : 2.103  
 CENTROID X : -.335  
 CENTROID Y : -.512

10 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1

## CENTERFIRE PATTERN # 2

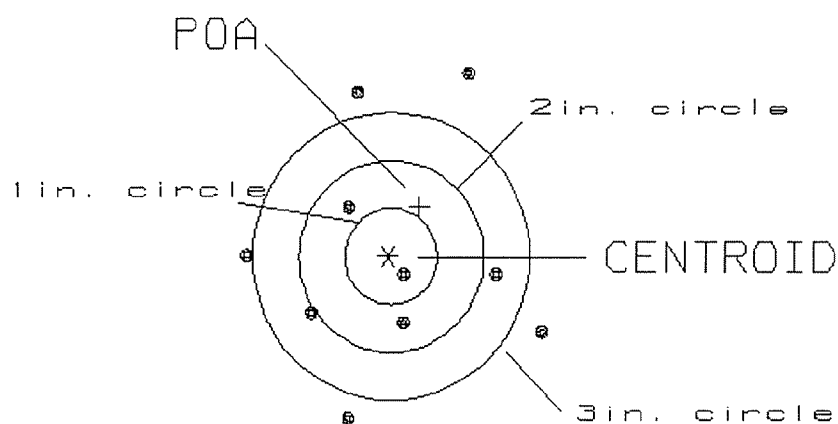

# OF SHOTS= 10

# IN CIRCLE

HS= 3.21

1

VS= 3.61

3

GS= 3.94

5

**BARBER - M24 0061470**


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐  
POA TO CENTROID: .295  
MIN RADIUS : .485  
MEAN RADIUS : 1.574  
MAX RADIUS : 3.816  
CENTROID X : .244  
CENTROID Y : .165

10 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1

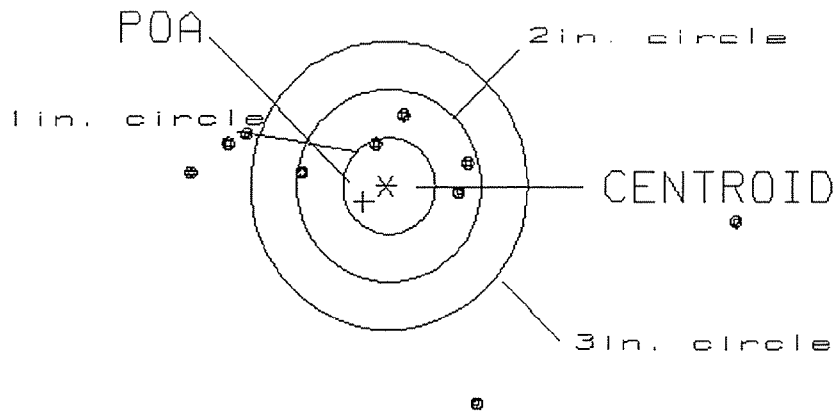**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 5.95  
VS= 3.06  
GS= 5.97


1  
5  
5

PATTERN #: ☐ 4 ☐  
 POA TO CENTROID: 1.021  
 MIN RADIUS : .734  
 MEAN RADIUS : 1.596  
 MAX RADIUS : 3.277  
 CENTROID X : -.763  
 CENTROID Y : -.679

10 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1

# CENTERFIRE PATTERN # 4

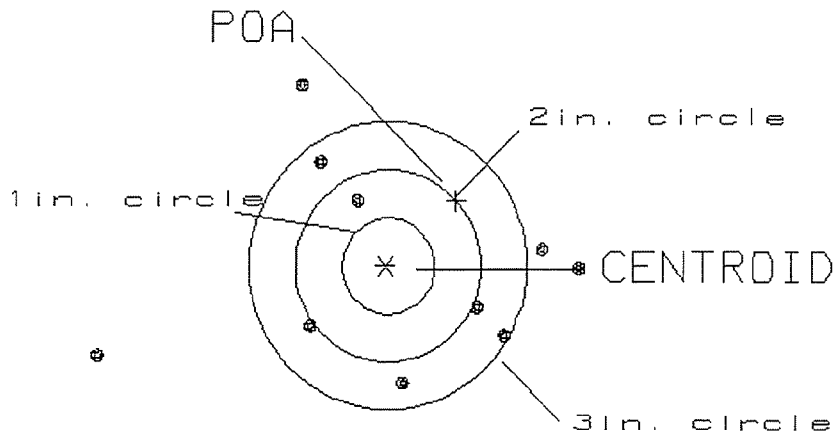

# OF SHOTS= 10

# IN CIRCLE

HS= 5.18

0

VS= 3.07

1

GS= 5.25


6

PATTERN #: ☐ 5 ☐  
 POA TO CENTROID: .895  
 MIN RADIUS : .385  
 MEAN RADIUS : 1.785  
 MAX RADIUS : 3.099  
 CENTROID X : -.871  
 CENTROID Y : -.205

10 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1

# CENTERFIRE PATTERN # 5

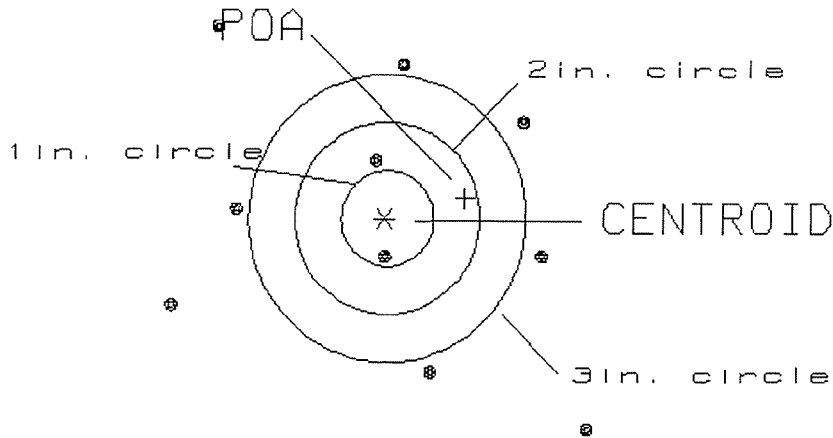

# OF SHOTS= 10

# IN CIRCLE

HS= 4.57  
 VS= 4.15  
 GS= 5.82

1  
 2  
 2

**BARBER - M24 0061473**

Remington Test Lab, Ilion, N.Y.


Centroidal distance calculations for Rifle # c6225464  
5 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS:  $-.3714$   
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS:  $-.6198$   
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS:  $.722558$

THE AMR FOR THIS RIFLE IS:  $1.335$

**CENTROIDAL DISTANCES**

|      |   |         |
|------|---|---------|
| Ø TO | 1 | 1.48012 |
| 1 TO | 2 | 1.51834 |
| 1 TO | 3 | .590529 |
| 1 TO | 4 | 1.92604 |
| 1 TO | 5 | 1.95144 |

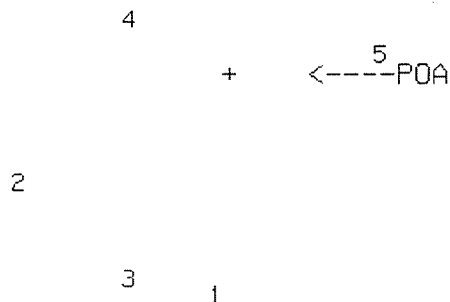


PATTERN #: ☐ 1 ☐  
 POA TO CENTROID: 1.480  
 MIN RADIUS : .541  
 MEAN RADIUS : 1.464  
 MAX RADIUS : 2.803  
 CENTROID X : -.096  
 CENTROID Y : -1.477

5 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464

# CENTERFIRE PATTERN # 1

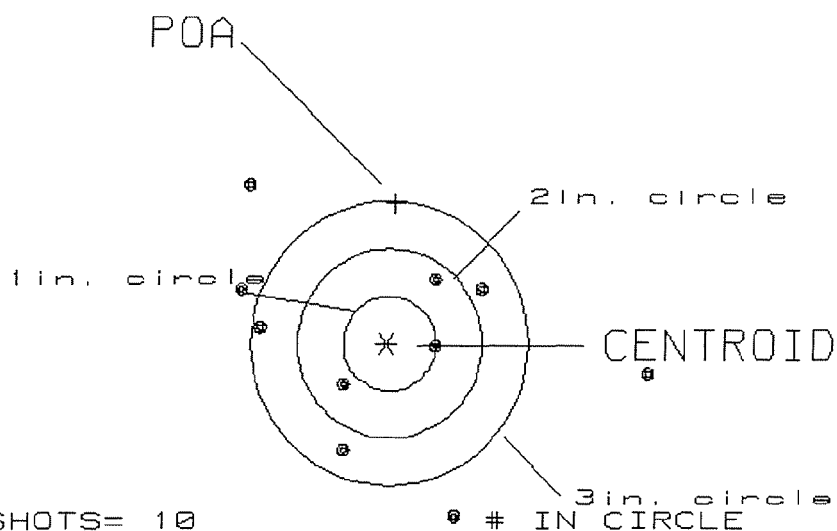

# OF SHOTS= 10

# IN CIRCLE

HS= 4.40  
 VS= 3.54  
 GS= 4.77


0  
 3  
 6

PATTERN #: 0 2 0  
 POA TO CENTROID: 1.597  
 MIN RADIUS : .587  
 MEAN RADIUS : 1.480  
 MAX RADIUS : 3.459  
 CENTROID X : -1.419  
 CENTROID Y : -.732

5 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464

# CENTERFIRE PATTERN # 2

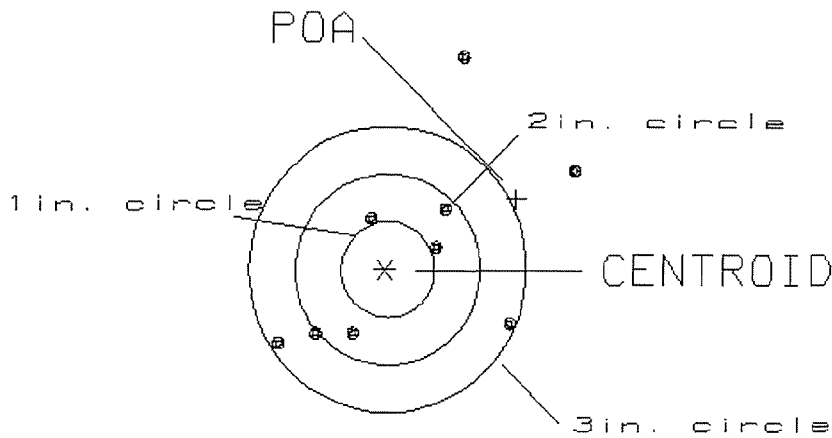

# OF SHOTS= 10

# IN CIRCLE

HS= 4.76

0

VS= 4.37

4

GS= 5.74

7

**BARBER - M24 0061476**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: 1.534  
MIN RADIUS : .537  
MEAN RADIUS : .984  
MAX RADIUS : 1.618  
CENTROID X : -.678  
CENTROID Y : -1.377

5 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464

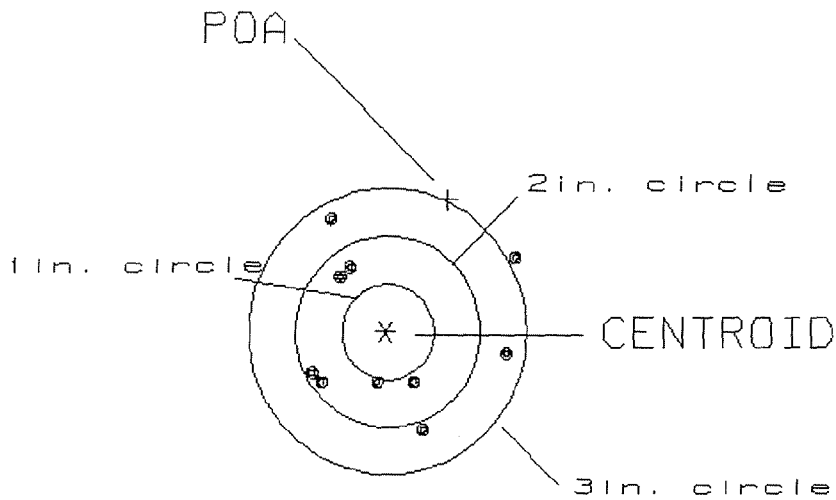**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.25  
VS= 2.21  
GS= 2.55


0  
6  
9

PATTERN #: 4  
 POA TO CENTROID: .767  
 MIN RADIUS : .614  
 MEAN RADIUS : 1.134  
 MAX RADIUS : 1.686  
 CENTROID X : -.678  
 CENTROID Y : .359

5 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464

# CENTERFIRE PATTERN # 4

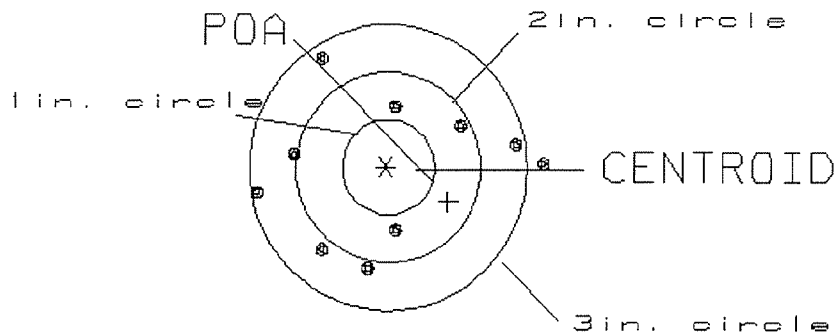

# OF SHOTS= 10

# IN CIRCLE

HS= 3.13

0

VS= 2.22

3

GS= 3.14


9

PATTERN #: 5  
 POA TO CENTROID: 1.022  
 MIN RADIUS : .615  
 MEAN RADIUS : 1.611  
 MAX RADIUS : 3.435  
 CENTROID X : 1.014  
 CENTROID Y : .128

5 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464

# CENTERFIRE PATTERN # 5

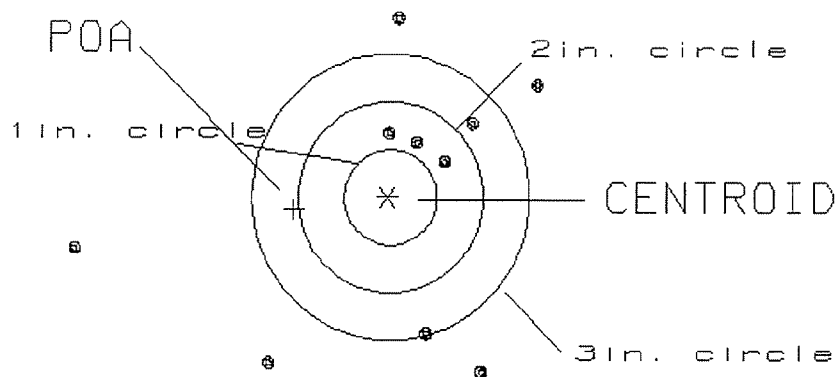

# OF SHOTS= 10

# IN CIRCLE

HS= 4.93

0

VS= 3.60

3

GS= 5.23

5

**BARBER - M24 0061479**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225464  
15 Jan 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.144  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0886  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .169074

THE AMR FOR THIS RIFLE IS: 1.352

**CENTROIDAL DISTANCES**

|      |   |         |
|------|---|---------|
| Ø TO | 1 | .187545 |
| 1 TO | 2 | .236415 |
| 1 TO | 3 | .257769 |
| 1 TO | 4 | .409558 |
| 1 TO | 5 | .35756  |

3  
1 + <----POA  
2  
5

**BARBER - M24 0061480**

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .188  
MIN RADIUS : .404  
MEAN RADIUS : 1.336  
MAX RADIUS : 2.041  
CENTROID X : -.177  
CENTROID Y : .062

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1

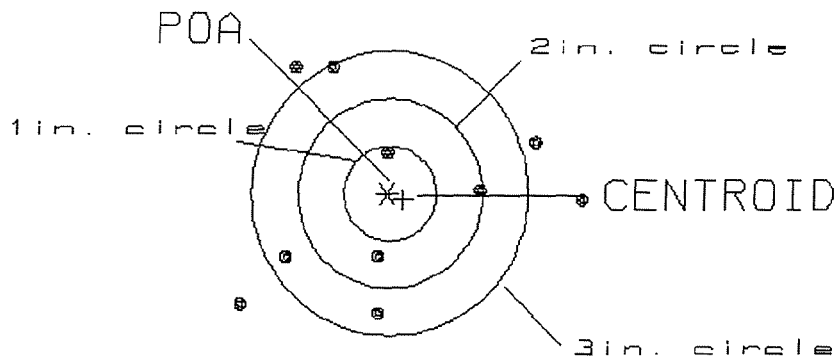**CENTERFIRE PATTERN # 1**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.68

1

VS= 2.58

3

GS= 3.84

6

**BARBER - M24 0061481**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .258

MIN RADIUS : .646

MEAN RADIUS : 1.294


MAX RADIUS : 2.620

CENTROID X : -.191

CENTROID Y : -.174

15 Jan 2001

FILE:/Hqbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1

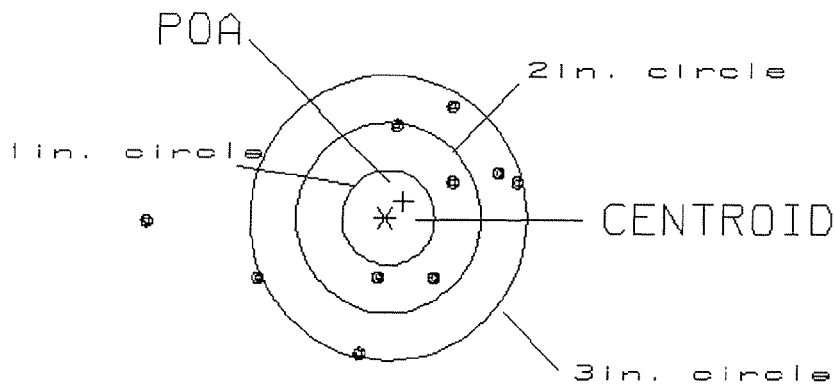**CENTERFIRE PATTERN # 2**

# OF SHOTS= 10

# IN CIRCLE

HS= 4.00

0

VS= 2.67

4

GS= 4.02

8

**BARBER - M24 0061482**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .318

MIN RADIUS : .181

MEAN RADIUS : 1.563


MAX RADIUS : 2.879

CENTROID X : -.091

CENTROID Y : .305

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1

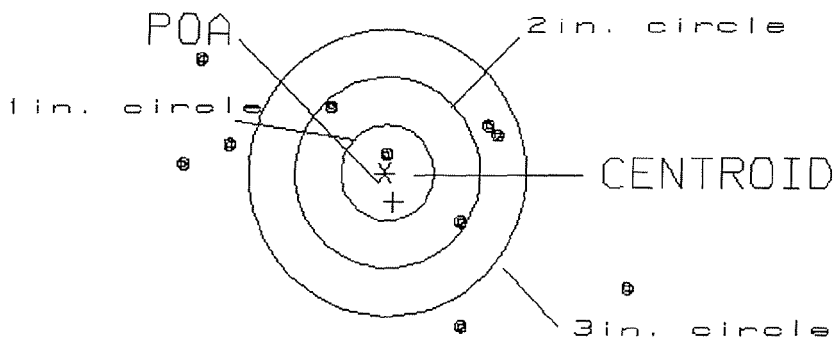**CENTERFIRE PATTERN # 3**

# OF SHOTS= 10

# IN CIRCLE

HS= 4.85

1

VS= 2.76

3

GS= 5.17

5

**BARBER - M24 0061483**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .356

MIN RADIUS : .713

MEAN RADIUS : 1.319


MAX RADIUS : 2.381

CENTROID X : -.104

CENTROID Y : -.341

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1

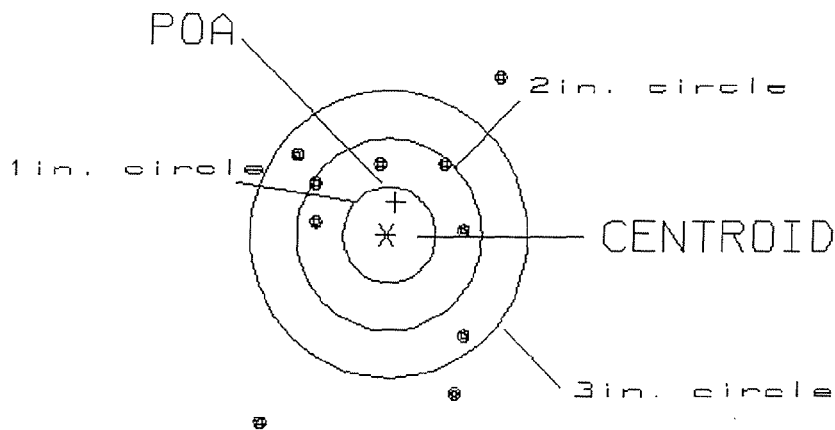**CENTERFIRE PATTERN # 4**

# OF SHOTS= 10

# IN CIRCLE

HS= 2.63

0

VS= 3.58

5

GS= 4.45

7

**BARBER - M24 0061484**

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .334

MIN RADIUS : .299

MEAN RADIUS : 1.250


MAX RADIUS : 2.225

CENTROID X : -.157

CENTROID Y : -.295

15 Jan 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire\_Patt/c6225464.1.1

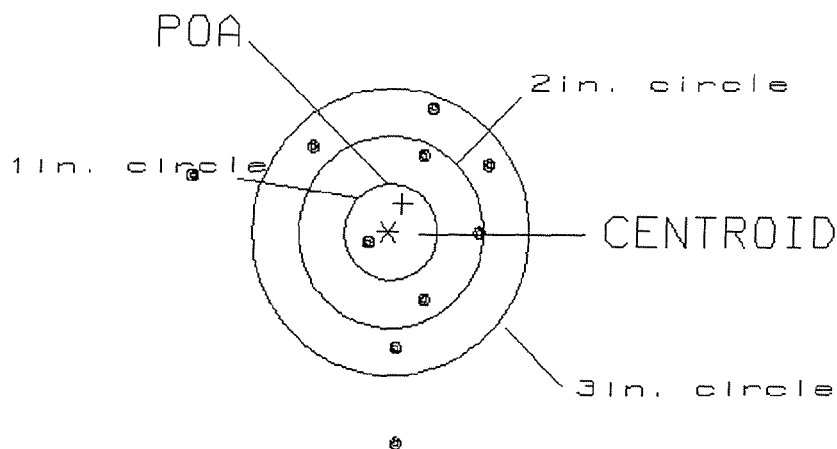**CENTERFIRE PATTERN # 5**

# OF SHOTS= 10

# IN CIRCLE

HS= 3.21

1

VS= 3.45

4

GS= 3.54

5