

C6225484

MODEL 700™ M24

Model 700 M24™

Action

Barrel Length

Capacity

Order No. 5715

*Includes 1 in chamber.



M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6225484

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	9 12	8 8	FB
600	Proof	9 19	8 8	RW
607	Check Headspace	9 19	8 8	RW
610	Dis-assemble gun	9 19	8 8	RW
612	Magnaflux Barrel Action		9 22 88	Pfe.
	Magnaflux Bolt		9 22 88	Pfe.
615	Rollmark Caliber			
617	Drill & Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/9/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/9/88	RW
	C) Inspect Ejector Hole for Chamfer		11/9/88	RW

OVER

OP.#		READINGS	DATE	INITIAL
625	D) Oil Firing Pin Ass'y		11/9/88	RW
cont.	E) Adjust Trigger Pull to Min. Setting and Stake		10 NOV 88	JS
	F) Safety on Force	4 : 4 : 4	11 NOV 88	JS
	G) Safety off Force	3 : 3 : 3	11 NOV 88	JS
	H) Trigger Pull Test & Retainability		10 NOV 88	JS
	I) Firing Pin Indent	.0215 : .022 : .022	11 NOV 88	JS
	J) Assemble Stock		11/14/88	RW
	K) Attach Front & Rear Sight Assemblies		11/14/88	RW
	L) Iron Sight Alignment		11/14/88	RW
	M) Detach Front & Rear Sights & place in numbered container		11/14/88	RW
	N) Attach Scope to Rifle		11/14/88	W.B
	O) Detach & Attach Scope 20 times		11/14/88	W.B
640	Gallery Target & Test	81 R 72 L	11/15/88	A.C.
	A) Optical Clarity of Scope		11/15/88	JS
645	Inspect for Live Ammo		11/15/88	JS
655	Final Inspection			
	A) Headspace		29 NOV 88	JS
	B) Trigger Pull	2.57 : 251 : 252	2.47 : 2.40	JS
	C) Function		29 NOV 88	JS
	D) Assemble Swivel Studs		29 NOV 88	JS
660	Pack		15 Dec 88	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6225484

DATE 10/10/88

TESTER J. H. + J. S.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.41	2.34	2.51	2.57	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.39	2.36	2.51	2.51	
PULL #3	2.39	2.37	2.51	2.52	
PULL #4	2.37	2.39	2.51	2.47	
PULL #5	2.42	2.37	2.54	2.40	
TOTAL	11.98	11.83	12.58	12.47	
AVG.	2.396	2.366	2.516	2.494	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.16		
PULL #2	3.25	3.20		
PULL #3	3.24	2.99		
PULL #4	3.25	3.18		
PULL #5	3.22	3.17		
TOTAL	16.19	15.70		
AVG.	3.238	3.14		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.32	4.20		4.27
PULL #2	4.24	4.21		4.13
PULL #3	4.25	4.29		4.29
PULL #4	4.24	4.28		4.28
PULL #5	4.27	4.28		4.22
TOTAL	21.32	21.26		21.19
AVG.	4.264	4.252		4.238


CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225484

CENTROIDAL DISTANCES


0 TO	1	.321622
1 TO	2	.361809
1 TO	3	.708035
1 TO	4	.522552
1 TO	5	.0326497

$\frac{2.9}{31}$ (----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0046
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0504
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0506095
THE AMP FOR THIS RIFLE IS: .9212

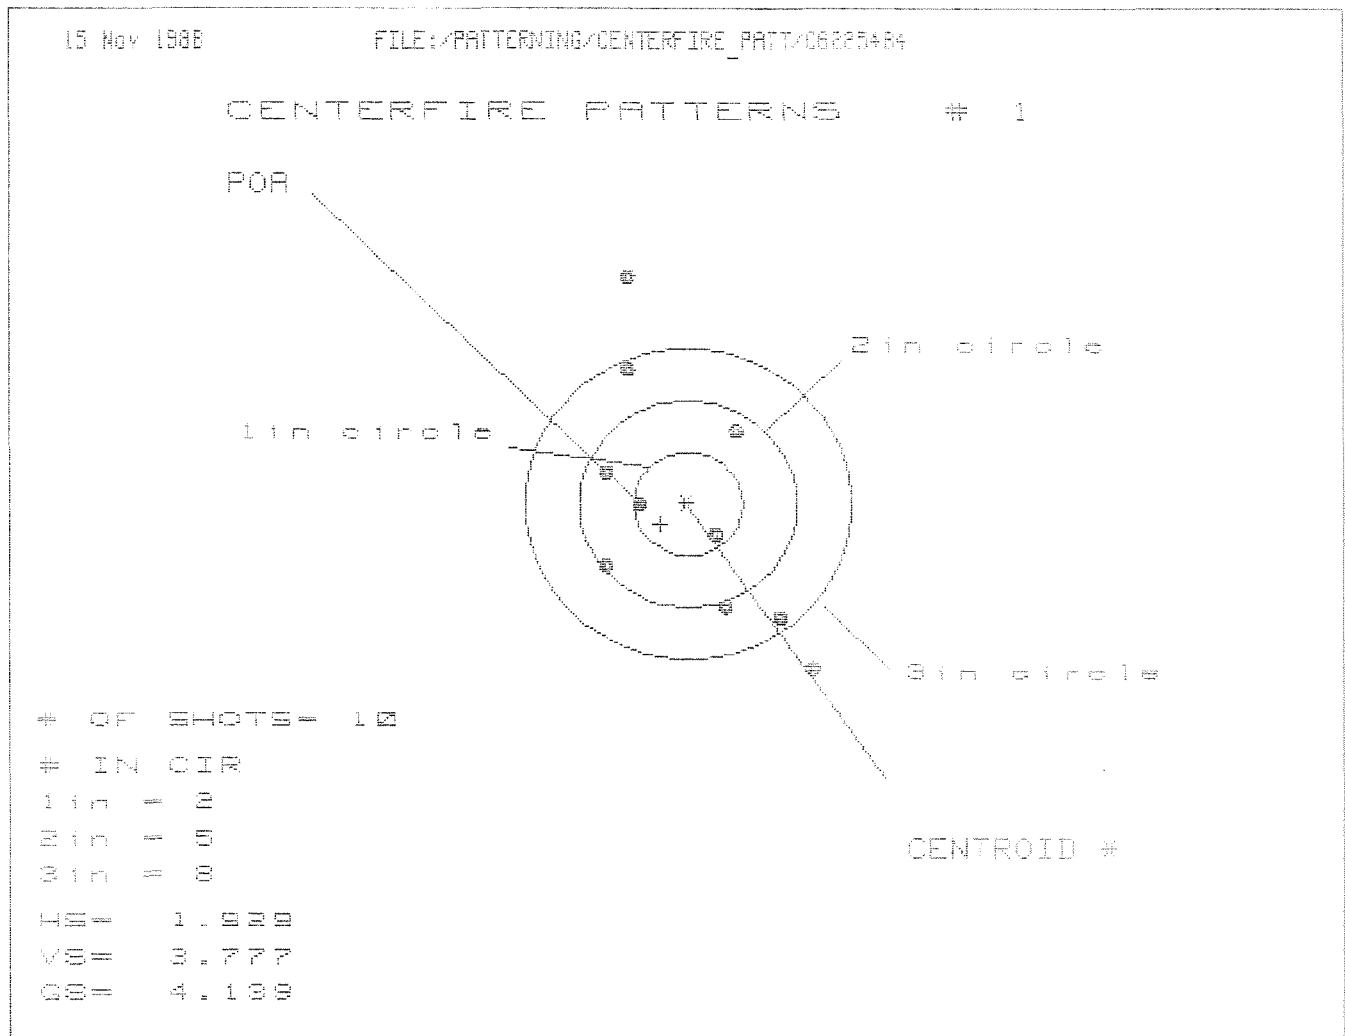

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.151	1.091	.880
MINIMUM X	-.778	-.838	-.701
MAXIMUM Y	2.263	1.576	1.410
MINIMUM Y	-1.574	-1.329	-1.012
CENTROID X	.255	.315	.178
CENTROID Y	.196	-.049	.117
POA TO CENTROID in.	.321	.319	.213
MIN RADIUS	.398	.181	.389
MEAN RADIUS	1.151	.997	.896
MAX RADIUS	2.269	1.720	1.475
HORIZONTAL SPREAD	1.929	1.929	1.581
VERTICAL SPREAD	3.777	2.905	2.422
EXTREME SPREAD	4.139	3.346	2.755
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

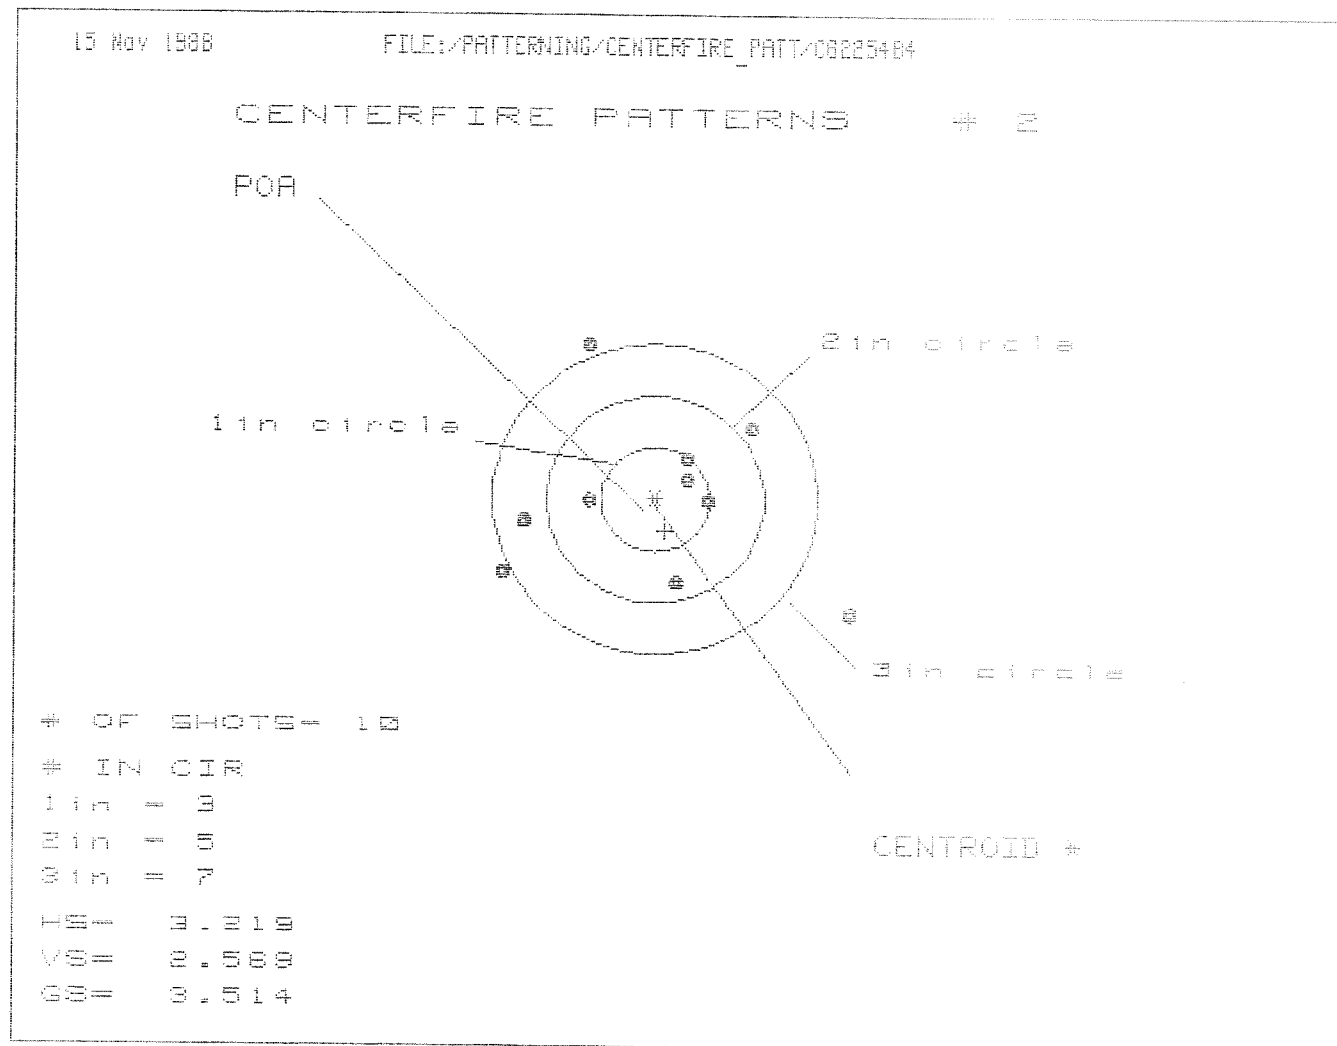

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.790	1.692	1.938
MINIMUM X	-1.429	-1.230	-1.142
MAXIMUM Y	1.449	1.324	1.226
MINIMUM Y	-1.120	-0.935	-1.033
CENTROID X	-0.090	-0.289	-0.135
CENTROID Y	.305	.430	.528
POA TO CENTROID in.	.319	.518	.545
MIN RADIUS	.337	.412	.340
MEAN RADIUS	1.031	.914	.812
MAX RADIUS	2.112	1.458	1.349
HORIZONTAL SPREAD	3.219	2.322	2.088
VERTICAL SPREAD	2.569	2.259	2.259
EXTREME SPREAD	3.514	2.708	2.383
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		

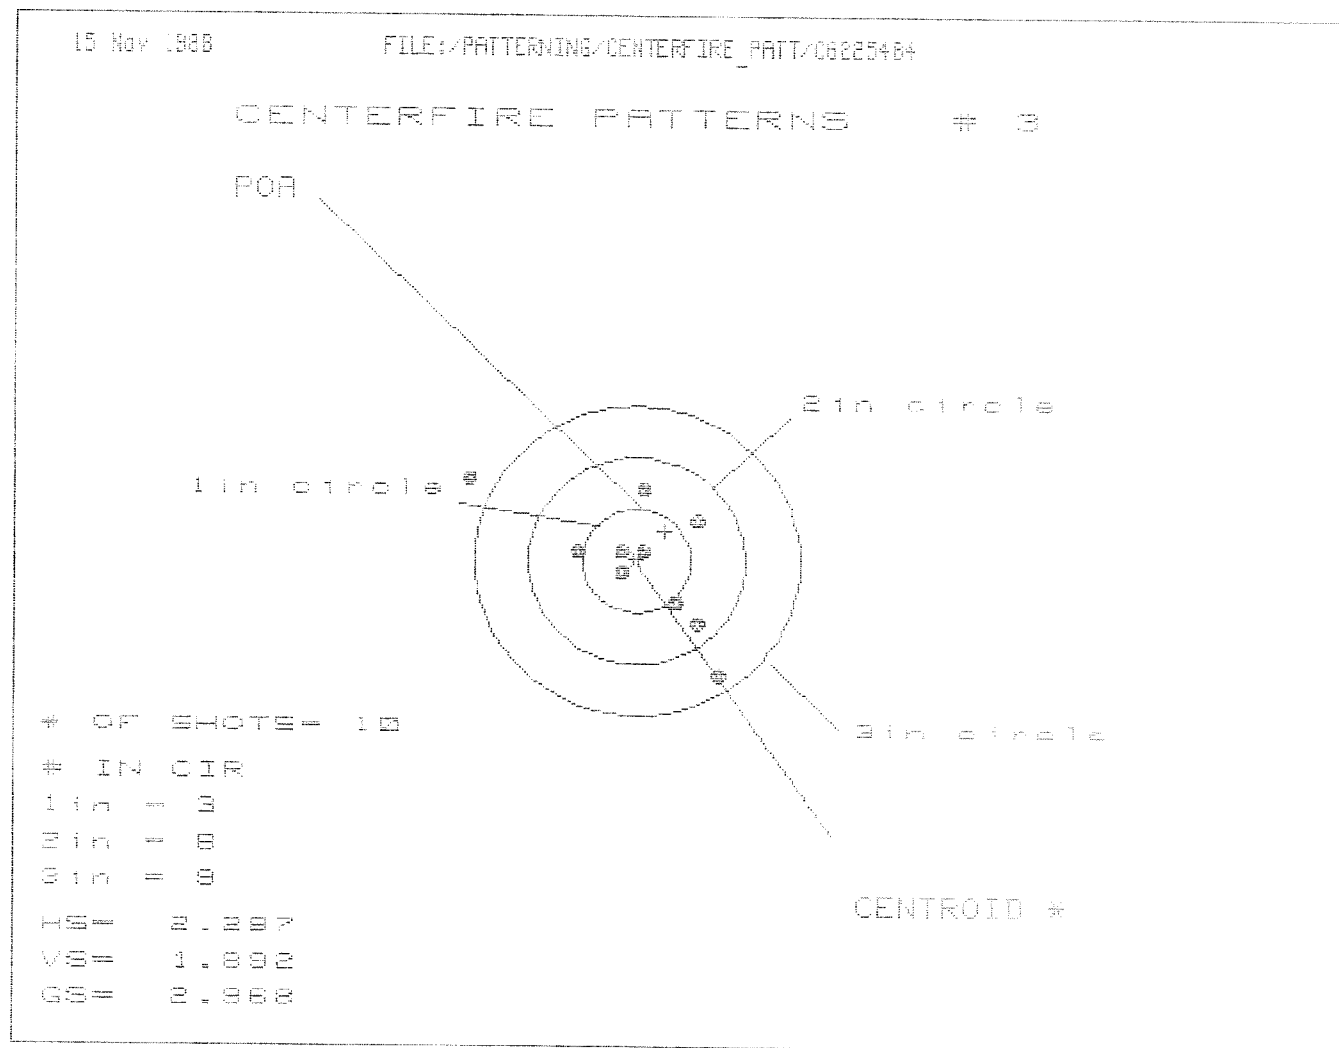


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.773	.605	.488
MINIMUM X	-1.514	-.868	-.593
MAXIMUM Y	.820	.788	.665
MINIMUM Y	-1.072	-.980	-.591
CENTROID X	-.258	-.090	-.165
CENTROID Y	-.292	-.384	-.261
POA TO CENTROID in.	.398	.394	.329
MIN RADIUS	.064	.190	.055
MEAN RADIUS	.667	.567	.461
MAX RADIUS	1.722	1.152	.761
HORIZONTAL SPREAD	2.287	1.273	1.073
VERTICAL SPREAD	1.892	1.768	1.256
EXTREME SPREAD	2.968	1.903	1.353
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =			9

15 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/05825484

CENTERFIRE PATTERNS # 4

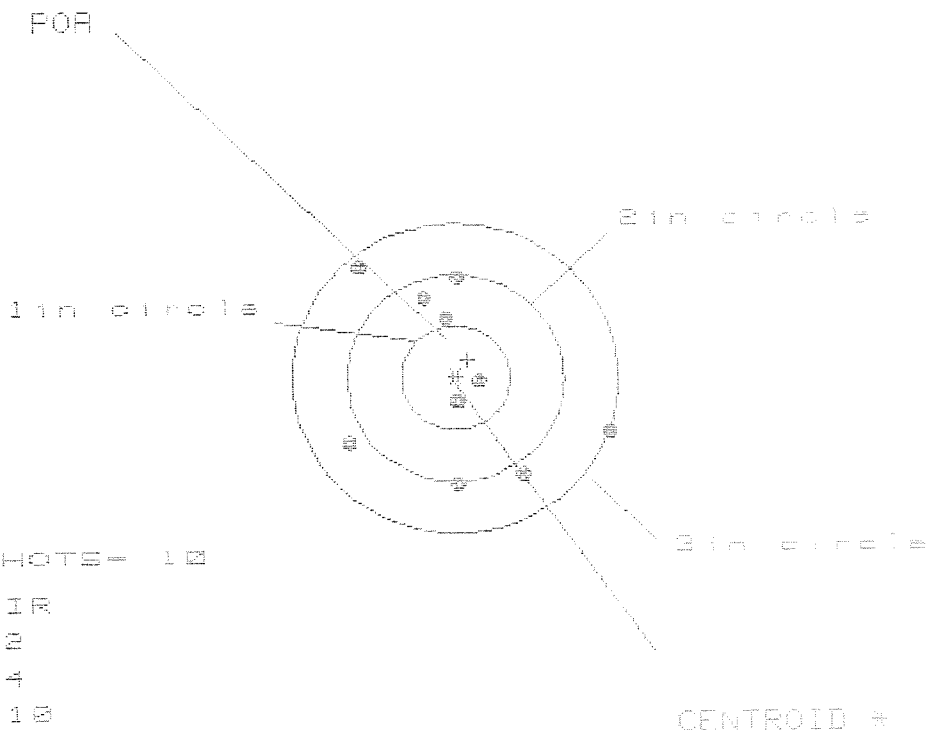

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 4

3 in = 10

HEI = 2.274

VSI = 2.149

QSI = 2.727

PATTERN #

:

4

SHOTS (BEST OF)

:

10

9

8

MAXIMUM X

:

1.370

.764

.678

MINIMUM X

:

-1.003

-.851

-.937

MAXIMUM Y

:

1.095

1.039

1.073

MINIMUM Y

:

-1.054

-1.110

-.980

CENTROID X

:

-.114

-.266

-.180

CENTROID Y

:

-.174

-.118

-.248

POA TO CENTROID in.

:

.208

.291

.307

MIN RADIUS

:

.182

.314

.159

MEAN RADIUS

:

.983

.847

.776

MAX RADIUS

:

1.468

1.268

1.113

HORIZONTAL SPREAD

:

2.373

1.615

1.615

VERTICAL SPREAD

:

2.149

2.149

2.053

EXTREME SPREAD

:

2.727

2.513

2.053

NUMBER IN ONE INCH CIRCLE =

2

NUMBER IN TWO INCH CIRCLE =

4


NUMBER IN THREE INCH CIRCLE =

10

15 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06025484

CENTERFIRE PATTERNS # 5

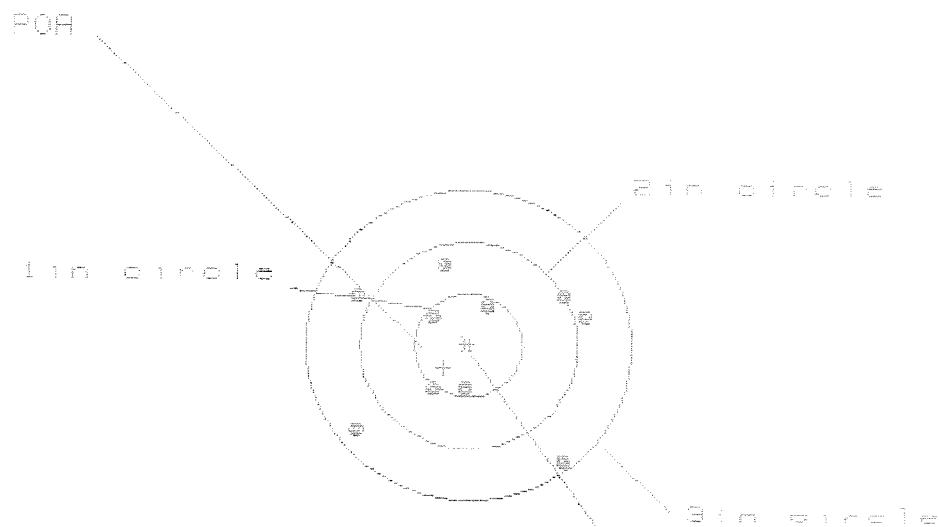

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 2.062

VS= 1.900

GS= 2.475

CENTROID #

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.833
MINIMUM X	-1.029
MAXIMUM Y	.784
MINIMUM Y	-1.115
CENTROID X	.230
CENTROID Y	.217
POA TO CENTROID in.	.317
MIN RADIUS	.417
MEAN RADIUS	.854
MAX RADIUS	1.412
HORIZONTAL SPREAD	2.062
VERTICAL SPREAD	1.900
EXTREME SPREAD	2.475
NUMBER IN ONE INCH CIRCLE	2
NUMBER IN TWO INCH CIRCLE	6
NUMBER IN THREE INCH CIRCLE	10

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 94-22621

INITIAL CUSTOMER ORDER NO.

M-24 ATTN: FRED MARTIN/PAINTED OUTSIDE SHOP

DATE RECEIVED 08/01/94 DATE OPENED 08/02/94 DATE CODE DI 9-88 SERIAL NUMBER C6225484 NEW SERIAL NUMBER MODEL AND GRADE 700 7.62 NATO
ACCESSORIES W/STUDS SCOPE MNTS SCOPE BASE

FROM:

SHIP TO:

DEPT OF THE ARMY
B CO ARMS
2/75 RANGER BATTALION
FT LEWIS

WA 98433

DEPT OF THE ARMY
B CO ARMS
2/75 RANGER BATTALION
FT LEWIS

WA

98433

CUST NO: 062072 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN AMMO FUNCTION FINISH ACCURACY FIT INSPECT

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		D5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

New Barrel

PARTS

COMMENTS

Barrel - 96003

Repaider Coat Trigger Guard
Assy, Front & Rear Sight Bases
Rezine Scope Base, Rings &
Swivel Studs

W52 H094521 H257

REPAIRMAN PROOF CLEAN TEST TARGET PATTERN

RW ✓ ✓ ✓ ✓

GALLERY TESTER DATE DATE DATE DATE DATE DATE


RW 8/3/94 8/13/94 8/15/94 8/15/94

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 066198961820

PACKING LIST		PACKED BY Mr. Ray Fuller WG-10 Bn. Armorer	1. NO. BOXES /	2a. REQUISITION NO. 92065	
3. END ITEM 7.62mm M24 Sniper Weapons System (SW5)		4. DATE 26 July 1994		5. PAGE 1 OF 1 PAGES	
BOX NO. (a)	CONTENTS - STOCK NUMBER AND NOMENCLATURE (b)	UNIT OF ISSUE (c)	QUANTITIES REQUIRED		
			INITIAL OPERATION (d)	RUNNING SPARES (e)	TOTAL (f)
1	7.62mm M24 Sniper Weapon System (SW5) Serial No. C6225484 NSN: 1005-01-240-2136    Note: All Optic Scope Ring mounts Packed	EA			1
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES					
TYPED NAME AND TITLE Ray Fuller WG-10 Bn Armorer			SIGNATURE 		

DD FORM 1 SEP 70 1750

FORM 2407
MAY 81

EDITION OF JUL 79 IS OBSOLETE.

NMP COPY 2

BARBER - M24 0061789 0061822

Final Inspection

In: C6225484

DATE REC'D: 8/1/94

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

- ___ BARREL
- ___ RECEIVER
- ___ FRONT SIGHT BLOCK
- ___ REAR SIGHT BLOCK
- ___ SCREWS
- ___ FINISH

Scope Assy.

- ___ SCOPE
- ___ SCOPE RINGS
- ___ MOUNTING SCREWS
- ___ MOUNTING BASE
- ___ SCREWS
- ___ FINISH
- ___ LOOSENESS
- ___ CLARITY

Misc.

- ___ DD-250
- ___ BAR CODE
- ___ PACKAGING

Item:

Stock Assy.

- ___ STOCK
- ___ SLING SWIVEL STUDS
- ___ ADJUSTABLE BUTT PLATE
- ___ LOCK NUTS
- ___ BARREL CLEARANCE
- ___ COLOR/FINISH

Systems Case

- ___ SCOPE CASE
- ___ IRON SIGHTS
- ___ DEPLOYMENT KIT

Trigger

- ___ SAFETY OPERATION
- ___ SET
- ___

Comments: _____

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225484

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		8/3/94	RW
600	Proof		8/3/94	RW
607	Check Headspace		8/3/94	RW
610	Dis-assemble Gun		8/3/94	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/12/94	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/12/94	RW
	C) Inspect Ejector Hole for Chamfer		8/12/94	RW
	D) Oil Firing Pin Ass'y		8/12/94	RW
	E) Adjust Trigger Pull to Min Setting and Stake		8/12/94	RW

op. #	BARBER - M24 0061786 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test							
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo							
655	Final Inspection A) Headspace						8/16/94	WLB
	B) Trigger Pull	2.44	2.40	2.40	2.43	2.41	8/16/94	WLB
	C) Function							
660	Pack							

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225484
18 Aug 1994

CENTROIDAL DISTANCES

0 TO	1	.185801
1 TO	2	.0724707
1 TO	3	.507694
1 TO	4	.260292
1 TO	5	.121264


3  <----FOR

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2218
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0846
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .237387
THE AMR FOR THIS RIFLE IS: .9322

18 Aug 1984

FILE:/PATTERNING/CENTERFIRE_PATT/062254B4

CENTERFIRE PATTERNS # 1

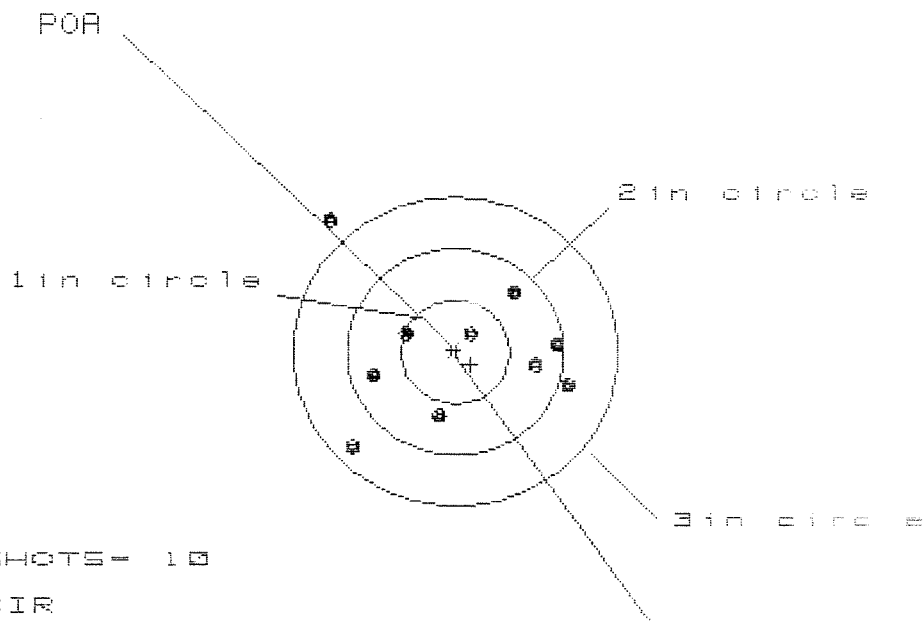

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 7

3 in = 9

HS = 2.248

VS = 2.196


GS = 2.770

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.077	.947	.813
MINIMUM X	-1.171	-1.078	-1.034
MAXIMUM Y	1.281	.686	.590
MINIMUM Y	-.915	-.773	-.503
CENTROID X	-.141	-.011	.124
CENTROID Y	.121	-.021	.075
POA TO CENTROID in.	.186	.024	.145
MIN RADIUS	.232	.295	.213
MEAN RADIUS	.873	.764	.665
MAX RADIUS	1.735	1.326	1.055
HORIZONTAL SPREAD	2.248	2.025	1.846
VERTICAL SPREAD	2.196	1.459	1.153
EXTREME SPREAD	2.770	2.124	1.848
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

18 Aug 1984

FILE:/PATTERNING/CENTERFIRE_PATT/062254B4

CENTERFIRE PATTERNS # 2

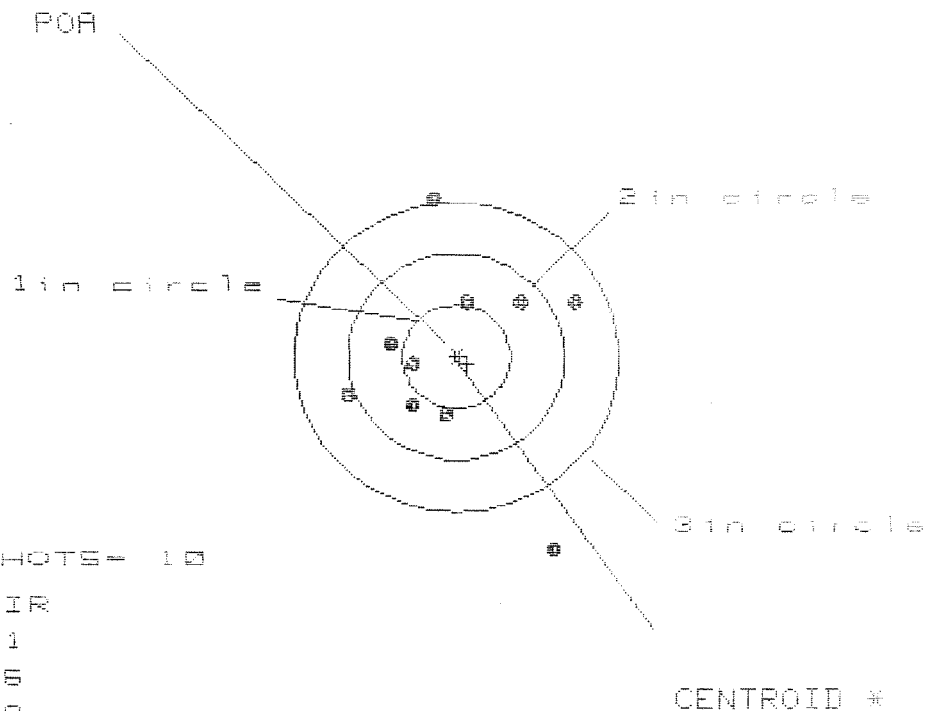

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 8

HS = 2.106

VS = 3.359


GS = 3.549

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.091	1.195	1.182
MINIMUM X	-1.015	-.911	-.924
MAXIMUM Y	1.544	1.342	.535
MINIMUM Y	-1.815	-.775	-.687
CENTROID X	-.095	-.199	-.186
CENTROID Y	.065	.267	.099
POB TO CENTROID in.	.115	.333	.210
MIN RADIUS	.426	.412	.348
MEAN RADIUS	.947	.805	.715
MAX RADIUS	2.042	1.346	1.297
HORIZONTAL SPREAD	2.106	2.106	2.106
VERTICAL SPREAD	3.359	2.117	1.142
EXTREME SPREAD	3.549	2.293	2.293
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

18 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/08225484

CENTERFIRE PATTERNS # 3

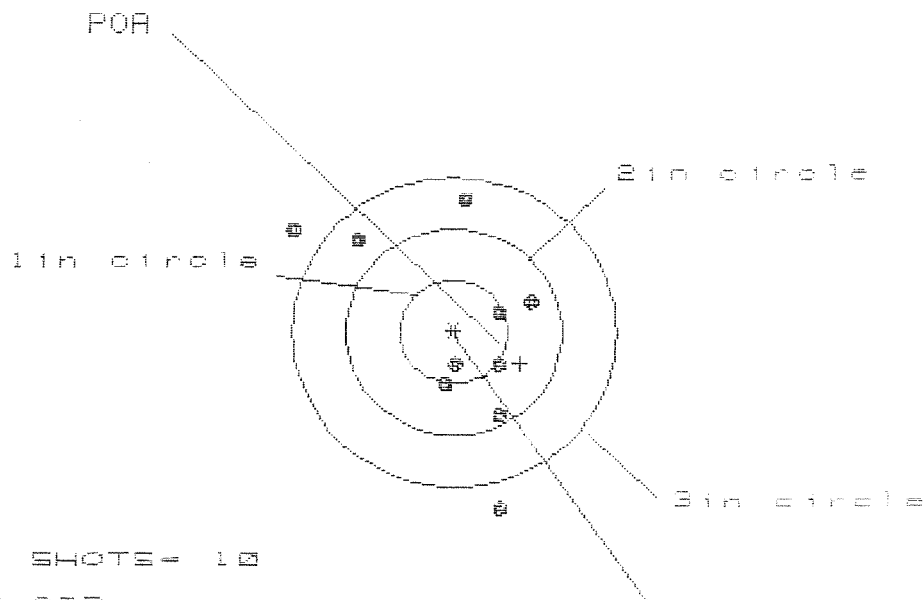

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 6

3 in = 8

HS = 2.178

VS = 2.973


GS = 3.210

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.709	.546	.573
MINIMUM X	:	-1.469	-1.022	-.995
MAXIMUM Y	:	1.313	1.421	1.226
MINIMUM Y	:	-1.660	-1.552	-.944
CENTROID X	:	-.613	-.450	-.477
CENTROID Y	:	.308	.200	.395
POA TO CENTROID in.	:	.686	.493	.619
MIN RADIUS	:	.325	.285	.347
MEAN RADIUS	:	.983	.827	.756
MAX RADIUS	:	1.758	1.567	1.294
HORIZONTAL SPREAD	:	2.178	1.568	1.568
VERTICAL SPREAD	:	2.973	2.973	2.178
EXTREME SPREAD	:	3.210	2.983	2.187
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

18 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/062254B4

CENTERFIRE PATTERN # 4

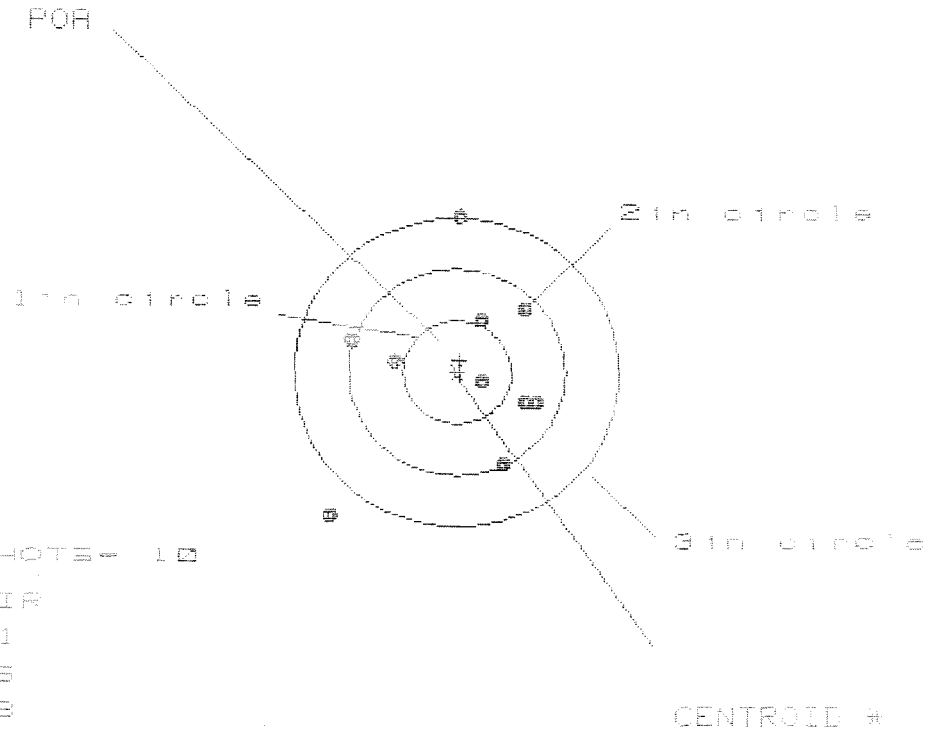

OF SHOTS = 10

IN CIR

1in = 1

2in = 6

3in = 3

HE = 1.943

VS = 2.889

GS = 3.159


CENTROID #

PATTERN #	4
SHOTS (BEST OF)	10
MAXIMUM X	.725
MINIMUM X	-1.218
MAXIMUM Y	1.499
MINIMUM Y	-1.390
CENTROID X	-.027
CENTROID Y	-.113
POA TO CENTROID in.	.116
MIN RADIUS	.281
MEAN RADIUS	.916
MAX RADIUS	1.848
HORIZONTAL SPREAD	1.943
VERTICAL SPREAD	2.889
EXTREME SPREAD	3.159
NUMBER IN ONE INCH CIRCLE =	1
NUMBER IN TWO INCH CIRCLE =	6
NUMBER IN THREE INCH CIRCLE =	3

16 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225484

CENTERFIRE PATTERNS # 5

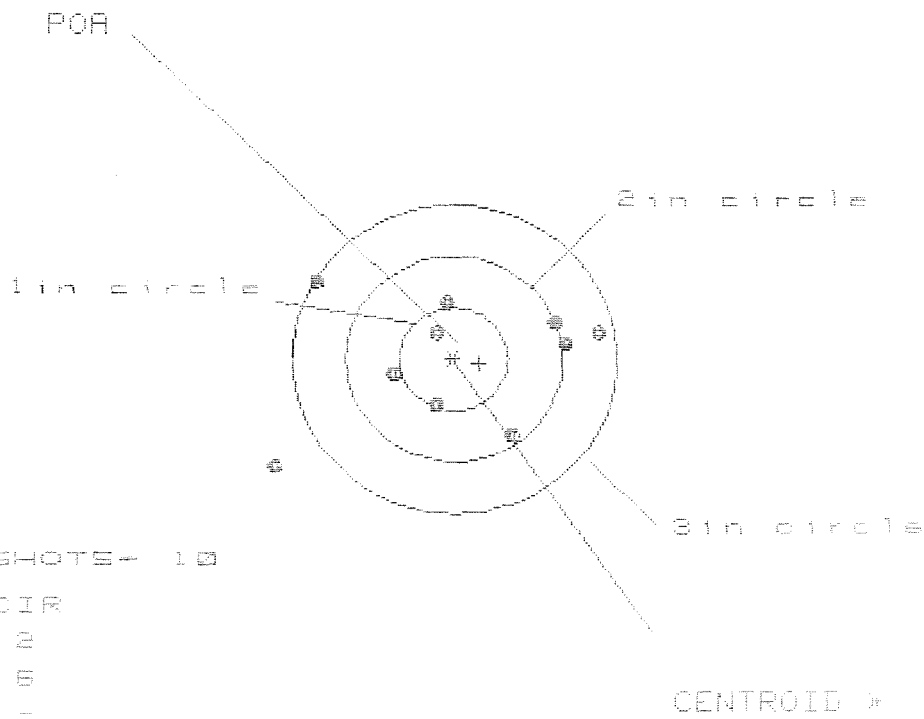

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 9

HS= 2.883

VE= 1.884

GS= 3.242

PATTERN #	5	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.295	1.110	.932
MINIMUM X	-1.668	-1.425	-.962
MAXIMUM Y	.746	.629	.582
MINIMUM Y	-1.058	-.813	-.735
CENTROID X	-.233	-.048	.130
CENTROID Y	.042	.159	.081
POA TO CENTROID in.	.237	.166	.153
MIN RADIUS	.298	.371	.566
MEAN RADIUS	.962	.838	.743
MAX RADIUS	1.975	1.558	.980
HORIZONTAL SPREAD	2.963	2.535	1.854
VERTICAL SPREAD	1.884	1.442	1.237
EXTREME SPREAD	3.242	2.582	1.938
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

NMP COPY 2

BARBER - M24 0061794 M2400061833

BARBER - M24 0061795

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225484
22 Apr 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0178
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0266
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0320062

THE AMR FOR THIS RIFLE IS: .9456

CENTROIDAL DISTANCES

0 TO	1	.222272
1 TO	2	.233497
1 TO	3	.0962133
1 TO	4	.348432
1 TO	5	.527595

5
4
3 <----POA

BARBER - M24 0061796


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
POA TO CENTROID: .222
MIN RADIUS : .252
MEAN RADIUS : .827
MAX RADIUS : 1.620
CENTROID X : -.171
CENTROID Y : -.142

22 Apr 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225484

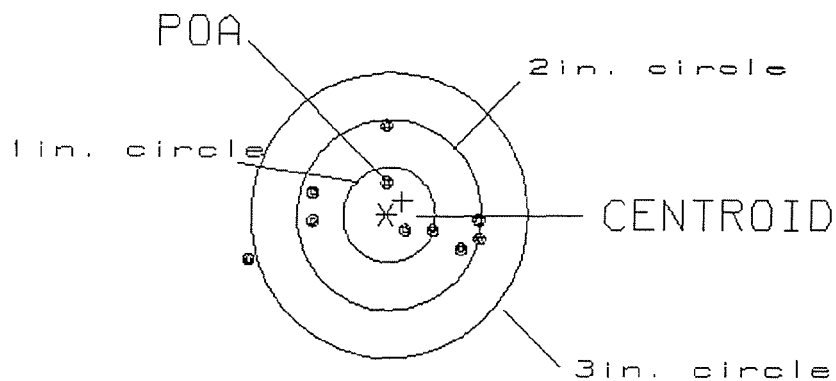CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 2.57
VS= 1.35
GS= 2.59

2
6
9

BARBER - M24 0061797


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
POA TO CENTROID: .058
MIN RADIUS : .189
MEAN RADIUS : .980
MAX RADIUS : 2.831
CENTROID X : .040
CENTROID Y : -.042

22 Apr 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225484

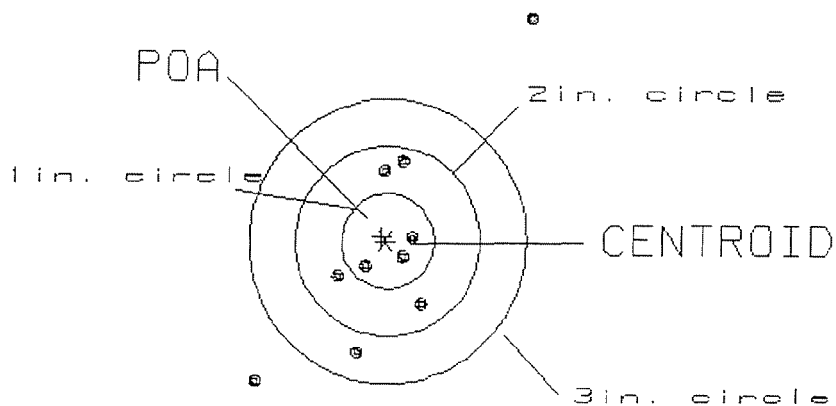CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 3.05

3

VS= 3.75

7

GS= 4.84

8

BARBER - M24 0061798

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: .245
MIN RADIUS : .302
MEAN RADIUS : .871
MAX RADIUS : 1.375
CENTROID X : -.112
CENTROID Y : -.218

22 Apr 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225484

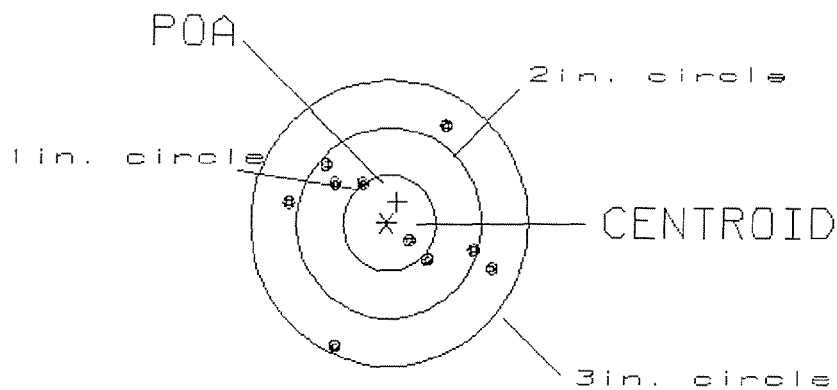CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.17

2

VS= 2.23

6

GS= 2.53


10

PATTERN #: 4
 POA TO CENTROID: .131
 MIN RADIUS : .359
 MEAN RADIUS : .949
 MAX RADIUS : 1.627
 CENTROID X : .123
 CENTROID Y : .045

22 Apr 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225484

CENTERFIRE PATTERN # 4

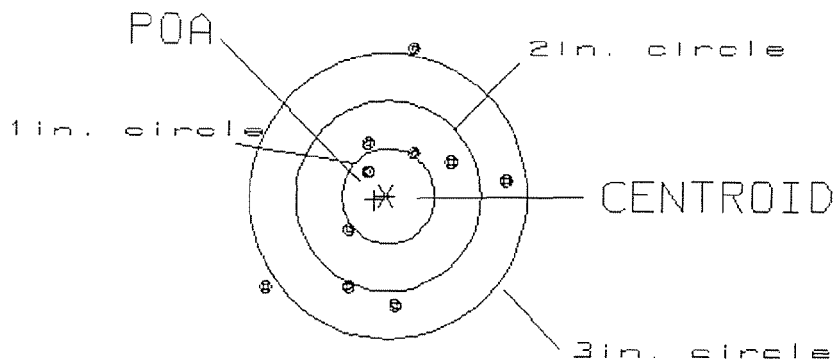

OF SHOTS= 10

IN CIRCLE

HS= 2.59
 VS= 2.77
 GS= 3.02

1
 5
 8

BARBER - M24 0061800

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .307
 MIN RADIUS : .108
 MEAN RADIUS : 1.101
 MAX RADIUS : 1.880
 CENTROID X : .209
 CENTROID Y : .224

22 Apr 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225484

CENTERFIRE PATTERN # 5

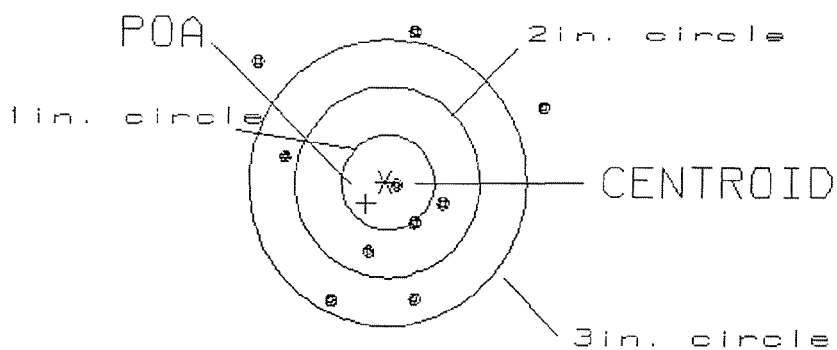

OF SHOTS= 10

IN CIRCLE

HS= 3.07

1

VS= 2.80

4

GS= 3.12

7