

|                         |      |
|-------------------------|------|
| C6348794                |      |
| MODEL 700™ M24          |      |
| Model                   | SMS™ |
| Action                  |      |
| Barrel Length           |      |
| Capacity                |      |
| Order No.               | 5716 |
| *Includes 1 in chamber. |      |
| Remington               |      |

## Repair Inquiry

Repair Number: RE00123769

Serial: C6348794 Model M24 SWS Center Fire  
Caliber: 308

Repairman:

Verify Repair

Status: Closed 1/17/2007 8:15:53 AM

## Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: DEPT OF ARMY CCO 2/1 SFG (A)

DEPT OF ARMY CCO 2/1 SFG (A)

Address 1: ATTN SGT SHEPARD DONALD

ATTN SGT SHEPARD DONALD

Address 2: BOX 339500 MS 78

PO Box:

BOX 339500 MS 78

PO Box:

City: FORT LEWIS

FORT LEWIS

State: WA

Zip Code: 98433

Country: US

State: WA

Zip Code: 98433

Country: US

FFL:

## Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

## Contact Information

Phone: NA

Fax:

Email:

Comments:

## Received Condition

Fair

Condition  
Notes:CSR  
Notes:

## Accessories Received

| Code | Desc       | Qty |
|------|------------|-----|
| A007 | With Stud  | 3   |
| A010 | Hard Case  | 1   |
| A017 | Scope Base | 2   |

Repair Search

Refresh

Close

naglelj

1/17/2007

9:53 AM

CAPS

NUM

INS

SCRL



Serial Number: C6348794

Model: M24 SWS



RE00123769

## INSPECTION CHECKLIST - REPAIRS

CONTRACT #: DAAE-20-02-C-0149

| R & E NUMBER  | 123 769              |                                                                                   |             |
|---------------|----------------------|-----------------------------------------------------------------------------------|-------------|
| SERIAL NUMBER | 06348794             |                                                                                   |             |
| LOG-IN DATE   | 1-17-07              |                                                                                   |             |
| OPERATION #   | OPERATION NAME       | DATE                                                                              | INITIAL     |
| 500           | DIS-ASSEMBLE GUN     | 1-18-07                                                                           | RTZ         |
| 505           | RE-BARREL            | 1-19-07                                                                           | RTZ         |
| 420           | ASSEMBLE             | 1-19-07                                                                           | RTZ         |
| 440           | PROOF                | MAGNA-FLUX INSPECTED                                                              |             |
| 460           | CHECK HEADSPACE      | 1-19-07                                                                           | RP          |
| 470           | DIS-ASSEMBLE GUN     | 1-22-07                                                                           | RTZ         |
| 480           | MAGNAFLUX            | 1-23-07                                                                           | APD         |
| 510           | DRILL AND TAP        | 1-22-07                                                                           | FM          |
| 500           | ROLLMARK CALIBER     | 1-23-07                                                                           | CW          |
| 520           | GOFF BLAST BBL / REC | 1-23-07                                                                           | LB          |
| 530 & 540     | APPLY COATINGS       | 1-25-07                                                                           | LB          |
| 560           | FINAL ASSEMBLY       | 1-30-07                                                                           | RTZ         |
| 640           | FUNCTION TEST AND    | PASS FAIL                                                                         | 1/30/07 MSH |
| 650           | TARGET               | PASS FAIL                                                                         | 1/30/07 MSH |
|               | MALFUNCTION          | CORRECTION                                                                        |             |
|               | MALFUNCTION          | CORRECTION                                                                        |             |
|               | MALFUNCTION          | CORRECTION                                                                        |             |
|               | MALFUNCTION          | CORRECTION                                                                        |             |
| 670           | FINAL INSPECTION     | 1-30-07                                                                           | TRH         |
|               | A) HEADSPACE         | PASS FAIL                                                                         | 2-1-07 RTZ  |
|               | B) TRIGGER PULL      | +/- .5 LBS<br>MIN 2.50 LBS<br>MAX 4.0 LBS<br>2.26 2.15 2.18 2.22 2.21 1-31-07 TRH |             |
| 680           | F) SAFETY ON FORCE   | 2 LBS MIN<br>10 LBS MAX<br>4.5 5.0 4.5 1-31-07 OA                                 |             |
|               | G) SAFETY OFF FORCE  | 2 LBS<br>2.0 2.0 2.0 1-31-07 OA                                                   |             |
|               | I) FIRING PIN INDENT | .020<br>.024 .024 .024 1-31-07 OA                                                 |             |
| 690           | PACK                 | 2-1-07 OA                                                                         |             |

F006 REV 5/2006

## BARREL ASSEMBLY

\_\_\_\_\_  
BARREL\_\_\_\_\_  
RECEIVER\_\_\_\_\_  
FRONT SIGHT BASE\_\_\_\_\_  
REAR SIGHT BASE\_\_\_\_\_  
SCREWS\_\_\_\_\_  
FINISH

## SCOPE ASSEMBLY

\_\_\_\_\_  
SCOPE\_\_\_\_\_  
SCOPE RINGS\_\_\_\_\_  
MOUNTING SCREWS\_\_\_\_\_  
MOUNTING BASE\_\_\_\_\_  
SCREWS\_\_\_\_\_  
FINISH\_\_\_\_\_  
CLARITY

## STOCK ASSEMBLY

\_\_\_\_\_  
STOCK\_\_\_\_\_  
SLING SWIVEL STUDS\_\_\_\_\_  
BUTT PATE\_\_\_\_\_  
LOCK NUTS\_\_\_\_\_  
BARREL CLEARANCE\_\_\_\_\_  
COLOR / FINISH

## SYSTEM CASE

\_\_\_\_\_  
SCOPE CASE\_\_\_\_\_  
IRON SIGHTS\_\_\_\_\_  
DEPLOYMENT KIT

## TRIGGER ASSEMBLY

\_\_\_\_\_  
SAFETY OPERATION\_\_\_\_\_  
RE-SET TO FACTORY  
SPECS

COMMENTS: \_\_\_\_\_

F006 REV 5/2006

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348794.\_\_\_0

FILE DATE AND TIME: 01/31/2007 12:53


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | 0.003  |
| The Average Y Centroid of the Five Target Set:              | -0.035 |
| The Average Point of Impact of the Five Target Set:         | 0.035  |
| The Average Mean Radius of the Five Target Set:             | 0.654  |
| The Distance from POA to Centroid Target #1:                | 0.129  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.194  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.097  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.208  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.339  |

SERIAL NUMBER: C6348794. \_\_0  
 TARGET NUMBER: 1  
 FILE DATE: 01/31/2007  
 FILE TIME: 12:53

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.469  | -1.082 |
| 2:     | 0.119  | -0.976 |
| 3:     | 0.075  | -0.358 |
| 4:     | 0.240  | -0.055 |
| 5:     | 0.519  | 0.245  |
| 6:     | -0.130 | 0.705  |
| 7:     | -0.267 | 1.118  |
| 8:     | -1.499 | -0.664 |
| 9:     | -1.364 | 0.587  |
| 10:    | 1.028  | 1.486  |

X CENTROID: -0.081  
 Y CENTROID: 0.101  
 POA TO CENTROID: 0.129  
 HORZ SPREAD: 2.527  
 VERT SPREAD: 2.568  
 GROUP SPREAD: 3.318  
 MIN RADIUS: 0.357  
 MAX RADIUS: 1.775  
 MEAN RADIUS: 1.026  
 # IN 1 IN DIAMETER: 2  
 # IN 2 IN DIAMETER: 4  
 # in 3 IN DIAMETER: 8

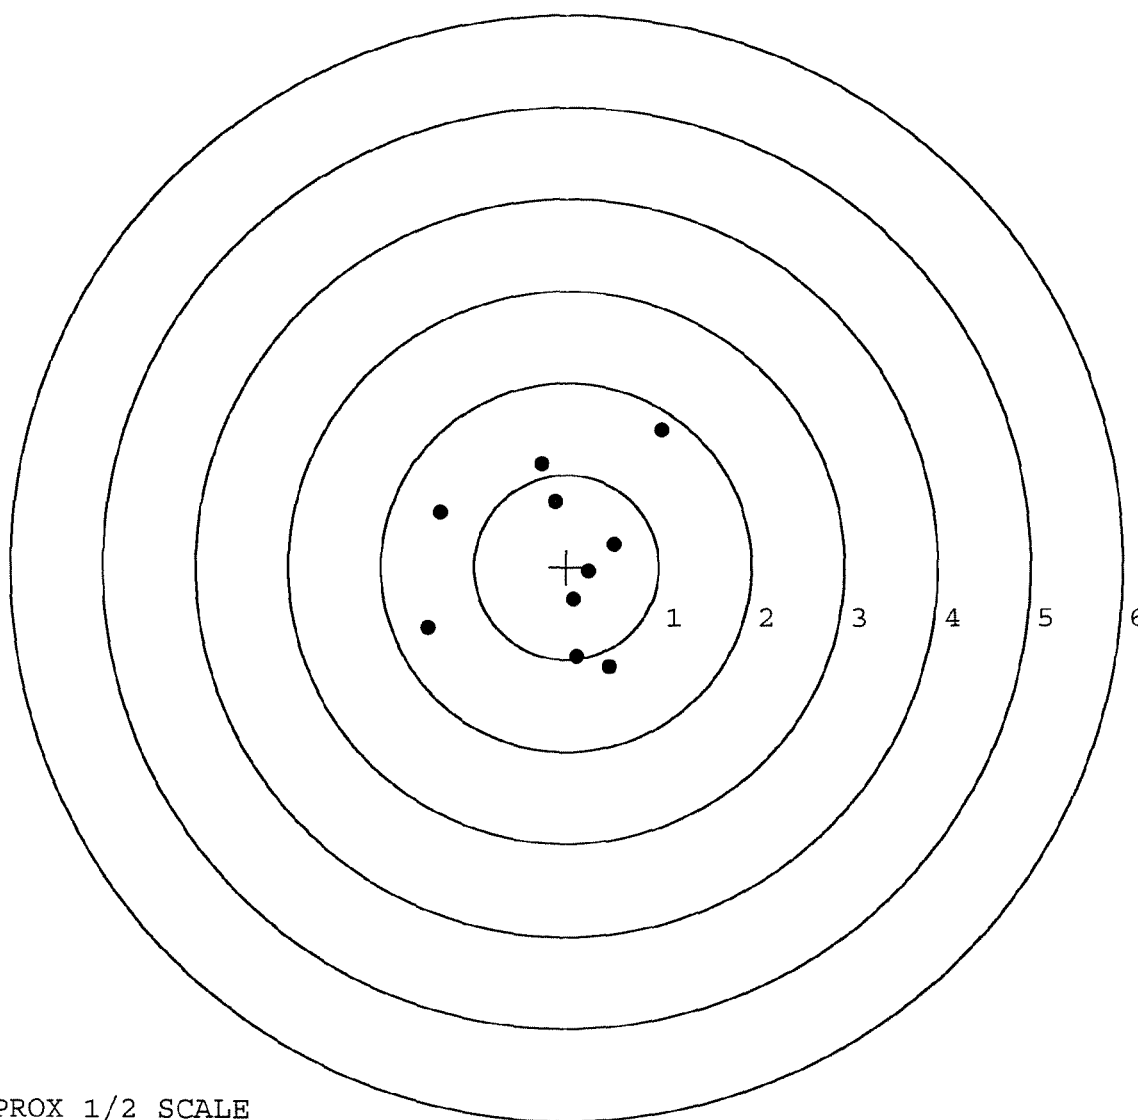

TARGET APPROX 1/2 SCALE

**BARBER - M24 0064197**

SERIAL NUMBER: C6348794. \_\_0

TARGET NUMBER: 2

FILE DATE: 01/31/2007

FILE TIME: 12:53

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.375  | 0.670  |
| 2:     | 0.689  | 0.142  |
| 3:     | 0.388  | -0.256 |
| 4:     | 0.152  | 0.216  |
| 5:     | -0.032 | 0.231  |
| 6:     | -0.347 | -0.043 |
| 7:     | 0.033  | -0.140 |
| 8:     | 0.281  | 0.062  |
| 9:     | -0.485 | -0.895 |
| 10:    | -0.391 | -0.241 |

X CENTROID: 0.066

Y CENTROID: -0.025

POA TO CENTROID: 0.071

HORZ SPREAD: 1.174

VERT SPREAD: 1.565

GROUP SPREAD: 1.786

MIN RADIUS: 0.119


MAX RADIUS: 1.030

MEAN RADIUS: 0.463

# IN 1 IN DIAMETER: 6

# IN 2 IN DIAMETER: 9

# in 3 IN DIAMETER: 10

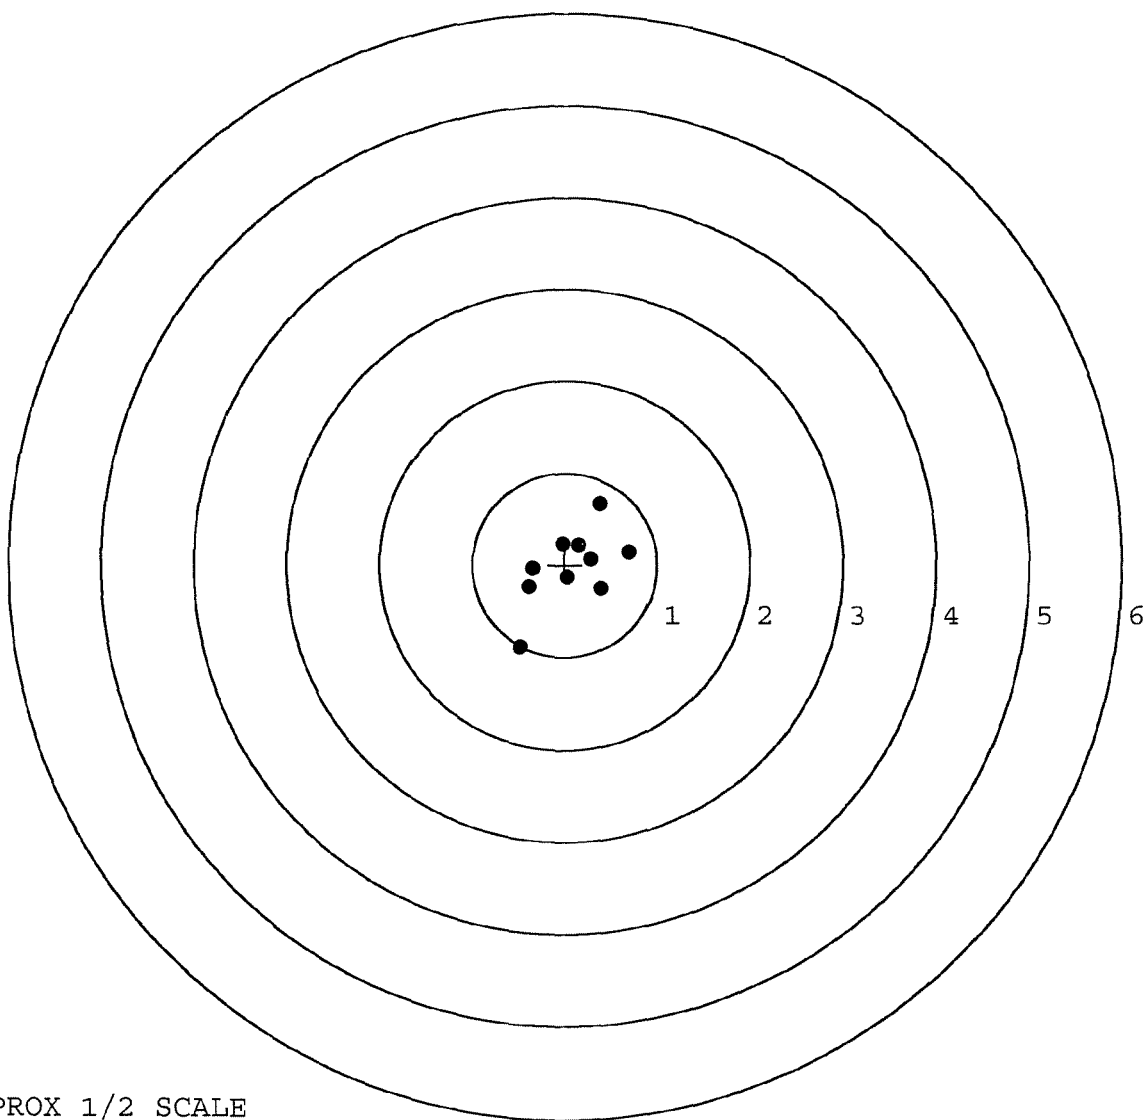


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348794. 0  
 TARGET NUMBER: 3  
 FILE DATE: 01/31/2007  
 FILE TIME: 12:53

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.664 | 0.757  |
| 2:     | -0.011 | 0.748  |
| 3:     | -0.284 | 0.363  |
| 4:     | -0.473 | -0.048 |
| 5:     | -0.509 | -0.271 |
| 6:     | 0.096  | -0.733 |
| 7:     | 0.313  | -0.601 |
| 8:     | 0.423  | -0.142 |
| 9:     | -0.010 | -0.169 |
| 10:    | 0.081  | 0.157  |

X CENTROID: -0.104  
 Y CENTROID: 0.006  
 POA TO CENTROID: 0.104  
 HORZ SPREAD: 1.087  
 VERT SPREAD: 1.490  
 GROUP SPREAD: 1.673  
 MIN RADIUS: 0.199  
 MAX RADIUS: 0.937  
 MEAN RADIUS: 0.543  
 # IN 1 IN DIAMETER: 5  
 # IN 2 IN DIAMETER: 10  
 # in 3 IN DIAMETER: 10

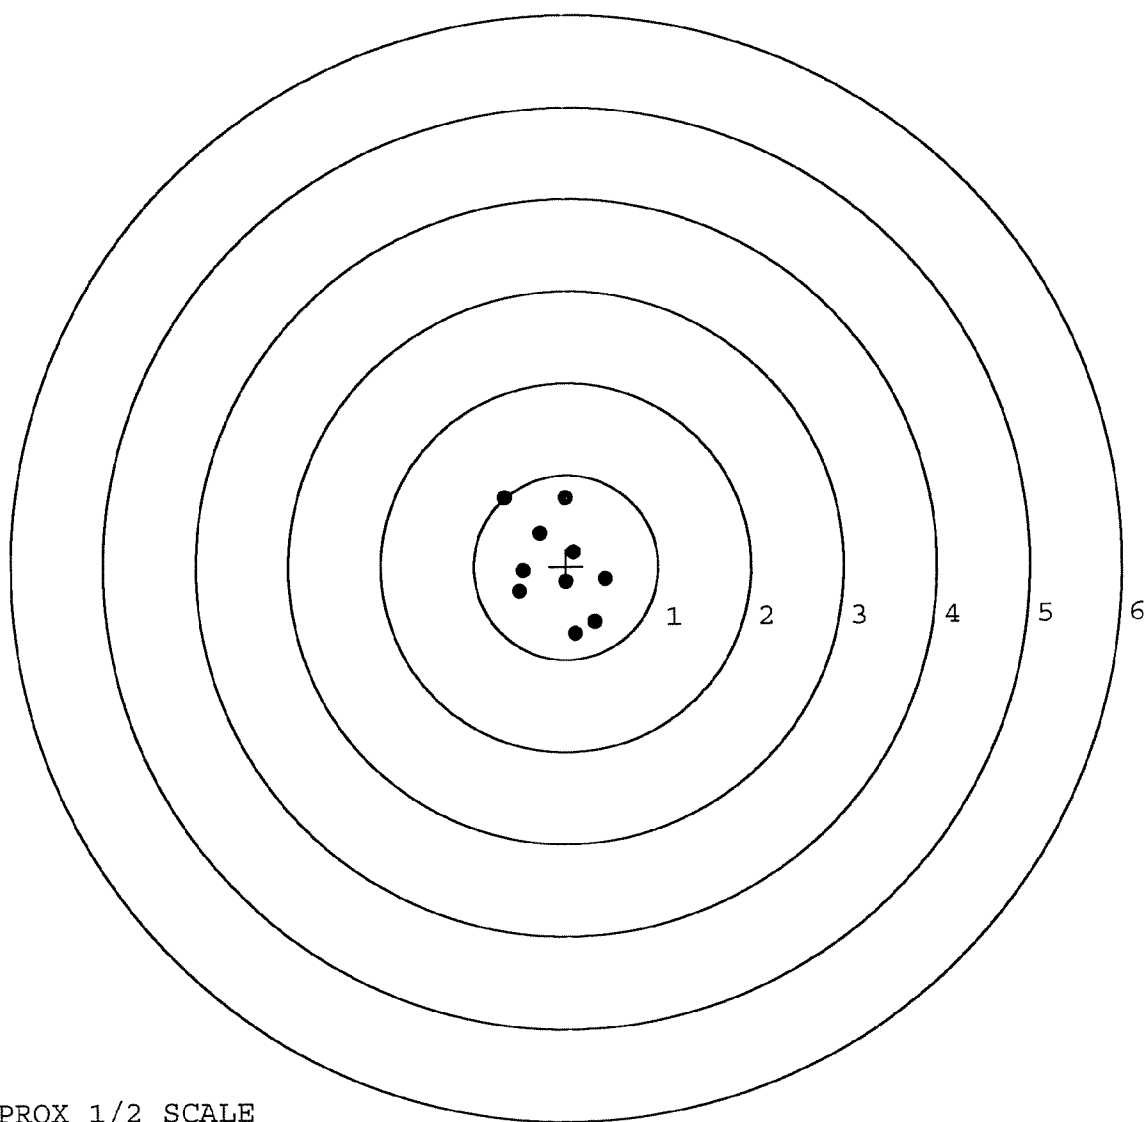


TARGET APPROX 1/2 SCALE



**BARBER - M24 0064199**

|                               |        |        |        |
|-------------------------------|--------|--------|--------|
| SERIAL NUMBER: C6348794.____0 | POINT# | X      | Y      |
| TARGET NUMBER: 4              | 1:     | 0.739  | -0.834 |
| FILE DATE: 01/31/2007         | 2:     | 1.022  | -0.019 |
| FILE TIME: 12:53              | 3:     | 0.157  | -0.600 |
|                               | 4:     | -0.115 | -0.574 |
| X CENTROID: 0.048             | 5:     | -0.249 | -0.284 |
| Y CENTROID: -0.063            | 6:     | -0.226 | 0.012  |
| POA TO CENTROID: 0.079        | 7:     | -0.546 | -0.084 |
| HORZ SPREAD: 1.568            | 8:     | -0.084 | 0.220  |
| VERT SPREAD: 1.774            | 9:     | 0.004  | 0.590  |
| GROUP SPREAD: 2.020           | 10:    | -0.227 | 0.940  |
| MIN RADIUS: 0.284             |        |        |        |
| MAX RADIUS: 1.040             |        |        |        |
| MEAN RADIUS: 0.635            |        |        |        |
| # IN 1 IN DIAMETER: 3         |        |        |        |
| # IN 2 IN DIAMETER: 8         |        |        |        |
| # in 3 IN DIAMETER: 10        |        |        |        |

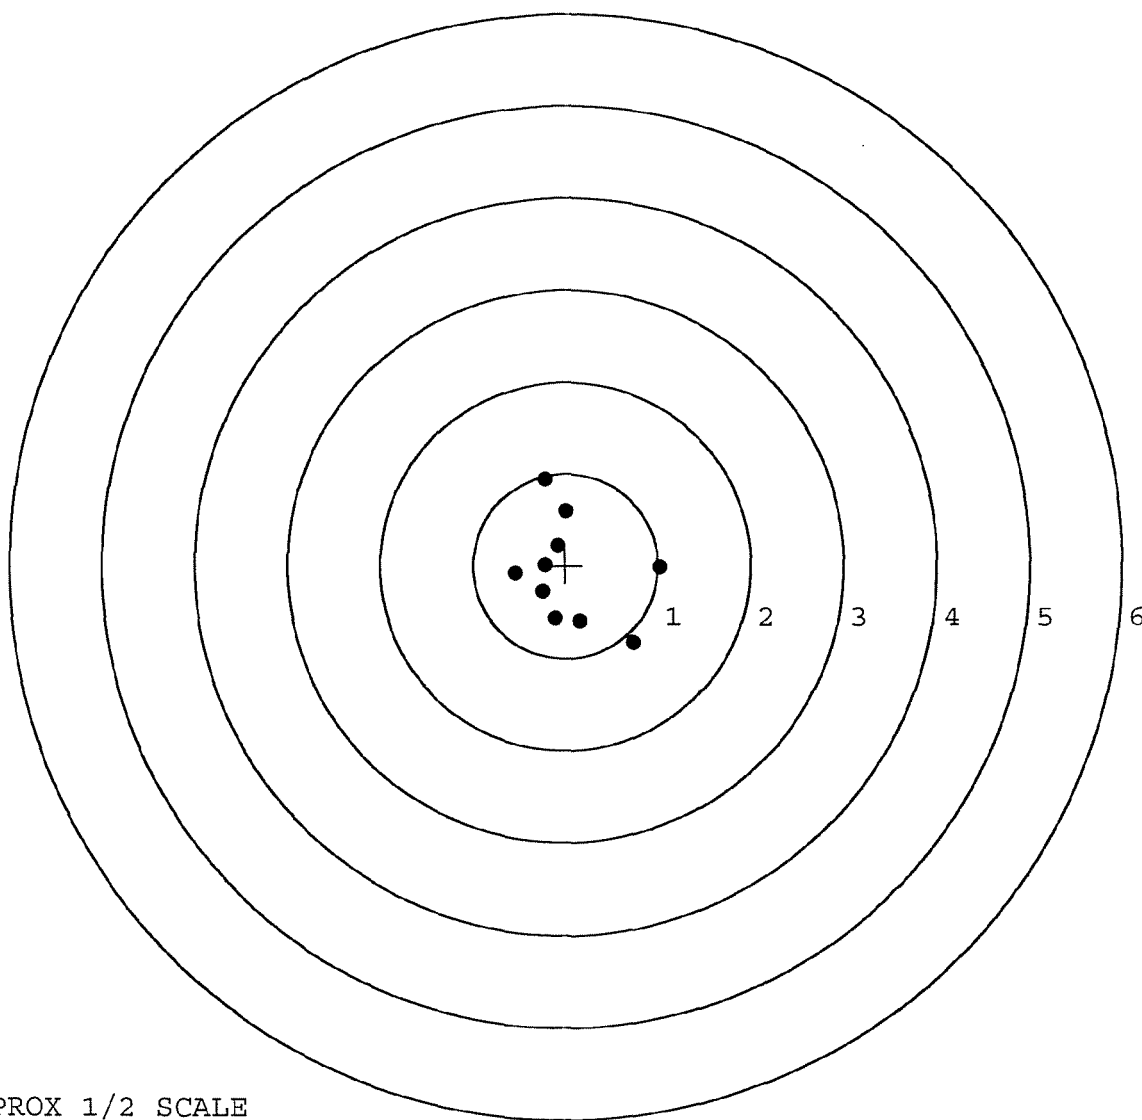

TARGET APPROX 1/2 SCALE

**BARBER - M24 0064200**

SERIAL NUMBER: C6348794. 0

TARGET NUMBER: 5

FILE DATE: 01/31/2007

FILE TIME: 12:53

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.200  | -1.632 |
| 2:     | -0.050 | -0.616 |
| 3:     | -0.141 | -0.509 |
| 4:     | -0.168 | -0.269 |
| 5:     | -0.593 | 0.081  |
| 6:     | -0.045 | 0.072  |
| 7:     | 0.043  | 0.301  |
| 8:     | 0.549  | 0.492  |
| 9:     | 0.613  | 0.366  |
| 10:    | 0.468  | -0.221 |

X CENTROID: 0.088

Y CENTROID: -0.193

POA TO CENTROID: 0.212

HORZ SPREAD: 1.206

VERT SPREAD: 2.124

GROUP SPREAD: 2.152

MIN RADIUS: 0.267


MAX RADIUS: 1.443

MEAN RADIUS: 0.605

# IN 1 IN DIAMETER: 6

# IN 2 IN DIAMETER: 9

# in 3 IN DIAMETER: 10

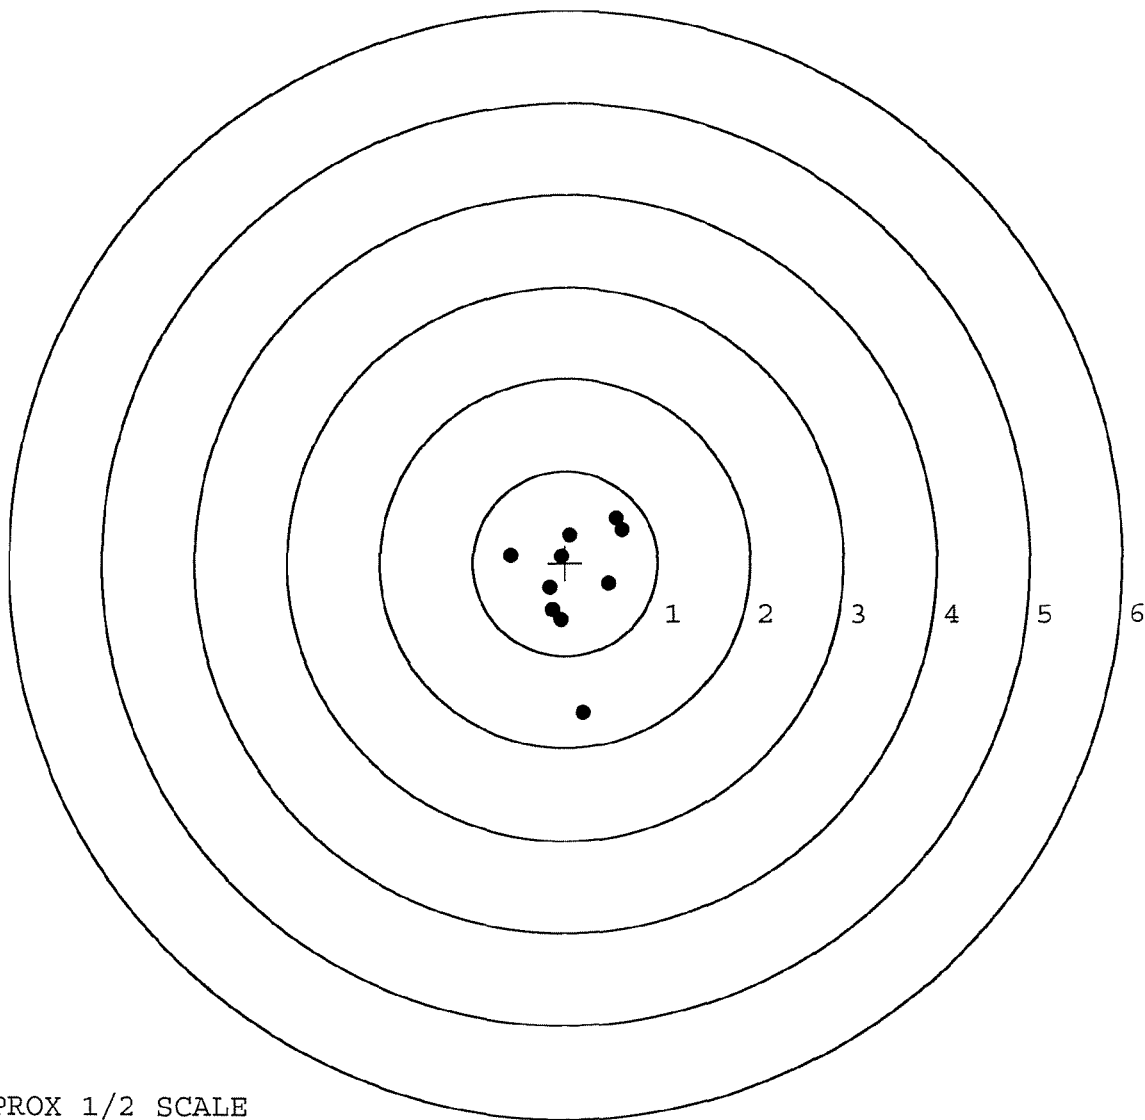

TARGET APPROX 1/2 SCALE

| MAINTENANCE REQUEST<br>For use of this form, see DA PAM 750-8; the proponent agency is DCS, G-4.                                             |                                      |                          |                                                                                                        | PAGE NO<br>1                                                             | NO OF PAGES<br>1                                                                                          | REQUIREMENT CONTROL SYMBOL<br>CSGLD-1047(R1) |                                 |
|----------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|----------------------------------------------|---------------------------------|
| SECTION I - CUSTOMER DATA                                                                                                                    |                                      |                          |                                                                                                        | SECTION II - MAINTENANCE ACTIVITY DATA                                   |                                                                                                           |                                              |                                 |
| 1a. UIC/CUSTOMER<br>WHITMAN 2/1                                                                                                              | 1b. CUSTOMER UNIT NAME<br>1ST SFG(A) | 1c. PHONE NO<br>967 8644 | 3a. WORK ORDER NUMBER (WON)<br>6353-1                                                                  | 3b. SHOP<br>DS/GS ARMS SHOP<br>FT. LEWIS, WA                             | 3c. PHONE NO                                                                                              |                                              |                                 |
| 2a. SAMS-2 UIC/SAMS-1 TDA                                                                                                                    | 2b. UTILIZATION CODE                 | 2c. MCSR                 | 4a. UIC SUPPORT UNIT                                                                                   | 4b. SUPPORT UNIT NAME                                                    |                                                                                                           |                                              |                                 |
| SECTION III - EQUIPMENT DATA                                                                                                                 |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 5. TYPE MNT REQ CODE                                                                                                                         | 6. ID                                | 7. NSN<br>100501240236   | 15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code)<br>See DA Pamphlets 738-750 and 738-751 |                                                                          | 15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code)<br>See DA Pamphlets 738-750 and 738-751 |                                              |                                 |
| 8. MODEL<br>Rem 700                                                                                                                          | 9. NOUN<br>SNIPER RIFLE              |                          | 16. MILES/KILOMETERS/HOURS/ROUNDS                                                                      |                                                                          | 16. MILES/KILOMETERS/HOURS/ROUNDS                                                                         |                                              |                                 |
| 10a. ORG WON/DOC NO                                                                                                                          | 10b. EIC                             |                          | 17. PROJECT CODE (if assigned)                                                                         |                                                                          | 18. ACCOUNT PROCESSING CODE                                                                               |                                              | 19. IN WARRANTY? (enter Y or N) |
| 11. SERIAL NUMBER<br>6748794                                                                                                                 | 12. QTY<br>1                         | 13. PD                   | 21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N)                                         |                                                                          | 20. ADMIN NO                                                                                              |                                              |                                 |
| 14. MALFUNCTION DESCRIPTION (for DSU, GSUI/AVIM, DEPOT use)                                                                                  |                                      |                          |                                                                                                        | 22. LEVEL OF WORK                                                        |                                                                                                           | 23. SIGNATURE                                |                                 |
| 24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 25. REMARKS<br>Fail NO go home check                                                                                                         |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 26. TECHNICAL REFERENCES                                                                                                                     |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| SECTION IV - TASK REQUIREMENTS DATA                                                                                                          |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 27a. FILE INPUT ACT CD                                                                                                                       | 27b. TASK NO                         | 27c. ACT CODE            | 27d. TASK DESCRIPTION                                                                                  | 27e. QTY TO BE RPR                                                       | 27f. WORK CENTER                                                                                          | 27g. FAILURE CODE                            | 27h. MH PROJ                    |
|                                                                                                                                              | A01                                  | F                        | INITIAL                                                                                                | 0.1                                                                      | ARMZ                                                                                                      | 020                                          |                                 |
|                                                                                                                                              | A02                                  | J                        | TRE                                                                                                    |                                                                          |                                                                                                           | 020                                          |                                 |
|                                                                                                                                              | A03                                  | L                        | FINISH                                                                                                 |                                                                          |                                                                                                           | 020                                          |                                 |
| SECTION V - PART REQUIREMENTS                                                                                                                |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 28a. FILE INPUT ACT CD                                                                                                                       | 28b. TASK NO                         | 28c. ID NO               | 28d. NSN OR PART NUMBER                                                                                | 28e. SFX CD                                                              | 28f. QTY RQD                                                                                              | 28g. QTY ISSUED                              | 28h. NMCS CD                    |
|                                                                                                                                              |                                      |                          | N/A                                                                                                    |                                                                          |                                                                                                           |                                              |                                 |
| 28m. TOTAL MANHOURS                                                                                                                          |                                      |                          |                                                                                                        | 28n. TOTAL MANHOURS COSTS \$                                             |                                                                                                           | 28o. TOTAL PARTS COSTS \$                    |                                 |
| SECTION VI - COMPLETION DATA                                                                                                                 |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 29. QTY RPR                                                                                                                                  | 30. QTY CONDEMN                      | 31. QTY RTS              | 32. EVAC WON                                                                                           | 33. VAC UNIT NAME<br>1ST SFG(A) A.N.<br>DS/GS ARMS SHOP<br>FT. LEWIS, WA |                                                                                                           |                                              |                                 |
| SECTION VII - ACTION SIGNATURES                                                                                                              |                                      |                          |                                                                                                        |                                                                          |                                                                                                           |                                              |                                 |
| 34a. SUBMITTED BY<br>2/1                                                                                                                     | 35a. ACCEPTED BY<br>A01              | 35c. DATE<br>12-19-06    | 36a. WORK STARTED BY<br>A01                                                                            | 37a. INSPECTED BY<br>A01                                                 | 38a. PICKED UP BY<br>2/1                                                                                  |                                              |                                 |
| 34b. DATE<br>12-19-06                                                                                                                        | 35b. STATUS<br>C                     | 35d. TIME                | 36b. STATUS<br>B                                                                                       | 36c. DATE<br>12-19-06                                                    | 36d. TIME                                                                                                 | 37b. STATUS<br>R                             | 37c. DATE<br>12-19-06           |
| 37d. TIME                                                                                                                                    | 38b. STATUS<br>U                     | 38c. DATE<br>12-19-06    | 38d. TIME                                                                                              |                                                                          |                                                                                                           |                                              |                                 |

DA FORM 2407, JUL 94

NMP COPY 2

Return to Remington for  
Contract Repairs1ST SFG(A) A.N.  
DS/GS ARMS SHOP  
FT. LEWIS, WA

**Arms Services Repair & Estimate System**

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

**Repair Inquiry**

Repair Number: **RE00052516** Serial: C6348794 Model: 700 Center Fire Caliber: Z62 NATO M-24 (SWS) Repairman: Status: Closed 9/19/02 6:42:18 AM

Verify Repair

**Address Information**

Customer: Received From: Return To: Received From:

Name: MATERIAL MOVEMENT SECTION MATERIAL MOVEMENT SECTION

Address 1: BLDG 9630 BLDG 9630

Address 2: PO Box: PO Box:

City: FORT LEWIS FORT LEWIS

State: WA Zip Code: 98433 Country: US State: WA Zip Code: 98433 Country: US

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

**Contact / Condition Problems Estimate History / Status Shipping / Billing**

**Contact Information**

Phone: Fax: Email: Comments:

**Received Condition**

Condition: Poor

Condition Notes: CSR Notes:

**Accessories Received**

| Code | Desc              | Qty |
|------|-------------------|-----|
| A007 | With Stud         | 1   |
| X    | FRT & REAR SGT BA | 1   |


Repair Search Refresh Close

inagel 9/19/02 7:14 AM CAPS NUM INS SCRL

Start Inbox - Microsoft Outlook Arms Services Repair...

Serial Number: **C6348794**

Model: **700**



**RE00052516**

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348794.\_\_\_0

FILE DATE AND TIME: 10/15/2002 13:41

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.241 |
| The Average Y Centroid of the Five Target Set:              | -0.019 |
| The Average Point of Impact of the Five Target Set:         | 0.242  |
| The Average Mean Radius of the Five Target Set:             | 0.661  |
| The Distance from POA to Centroid Target #1:                | 0.699  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.645  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.705  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.759  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.631  |

**BARBER - M24 0064204**

SERIAL NUMBER: C6348794. \_\_0

TARGET NUMBER: 1

FILE DATE: 10/15/2002

FILE TIME: 13:41

| POINT# | X      | Y     |
|--------|--------|-------|
| 1:     | 0.313  | 0.264 |
| 2:     | -0.063 | 0.252 |
| 3:     | -0.568 | 0.405 |
| 4:     | -0.447 | 0.912 |
| 5:     | -2.072 | 0.211 |

X CENTROID: -0.567

Y CENTROID: 0.409

POA TO CENTROID: 0.699

HORZ SPREAD: 2.385

VERT SPREAD: 0.701

GROUP SPREAD: 2.386

MIN RADIUS: 0.004


MAX RADIUS: 1.518

MEAN RADIUS: 0.692

# IN 1 IN DIAMETER: 1

# IN 2 IN DIAMETER: 4

# in 3 IN DIAMETER: 4

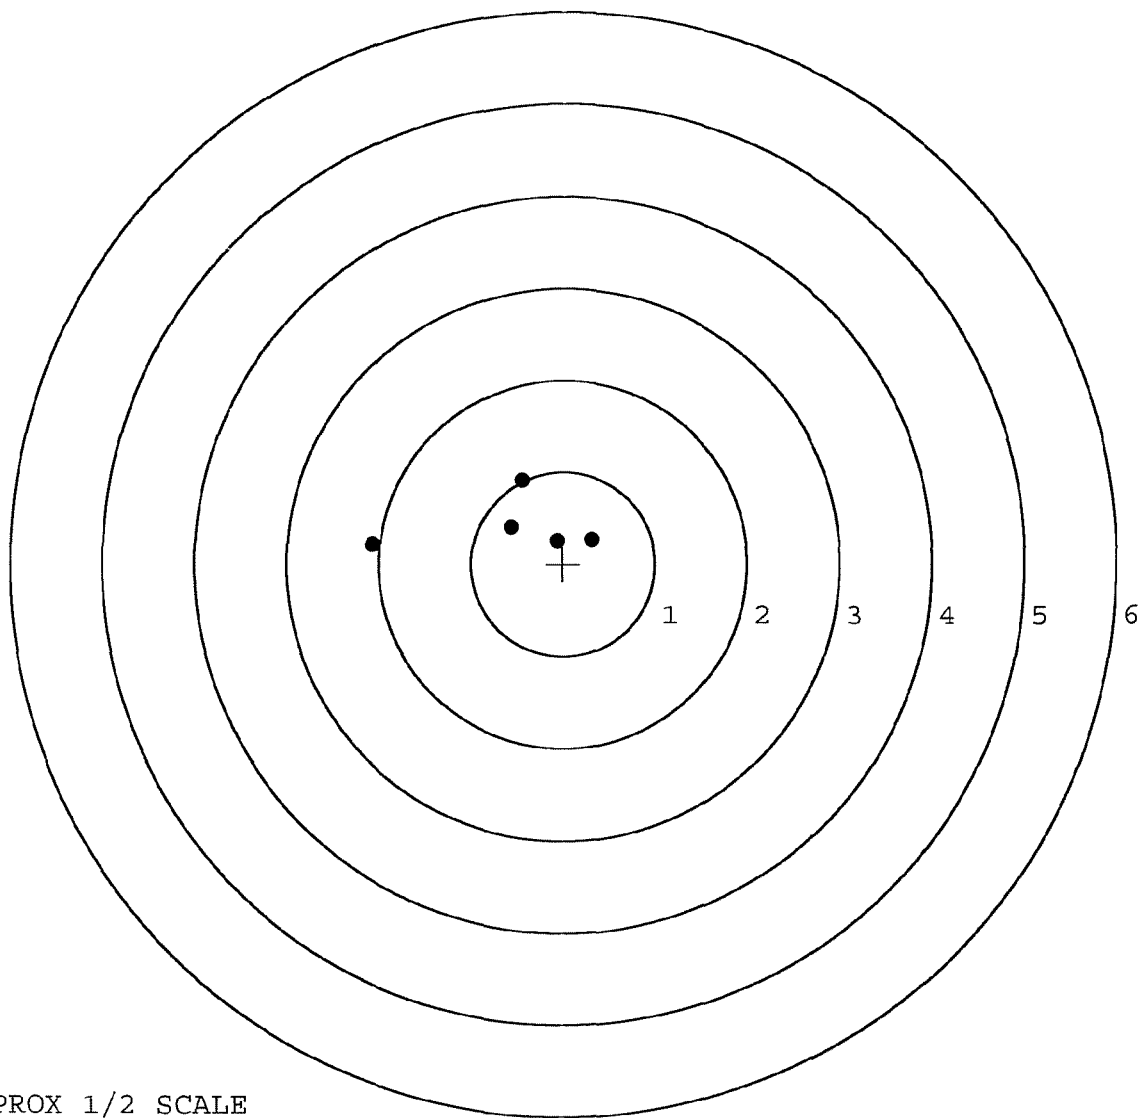


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348794. \_\_0  
 TARGET NUMBER: 2  
 FILE DATE: 10/15/2002  
 FILE TIME: 13:41

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -1.033 | -1.212 |
| 2:     | -0.752 | -0.613 |
| 3:     | -0.498 | -0.387 |
| 4:     | -2.637 | -0.335 |
| 5:     | -0.005 | 0.960  |
| 6:     | 0.816  | -0.153 |
| 7:     | 0.305  | 0.043  |
| 8:     | 0.049  | 0.057  |
| 9:     | 0.079  | -0.283 |
| 10:    | 0.143  | -0.075 |

X CENTROID: -0.353  
 Y CENTROID: -0.200  
 POA TO CENTROID: 0.406  
 HORZ SPREAD: 3.453  
 VERT SPREAD: 2.172  
 GROUP SPREAD: 3.458  
 MIN RADIUS: 0.237  
 MAX RADIUS: 2.288  
 MEAN RADIUS: 0.883  
 # IN 1 IN DIAMETER: 3  
 # IN 2 IN DIAMETER: 6  
 # in 3 IN DIAMETER: 9

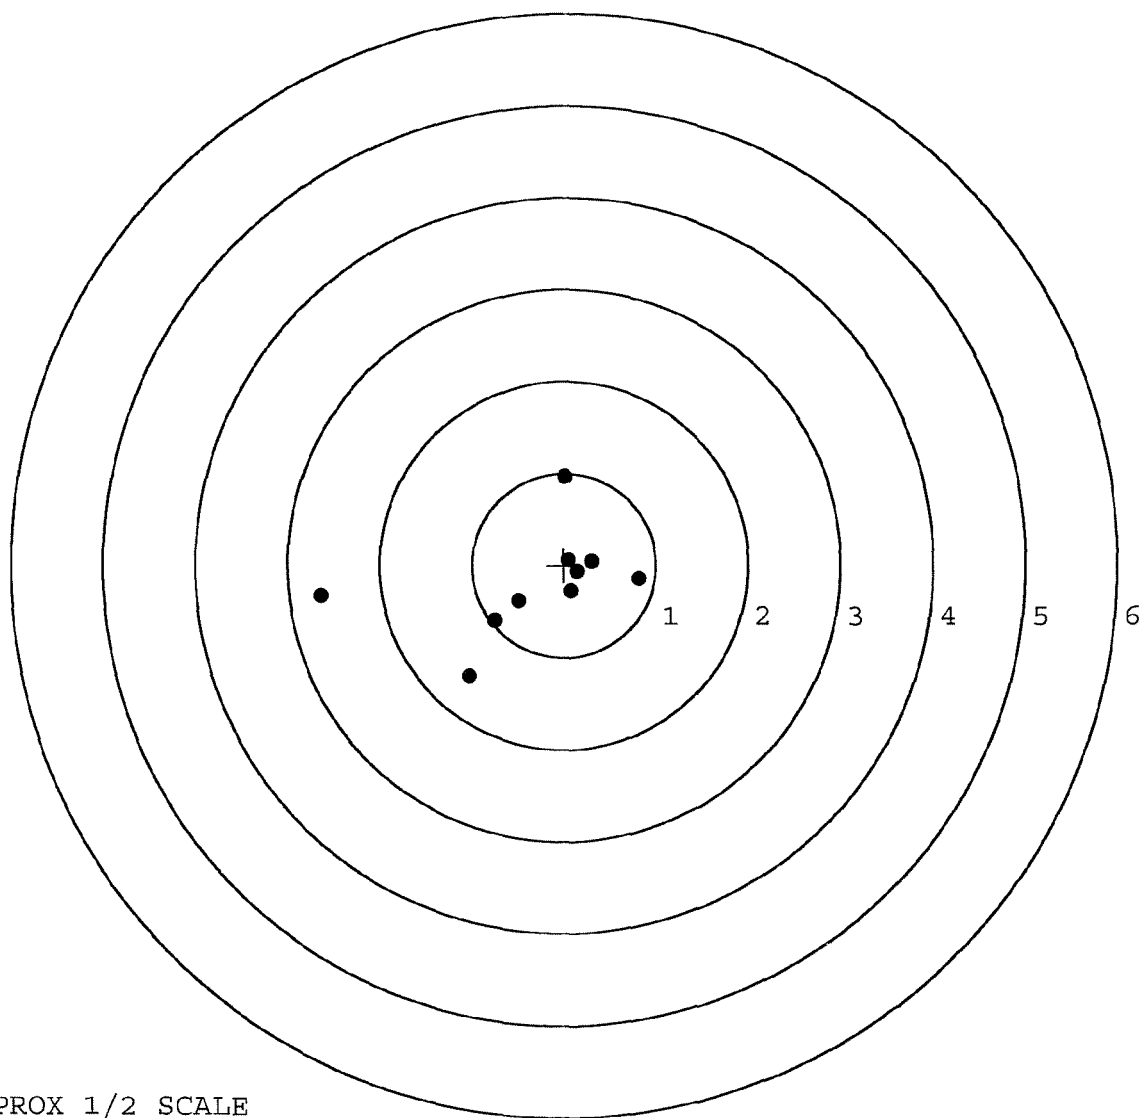


TARGET APPROX 1/2 SCALE

**BARBER - M24 0064206**

SERIAL NUMBER: C6348794. \_\_0  
TARGET NUMBER: 3  
FILE DATE: 10/15/2002  
FILE TIME: 13:41

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.253  | -1.014 |
| 2:     | -0.865 | -0.512 |
| 3:     | -0.757 | -0.425 |
| 4:     | 0.207  | -0.568 |
| 5:     | 0.205  | 0.451  |
| 6:     | -0.559 | 0.606  |
| 7:     | -0.261 | 0.005  |
| 8:     | -0.048 | -0.037 |
| 9:     | 0.095  | 0.016  |
| 10:    | 0.223  | -0.118 |

X CENTROID: -0.151  
Y CENTROID: -0.160  
POA TO CENTROID: 0.220  
HORZ SPREAD: 1.118  
VERT SPREAD: 1.620  
GROUP SPREAD: 1.812  
MIN RADIUS: 0.160  
MAX RADIUS: 0.945  
MEAN RADIUS: 0.556  
# IN 1 IN DIAMETER: 4  
# IN 2 IN DIAMETER: 10  
# in 3 IN DIAMETER: 10

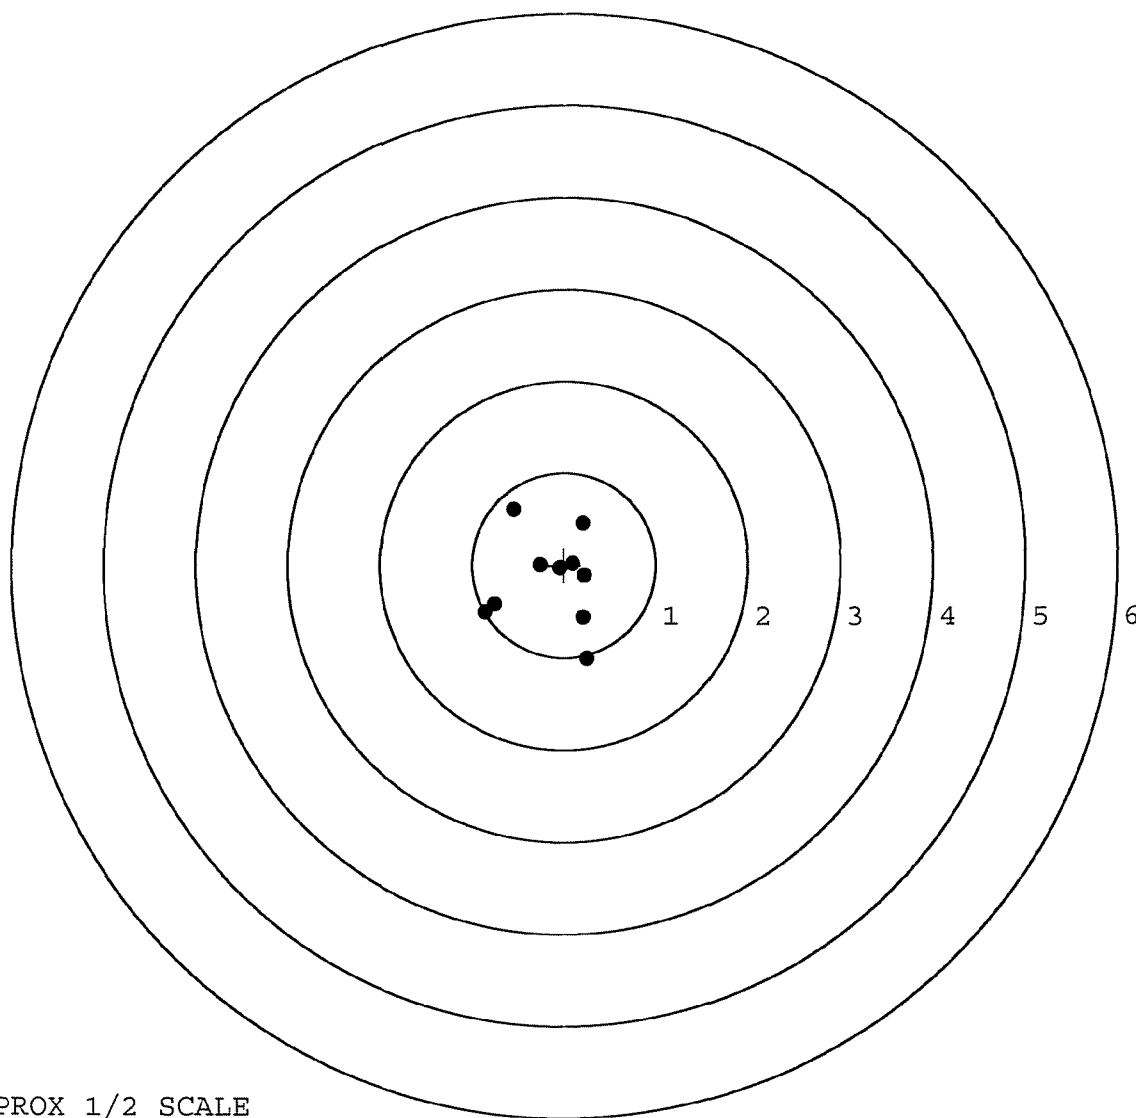


TARGET APPROX 1/2 SCALE



SERIAL NUMBER: C6348794. \_\_0  
 TARGET NUMBER: 4  
 FILE DATE: 10/15/2002  
 FILE TIME: 13:41

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.954 | -0.490 |
| 2:     | -1.311 | -0.487 |
| 3:     | -0.205 | -0.441 |
| 4:     | 0.795  | -0.554 |
| 5:     | 0.671  | -0.136 |
| 6:     | -0.202 | 0.510  |
| 7:     | -0.199 | 0.310  |
| 8:     | 0.292  | 0.090  |
| 9:     | 0.297  | -0.042 |
| 10:    | 0.461  | -0.085 |

X CENTROID: -0.036  
 Y CENTROID: -0.132  
 POA TO CENTROID: 0.137  
 HORZ SPREAD: 2.106  
 VERT SPREAD: 1.064  
 GROUP SPREAD: 2.107  
 MIN RADIUS: 0.345  
 MAX RADIUS: 1.324  
 MEAN RADIUS: 0.667  
 # IN 1 IN DIAMETER: 5  
 # IN 2 IN DIAMETER: 9  
 # in 3 IN DIAMETER: 10

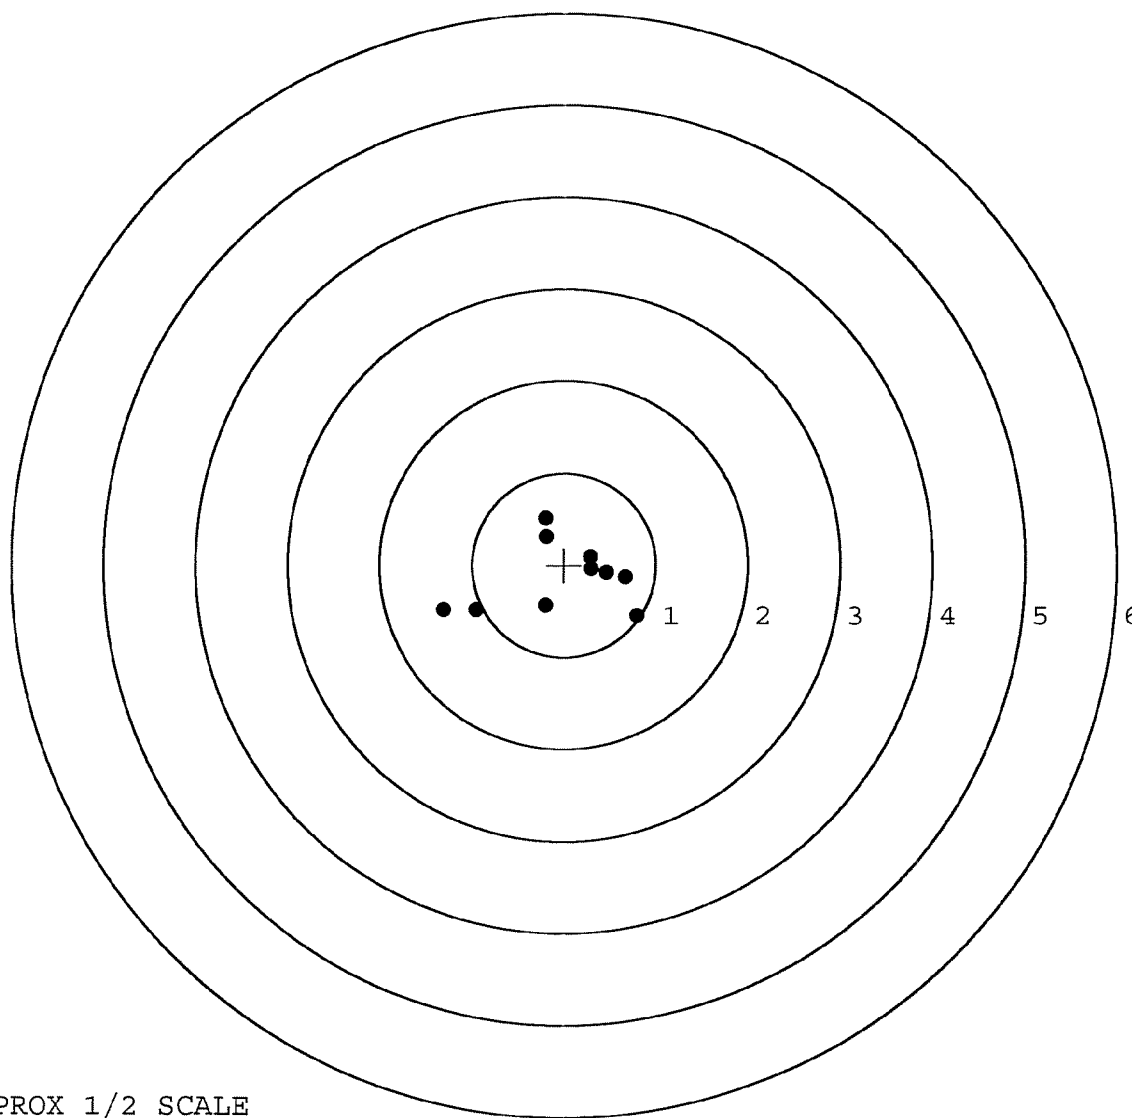


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348794. \_\_0  
 TARGET NUMBER: 5  
 FILE DATE: 10/15/2002  
 FILE TIME: 13:41

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.593  | 0.816  |
| 2:     | -0.413 | 0.697  |
| 3:     | 0.319  | 0.042  |
| 4:     | -0.058 | 0.267  |
| 5:     | -0.493 | -0.033 |
| 6:     | -0.176 | -0.194 |
| 7:     | -0.145 | -0.499 |
| 8:     | -0.383 | -0.759 |
| 9:     | -0.290 | -0.447 |
| 10:    | 0.066  | -0.014 |

X CENTROID: -0.098  
 Y CENTROID: -0.012  
 POA TO CENTROID: 0.099  
 HORZ SPREAD: 1.086  
 VERT SPREAD: 1.575  
 GROUP SPREAD: 1.853  
 MIN RADIUS: 0.164  
 MAX RADIUS: 1.079  
 MEAN RADIUS: 0.508  
 # IN 1 IN DIAMETER: 7  
 # IN 2 IN DIAMETER: 9  
 # in 3 IN DIAMETER: 10

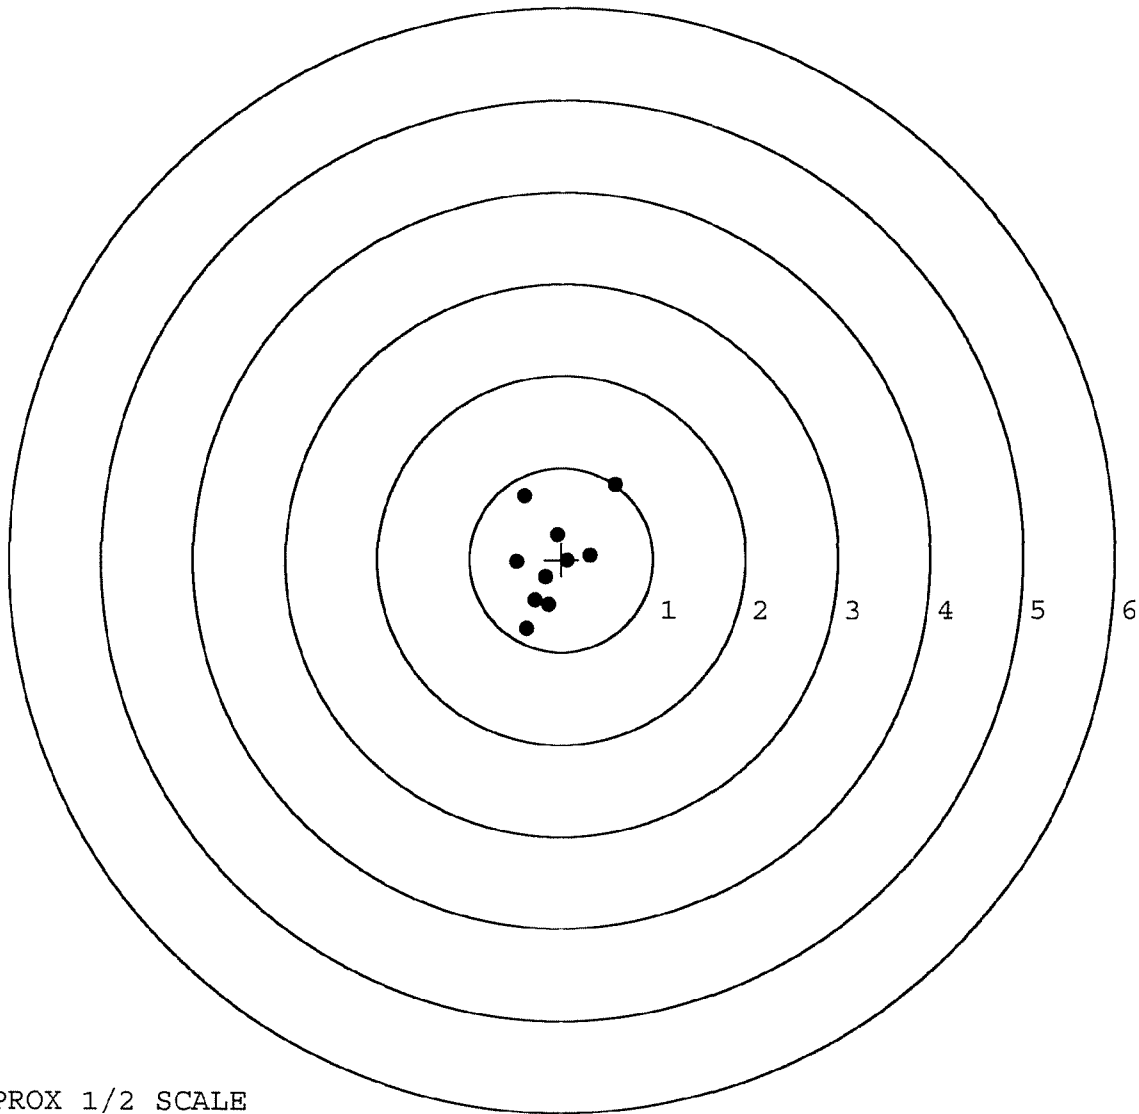

TARGET APPROX 1/2 SCALE

## Final Inspection

In: C6348794

DATE REC'D: 9/18/02

DATE RET'D:

EDITOR: RW

## Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☐ Scope
- ☐ Scope Rings
- ☐ Mounting Screws
- ☒ Mounting Base
- ☒ Screws
- ☐ Finish
- ☐ Looseness
- ☐ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

## Item:

Stock Assy.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

|                     |                     |           |         |
|---------------------|---------------------|-----------|---------|
| R & E NUMBER        | 52516               |           |         |
| SERIAL NUMBER       | C6348794            |           |         |
| LOG-IN DATE         | 9/18/02             |           |         |
| INSPECT AND VERIFY: |                     |           |         |
| OPERATION #         | OPERATION NAME      | DATE      | INITIAL |
| 550                 | DIS-ASSEMBLE GUN    | 9/20/02   | RL      |
| 560 A               | RE-BARREL           | 9/20/02   | RA      |
| B                   | DRILL AND TAP       | 9-21-02   | AC      |
| 575                 | ASSEMBLE            | 9/24/02   | RL      |
| 600                 | PROOF               | 9-25-02   | AC      |
| 605                 | CHECK HEADSPACE     | 9-25-02   | K       |
| 610                 | DIS-ASSEMBLE GUN    | 9/24/02   | RL      |
| 612                 | MAGNAFLUX           | RL        |         |
| 615                 | ROLLMARK CALIBER    | 9/27/02   | TD      |
| 618                 | ROTO-BLAST          | 9/30/02   | KO      |
| 620                 | APPLY COATINGS      | 10-5      | TA      |
| 625 A               | FINAL ASSEMBLY      | 10/9/02   | RL      |
| B                   | TRIGGER PULL TEST   |           |         |
| C                   | SAFETY "ON" FORCE   |           |         |
| D                   | SAFETY "OFF" FORCE  |           |         |
| E                   | FIRING PIN INDENT   |           |         |
| 640                 | TARGET              | 10-14-02  | TRW     |
| 655                 | FINAL INSPECT       | 10-14-02  | CU      |
| 660                 | PACK                | 10-15-02  | RA      |
|                     |                     |           |         |
|                     |                     |           |         |
|                     |                     |           |         |
|                     |                     |           |         |
|                     |                     | SHIP DATE |         |
|                     | QAR INSPECTION DATE |           |         |

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348794

| OP. #        | OP. NAME                                                       | READINGS | DATE     | INIT |
|--------------|----------------------------------------------------------------|----------|----------|------|
| 575 &<br>580 | Assemble Action<br>and Stock                                   | 10-9     | 89       | RW   |
| 600          | Proof                                                          | 10-9     | 89       | A.C. |
| 607          | Check Headspace                                                | 10-9     | 89       | RW   |
| 610          | Dis-assemble Gun                                               | 10-9     | 89       | RW   |
| 612          | Magnaflux Barrel<br>Action                                     |          | 10/13/89 | KCR  |
|              | Magnaflux Bolt                                                 |          | 10/13/89 | KCR  |
| 615          | Rollmark Caliber                                               |          |          |      |
| 7            | Drill and Tap Sight Holes                                      | 10       | 1689     | LB   |
| 618          | Polish Barrel RB                                               | 10       | 1689     | BT   |
| 620          | Apply Coatings<br>(Barrel Action)                              |          | 10-27-89 | TJA  |
|              | Apply Coating (Bolt)                                           |          |          |      |
| 625          | Final Assembly<br>A) Clean inside of<br>Bolt Assembly          |          | 10/30/89 | RW   |
|              | B) Inspect Rear Firing<br>Pin Hole for Chamfer<br>in Bolt Head |          | 10/30/89 | RW   |
|              | C) Inspect Ejector Hole<br>for Chamfer                         |          | 10/30/89 | RW   |
|              | D) Oil Firing Pin Ass'y                                        |          | 10/30/89 | RW   |
|              | E) Adjust Trigger Pull to<br>Min Setting and Stake             |          | 3/10/89  | JS   |

**BARBER - M24 0064212**

| op. #        | OP. NAME                                                    | READINGS |      |       |     |     | DATE     | INIT |
|--------------|-------------------------------------------------------------|----------|------|-------|-----|-----|----------|------|
| 625<br>cont. | F) Safety On Force                                          | 4        | 4    | 4     |     |     | 10/31/89 | JK   |
|              | G) Safety Off Force                                         | 4        | 4    | 4     |     |     | 10/31/89 | JK   |
|              | H) Trigger Pull Test & Retainability                        |          |      |       |     |     | 3/10/89  | JS   |
|              | I) Firing Pin Indent                                        | .0215    | .022 | .0215 |     |     | 10/31/89 | JK   |
|              | J) Assemble Stock                                           |          |      |       |     |     | 12/1/89  | RW   |
|              | K) Assemble Swivel Studs                                    |          |      |       |     |     | 7/10/89  | JS   |
|              | L) Attach Front and Rear Sight Assemblies                   |          |      |       |     |     | 11/1/89  | RW   |
|              | M) Iron Sight Alignment                                     |          |      |       |     |     | 11/1/89  | RW   |
|              | N) Detach Front & Rear Sights & place in numbered container |          |      |       |     |     | 11/1/89  | RW   |
|              | O) Attach Scope to Rifle                                    |          |      |       |     |     | 11/1/89  | JK   |
|              | P) Detach & Attach Scope 20 Times                           |          |      |       |     |     | 11/1/89  | JK   |
| 640          | Gallery Target & Test                                       |          |      |       |     |     | 11-2-89  | DH   |
|              | A) Time                                                     |          |      |       |     |     | 11-2-89  | DH   |
|              | B) Malfunctions                                             |          |      |       |     |     | 11-2-89  | DH   |
|              | C) Pierced Primers                                          |          |      |       |     |     | 11-2-89  | DH   |
|              | D) Optical Clarity of Scope                                 |          |      |       |     |     | 11-2-89  | DH   |
| 645          | Inspect for Live Ammo                                       |          |      |       |     |     | 11-2-89  | DH   |
| 655          | Final Inspection                                            |          |      |       |     |     |          |      |
|              | A) Headspace                                                |          |      |       |     |     | 7/10/89  | JS   |
|              | B) Trigger Pull                                             | 269      | 266  | 265   | 265 | 253 | 7/10/89  | JS   |
|              | C) Function                                                 |          |      |       |     |     | 7/10/89  | JS   |
| 660          | Pack                                                        |          |      |       |     |     | 140/89   | JS   |

| MOD. _____ |         | GA. CAL. _____                        | GUN # _____ | ASSEM. # _____ |
|------------|---------|---------------------------------------|-------------|----------------|
| # TEST     | DATE    | MALFUNCTION/DEFECT                    |             |                |
|            | 1st     |                                       |             |                |
|            | 11-2-89 | shoe butt<br>don't eject              |             |                |
|            | 2nd     |                                       |             |                |
|            | 11/6/89 | Polish Ejector<br>Ram Ejector<br>Hole |             | Rev            |
|            | 3rd     |                                       |             |                |
|            | 4th     |                                       |             |                |
|            |         | FUNCTION                              |             | RD 6654 Rev 1  |

| TEST INIT. ACTION TO CORRECT |                                     | ASSEM.<br># |
|------------------------------|-------------------------------------|-------------|
| PROOF                        | 11-6-89<br>shot 100 rounds<br>OK DH |             |
| TEST                         |                                     |             |
| TGT                          |                                     |             |
| PROOF                        |                                     |             |
| TEST                         |                                     |             |
| TGT                          |                                     |             |
| PROOF                        | ENGINEER                            |             |
| TEST                         |                                     |             |
| TGT                          |                                     |             |
| PROOF                        | ENGINEER                            |             |
| TEST                         |                                     |             |
| TGT                          |                                     |             |



AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 6348794

DATE 3/30/90

TESTER D.H

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# | COMMENTS                                                               |
|---------|------------------|--------------------------|--------------------------------|------------------------------------------------------------------------|
| PULL #1 | 2.44             | 2.47                     | 2.41                           | MIN. SETTING,<br>NO AVG. OF 5<br>READINGS ACCEPT-<br>ABLE LESS THAN 2# |
| PULL #2 | 2.42             | 2.40                     | 2.44                           |                                                                        |
| PULL #3 | 2.41             | 2.44                     | 2.43                           |                                                                        |
| PULL #4 | 2.41             | 2.46                     | 2.43                           |                                                                        |
| PULL #5 | 2.19             | 2.43                     | 2.46                           |                                                                        |
| TOTAL   | 11.87            | 12.20                    | 12.17                          |                                                                        |
| AVG.    | 2.37             | 2.44                     | 2.43                           |                                                                        |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES | COMMENTS |
|---------|------------------|--------------------------|----------|
| PULL #1 | 3.09             | 3.13                     |          |
| PULL #2 | 3.13             | 3.16                     |          |
| PULL #3 | 3.16             | 3.13                     |          |
| PULL #4 | 3.14             | 3.11                     |          |
| PULL #5 | 3.09             | 3.15                     |          |
| TOTAL   | 15.61            | 15.68                    |          |
| AVG.    | 3.12             | 3.13                     |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCURACY |
|---------|------------------|--------------------------|--------------------------------|--------------------------------------|
| PULL #1 | 4.01             | 4.01                     |                                |                                      |
| PULL #2 | 4.00             | 4.03                     |                                |                                      |
| PULL #3 | 4.05             | 4.01                     |                                |                                      |
| PULL #4 | 4.09             | 3.99                     |                                |                                      |
| PULL #5 | 4.08             | 4.06                     |                                |                                      |
| TOTAL   | 20.23            | 20.10                    |                                |                                      |
| AVG.    | 4.04             | 4.02                     |                                |                                      |

CENTROIDAL DISTANCE CALCULATIONS  
FOR RIFLE # 06348794  
2 Nov 1989

CENTROIDAL DISTANCES

|      |   |         |
|------|---|---------|
| 0 TO | 1 | .775506 |
| 1 TO | 2 | .126827 |
| 1 TO | 3 | .531718 |
| 1 TO | 4 | .729445 |
| 1 TO | 5 | .516512 |


#3 (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .4128  
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0298  
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .418874  
THE AMR FOR THIS RIFLE IS: .9706

2 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/06348794

## CENTERFIRE PATTERNS # 1

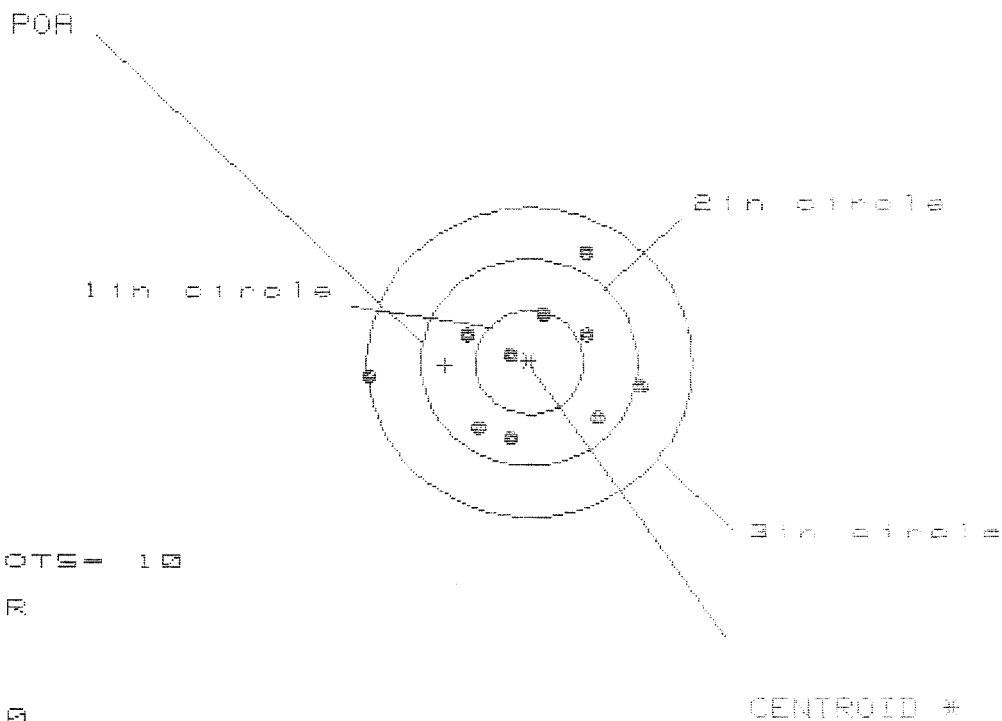

# OF SHOTS = 10

# IN CIR

1in = 2

2in = 7

3in = 10

HS = 2.472

VS = 1.814

GS = 2.473

| PATTERN #                     | 1      | 2     | 3     |
|-------------------------------|--------|-------|-------|
| SHOTS (BEST OF)               | 10     | 9     | 8     |
| MAXIMUM X                     | 1.013  | .851  | .893  |
| MINIMUM X                     | -1.459 | -.769 | -.727 |
| MAXIMUM Y                     | 1.112  | 1.094 | .578  |
| MINIMUM Y                     | -.702  | -.720 | -.583 |
| CENTROID X                    | .775   | .937  | .895  |
| CENTROID Y                    | .028   | .046  | -.091 |
| POA TO CENTROID in.           | .775   | .938  | .900  |
| MIN RADIUS                    | .149   | .309  | .304  |
| MEAN RADIUS                   | .794   | .716  | .658  |
| MAX RADIUS                    | 1.468  | 1.143 | .901  |
| HORIZONTAL SPREAD             | 2.472  | 1.620 | 1.620 |
| VERTICAL SPREAD               | 1.814  | 1.814 | 1.153 |
| EXTREME SPREAD                | 2.473  | 1.974 | 1.706 |
| NUMBER IN ONE INCH CIRCLE =   | 2      |       |       |
| NUMBER IN TWO INCH CIRCLE =   | 7      |       |       |
| NUMBER IN THREE INCH CIRCLE = | 10     |       |       |

2 May 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/C8348794

## CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

CENTROID #

# OF SHOTS= 10

# IN CIR

1in = 0

2in = 4

3in = 10

HS= 1.866

VS= 2.453

GS= 2.453

| PATTERN #                   | : | 2      |       |       |
|-----------------------------|---|--------|-------|-------|
| SHOTS (BEST OF)             | : | 10     | 9     | 8     |
| MAXIMUM X                   | : | .953   | .968  | .991  |
| MINIMUM X                   | : | -.913  | -.898 | -.875 |
| MAXIMUM Y                   | : | 1.156  | 1.012 | .962  |
| MINIMUM Y                   | : | -1.297 | -.877 | -.751 |
| CENTROID X                  | : | .672   | .657  | .634  |
| CENTROID Y                  | : | -.046  | .098  | -.028 |
| POA TO CENTROID in.         | : | .673   | .664  | .635  |
| MIN RADIUS                  | : | .673   | .572  | .634  |
| MEAN RADIUS                 | : | .969   | .922  | .902  |
| MAX RADIUS                  | : | 1.384  | 1.199 | 1.093 |
| HORIZONTAL SPREAD           | : | 1.866  | 1.866 | 1.866 |
| VERTICAL SPREAD             | : | 2.453  | 1.889 | 1.613 |
| EXTREME SPREAD              | : | 2.453  | 2.137 | 2.083 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 0     |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 4     |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 10    |       |

2 Nov 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/0634B794

## CENTERFIRE PATTERNS # 3

POA

1 in circle

2 in circle

3 in circle

# OF SHOTS= 10

# IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 1.938

VS= 2.740

GS= 2.837


CENTROID \*

| PATTERN #                     | 1      | 3      | 8      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | .768   | .742   | .593   |
| MINIMUM X                     | -1.170 | -1.196 | -1.710 |
| MAXIMUM Y                     | 1.615  | .858   | .813   |
| MINIMUM Y                     | -1.125 | -.946  | -.991  |
| CENTROID X                    | .257   | .283   | .432   |
| CENTROID Y                    | .148   | -.032  | .013   |
| POA TO CENTROID in.           | .297   | .285   | .433   |
| MIN RADIUS                    | .445   | .547   | .471   |
| MEAN RADIUS                   | .960   | .883   | .821   |
| MAX RADIUS                    | 1.631  | 1.248  | 1.044  |
| HORIZONTAL SPREAD             | 1.938  | 1.938  | 1.302  |
| VERTICAL SPREAD               | 2.740  | 1.804  | 1.804  |
| EXTREME SPREAD                | 2.837  | 2.226  | 1.897  |
| NUMBER IN ONE INCH CIRCLE =   |        | 1      |        |
| NUMBER IN TWO INCH CIRCLE =   |        | 6      |        |
| NUMBER IN THREE INCH CIRCLE = |        | 9      |        |

2 Nov 1985

FILE:/PATTERNING/CENTERFIRE\_PATT/06040794

## CENTERFIRE PATTERNS # 4

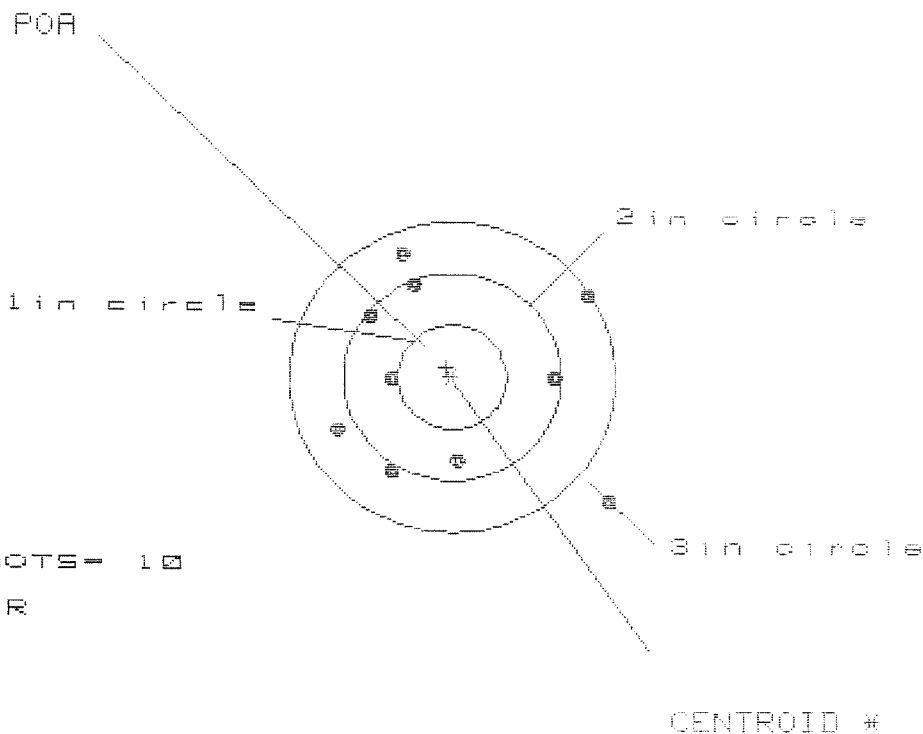

# OF SHOTS= 10

# IN CIR

1 in = 0

2 in = 4

3 in = 9

HS= 2.515

VS= 2.476


GS= 3.163

| PATTERN #                   | : | 4      |        |       |
|-----------------------------|---|--------|--------|-------|
| SHOTS (BEST OF)             | : | 10     | 9      | 8     |
| MAXIMUM X                   | : | 1.492  | 1.429  | 1.322 |
| MINIMUM X                   | : | -1.023 | -.857  | -.678 |
| MAXIMUM Y                   | : | 1.238  | 1.100  | 1.181 |
| MINIMUM Y                   | : | -1.238 | -1.047 | -.966 |
| CENTROID X                  | : | .056   | -.110  | -.289 |
| CENTROID Y                  | : | -.095  | .043   | -.008 |
| POA TO CENTROID in.         | : | .110   | .118   | .291  |
| MIN RADIUS                  | : | .518   | .374   | .179  |
| MEAN RADIUS                 | : | 1.120  | .993   | .877  |
| MAX RADIUS                  | : | 1.939  | 1.568  | 1.326 |
| HORIZONTAL SPREAD           | : | 2.515  | 2.286  | 2.000 |
| VERTICAL SPREAD             | : | 2.476  | 2.147  | 2.147 |
| EXTREME SPREAD              | : | 3.163  | 2.641  | 2.151 |
| NUMBER IN ONE INCH CIRCLE   | = |        | 0      |       |
| NUMBER IN TWO INCH CIRCLE   | = |        | 4      |       |
| NUMBER IN THREE INCH CIRCLE | = |        | 9      |       |

2 Nov 1989

FILE:/PATTERNING/CENTERFIRE\_PATT/06348794

## CENTERFIRE PATTERNS # 5

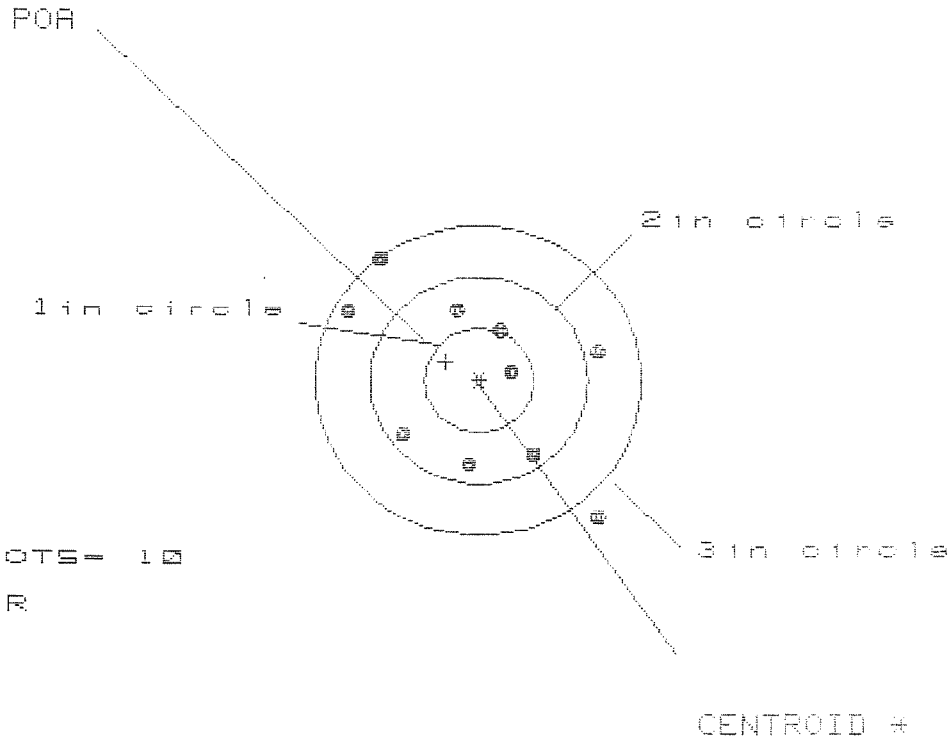

# OF SHOTS = 10

# IN CIR

1 in = 1

2 in = 6

3 in = 8

HS = 2.270

VS = 2.562

GS = 3.267


| PATTERN #                     | 5      | 5      | 5      |
|-------------------------------|--------|--------|--------|
| SHOTS (BEST OF)               | 10     | 9      | 8      |
| MAXIMUM X                     | 1.106  | 1.227  | 1.125  |
| MINIMUM X                     | -1.164 | -1.043 | -1.144 |
| MAXIMUM Y                     | 1.227  | 1.079  | .691   |
| MINIMUM Y                     | -1.335 | -.988  | -.853  |
| CENTROID X                    | .304   | .183   | .284   |
| CENTROID Y                    | -.184  | -.036  | -.171  |
| POA TO CENTROID in.           | .355   | .186   | .332   |
| MIN RADIUS                    | .323   | .448   | .339   |
| MEAN RADIUS                   | 1.010  | .923   | .855   |
| MAX RADIUS                    | 1.723  | 1.353  | 1.337  |
| HORIZONTAL SPREAD             | 2.270  | 2.270  | 2.270  |
| VERTICAL SPREAD               | 2.562  | 2.067  | 1.544  |
| EXTREME SPREAD                | 3.267  | 2.475  | 2.309  |
| NUMBER IN ONE INCH CIRCLE =   | 1      |        |        |
| NUMBER IN TWO INCH CIRCLE =   | 6      |        |        |
| NUMBER IN THREE INCH CIRCLE = | 8      |        |        |

|                                                                                      |  |                                             |                                                                                           |
|--------------------------------------------------------------------------------------|--|---------------------------------------------|-------------------------------------------------------------------------------------------|
| <b>Remington</b>                                                                     |  | <b>DU PONT</b><br>REG. U.S. PAT. & TM. OFF. | VERY IMPORTANT:<br>Instruction Book<br>enclosed to assure<br>safe use of this<br>firearm. |
| <b>MODEL 700™ H24</b>                                                                |  | <b>SERIAL NO.</b><br>C6348794               | <b>ORDER NO.</b><br><b>5716</b>                                                           |
| MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee. |  | 01                                          |                                                                                           |



5716 C6348794

UPC



0 47700 25716 7