

C6348800

MODEL 700™ M24

Model SMS™

Action

Barrel Length

Capacity

Order No. 5716

*Includes 1 in chamber.

Remington

Smead

Closed 9/28/2004 2:35:49 PM

Received From

Country US

Shipping / Billing

Code	Desc	Qty
A007	With Studs	3
A010	Hard Case	1
A017	Scope Bases	3

Close

5091

四

RE00085596

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO.

DATE 10-20-04

TESTER

TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.15	2.15		2.12	
PULL #2	2.20	2.26		2.15	
PULL #3	2.34	2.14		2.16	
PULL #4	2.23	2.19		2.16	
PULL #5	2.30	2.25		2.07	
TOTAL	11.22	10.99		10.66	
AVERAGE	2.24	2.19		2.13	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.33	3.15		
PULL #2	3.28	3.22		
PULL #3	3.31	3.22		
PULL #4	3.30	3.18		
PULL #5	3.28	3.15		
TOTAL	16.50	15.92		
AVERAGE	3.30	3.18		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.15	4.01		3.97
PULL #2	4.12	4.05		4.46
PULL #3	4.13	3.98		4.46
PULL #4	4.10	4.05		4.45
PULL #5	4.14	4.04		4.51
TOTAL	20.64	20.13		21.85
AVERAGE	4.12	4.02		4.37

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6348800.___0
FILE DATE AND TIME: 10/26/2004 08:03


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.024
The Average Y Centroid of the Five Target Set:	0.087
The Average Point of Impact of the Five Target Set:	0.090
The Average Mean Radius of the Five Target Set:	0.622
The Distance from POA to Centroid Target #1:	0.247
The Distance from Centroid Target #2 to Centroid Target #1:	0.159
The Distance from Centroid Target #3 to Centroid Target #1:	0.265
The Distance from Centroid Target #4 to Centroid Target #1:	0.653
The Distance from Centroid Target #5 to Centroid Target #1:	0.368

SERIAL NUMBER: C6348800. __0
 TARGET NUMBER: 1
 FILE DATE: 10/26/2004
 FILE TIME: 08:03

POINT#	X	Y
1:	1.146	-0.352
2:	0.842	0.294
3:	0.652	0.349
4:	-0.095	-0.795
5:	-0.079	-0.265
6:	-0.075	0.494
7:	0.347	0.121
8:	-0.085	-0.011
9:	-0.079	0.115
10:	-0.119	0.291

X CENTROID: 0.246
 Y CENTROID: 0.024
 POA TO CENTROID: 0.247
 HORZ SPREAD: 1.265
 VERT SPREAD: 1.289
 GROUP SPREAD: 1.485
 MIN RADIUS: 0.140
 MAX RADIUS: 0.976
 MEAN RADIUS: 0.530
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

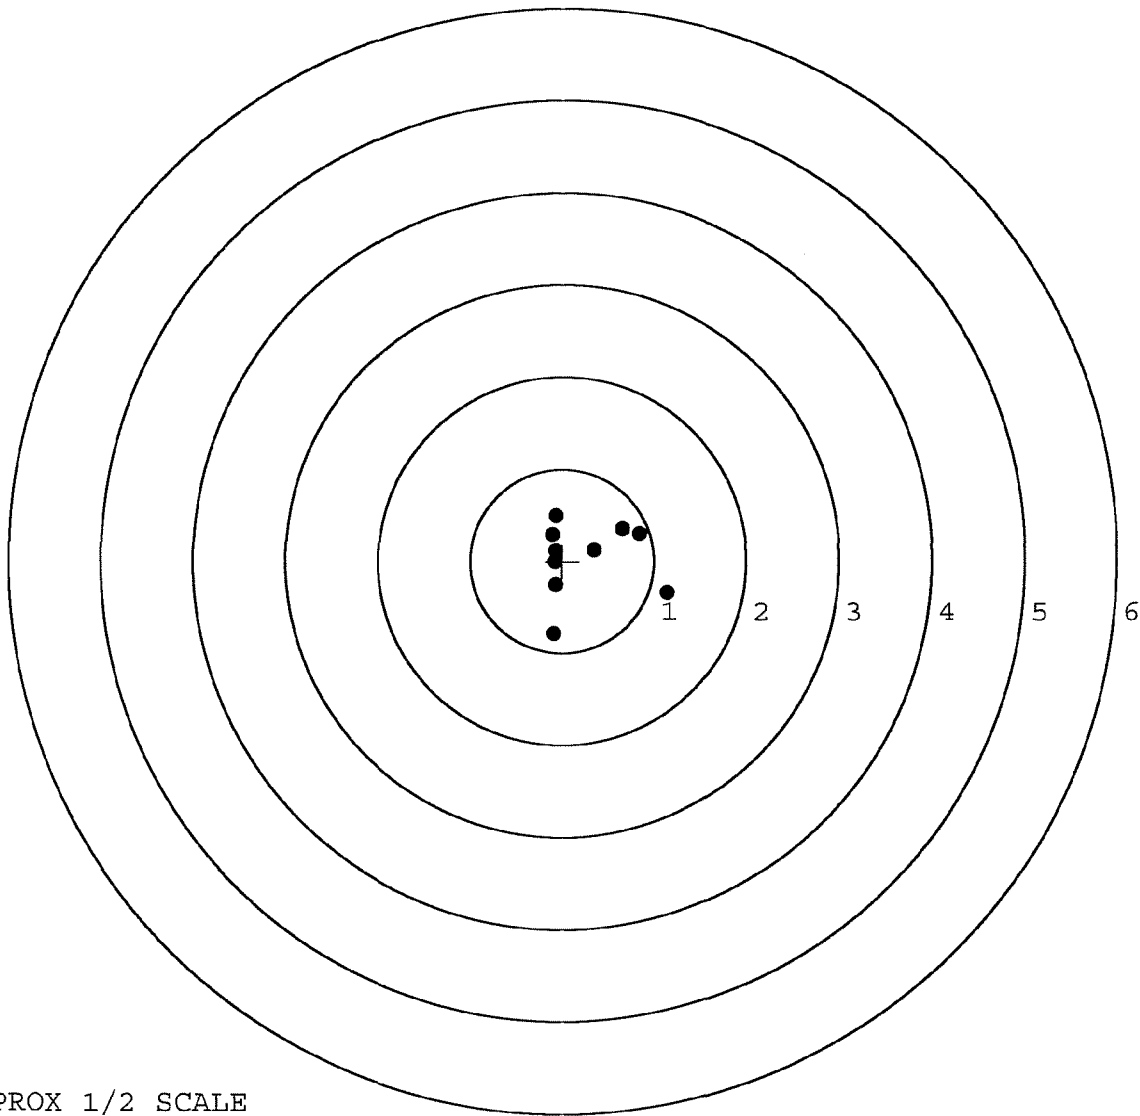


TARGET APPROX 1/2 SCALE

BARBER - M24 0064382

SERIAL NUMBER: C6348800. __0
TARGET NUMBER: 2
FILE DATE: 10/26/2004
FILE TIME: 08:03

POINT#	X	Y
1:	0.474	0.406
2:	-0.114	0.793
3:	-0.676	0.326
4:	-0.086	0.011
5:	-0.256	-0.100
6:	-0.992	-0.898
7:	0.610	-0.018
8:	0.782	-0.110
9:	0.600	-0.220
10:	0.528	-0.121


X CENTROID: 0.087
Y CENTROID: 0.007
POA TO CENTROID: 0.087
HORZ SPREAD: 1.774
VERT SPREAD: 1.691
GROUP SPREAD: 1.962
MIN RADIUS: 0.173
MAX RADIUS: 1.408
MEAN RADIUS: 0.638
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

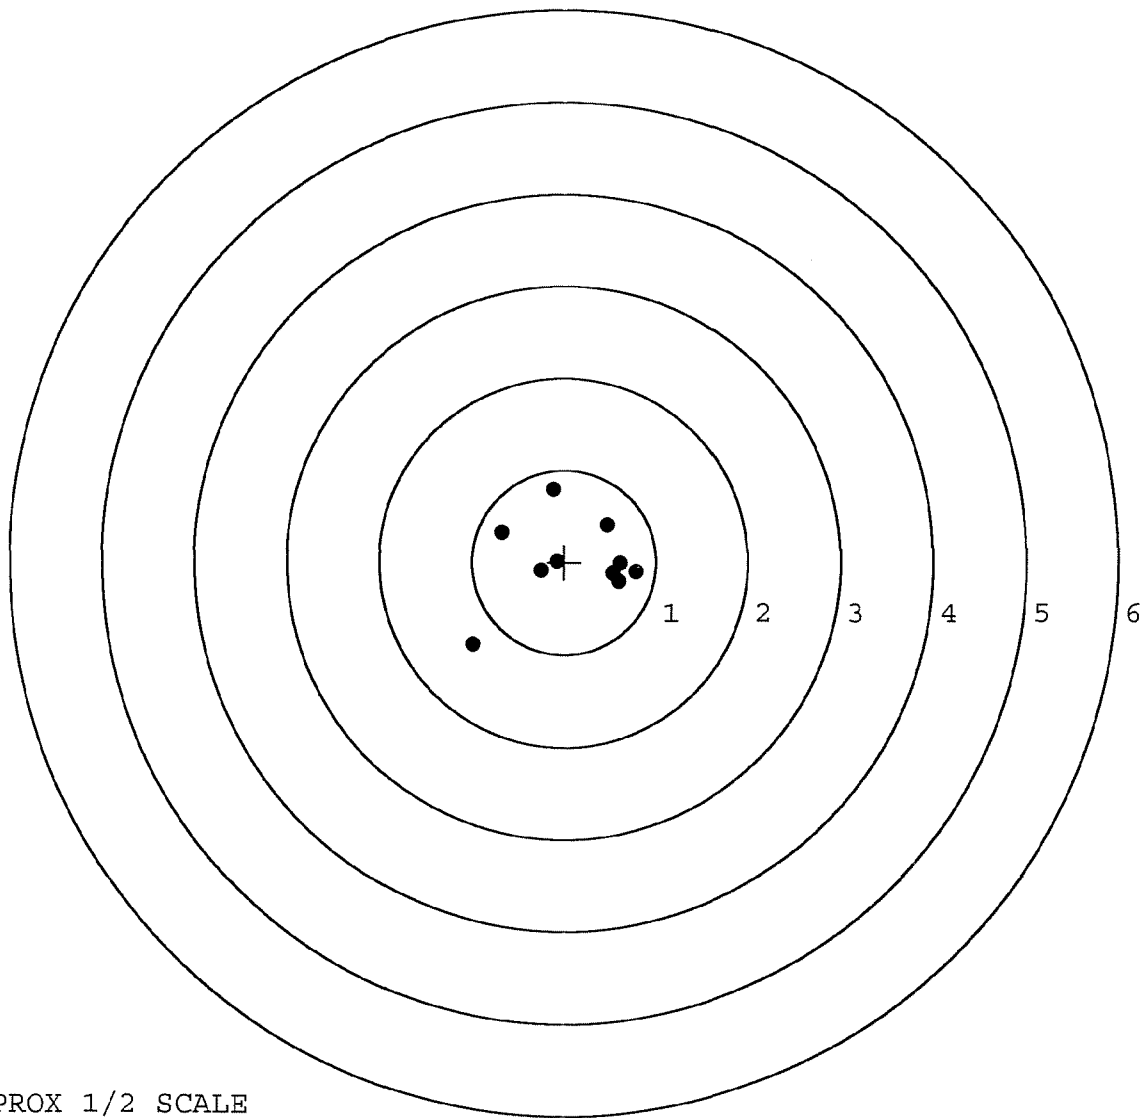

TARGET APPROX 1/2 SCALE

BARBER - M24 0064383

SERIAL NUMBER: C6348800.____0	POINT#	X	Y
TARGET NUMBER: 3	1:	-0.937	0.918
FILE DATE: 10/26/2004	2:	0.533	0.729
FILE TIME: 08:03	3:	0.456	0.628
	4:	0.480	-0.058
X CENTROID: 0.022	5:	0.253	-0.094
Y CENTROID: 0.166	6:	0.216	0.207
POA TO CENTROID: 0.168	7:	0.230	-0.514
HORZ SPREAD: 1.470	8:	-0.036	-0.023
VERT SPREAD: 1.432	9:	-0.294	0.101
GROUP SPREAD: 1.847	10:	-0.681	-0.229
MIN RADIUS: 0.198			
MAX RADIUS: 1.218			
MEAN RADIUS: 0.571			
# IN 1 IN DIAMETER: 4			
# IN 2 IN DIAMETER: 9			
# in 3 IN DIAMETER: 10			

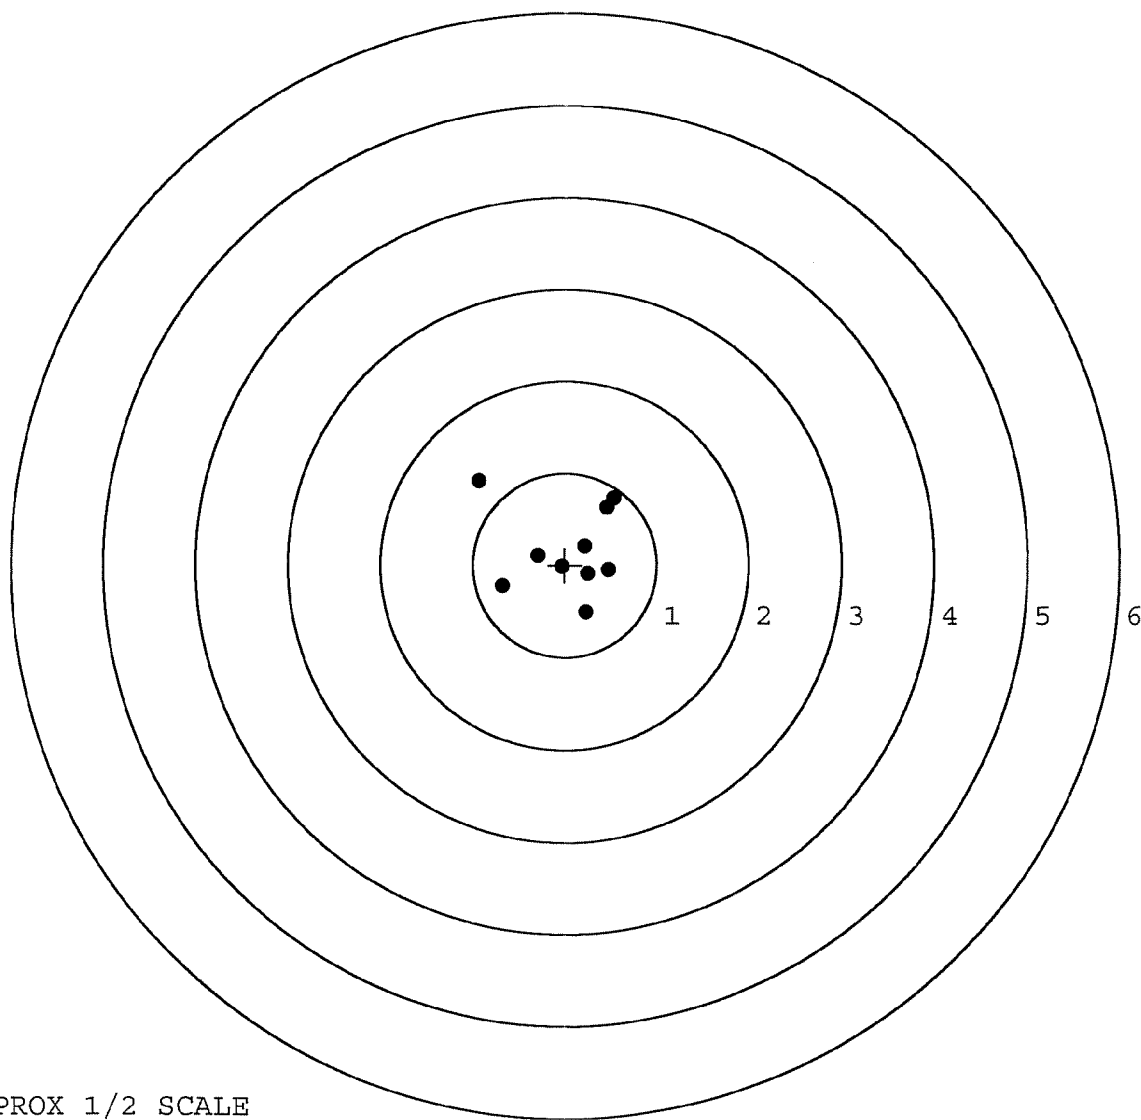


TARGET APPROX 1/2 SCALE

BARBER - M24 0064384

SERIAL NUMBER: C6348800. __0
TARGET NUMBER: 4
FILE DATE: 10/26/2004
FILE TIME: 08:03

POINT#	X	Y
1:	0.978	0.518
2:	0.336	0.021
3:	0.071	-0.567
4:	-1.117	-0.637
5:	-1.011	-0.385
6:	-0.104	0.270
7:	-0.592	0.281
8:	-0.399	1.109
9:	-0.706	1.075
10:	-1.031	1.054

X CENTROID: -0.357
Y CENTROID: 0.274
POA TO CENTROID: 0.450
HORZ SPREAD: 2.095
VERT SPREAD: 1.746
GROUP SPREAD: 2.392
MIN RADIUS: 0.235
MAX RADIUS: 1.358
MEAN RADIUS: 0.838
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

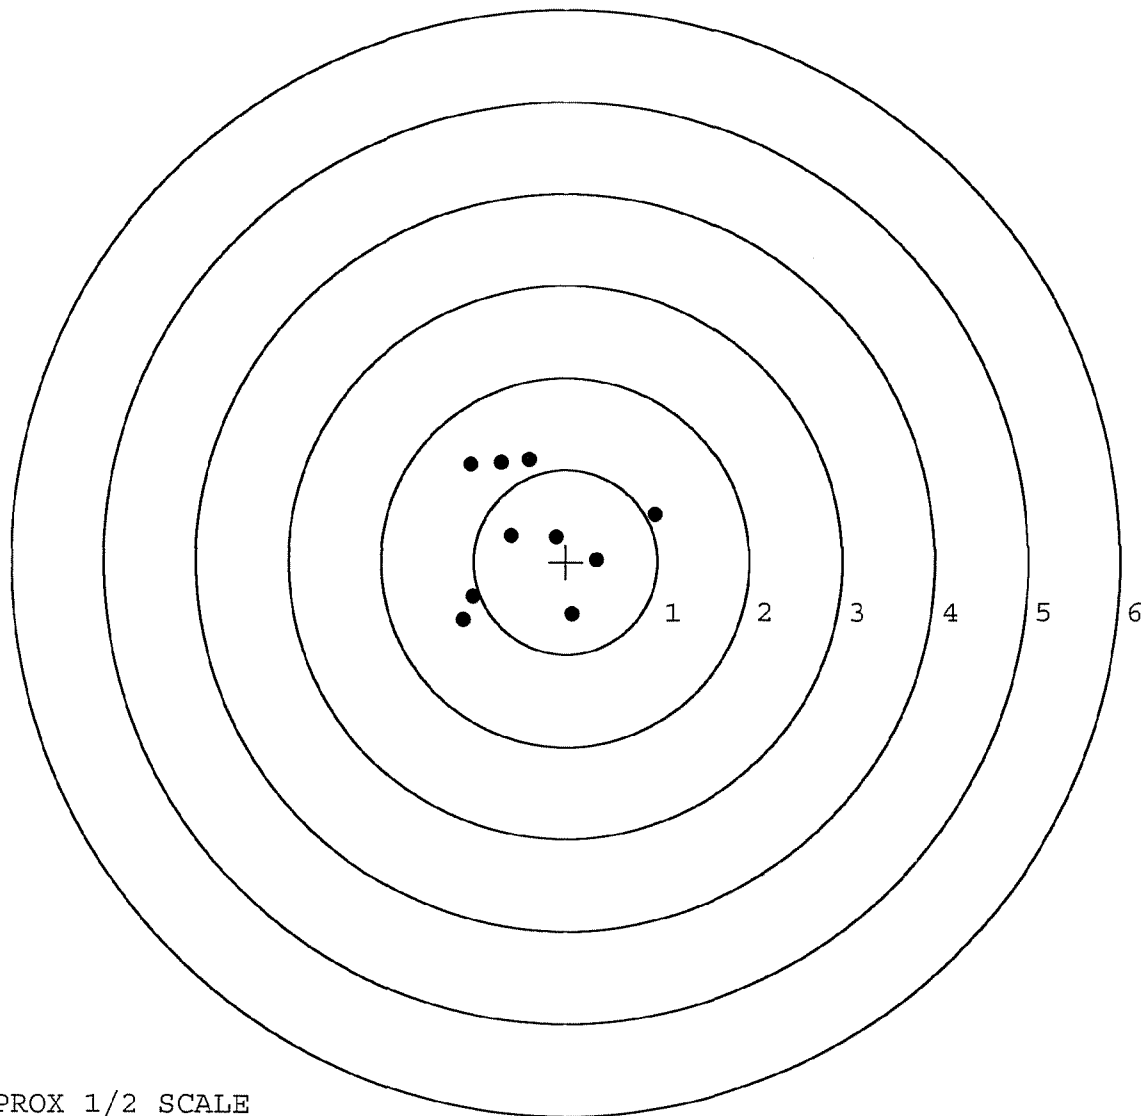


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6348800. __0
 TARGET NUMBER: 5
 FILE DATE: 10/26/2004
 FILE TIME: 08:03

POINT#	X	Y
1:	0.663	0.051
2:	0.244	-0.356
3:	0.204	-0.712
4:	-0.553	-0.417
5:	-0.792	-0.013
6:	0.290	0.373
7:	-0.014	0.275
8:	-0.155	0.207
9:	-0.437	0.142
10:	-0.623	0.076

X CENTROID: -0.117
 Y CENTROID: -0.037
 POA TO CENTROID: 0.123
 HORZ SPREAD: 1.455
 VERT SPREAD: 1.085
 GROUP SPREAD: 1.456
 MIN RADIUS: 0.247
 MAX RADIUS: 0.785
 MEAN RADIUS: 0.531
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

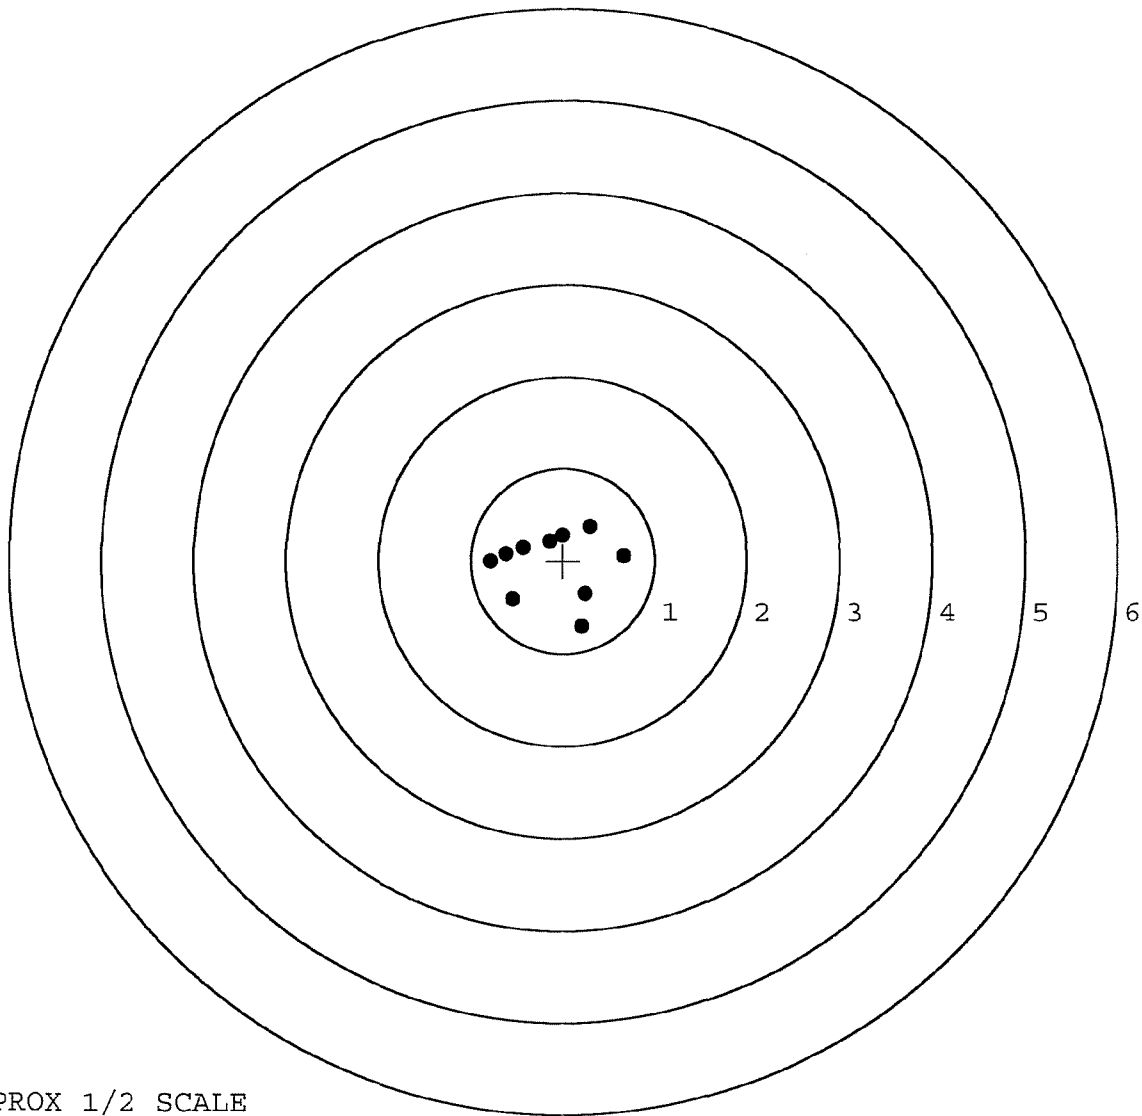

TARGET APPROX 1/2 SCALE

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

[illegible]

R & E NUMBER	85596		
SERIAL NUMBER	C 6348800		
LOG-IN DATE	9-28-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-4-04	AC
560 A	RE-BARREL	10-6-04	AC
B	DRILL AND TAP	10-8-04	TRW
575	ASSEMBLE	10-6-04	
600	PROOF	10-7-04	
605	CHECK HEADSPACE	10-7-04	
610	DIS-ASSEMBLE GUN	10-7-04	
612	MAGNAFLUX		
615	ROLLMARK CALIBER	10-11-04	SB/CW
618	ROTO-BLAST	10-11-04	LB
620	APPLY COATINGS	10/19/04	HP
625 A	FINAL ASSEMBLY	10-21-04	KTC
B	TRIGGER PULL TEST	11-3-04	RA
C	SAFETY "ON" FORCE	11-3-04	RA
D	SAFETY "OFF" FORCE	11-3-04	RA
E	FIRING PIN INDENT	11-3-04	RA
640	TARGET	10-26-04	AC
655	FINAL INSPECT	11-3-04	
660	PACK	11-4-04	RA
		SHIP DATE	
QAR INSPECTION DATE			



MODEL 700™ H24

SERIAL NO.
C6348800

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6348800

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6348800

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	11 89	7/11/89	RW
600	Proof	11 89	7/11/89	RW
607	Check Headspace	11 89	7/11/89	RW
610	Dis-assemble Gun			RW
612	Magnaflux Barrel Action		7/13	KCR
	Magnaflux Bolt		7/13	KCR
615	Rollmark Caliber		7/13	M.S.
7	Drill and Tap Sight Holes	7 13	89	FB
618	Polish Barrel <i>RB</i>	7 13	89	BT
620	Apply Coatings (Barrel Action)		7/21/89	TJA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		7/25/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		7/25/89	RW
	C) Inspect Ejector Hole for Chamfer		7/25/89	RW
	D) Oil Firing Pin Ass'y		7/25/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7/28/89	J.U.

op. #	BARBER - M24 0064390 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6 1/4	6			7/28/89	WB
	G) Safety Off Force	3	3	3			7/28/89	WB
	H) Trigger Pull Test & Retainability						7/28/89	WB
	I) Firing Pin Indent	.0227	.0225	.0225			7/28/89	WB
	J) Assemble Stock						7/31/89	RW
	K) Assemble Swivel Studs						1 Aug 89	JS
	L) Attach Front and Rear Sight Assemblies						7/31/89	RW
	M) Iron Sight Alignment						7/31/89	RW
	N) Detach Front & Rear Sights & place in numbered container						7/31/89	RW
	O) Attach Scope to Rifle						7/31/89	JS
	P) Detach & Attach Scope 20 Times						7/31/89	JS
640	Gallery Target & Test	84 R	64 L				7/31/89	
	A) Time						7-31-89	
	B) Malfunctions						7-31-89	
	C) Pierced Primers						7-31-89	
	D) Optical Clarity of Scope						7-31-89	
645	Inspect for Live Ammo						7-31-89	
655	Final Inspection						1 Aug 89	JS
	A) Headspace						1 Aug 89	JS
	B) Trigger Pull	268	2.59	2.74	2.85	2.80	1 Aug 89	JS
	C) Function						1 Aug 89	JS
660	Pack						19 Sep 89	JS

repaired Stock at front Survival 13 Sept 89

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06348800
1 Aug 1989

CENTROIDAL DISTANCES

0 TO	1	.346771
1 TO	2	.380865
1 TO	3	.346954
1 TO	4	.498293
1 TO	5	.642153

+²₄₅ <----POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .5344
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2182
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .57723
THE AMR FOR THIS RIFLE IS: 1.185

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C63468800

CENTERFIRE PATTERNS

1

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 2.386

VS= 3.450


GS= 4.195

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.211	1.031	.901
MINIMUM X	-1.175	-1.041	-.961
MAXIMUM Y	1.934	.831	.668
MINIMUM Y	-1.516	-1.301	-1.198
CENTROID X	.341	.207	.337
CENTROID Y	-.063	-.278	-.115
POA TO CENTROID in.	.347	.346	.356
MIN RADIUS	.040	.249	.075
MEAN RADIUS	1.047	.934	.791
MA. RADIUS	2.282	1.666	1.198
HORIZONTAL SPREAD	2.386	2.072	1.862
VERTICAL SPREAD	3.450	2.132	1.866
EXTREME SPREAD	4.195	2.948	2.081
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C63468800

CENTERFIRE PATTERNS # 2

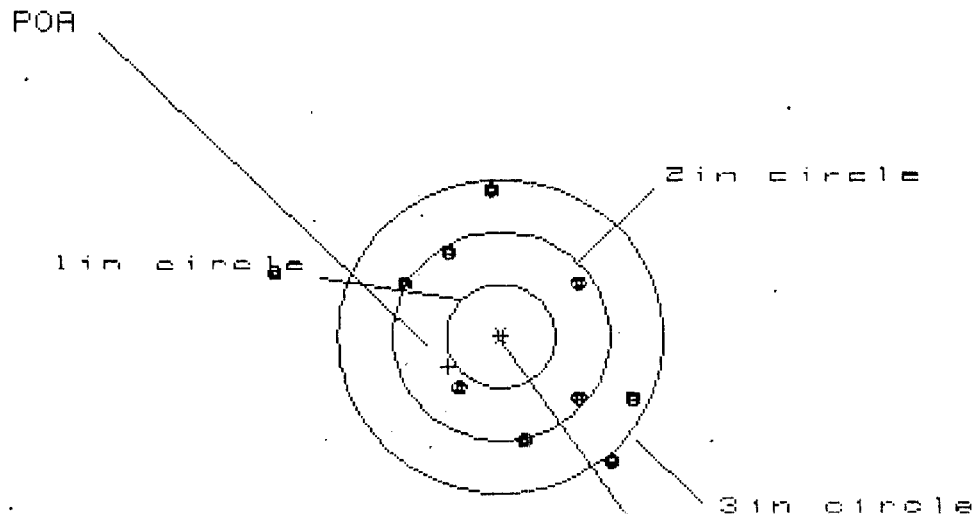

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 8

HS= 3.382

VS= 2.575

GS= 3.642


CENTROID *

PATTERN #	2
SHOTS (BEST OF)	10
MAXIMUM X	1.258
MINIMUM X	-2.124
MAXIMUM Y	1.382
MINIMUM Y	-1.193
CENTROID X	.484
CENTROID Y	.290
POA TO CENTROID in.	.564
MIN RADIUS	.599
MEAN RADIUS	1.198
MAX RADIUS	2.219
HORIZONTAL SPREAD	3.382
VERTICAL SPREAD	2.575
EXTREME SPREAD	3.642
NUMBER IN ONE INCH CIRCLE =	0
NUMBER IN TWO INCH CIRCLE =	4
NUMBER IN THREE INCH CIRCLE =	8

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346880

CENTERFIRE PATTERNS # 3

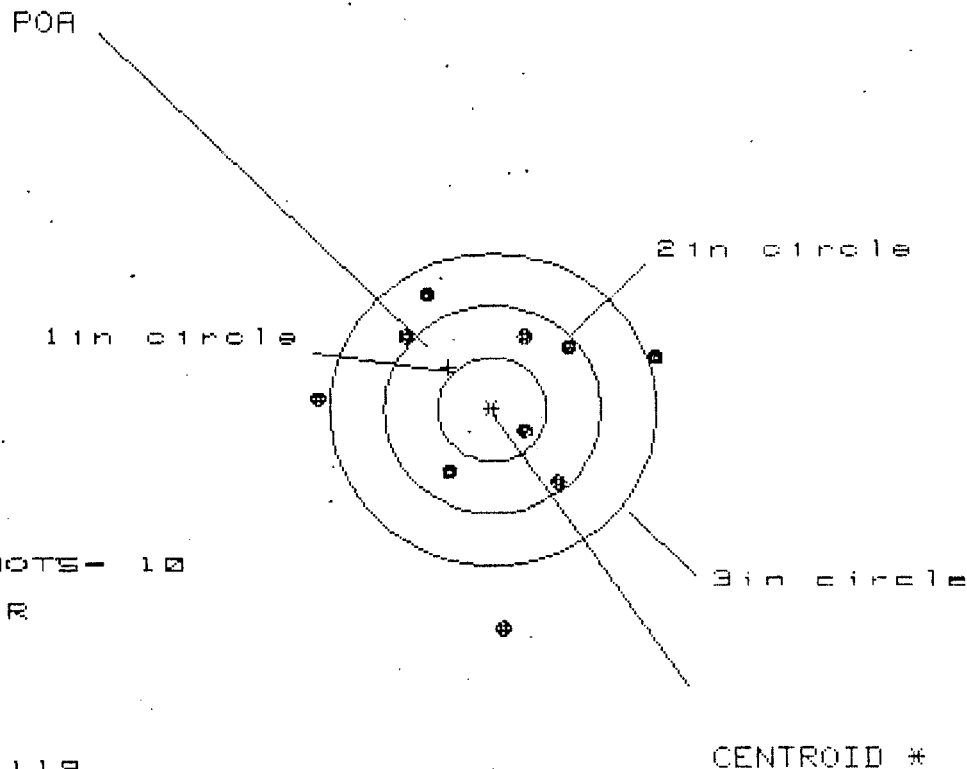

OF SHOTS - 10

IN CIR

1in = 1

2in = 5

3in = 7

HS = 3.119

VS = 3.251


GS = 3.327

PATTERN #	3		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.473	1.487	1.283
MINIMUM X	-1.646	-1.632	-1.022
MAXIMUM Y	1.133	.898	.877
MINIMUM Y	-2.118	-.943	-.964
CENTROID X	.405	.391	.595
CENTROID Y	-.404	-.169	-.148
POA TO CENTROID in.	.572	.426	.613
MIN RADIUS	.375	.545	.425
MEAN RADIUS	1.141	1.017	.909
MAX RADIUS	2.121	1.641	1.300
HORIZONTAL SPREAD	3.119	3.119	2.305
VERTICAL SPREAD	3.251	1.841	1.841
EXTREME SPREAD	3.327	3.144	2.322
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346880

CENTERFIRE PATTERNS # 4

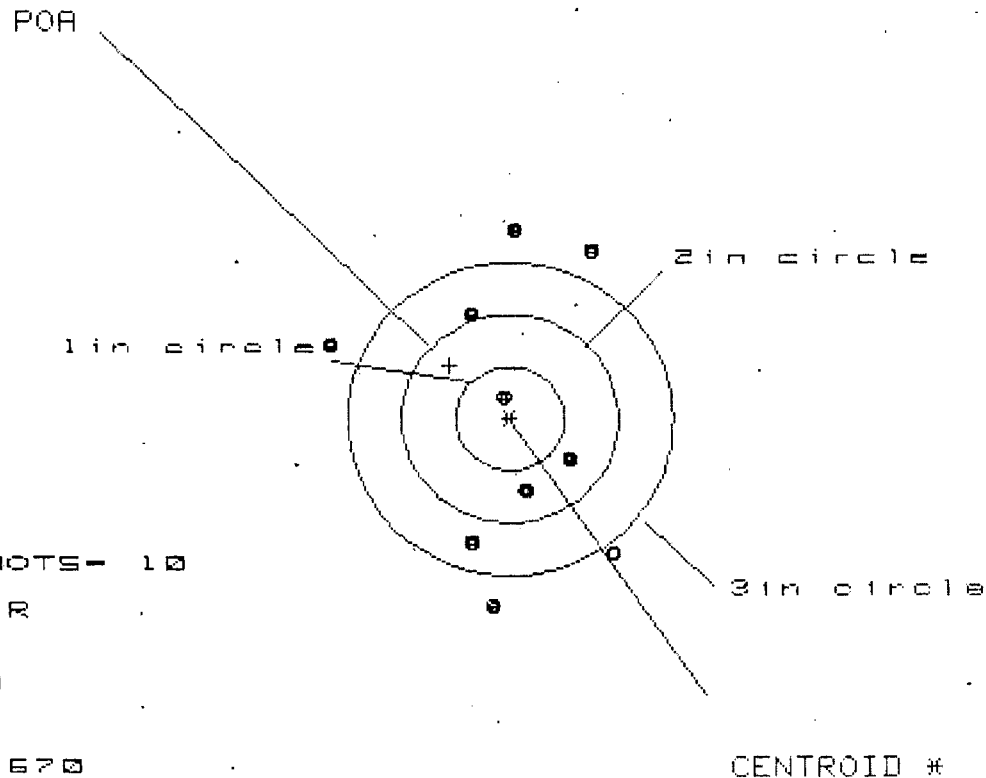

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 3

3 in = 5

HS= 2.670

VS= 3.531

GS= 3.534


PATTERN #	54	54	54
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.993	.806	.785
MINIMUM X	-1.677	-.500	-.521
MAXIMUM Y	1.729	1.860	1.913
MINIMUM Y	-1.752	-1.671	-1.439
CENTROID X	.555	.742	.763
CENTROID Y	-.513	-.594	-.826
POA TO CENTROID in.	.756	.950	1.125
MIN RADIUS	.190	.337	.376
MEAN RADIUS	1.256	1.176	1.051
MAX RADIUS	1.829	1.868	1.983
HORIZONTAL SPREAD	2.670	1.306	1.306
VERTICAL SPREAD	3.531	3.531	3.352
EXTREME SPREAD	3.534	3.534	3.462
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	5		

31 Jul 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6346800

CENTERFIRE PATTERNS # 5

POA

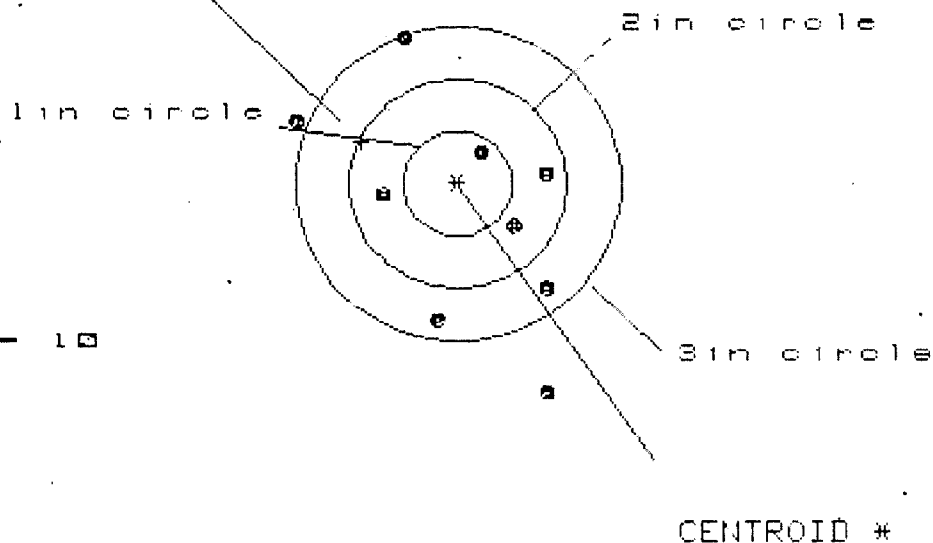

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 4

3 in = 7

HS= 2.378

VS= 4.382

GS= 4.514

PATTERN #	157		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.852	.819	.912
MINIMUM X	-1.526	-1.559	-1.466
MAXIMUM Y	2.427	1.630	1.420
MINIMUM Y	-1.955	-1.686	-1.283
CENTROID X	.887	.920	.827
CENTROID Y	-.401	-.670	-.460
POA TO CENTROID in.	.973	1.139	.946
MIN RADIUS	.377	.502	.459
MEAN RADIUS	1.284	1.137	1.041
MAX RADIUS	2.446	1.844	1.616
HORIZONTAL SPREAD	2.378	2.378	2.378
VERTICAL SPREAD	4.382	3.316	2.703
EXTREME SPREAD	4.514	3.540	2.829
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		7	

BARBER - M24 0064397

COMMENTS

M-24 SNIPER

INITIAL	CUSTOMER ORDER NO.
JJM	

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	MODEL AND GRADE	ORDER
05/29/90	05/31/90		C6348800	9999 7.62 NATO	R 90-15632
ACCESSORIES	W/STUDS	W/SWIVELS	SOFT CASE	SCOPE BASE	

FROM:

TRAFFIC MANAGEMENT OFFICE
BLDG 1702 - BAY 3
MCGUIRE AFB NJ 08641

SHIP TO:

TRAFFIC MANAGEMENT OFFICE
BLDG 1702 - BAY 3
MCGUIRE AFB NJ
08641

ACCOUNT NUMBER	ACCOUNT NUMBER N/C
----------------	--------------------

WRITE

PROM. DATE

ESTIMATED	
-----------	--

VIA

UP'S

REPAIR CHARGE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL	100
-------	-----

GUN CONDITION:

☒ NEW

☐ SLIGHTLY WORN

☐ VERY WORN☐ MISUSED☐ MARRED

CUSTOMER'S REQUEST

REPLACE TRIGGER ASSY.

MAIN FAULT

[illegible]

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE _____

DATE _____

DATE _____

DATE _____

DATE _____

RD6925 REV. 6/88

OFFICE COPY

BARBER - M24 0064397

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6348800

DATE 4-9-90

TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.31	2.34	2.70	2.27	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.24	2.36	2.60	2.53	
PULL #3	2.27	2.41	2.72	2.47	
PULL #4	2.35	2.37	2.65	2.55	
PULL #5	2.33	2.39	2.73	2.56	
TOTAL	11.50	11.92	13.40	12.38	
AVG.	2.3	2.384	2.68	2.476	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.54	3.49		
PULL #2	3.31	3.46		
PULL #3	3.53	3.46		
PULL #4	3.53	3.32		
PULL #5	3.57	3.42		
TOTAL	17.48	17.15		
AVG.	3.496	3.43		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.28	4.16		
PULL #2	4.26	4.31		
PULL #3	4.30	4.33		
PULL #4	4.33	4.39		
PULL #5	4.33	4.41		
TOTAL	21.50	21.60		
AVG.	4.3	4.32		

RECEIVED BARBER M24 0064399

COMMENTS

ORDER
R 98-24056

INITIAL CUSTOMER ORDER NO.

JJM

DATE RECEIVED

11/12/98

DATE OPENED

11/13/98

DATE CODE

SERIAL NUMBER

C6348800

NEW SERIAL NUMBER

MODEL AND GRADE

700 7.62

NATO

ACCESSORIES

FROM:

SHIP TO:

COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA 96376COMMANDER
1ST BN 1ST SFG A UNIT 35123
ATTN PROPERTY BOOK OFFICER
PSC 560 TORII STA. CA
96376

CUST NO: 198287 C.O.D.L.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

Barrel

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6625 REV 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 006439964438

BARBER - M24 0064400

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6348800
19 Feb 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .135
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.17
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .217083

THE AMR FOR THIS RIFLE IS: 1.067

CENTROIDAL DISTANCES

0	TO	1	.144534
1	TO	2	.370277
1	TO	3	.296665
1	TO	4	.322591
1	TO	5	.691417


4
1+ 5----POA
3
2

PATTERN #: 5
 POA TO CENTROID: .630
 MIN RADIUS : .369
 MEAN RADIUS : 1.184
 MAX RADIUS : 2.856
 CENTROID X : .622
 CENTROID Y : -.103

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 5

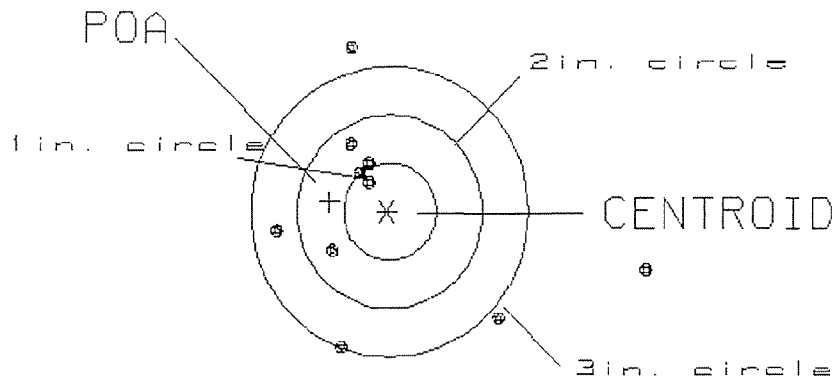

OF SHOTS= 10

IN CIRCLE

HS= 4.03
 VS= 3.05
 GS= 4.06


2
 5
 7

PATTERN #: 4
 POA TO CENTROID: .218
 MIN RADIUS : .645
 MEAN RADIUS : 1.222
 MAX RADIUS : 2.441
 CENTROID X : -.101
 CENTROID Y : .194

19 Feb 1999

FILE://Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348888

CENTERFIRE PATTERN # 4

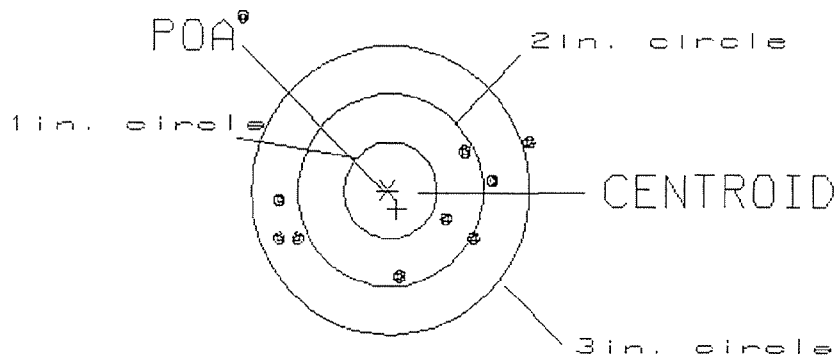

OF SHOTS= 10

IN CIRCLE

HS= 3.10
 VS= 2.76
 GS= 3.43

0
 3
 8

BARBER - M24 0064403

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: .382

MIN RADIUS : .157

MEAN RADIUS : .856


MAX RADIUS : 2.119

CENTROID X : .104

CENTROID Y : -.368

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

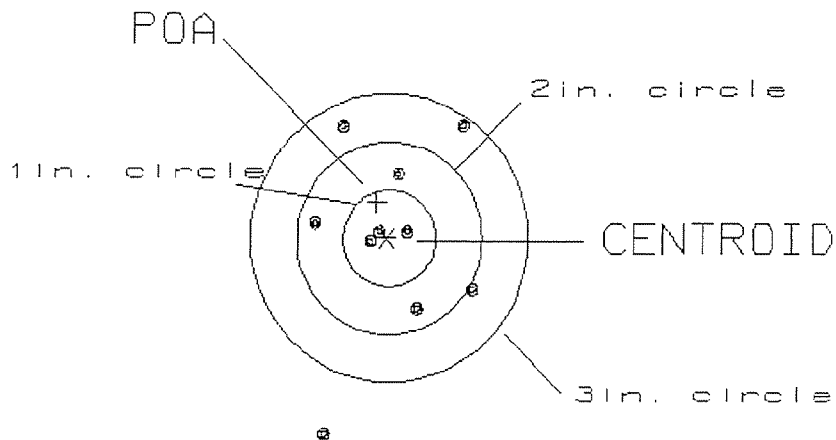CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 1.68

3

VS= 3.15

6

GS= 3.46


9

PATTERN #: 2
 POA TO CENTROID: .461
 MIN RADIUS : .320
 MEAN RADIUS : .940
 MAX RADIUS : 1.734
 CENTROID X : .119
 CENTROID Y : -.446

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

CENTERFIRE PATTERN # 2

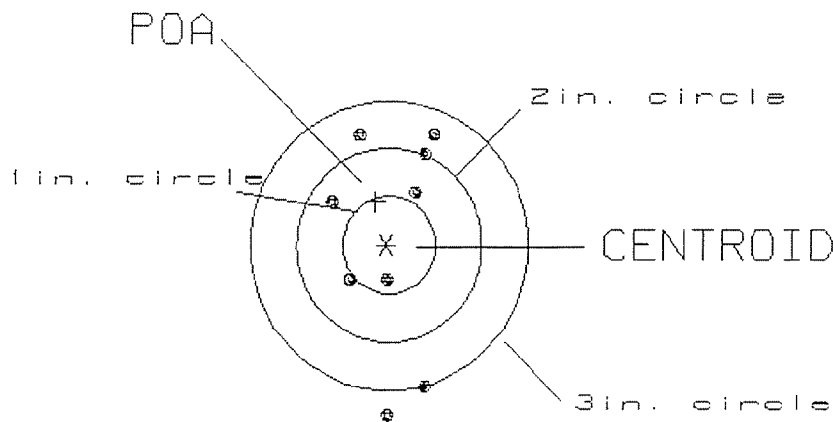

OF SHOTS= 10

IN CIRCLE

HS= 1.14
 VS= 2.91
 GS= 2.96

2
 6
 8

BARBER - M24 0064405

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .145

MIN RADIUS : .147

MEAN RADIUS : 1.132


MAX RADIUS : 3.399

CENTROID X : -.069

CENTROID Y : -.127

19 Feb 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6348800

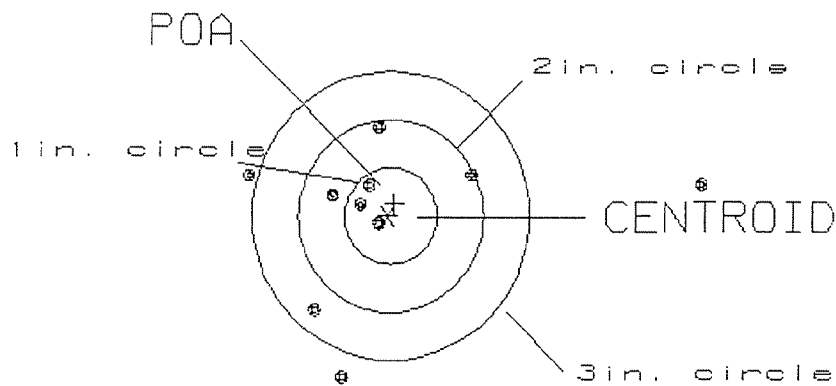CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 4.92

3

VS= 2.61

6

GS= 4.92

7