

C6649247

MODEL 700™ M24

Model **SMS**™

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.



Remington
REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

VERY IMPORTANT:
 Instruction Book
 enclosed to assure
 safe use of this
 firearm.


DU PONT

SERIAL NO.
 C6649247


ORDER NO.
 5716

MADE IN LION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

20



UPC



0 4700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6649247

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	7 2 9 1		RW
600	Proof	7 2 9 1		RW
607	Check Headspace	7 2 9 1		RW
610	Dis-assemble Gun	7 2 9 1		RW
612	Magnaflux Barrel Action		JUL 22 1991	LS
	Magnaflux Bolt		JUL 22 1991	LS
615	Rollmark Caliber		JUL 22 1991	LS
617	Drill and Tap Sight Holes		JUL 22 1991	LB
618	Polish Barrel		7/22/91	WB
620	Apply Coatings (Barrel Action)		7/22/91	LS
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/9/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/9/91	RW
	C) Inspect Ejector Hole for Chamfer		8/9/91	RW
	D) Oil Firing Pin Ass'y		8/9/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		8/16/91	WB

op. #	BARBER - M24 0066901	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			8-16-91	DH
	G) Safety Off Force	2	2	2			8-16-91	DH
	H) Trigger Pull Test & Retainability						8/16/91	WB
	I) Firing Pin Indent	.021	.022	.022			8-16-91	DH
	J) Assemble Stock						8/17/91	RW
	K) Assemble Swivel Studs						8-21-91	AC
	L) Attach Front and Rear Sight Assemblies						8/17/91	RW
	M) Iron Sight Alignment						8/17/91	RW
	N) Detach Front & Rear Sights & place in numbered container						8/17/91	RW
	O) Attach Scope to Rifle						8/17/91	RW
	P) Detach & Attach Scope 20 Times						8/17/91	RW
640	Gallery Target & Test						8-19-91	AC
	A) Time						8-19-91	AC
	B) Malfunctions						8-19-91	AC
	C) Pierced Primers						8-19-91	AC
	D) Optical Clarity of Scope						8-19-91	AC
645	Inspect for Live Ammo						8-19-91	AC
655	Final Inspection							
	A) Headspace						8-21-91	AC
	B) Trigger Pull	2.70	2.72	2.71	2.72	2.56	8-21-91	DH
	C) Function						8-21-91	AC
660	Pack						9-19-91	AC

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C6649247
DATE 8/16/91
TESTER W.B.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.36	2.48	2.43	2.70	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.28	2.33	2.50	2.72	
PULL #3	2.25	2.39	2.48	2.71	
PULL #4	2.37	2.36	2.53	2.72	
PULL #5	2.49	2.49	2.33	2.56	
TOTAL	11.75	12.05	12.27		
AVG.	2.35	2.41	2.45		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.13	3.17		
PULL #2	3.15	3.17		
PULL #3	3.17	3.15		
PULL #4	3.13	3.17		
PULL #5	3.22	3.15		
TOTAL	15.80	15.81		
AVG.	3.16	3.16		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.03	4.04		4.04
PULL #2	4.04	4.08		4.06
PULL #3	4.00	3.95		4.13
PULL #4	4.00	4.08		4.14
PULL #5	4.10	4.02		4.08
TOTAL	20.17	20.17		20.45
AVG.	4.03	4.03		4.09

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6649247
23 Aug 1991

CENTROIDAL DISTANCES

0 TO	1	.142285
1 TO	2	.313287
1 TO	3	.0980051
1 TO	4	.142667
1 TO	5	.446161


245 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0774
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0676
THE AVERAGE POI RADIUS FOR THIS RIFLE IS: .102764
THE AVERAGE POI RADIUS FOR THIS RIFLE IS: .9194

23 Aug 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6649247

CENTERFIRE PATTERNS # 1

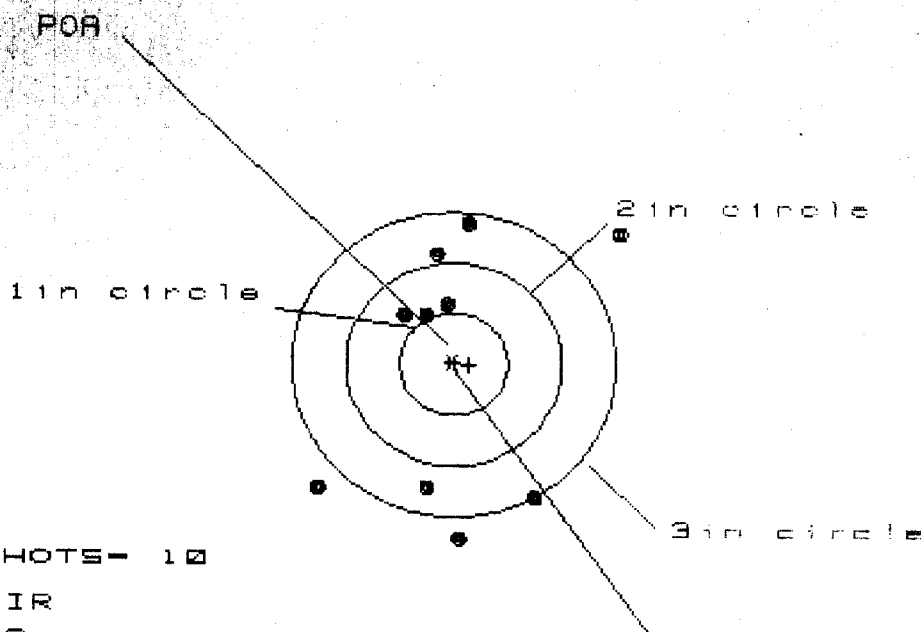

OF SHOTS- 10

IN CIR

1in - 0

2in - 3

3in = 7

HS= 2.789

VS= 3.149


GS= 3.746

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.560	.921	.949
MINIMUM X	-1.229	-1.056	-1.028
MAXIMUM Y	1.419	1.563	1.364
MINIMUM Y	-1.730	-1.586	-1.341
CENTROID X	-.142	-.315	-.343
CENTROID Y	.009	-.135	.064
POA TO CENTROID in.	.142	.342	.349
MIN RADIUS	.562	.685	.485
MEAN RADIUS	1.265	1.183	1.073
MAX RADIUS	2.026	1.602	1.643
HORIZONTAL SPREAD	2.789	1.977	1.977
VERTICAL SPREAD	3.149	3.149	2.705
EXTREME SPREAD	3.746	3.150	2.952
NUMBER IN ONE INCH CIRCLE	= 0		
NUMBER IN TWO INCH CIRCLE	= 3		
NUMBER IN THREE INCH CIRCLE	= 7		

23 Aug 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6649247

CENTERFIRE PATTERNS # 2

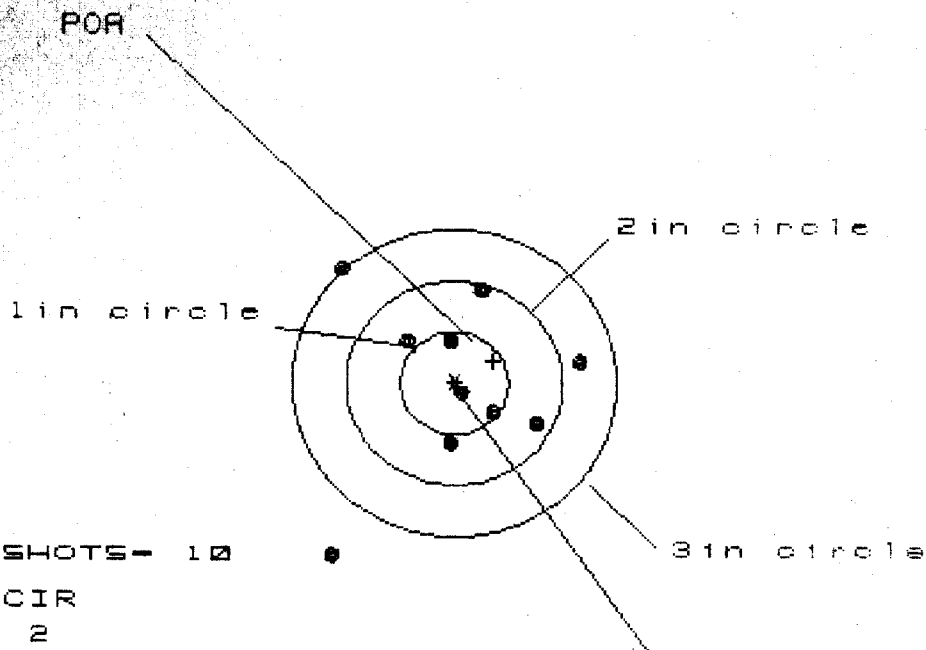

HS= 2.289

VS= 2.801


GS= 2.998

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.122	.993	.851
MINIMUM X	-1.167	-1.135	-.671
MAXIMUM Y	1.143	.958	.888
MINIMUM Y	-1.659	-.797	-.677
CENTROID X	-.360	-.231	-.089
CENTROID Y	-.216	-.032	-.152
POA TO CENTROID in.	.420	.233	.176
MIN RADIUS	.151	.289	.234
MEAN RADIUS	.881	.743	.633
MAX RADIUS	2.028	1.486	.889
HORIZONTAL SPREAD	2.289	2.128	1.522
VERTICAL SPREAD	2.801	1.755	1.565
EXTREME SPREAD	2.998	2.351	1.609
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	8		

23 Aug 1991

FILE: /PATTERNING/CENTERFIRE_PATT/CBB49247

CENTERFIRE PATTERNS # 3

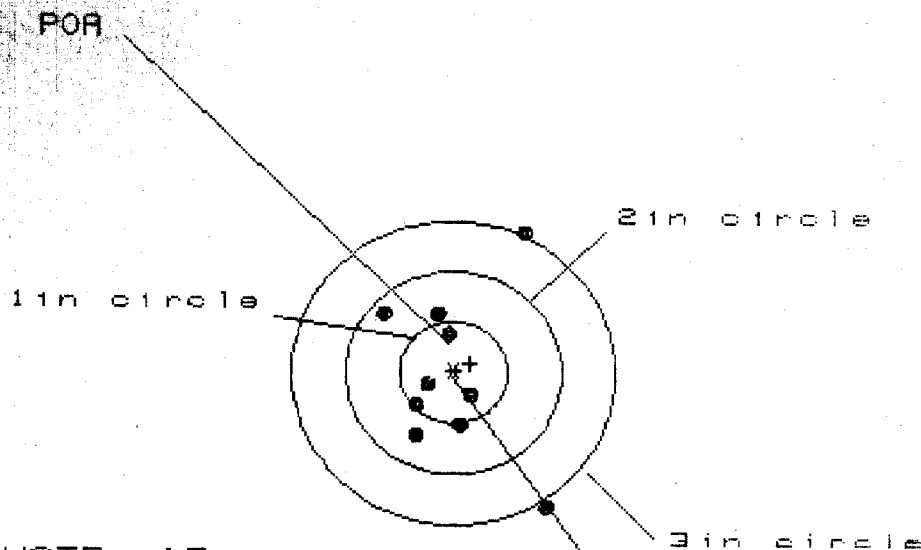

OF SHOTS- 10

IN CIR

1in = 5

2in = 8

3in = 9

HS= 1.552

VS= 2.617

GS= 2.627

CENTROID *

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.897	.763	.386
MINIMUM X	:	-.655	-.555	-.460
MAXIMUM Y	:	1.339	1.197	.628
MINIMUM Y	:	-1.278	-.722	-.573
CENTROID X	:	-.156	-.256	-.351
CENTROID Y	:	-.088	.054	-.095
POR TO CENTROID in.	:	.179	.261	.364
MIN RADIUS	:	.258	.251	.137
MEAN RADIUS	:	.714	.612	.476
MAX RADIUS	:	1.562	1.419	.744
HORIZONTAL SPREAD	:	1.552	1.318	.846
VERTICAL SPREAD	:	2.617	1.919	1.201
EXTREME SPREAD	:	2.627	2.152	1.279
NUMBER IN ONE INCH CIRCLE	=	5		
NUMBER IN TWO INCH CIRCLE	=	8		
NUMBER IN THREE INCH CIRCLE	=	9		

23 Aug 1981

FILE:/PATTERNING/CENTERFIRE_PATT/C6649247

CENTERFIRE PATTERNS # 4

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 2

2in = 6

3in = 8

HS= 1.583

VS= 2.490

GS= 2.713

CENTROID #

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.633	.693	.633
MINIMUM X	:	-.950	-.890	-.950
MAXIMUM Y	:	.984	.817	.763
MINIMUM Y	:	-1.506	-1.067	-.965
CENTROID X	:	-.015	-.075	-.015
CENTROID Y	:	.074	.241	.139
POA TO CENTROID in.	:	.075	.252	.140
MIN RADIUS	:	.258	.097	.213
MEAN RADIUS	:	.831	.722	.692
MAX RADIUS	:	1.601	1.119	1.059
HORIZONTAL SPREAD	:	1.583	1.583	1.583
VERTICAL SPREAD	:	2.490	1.884	1.728
EXTREME SPREAD	:	2.713	2.012	2.012
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

FILE:/PATTERNING/CENTERFIRE_PATT/C6649247

CENTERFIRE PATTERNS # 5

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 8

3 in = 8

HS= 2.396

VS= 1.594

GS= 2.604

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.573	1.275	1.157
MINIMUM X	-.823	-.649	-.489
MAXIMUM Y	.806	.731	.681
MINIMUM Y	-.788	-.863	-.913
CENTROID X	.286	.112	-.048
CENTROID Y	-.117	-.042	.008
POA TO CENTROID in.	.309	.119	.048
MIN RADIUS	.309	.332	.415
MEAN RADIUS	.906	.776	.671
MAX RADIUS	1.714	1.336	1.157
HORIZONTAL SPREAD	2.396	1.924	1.646
VERTICAL SPREAD	1.594	1.594	1.594
EXTREME SPREAD	2.604	2.034	1.658
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	9		