

PRINT # 7MM REM MAG
PROJECT # 241314
ENG:MIKE KEENEY

CHAMBER CAST

TLW 1447K
5/6/2004

ID	DESCRIPTION	DIN	PLUS	MINUS	A-1	A-2	A-3	A-4	A-5	M
A	O.D.	0.5136	0.002	0.000	0.5134	0.5138	0.5140	0.5136	0.5131	MV
B	O.D.	0.4928	0.002	0.000	0.4947	0.4943	0.4949	0.4948	0.4941	MV
C	O.D.	0.4918	0.002	0.000	0.4958	0.4945	0.4951	0.4949	0.4949	MV
D	O.D.	0.3170	0.002	0.000	0.3187	0.3184	0.3184	0.3184	0.3187	MV
E	O.D.	0.3160	0.002	0.000	0.3172	0.3168	0.3173	0.3169	0.3172	MV
F	O.D.	0.2845	0.002	0.000	0.2859	0.2860	0.2859	0.2858	0.2855	MV
G	DEGREE	25'			24.56	24.35	24.49	24.54	24.63	MV
H	DEGREE	45'			43.37	44.31	44.32	43.73	43.71	MV
I	RADIUS	0.150	0.030	0.000	0.154	0.149	0.152	0.151	0.154	MV
J										
K										
L										
M										
N										
O										
P										
Q										
R										
S										
T										
U										
V										
W										
X										
Y										
Z										
AA										
BB										
CC										
DD										
EE										
FF										
GG										
HH										
II										
JJ										
KK										
LL										

BARBER - 5.22.06/0004532

83



ET21532

Confidential - ~~BARBER~~ - 5.22.06/0004532
Order
Williams v. Remington

CARTRIDGE & CHAMBER
7mm REMINGTON MAGNUM
ISSUED 4-21-80
REV. 6-7-90

CARTRIDGE

UNLESS OTHERWISE NOTED
BODY DIA. -.008 (0.20)

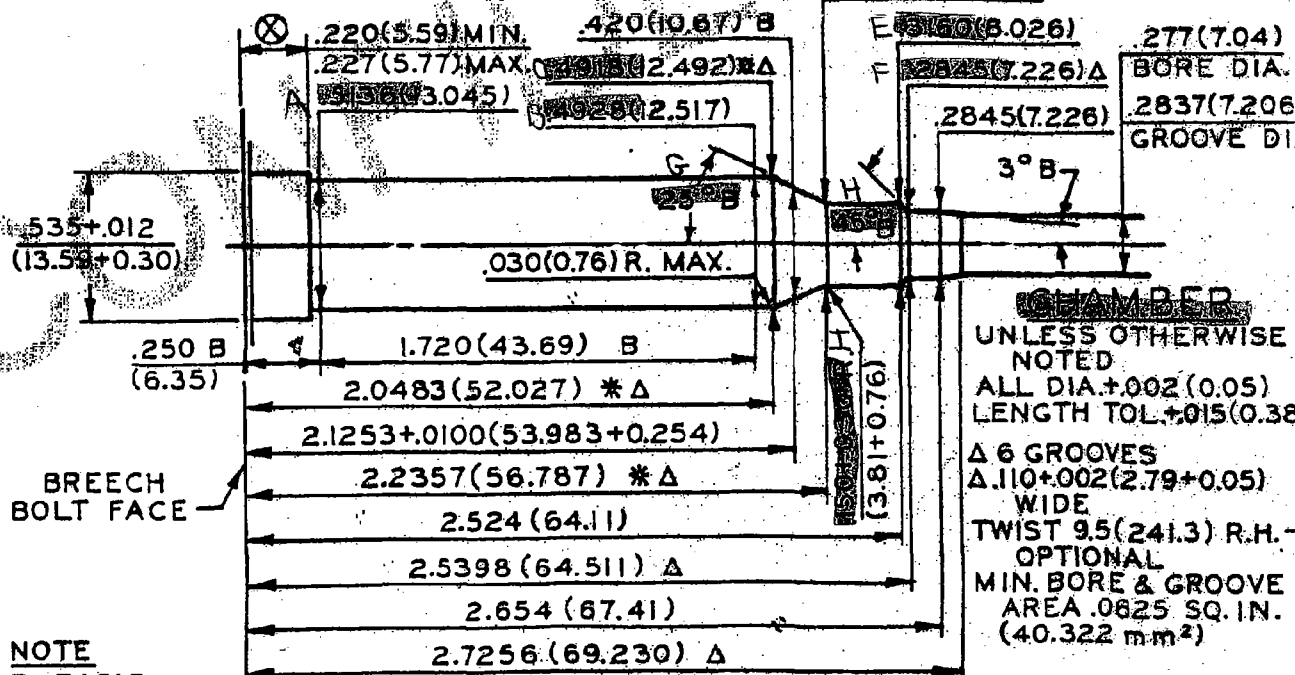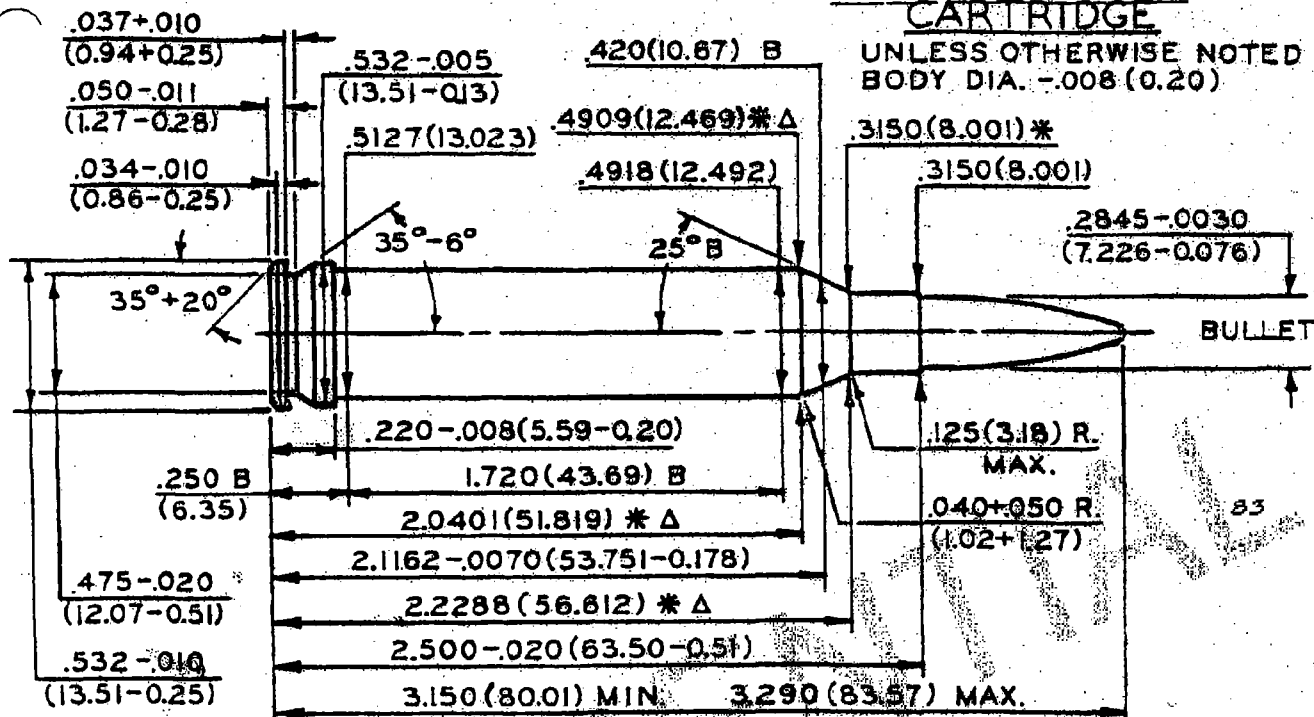

NOTE
B=BASIC
XX.XX)=MILLIMETERS
⊗=HEADSPACE DIMENSION
Δ=REFERENCE DIMENSION
* DIMENSIONS ARE TO INTERSECTION OF LINES
ALL CALCULATIONS APPLY AT MAXIMUM
MATERIAL CONDITION (MMC)

CHAMBER
UNLESS OTHERWISE
NOTED
ALL DIA.+.002(0.05)
LENGTH TOL.+.015(0.38)
Δ 6 GROOVES
Δ .110+.002(2.79+0.05)
WIDE
TWIST 9.5(241.3) R.H.-
OPTIONAL
MIN. BORE & GROOVE
AREA .0625 SQ. IN.
(40.322 mm²)

S A A M I
L.F.C. 7-18-1990

ET21533