

C6611400

MODEL 700TM M24

Model **SMS**TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.



Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00135359

Serial: C6611400 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 10/16/2007 7:31:59 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: COMMANDER OF KILO 2/11 ACR

COMMANDER OF KILO 2/11 ACR

Address 1: P.O. BOX 105050

P.O. BOX 105050

Address 2: PO Box:

PO Box:

City: FORT IRWIN

FORT IRWIN

State: CA Zip Code: 92310

Country: US

State: CA Zip Code: 92310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
A057	Frt and Rear Sgt Base	1

Repair Search

Refresh

Close

naglej

10/16/2007

10:00 AM

CAPS

NUM

INS

SCRL



2 Microsoft O...

3 Internet Ex...

Microsoft Excel ...

Arms Services ...

10:00 AM

Serial Number: C6611400

Model: M24 SWS



RE00135359

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6611400.___0
FILE DATE AND TIME: 12/11/2007 14:02

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.037
The Average Y Centroid of the Five Target Set:	-0.052
The Average Point of Impact of the Five Target Set:	0.064
The Average Mean Radius of the Five Target Set:	0.664
The Distance from POA to Centroid Target #1:	0.269
The Distance from Centroid Target #2 to Centroid Target #1:	0.256
The Distance from Centroid Target #3 to Centroid Target #1:	0.278
The Distance from Centroid Target #4 to Centroid Target #1:	0.331
The Distance from Centroid Target #5 to Centroid Target #1:	0.280

BARBER - M24 0076200

SERIAL NUMBER: C6611400. __0

TARGET NUMBER: 1

FILE DATE: 12/11/2007

FILE TIME: 14:02

X CENTROID: 0.242

Y CENTROID: -0.116

POA TO CENTROID: 0.269

HORZ SPREAD: 1.508

VERT SPREAD: 2.210

GROUP SPREAD: 2.426

MIN RADIUS: 0.174

MAX RADIUS: 1.324


MEAN RADIUS: 0.752

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.686	0.893
2:	1.193	0.407
3:	0.989	-0.460
4:	0.094	-1.110
5:	-0.315	-1.317
6:	-0.135	-0.277
7:	-0.169	-0.038
8:	0.316	0.041
9:	0.079	0.189
10:	-0.313	0.509

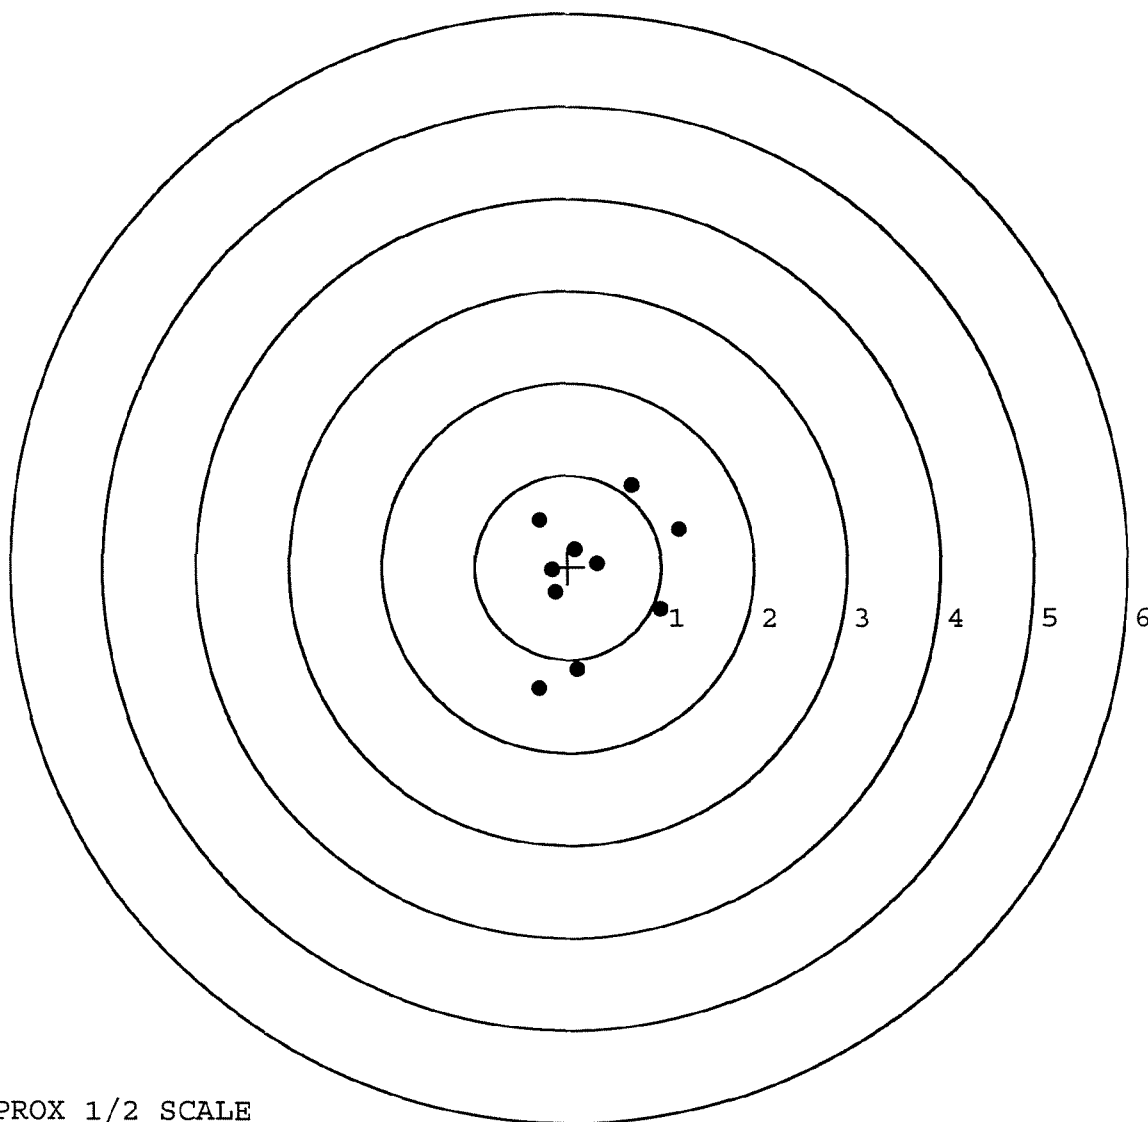


TARGET APPROX 1/2 SCALE

BARBER - M24 0076201

SERIAL NUMBER: C6611400.____0
 TARGET NUMBER: 2
 FILE DATE: 12/11/2007
 FILE TIME: 14:02

X CENTROID: 0.069
 Y CENTROID: 0.072
 POA TO CENTROID: 0.100
 HORZ SPREAD: 1.366
 VERT SPREAD: 2.297
 GROUP SPREAD: 2.465
 MIN RADIUS: 0.323
 MAX RADIUS: 1.560
 MEAN RADIUS: 0.855
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.902	1.391
2:	-0.245	1.313
3:	-0.338	0.916
4:	-0.423	0.238
5:	0.013	-0.246
6:	-0.061	-0.447
7:	0.205	-0.427
8:	-0.376	-0.717
9:	0.069	-0.906
10:	0.943	-0.395

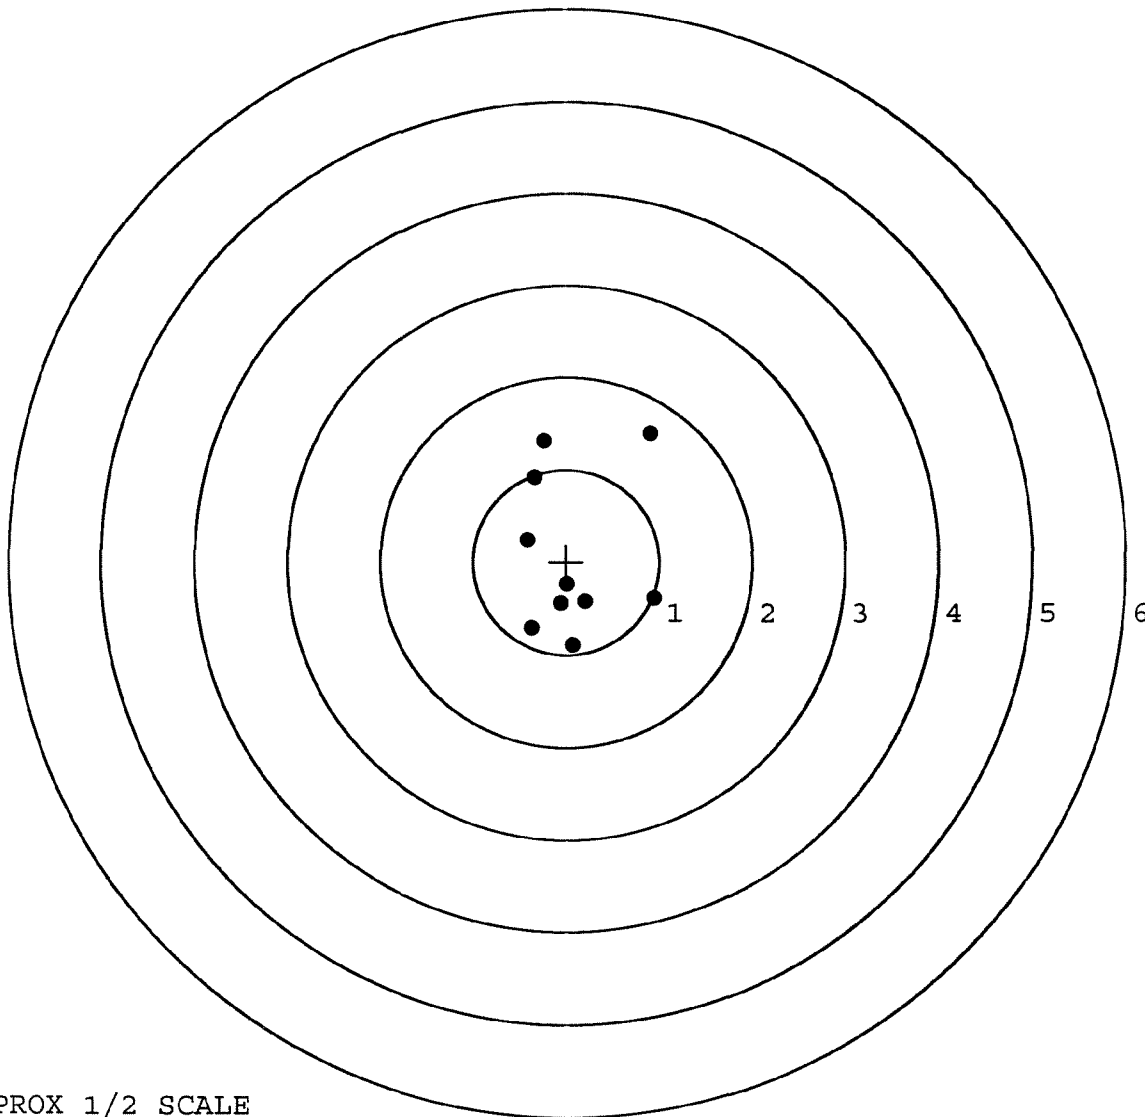

TARGET APPROX 1/2 SCALE

BARBER - M24 0076202

SERIAL NUMBER: C6611400. __ 0

TARGET NUMBER: 3

FILE DATE: 12/11/2007

FILE TIME: 14:02

X CENTROID: -0.035

Y CENTROID: -0.094

POA TO CENTROID: 0.101

HORZ SPREAD: 1.391

VERT SPREAD: 1.362

GROUP SPREAD: 1.484

MIN RADIUS: 0.268

MAX RADIUS: 0.957


MEAN RADIUS: 0.619

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.288	-0.986
2:	0.056	-0.743
3:	0.006	-0.359
4:	0.419	-0.160
5:	-0.972	-0.290
6:	-0.799	0.302
7:	0.413	0.244
8:	0.308	0.352
9:	0.095	0.320
10:	-0.165	0.376

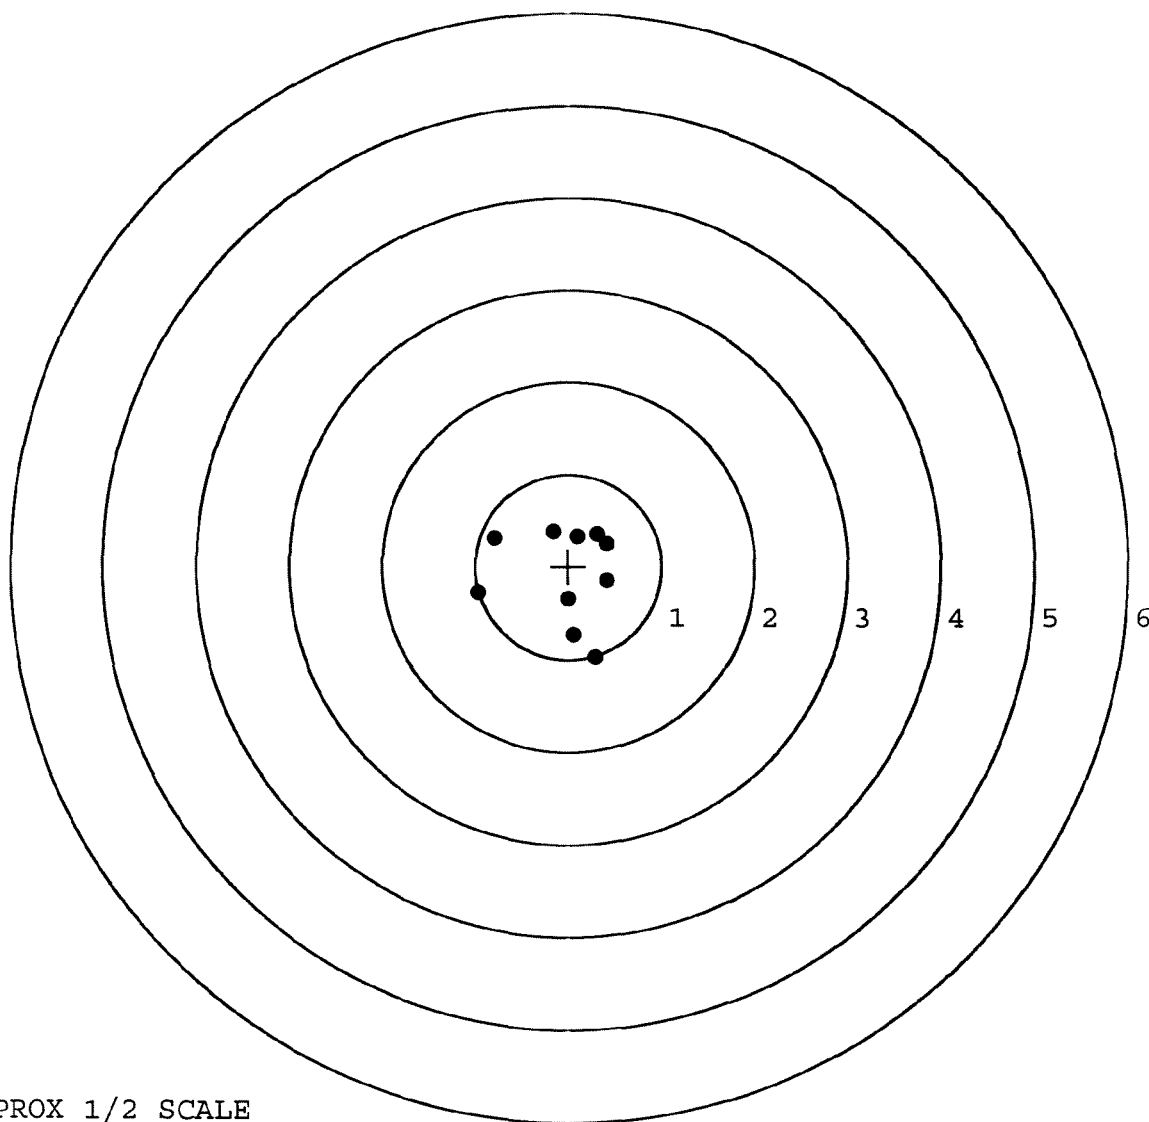

TARGET APPROX 1/2 SCALE

BARBER - M24 0076203

SERIAL NUMBER: C6611400. __ 0

TARGET NUMBER: 4

FILE DATE: 12/11/2007

FILE TIME: 14:02

X CENTROID: -0.088

Y CENTROID: -0.141

POA TO CENTROID: 0.166

HORZ SPREAD: 0.980

VERT SPREAD: 1.786

GROUP SPREAD: 1.803

MIN RADIUS: 0.115

MAX RADIUS: 0.983


MEAN RADIUS: 0.588

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.161	0.764
2:	0.330	0.450
3:	0.393	0.250
4:	0.310	-0.069
5:	0.022	-0.688
6:	-0.369	-1.022
7:	-0.587	-0.988
8:	-0.187	-0.199
9:	-0.194	0.119
10:	-0.433	-0.030

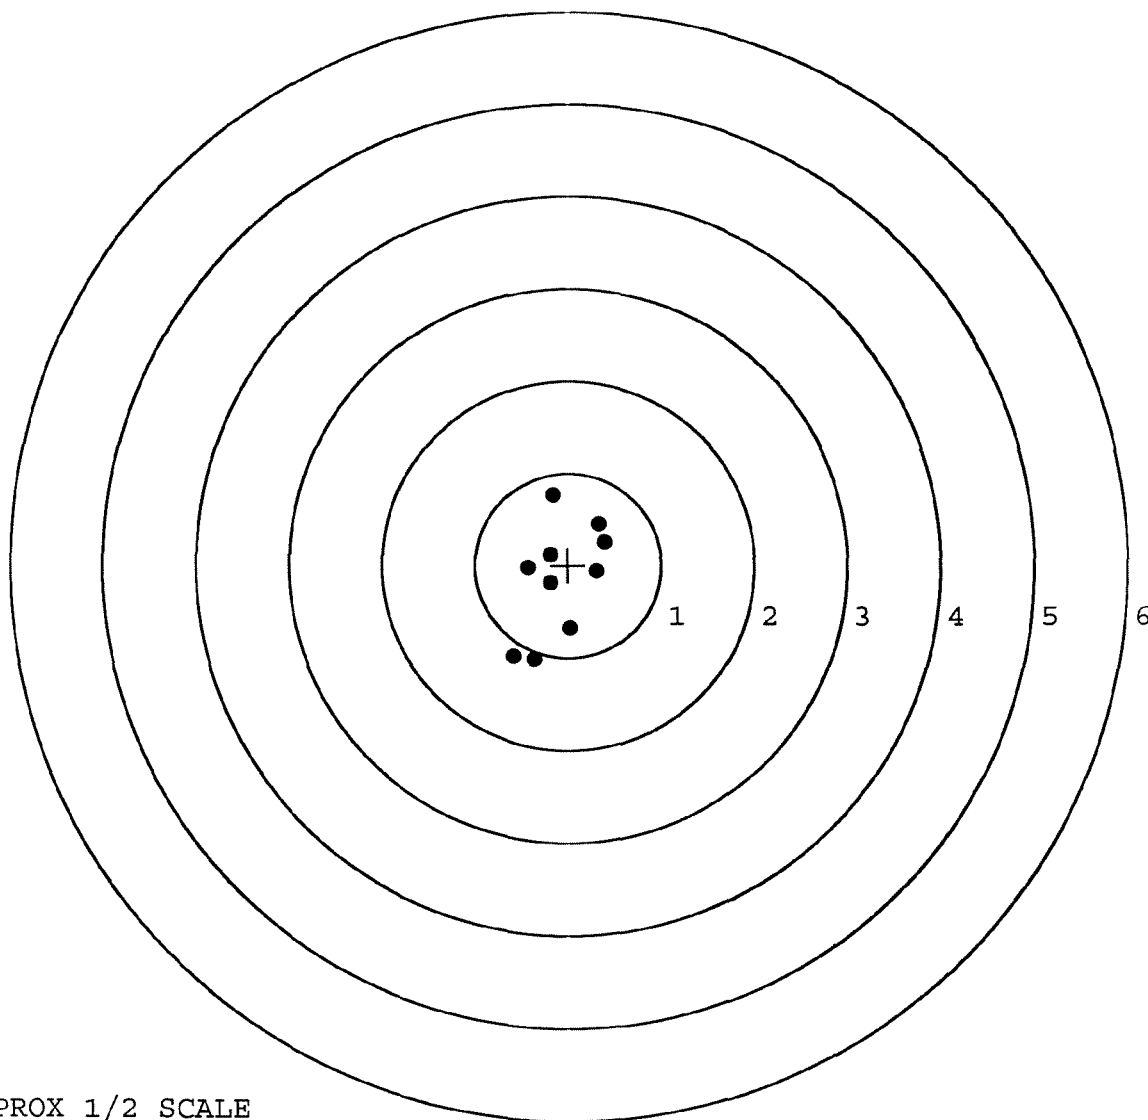


TARGET APPROX 1/2 SCALE

BARBER - M24 0076204

SERIAL NUMBER: C6611400. 0
 TARGET NUMBER: 5
 FILE DATE: 12/11/2007
 FILE TIME: 14:02

X CENTROID: -0.003
 Y CENTROID: 0.018
 POA TO CENTROID: 0.018
 HORZ SPREAD: 0.780
 VERT SPREAD: 1.765
 GROUP SPREAD: 1.864
 MIN RADIUS: 0.247
 MAX RADIUS: 1.054
 MEAN RADIUS: 0.506
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.464	-0.930
2:	0.135	0.835
3:	0.199	0.582
4:	-0.236	0.513
5:	-0.214	0.299
6:	-0.187	-0.149
7:	0.119	-0.484
8:	0.316	-0.229
9:	0.241	-0.018
10:	0.057	-0.243

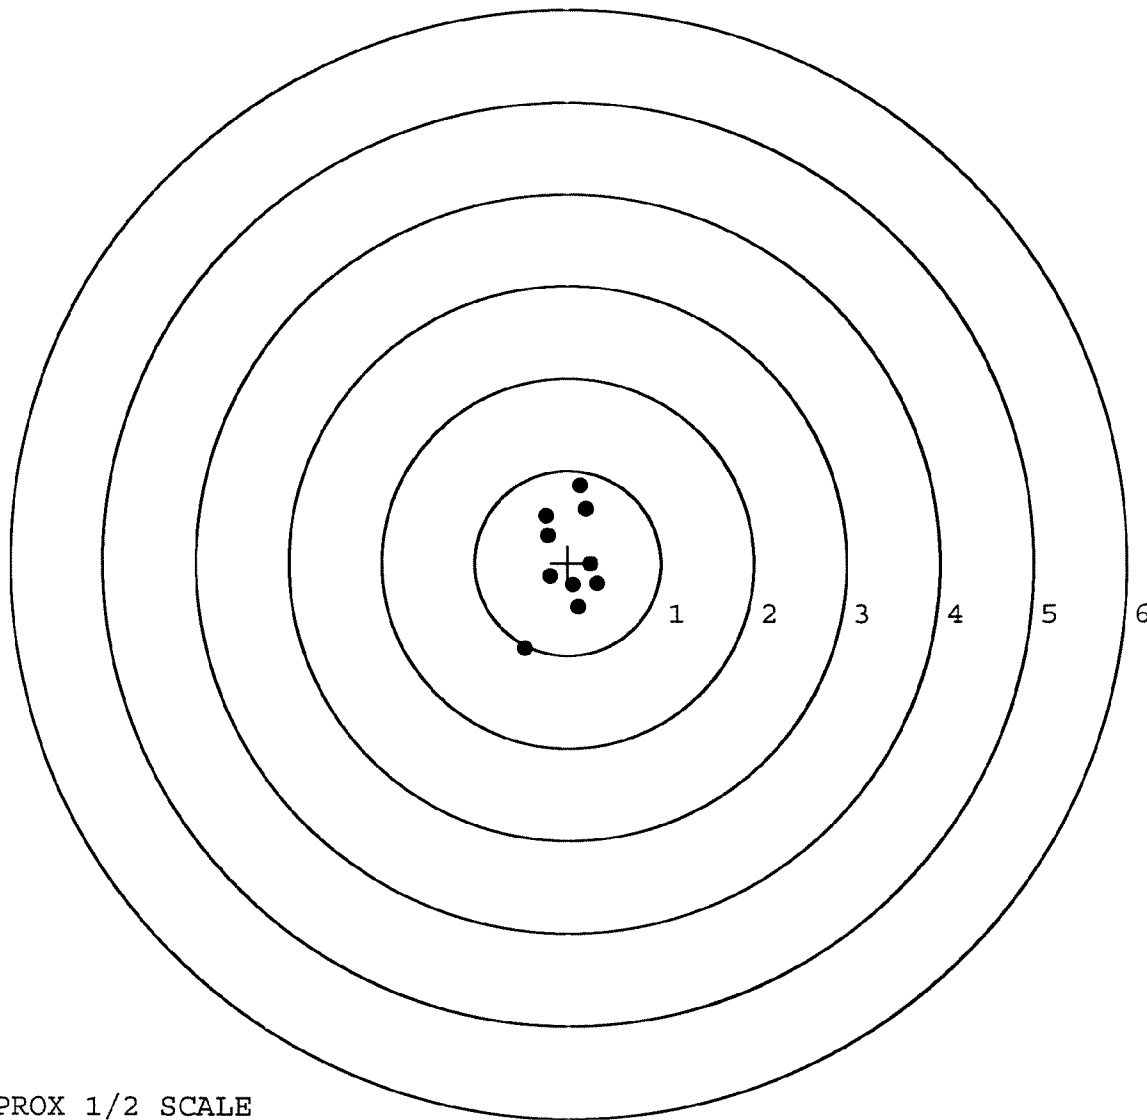

TARGET APPROX 1/2 SCALE

R & E NUMBER	135359		
SERIAL NUMBER	C6611400		
LOG-IN DATE	10-16-07		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	11-06-07	RTZ
505	RE-BARREL	11-08-07	TRW
560	ASSEMBLE	11-8-07	TRW
600	PROOF	11-12-07	TRW
605	CHECK HEADSPACE	11-12-07	TRW
610	DIS-ASSEMBLE GUN	11-13-07	RTZ
612	MAGNAFLUX	11-14-07	JB
510	DRILL AND TAP	11-13-07	TRW
615	ROLLMARK CALIBER	11-13-07	CW
618	ROTO-BLAST	11-14-07	YU
620	APPLY COATINGS	11-27-07	RB
625	FINAL ASSEMBLY	12-7-07	RTZ
640	FUNCTION TEST AND	PASS FAIL	12-11-07 TRW
650	TARGET	PASS FAIL	12-11-07 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	12-11-07 FM
670	FINAL INSPECTION		12-12-07 RA
	A) HEADSPACE	PASS FAIL	12-12-07 RA
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	295 294 295 292 296 12-12-07 RA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	40 45 42 12-12-07 RA
	G) SAFETY OFF FORCE	2 LBS MIN	25 25 25 12-12-07 RA
	I) FIRING PIN INDENT	.020	.022 .023 .023 12-12-07 RA
690	PACK		1-2-08 RA

RECEIVED M240076245 REPORT

COMMENTS

ORDER

R 94-18365

INITIAL	CUSTOMER ORDER NO.	W/10X SCOPE, M-24 SNIPER, W/DEPLOYMENT KIT			
FDC	DAAA09-92-C-0834	ATTN: FRED MARTIN Scope S/N 90 - 0534			
DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
06/11/94	06/11/94		C6611400		700 7.62 NATO
ACCESSORIES	SLING STRAP	HARD CASE	SCOPE MNTS	SCOPE BASE	

FROM:

SHIP TO:

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL 36201-5025

COMMANDER (W52H094138H226)
DEFENSE DIST DEPOT ANNISTON
ATTN DDAA-UR BLDG 112
ANNISTON

AL
36201-5025

CUST NO: 098397 C.O.D L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA
					FRT

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

New Trigger Assy
✓ Front & Rear Sight Assy

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
GALLERY TESTER	DATE	DATE	DATE	DATE	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0076245

BARBER - M24 0076207

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6611400DATE 8/8/96TESTER RW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.30	2.58		2.81	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.65	2.58		2.78	
PULL #3	2.76	2.47		2.74	
PULL #4	2.78	2.58		2.74	
PULL #5	2.78	2.58		2.75	
TOTAL	13.27	12.79		13.82	
AVG.	2.65	2.56		2.76	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.36	3.26		
PULL #2	3.29	3.30		
PULL #3	3.33	3.24		
PULL #4	3.33	3.19		
PULL #5	3.35	3.06		
TOTAL	16.66	16.05		
AVG.	3.33	3.21		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.23		4.14
PULL #2	4.27	4.05		4.29
PULL #3	4.27	4.16		4.08
PULL #4	4.05	4.27		4.31
PULL #5	4.28	4.23		4.00
TOTAL	21.02	20.94		20.82
AVG.	4.20	4.19		4.16

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6611400

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER M24 0076209 OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force	5	6	6	8/26/96	RW
	G) Safety Off Force	3	3	3	8/26/96	RW
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test					
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo					
655	Final Inspection					
	A) Headspace					
	B) Trigger Pull	2.67	2.49	2.48	2.47	2.51
	C) Function				8/24/96	RW
660	Pack					

Remington
MODEL 700™ M24

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

UPONT
REG. U.S. PAT. & TM. OFF.

SERIAL NO.
C6611400

ORDER NO.
5716


20

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off; Marca Registrada. Marque Deposee.



5716 C6611400

UPC



0 47700 25716 7

GUN SERIAL # C6611400

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	QUALITY AUDIT	1 25 91	RW
600	Proof		1 25 91	RW
607	Check Headspace		1 25 91	RW
610	Dis-assemble Gun		1 25 91	RW
612	Magnaflux Barrel Action		1 25 91	KR
	Magnaflux Bolt		1 25 91	KR
615	Rollmark Caliber		1 25 91	GS
617	Drill and Tap Sight Holes		1 30 91	LB
618	Polish Barrel <i>RBB</i>		1 30 91	LB
620	Apply Coatings (Barrel Action)		2-10-91	JH
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/11/91	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		2/11/91	RW
	C) Inspect Ejector Hole for Chamfer		2/11/91	RW
	D) Oil Firing Pin Ass'y		2/11/91	RW
	E) Adjust Trigger Pull to Min Setting and Stake		2/15/91	JH

op. #	BARBER M24 0076212	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4 1/2	4 1/2	4 1/2			2/15/91	WB
	G) Safety Off Force	3 1/4	3 1/4	3 1/4			2/15/91	WB
	H) Trigger Pull Test & Retainability						2/15/91	RL
	I) Firing Pin Indent	1.022	1.022	1.022			2/15/91	WB
	J) Assemble Stock						2/15/91	RW
	K) Assemble Swivel Studs						2-26-91	K
	L) Attach Front and Rear Sight Assemblies						2/15/91	RW
	M) Iron Sight Alignment						2/15/91	RW
	N) Detach Front & Rear Sights & place in numbered container						2/15/91	RW
	O) Attach Scope to Rifle						2/15/91	RW
	P) Detach & Attach Scope 20 Times						2/15/91	RW
640	Gallery Target & Test						2-15-91	AF
	A) Time						"	AF
	B) Malfunctions						"	AF
	C) Pierced Primers						"	AF
	D) Optical Clarity of Scope						"	AF
645	Inspect for Live Ammo						2-15-91	AF
655	Final Inspection							
	A) Headspace						2-26-91	K
	B) Trigger Pull	2.24	2.25	2.26	2.21	2.21	2/22/91	RL
	C) Function						2-26-91	K
660	Pack						3-18-91	DH

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. 06611400DATE 2/15/91TESTER J.P.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.28	2.30	2.38	2.24	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.47	2.24	2.26	2.25	
PULL #3	2.21	2.28	2.38	2.26	
PULL #4	2.26	2.25	2.38	2.21	
PULL #5	2.46	2.27	2.42	2.21	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.44	3.41		
PULL #2	3.38	3.40		
PULL #3	3.23	3.34		
PULL #4	3.24	3.30		
PULL #5	3.29	3.38		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.40	4.47		4.41
PULL #2	4.51	4.32		4.29
PULL #3	4.58	4.29		4.37
PULL #4	4.47	4.22		4.38
PULL #5	4.49	4.19		4.27
TOTAL				
AVG.				

CENTRAL DISTANCE CALCULATIONS
FOR RIFLE # C6611400
15 Feb 1991

CENTRAL DISTANCES

1 TO	1	.201002
1 TO	2	.26163
1 TO	3	.243647
1 TO	4	.212763
1 TO	5	.369381

14 X----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.017
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0598
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0621694
THE RMS FOR THIS RIFLE IS: .8628

13 Feb 1981

FILE:/PATTERNING/CENTERFIRE_PATT/C6811400

CENTERFIRE PATTERNS

1

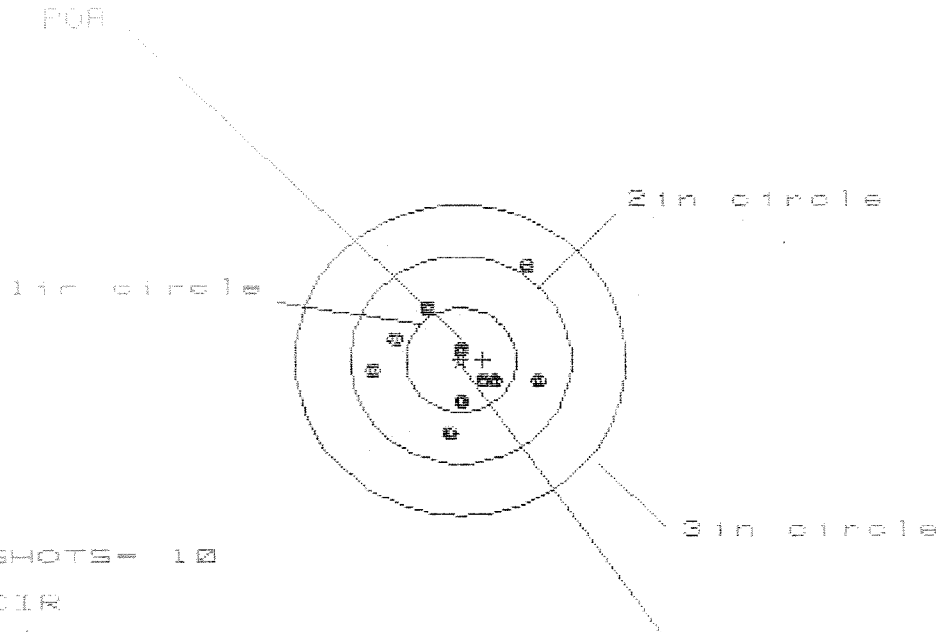

OF SHOTS- 10

IN CIR

1 in = 4

2 in = 9

3 in = 10

HS= 1.468

VS= 1.584

GS= 1.711

CENTROID #


PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.661	.725	.632
MINIMUM X	:	-.807	-.743	-.629
MAXIMUM Y	:	.934	.599	.604
MINIMUM Y	:	-.650	-.546	-.541
CENTROID X	:	-.201	-.265	-.172
CENTROID Y	:	-.001	-.105	-.110
POA TO CENTROID in.	:	.201	.285	.204
MIN RADIUS	:	.146	.253	.207
MEAN RADIUS	:	.567	.502	.453
MAX RADIUS	:	1.097	.744	.689
HORIZONTAL SPREAD	:	1.468	1.468	1.261
VERTICAL SPREAD	:	1.584	1.145	1.145
EXTREME SPREAD	:	1.711	1.476	1.318
NUMBER IN ONE INCH CIRCLE	=	4		
NUMBER IN TWO INCH CIRCLE	=	9		
NUMBER IN THREE INCH CIRCLE	=	10		

5 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C6B11480

CENTERFIRE PATTERNS # 2

POA

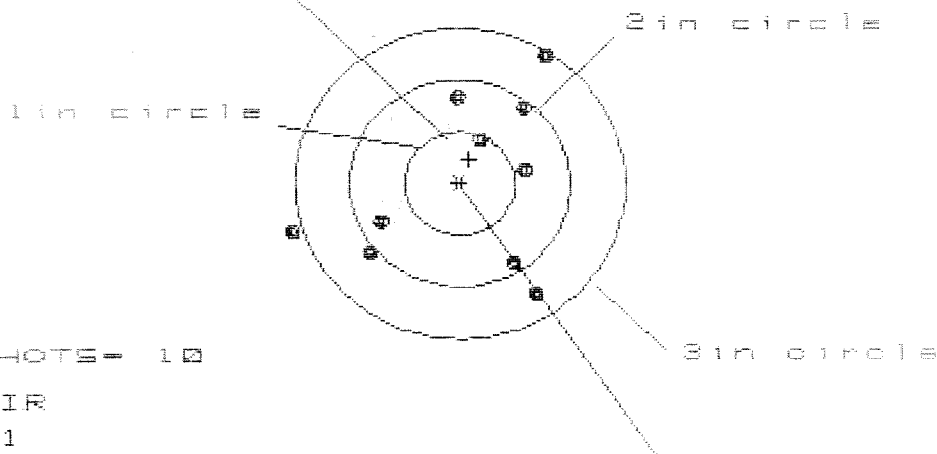

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS = 2.327

VS = 2.245

GS = 2.843


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.778	.606	.560
MINIMUM X	-1.549	-.996	-.920
MAXIMUM Y	1.199	1.151	.899
MINIMUM Y	-1.046	-1.094	-.950
CENTROID X	-.082	.090	.014
CENTROID Y	-.234	-.186	-.330
POA TO CENTROID in.	.248	.207	.330
MIN RADIUS	.471	.402	.533
MEAN RADIUS	.988	.890	.851
MAX RADIUS	1.609	1.301	1.103
HORIZONTAL SPREAD	2.327	1.602	1.480
VERTICAL SPREAD	2.245	2.245	1.849
EXTREME SPREAD	2.843	2.466	1.973
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

15 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611400

CENTERFIRE PATTERNS # 3

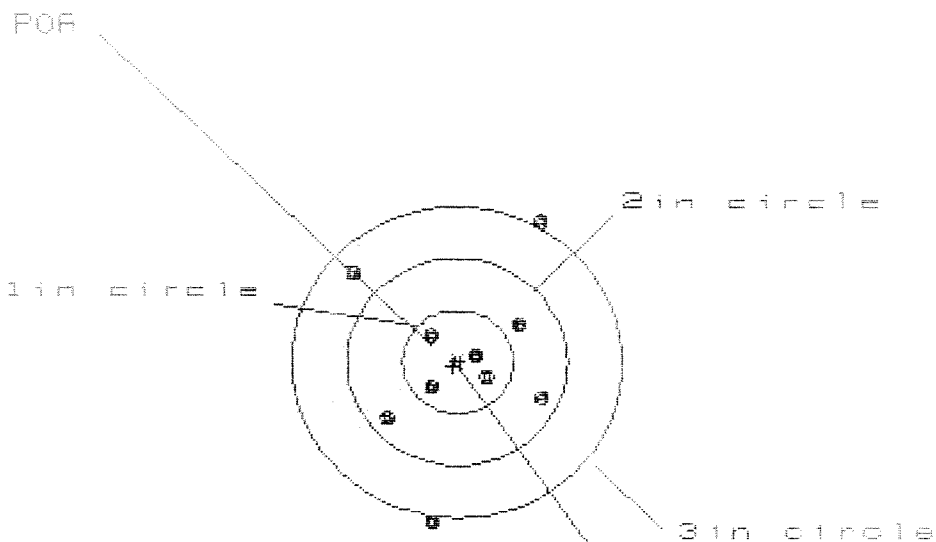

OF SHOTS - 10

IN CIR

1in = 4

2in = 7

3in = 8

HS= 1.681

VS= 2.881

GS= 3.049

CENTROID #

PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.718	.687	.772
MINIMUM X	-.963	-.994	-.908
MAXIMUM Y	1.334	1.162	.782
MINIMUM Y	-1.547	-.750	-.605
CENTROID X	.039	.070	-.016
CENTROID Y	.041	.213	.068
POA TO CENTROID in.	.057	.224	.070
MIN RADIUS	.131	.174	.183
MEAN RADIUS	.772	.692	.586
MAX RADIUS	1.572	1.350	1.199
HORIZONTAL SPREAD	1.681	1.681	1.680
VERTICAL SPREAD	2.881	1.912	1.387
EXTREME SPREAD	3.049	2.345	2.011
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	8		

15 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611400

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

CENTROID *

HS= 1.901

VS= 2.784

GS= 3.137

PATTERN #

4

SHOTS (BEST OF)

10

9

8

MAXIMUM X

.735

.606

.656

MINIMUM X

-1.166

-1.792

-1.742

MAXIMUM Y

1.226

1.063

.848

MINIMUM Y

-1.558

-1.721

-1.527

CENTROID X

.011

.140

.090

CENTROID Y

.017

.180

.395

POA TO CENTROID in.

.020

.228

.405

MIN RADIUS

.496

.511

.314

MEAN RADIUS

1.133

1.019

.882

MAX RADIUS

1.878

1.768

1.556

HORIZONTAL SPREAD

1.901

1.398

1.398

VERTICAL SPREAD

2.784

2.784

2.375

EXTREME SPREAD

3.137

2.948

2.375

NUMBER IN ONE INCH CIRCLE =

1

NUMBER IN TWO INCH CIRCLE =

4

NUMBER IN THREE INCH CIRCLE =

8

15 Feb 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8611400

CENTERFIRE PATTERNS

5

POR

1in circle

2in circle

3in circle

OF SHOTS= 10

IN CIR

1in = 0

2in = 7

3in = 10

HS= 2.086

VS= 1.989

GS= 2.260

CENTROID #

PATTERN #

:

5

SHOTS (BEST OF)

:

10

9

8

MAXIMUM X

:

1.099

1.058

1.085

MINIMUM X

:

-.987

-1.028

-.896

MAXIMUM Y

:

.627

.476

.387

MINIMUM Y

:

-1.362

-.715

-.596

CENTROID X

:

.148

.189

.057

CENTROID Y

:

-.122

.029

.118

POR TO CENTROID in.:

:

.192

.191

.131

MIN RADIUS

:

.502

.476

.373

MEAN RADIUS

:

.854

.770

.673

MAX RADIUS

:

1.411

1.277

1.096

HORIZONTAL SPREAD

:

2.086

2.086

1.981

VERTICAL SPREAD

:

1.989

1.191

.989

EXTREME SPREAD

:

2.260

2.260

1.993

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

7

NUMBER IN THREE INCH CIRCLE =

10