

C6611573

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Address Book Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

BARBER - M24 0078998

Repair Inquiry

Repair Number: **RE00054368** Serial: C6611573 Model 700 Center Fire Caliber: 7.62 NATO M-24 (SWS) Repairman: Status: Closed 10/22/2002 8:21:53 AM

Verify Repair

Address Information

Customer: Received From Return To: Received From

Name: **CSMS** **CSMS**

Address 1: **ATTN AL HOLKA** **ATTN AL HOLKA**

Address 2: **2960 N PARK RD** PO Box: **2960 N PARK RD** PO Box:

City: **LINCOLN** **LINCOLN**

State: **NE** Zip Code: **68524** Country: **US** State: **NE** Zip Code: **68524** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing															
Contact Information Phone: Fax: Email: Comments:	Received Condition Poor Condition Notes: CSR Notes:	Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Stud</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>X</td> <td>FRT & REAR SGT BA</td> <td>1</td> </tr> </tbody> </table>			Code	Desc	Qty	A007	With Stud	1	A017	Scope Base	1	A026	Scope	1	X	FRT & REAR SGT BA	1
Code	Desc	Qty																	
A007	With Stud	1																	
A017	Scope Base	1																	
A026	Scope	1																	
X	FRT & REAR SGT BA	1																	


Repair Search **Refresh** **Close**

neglejt 10/22/2002 8:33 AM CAPS NUM INS SCRL

start 3 Microsoft ... Scorecard-Daily Arms Services ... SAP Logon 620 Part Search by ... 8:33 AM

Serial Number: **C6611573**

Model: **700**



RE00054368

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6611573.__0

FILE DATE AND TIME: 11/07/2002 13:42

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.005
The Average Y Centroid of the Five Target Set:	0.067
The Average Point of Impact of the Five Target Set:	0.067
The Average Mean Radius of the Five Target Set:	0.760
The Distance from POA to Centroid Target #1:	0.160
The Distance from Centroid Target #2 to Centroid Target #1:	0.185
The Distance from Centroid Target #3 to Centroid Target #1:	0.170
The Distance from Centroid Target #4 to Centroid Target #1:	0.105
The Distance from Centroid Target #5 to Centroid Target #1:	0.243

BARBER - M24 0079000

SERIAL NUMBER: C6611573. __0
 TARGET NUMBER: 1
 FILE DATE: 11/07/2002
 FILE TIME: 13:42

POINT#	X	Y
1:	0.081	-1.649
2:	-0.794	-0.916
3:	-0.708	-0.455
4:	-0.308	-0.158
5:	0.138	0.271
6:	0.356	0.266
7:	0.562	0.239
8:	0.810	0.148
9:	-0.648	1.606
10:	0.110	2.194

X CENTROID: -0.040
 Y CENTROID: 0.155
 POA TO CENTROID: 0.160
 HORZ SPREAD: 1.604
 VERT SPREAD: 3.843
 GROUP SPREAD: 3.843
 MIN RADIUS: 0.213
 MAX RADIUS: 2.045
 MEAN RADIUS: 1.013
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 7

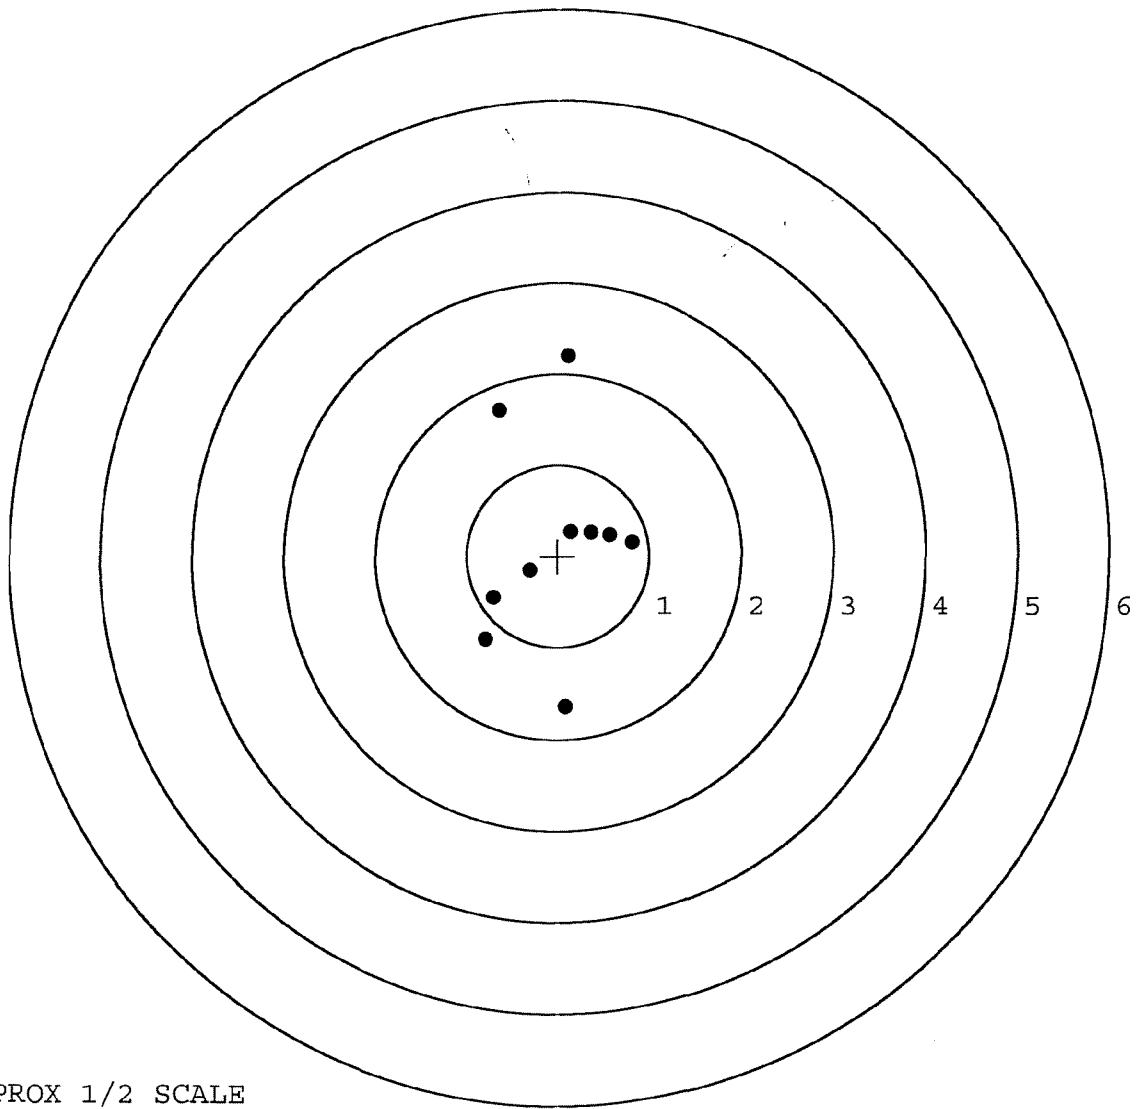


TARGET APPROX 1/2 SCALE

BARBER - M24 0079001

SERIAL NUMBER: C6611573. __0
 TARGET NUMBER: 2
 FILE DATE: 11/07/2002
 FILE TIME: 13:42

POINT#	X	Y
1:	0.850	-0.568
2:	0.571	-0.614
3:	0.259	-0.097
4:	-0.072	-0.707
5:	-0.315	-0.439
6:	-0.177	0.266
7:	-0.098	0.406
8:	-0.298	0.430
9:	-0.423	0.631
10:	-0.598	0.394

X CENTROID: -0.030
 Y CENTROID: -0.030
 POA TO CENTROID: 0.042
 HORZ SPREAD: 1.448
 VERT SPREAD: 1.338
 GROUP SPREAD: 1.749
 MIN RADIUS: 0.297
 MAX RADIUS: 1.032
 MEAN RADIUS: 0.612
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

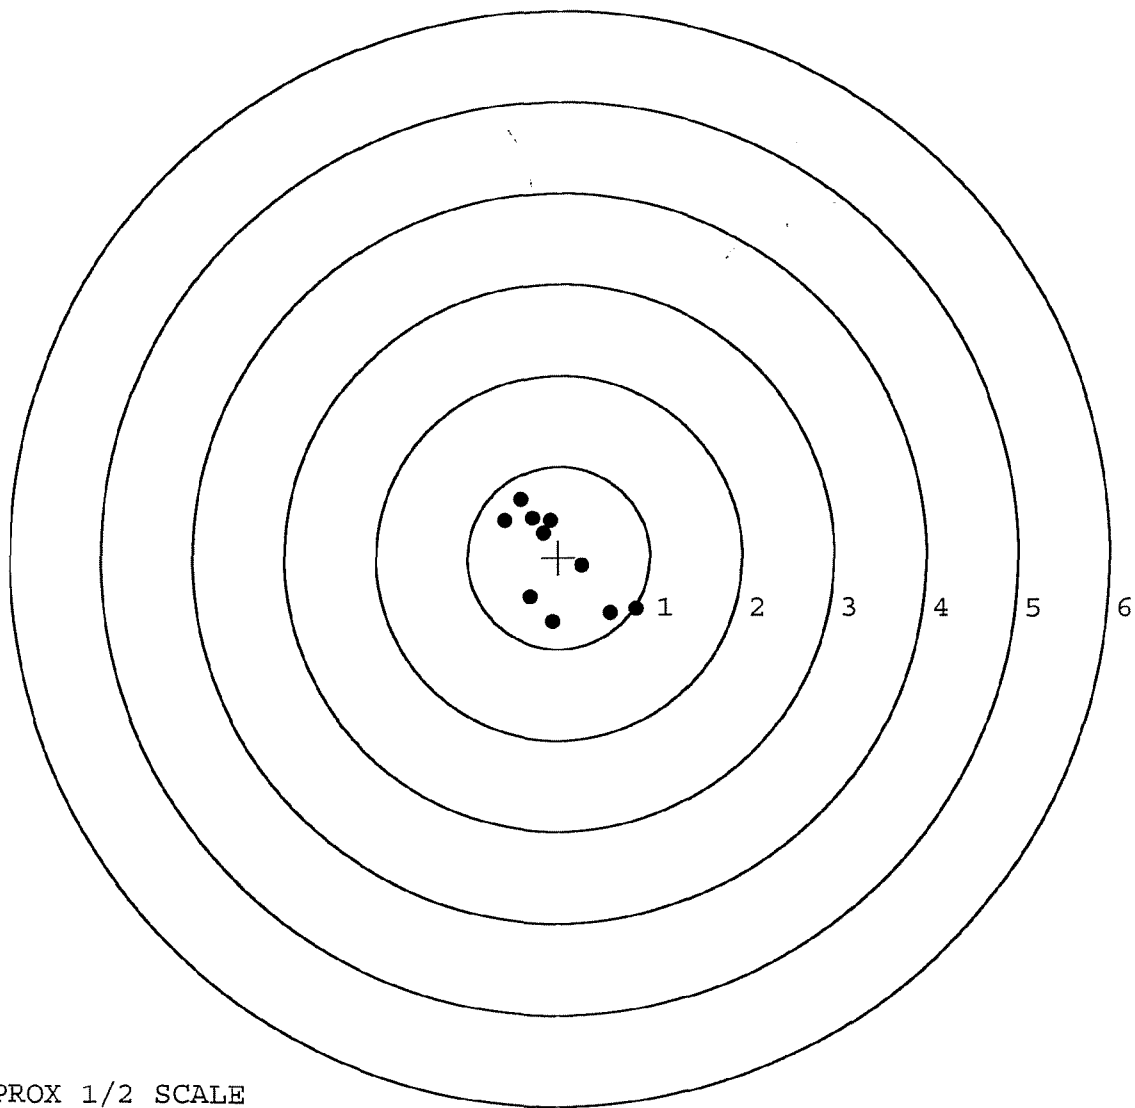


TARGET APPROX 1/2 SCALE

BARBER - M24 0079002

SERIAL NUMBER: C6611573. __0
 TARGET NUMBER: 3
 FILE DATE: 11/07/2002
 FILE TIME: 13:42

POINT#	X	Y
1:	1.345	-0.955
2:	-0.401	-0.814
3:	-0.220	-0.534
4:	-0.140	-0.170
5:	-0.747	-0.140
6:	-0.245	0.367
7:	0.313	0.517
8:	0.620	0.482
9:	-0.064	1.540
10:	-0.224	-0.325

X CENTROID: 0.024
 Y CENTROID: -0.003
 POA TO CENTROID: 0.024
 HORZ SPREAD: 2.092
 VERT SPREAD: 2.495
 GROUP SPREAD: 2.865
 MIN RADIUS: 0.234
 MAX RADIUS: 1.628
 MEAN RADIUS: 0.792
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 8

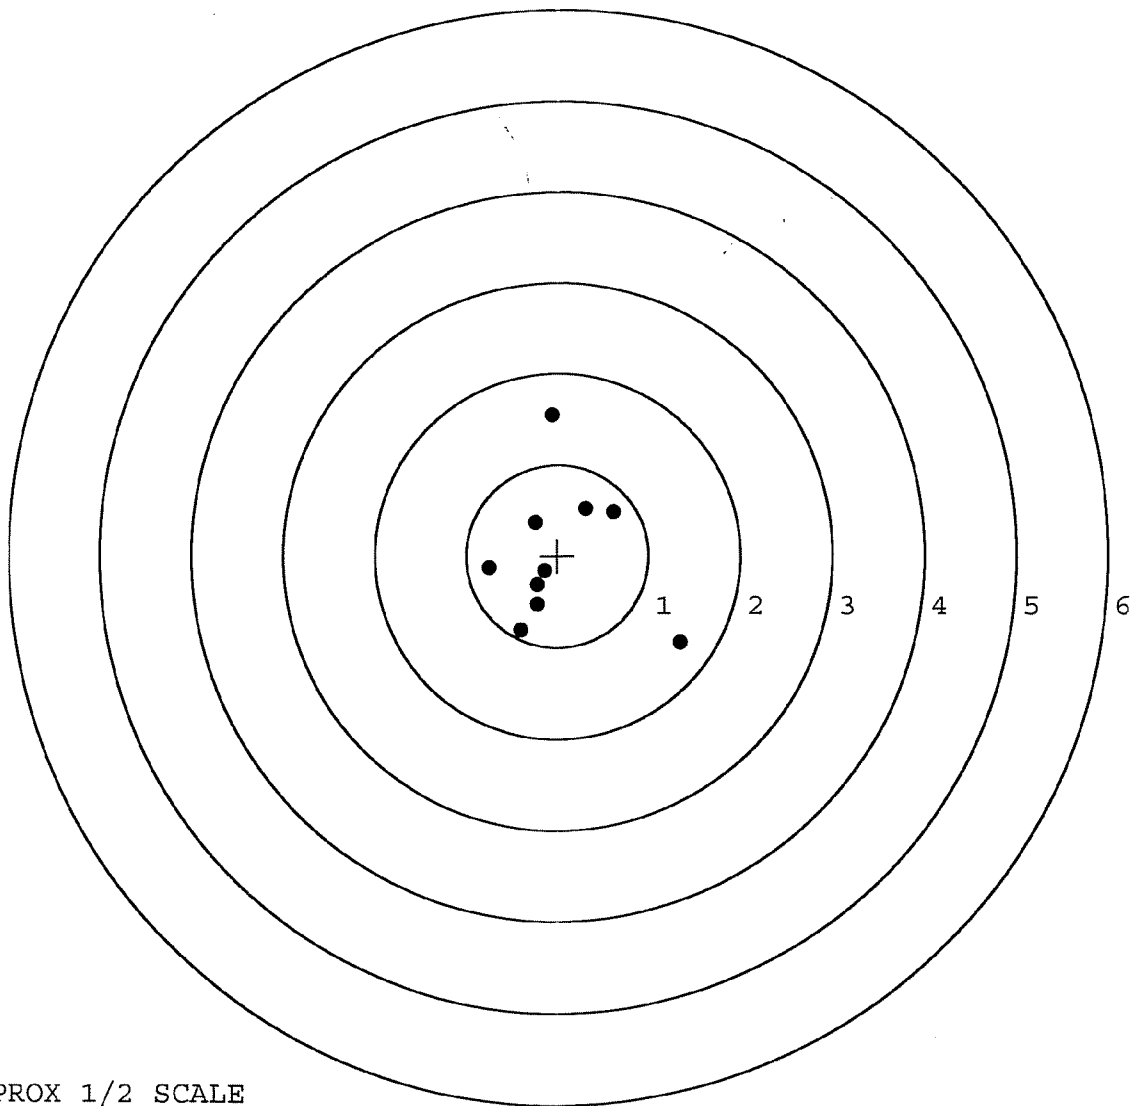


TARGET APPROX 1/2 SCALE

BARBER - M24 0079003

SERIAL NUMBER: C6611573. __0
 TARGET NUMBER: 4
 FILE DATE: 11/07/2002
 FILE TIME: 13:42


POINT#	X	Y
1:	-0.800	-0.509
2:	-0.212	-0.296
3:	-1.297	0.377
4:	-0.294	1.665
5:	0.663	1.426
6:	-0.159	0.399
7:	0.110	0.384
8:	0.399	0.080
9:	0.391	-0.312
10:	0.293	-0.745

X CENTROID: -0.091
 Y CENTROID: 0.247
 POA TO CENTROID: 0.263
 HORZ SPREAD: 1.960
 VERT SPREAD: 2.410
 GROUP SPREAD: 2.480
 MIN RADIUS: 0.167
 MAX RADIUS: 1.433
 MEAN RADIUS: 0.837
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 5
 # in 3 IN DIAMETER: 10

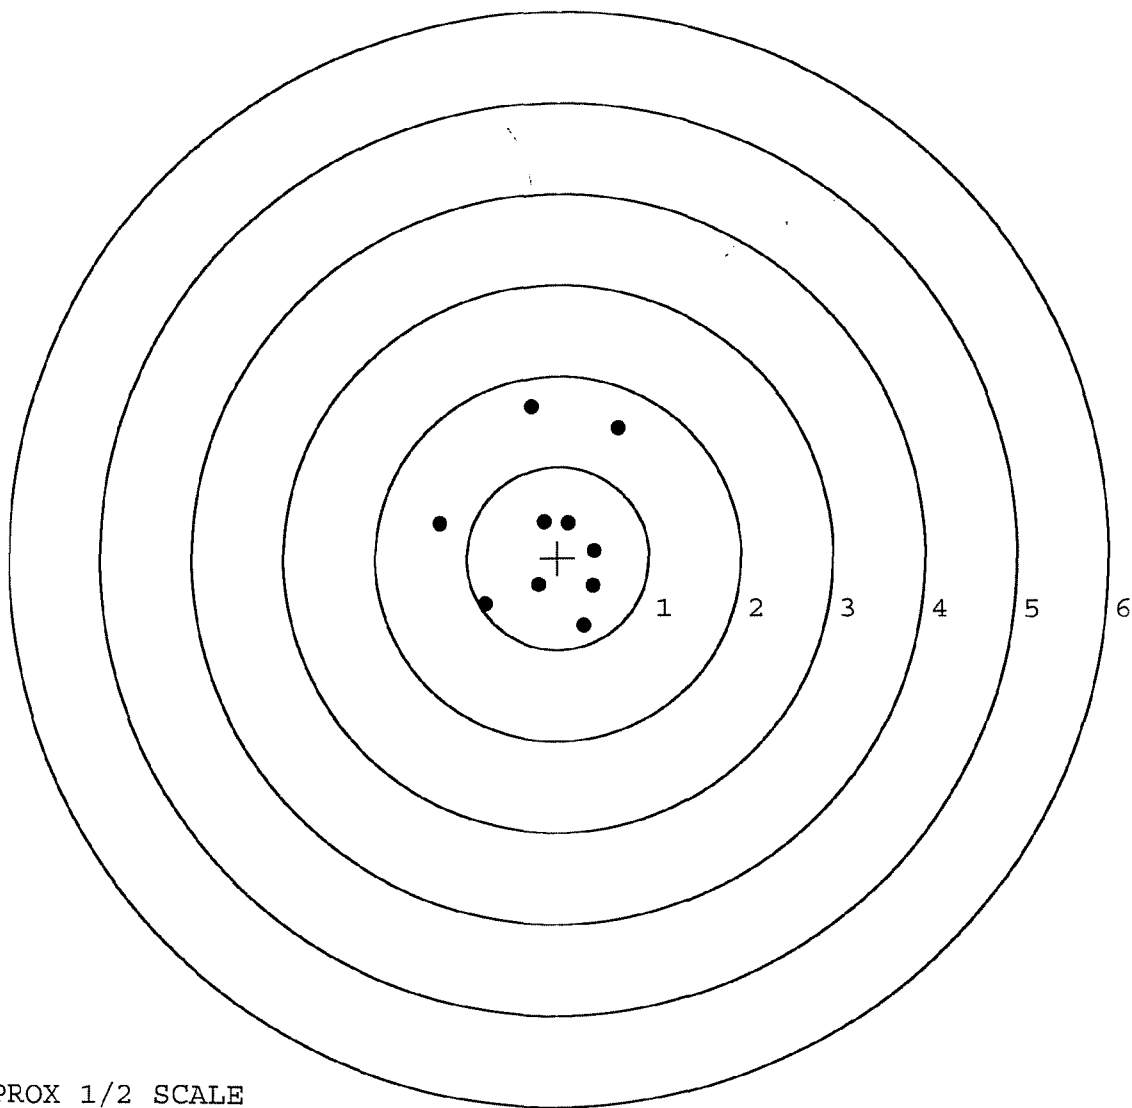

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6611573. __0	POINT#	X	Y
TARGET NUMBER: 5	1:	0.816	-0.126
FILE DATE: 11/07/2002	2:	0.559	0.886
FILE TIME: 13:42	3:	0.034	0.273
	4:	-0.519	-0.849
X CENTROID: 0.112	5:	-0.508	-0.180
Y CENTROID: -0.035	6:	-0.248	-0.122
POA TO CENTROID: 0.117	7:	-0.242	-0.289
HORZ SPREAD: 1.335	8:	0.295	-0.111
VERT SPREAD: 1.735	9:	0.415	0.031
GROUP SPREAD: 2.043	10:	0.514	0.140
MIN RADIUS: 0.199			
MAX RADIUS: 1.030			
MEAN RADIUS: 0.547			
# IN 1 IN DIAMETER: 6			
# IN 2 IN DIAMETER: 8			
# in 3 IN DIAMETER: 10			

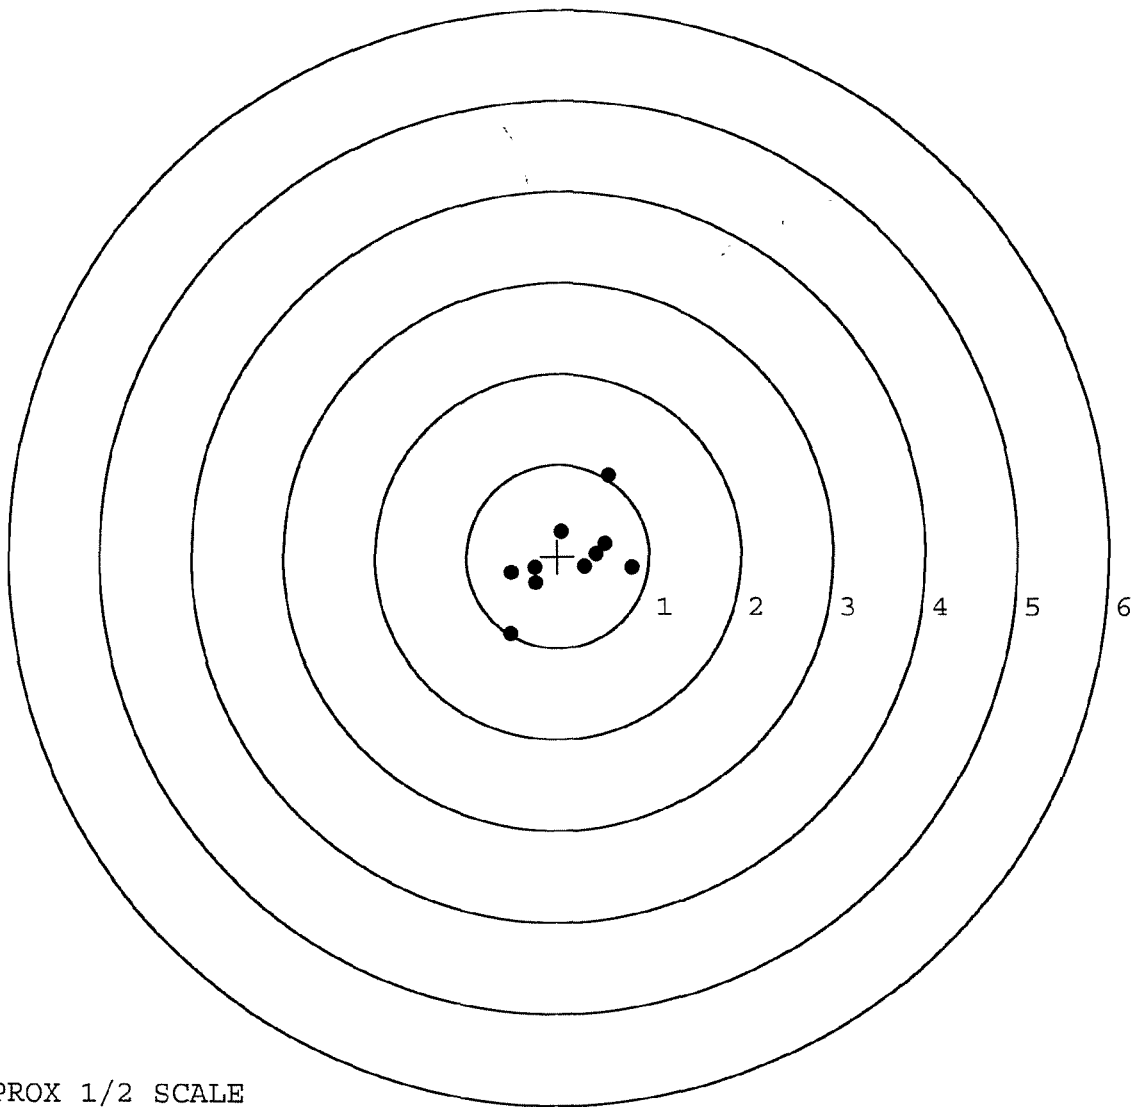

TARGET APPROX 1/2 SCALE

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.37	2.47	2.22	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2
PULL #2	2.20	2.36	2.51	
PULL #3	2.30	2.34	2.20	
PULL #4	2.32	2.43	2.42	
PULL #5	2.30	2.29	2.20	
TOTAL	11.49	11.89	11.55	
AVG.	2.29	2.37	2.31	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.27	3.27	
PULL #2	3.19	3.26	
PULL #3	3.15	3.20	
PULL #4	3.17	3.27	
PULL #5	3.19	3.32	
TOTAL	15.97	16.32	
AVG.	3.19	3.26	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCUR
PULL #1	4.22	4.18		4.39
PULL #2	4.02	4.06		4.29
PULL #3	4.13	4.24		4.25
PULL #4	4.15	4.23		4.18
PULL #5	4.05	4.08		4.20
TOTAL	20.57	20.79		21.31
AVG.	4.11	4.15		4.26

R & E NUMBER	54368		
SERIAL NUMBER	C6611573		
LOG-IN DATE	10/22/02		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10/24/02	RL
560 A	RE-BARREL	10-24-02	DA
B	DRILL AND TAP	10-29-02	TRW
575	ASSEMBLE	10-24-02	RW
600	PROOF	10-24-02	RW
605	CHECK HEADSPACE	10-24-02	RW
610	DIS-ASSEMBLE GUN	10-24-02	RW
612	MAGNAFLUX OPERATOR		
615	ROLLMARK CALIBER		
618	ROTO-BLAST	10/29/02	AD
620	APPLY COATINGS	10/30	DA
625 A	FINAL ASSEMBLY	11/1/02	RL
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	11-6-02	TRW
655	FINAL INSPECT	11-6-02	RW
660	PACK	11-12-02	DA
		SHIP DATE	
	QAR INSPECTION DATE		

Remington
REG. U.S. PAT. & TM. OFF.

MODEL 700™ M24

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

SERIAL NO.
C6611573

ORDER NO.
5716


46

MADE IN LION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5716 C6611573

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C 6611573

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		3/26/91	K.S.
600	Proof		3/26/91	K.S.
607	Check Headspace		3/26/91	K.S.
610	Dis-assemble Gun		3/26/91	K.S.
612	Magnaflux Barrel Action	APR	2 1991	KR
	Magnaflux Bolt	APR	2 1991	KR
615	Rollmark Caliber	APR	2 1991	LS
617	Drill and Tap Sight Holes	APR	5 1991	WB
618	Polish Barrel	APR	5 1991	WB
620	Apply Coatings (Barrel Action)		4/10/91	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/10/91	KS
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/10/91	KS
	C) Inspect Ejector Hole for Chamfer		4/10/91	KS
	D) Oil Firing Pin Ass'y		4/10/91	KS
	E) Adjust Trigger Pull to Min Setting and Stake		4/15/91	JA

BARBER - M24 0079009		READINGS					DATE	INIT
op. #	OP. NAME							
625 cont.	F) Safety On Force	6	6	6 $\frac{1}{4}$			4-19-91	DH
	G) Safety Off Force	2	2	2			4-19-91	DH
	H) Trigger Pull Test & Retainability						2/15/91	JCL
	I) Firing Pin Indent	.021	.021	.022			4-16-91	DH
	J) Assemble Stock						4/24/91	KH
	K) Assemble Swivel Studs						4-30-91	DH
	L) Attach Front and Rear Sight Assemblies						4/24/91	KH
	M) Iron Sight Alignment						4/24/91	KH
	N) Detach Front & Rear Sights & place in numbered container						4/24/91	KH
	O) Attach Scope to Rifle						4/24/91	KH
	P) Detach & Attach Scope 20 Times						4/24/91	KH
640	Gallery Target & Test						4/25/91	KH
	A) Time							KH
	B) Malfunctions							KH
	C) Pierced Primers							KH
	D) Optical Clarity of Scope							KH
645	Inspect for Live Ammo						4/25/91	KH
655	Final Inspection						4-30-91	DH
	A) Headspace							
	B) Trigger Pull	2.30	2.36	2.42	2.37	2.43	4/26/91	DH
	C) Function						4-30-91	DH
660	Pack						6-17-91	NF

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. C-6611573DATE 4/15/91TESTER JH

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.46	2.24	2.40	2.30	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.44	2.45	2.46	2.36	
PULL #3	2.44	2.42	2.40	2.42	
PULL #4	2.40	2.45	2.43	2.37	
PULL #5	2.53	2.41	2.45	2.43	
TOTAL					
AVG.					

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.27	3.13		
PULL #2	3.51	3.46		
PULL #3	3.40	3.40		
PULL #4	3.32	3.19		
PULL #5	3.25	3.39		
TOTAL				
AVG.				

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.47	4.34		4.18
PULL #2	4.50	4.48		4.36
PULL #3	4.36	4.58		4.31
PULL #4	4.46	4.56		4.24
PULL #5	4.49			4.22
TOTAL				
AVG.				

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06611573
25 Apr 1991

CENTROIDAL DISTANCES

0 TO	1	.409207
1 TO	2	.417813
1 TO	3	.879985
1 TO	4	.271465
1 TO	5	.185952

---- POR


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.073
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.004
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0050613
THE AMP FOR THIS RIFLE IS: 1.036

25 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8511573

CENTERFIRE PATTERNS

1

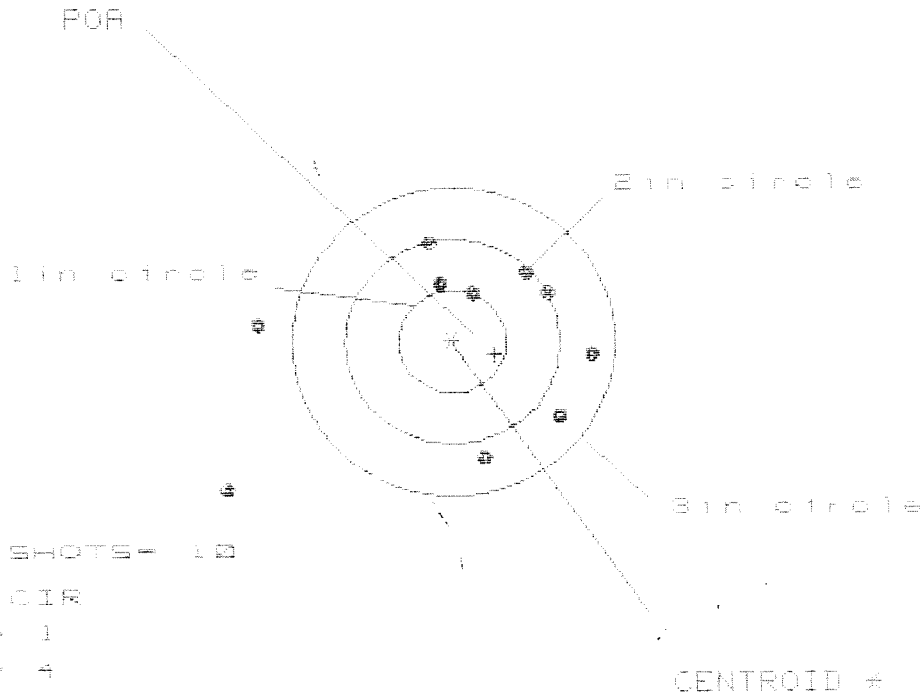

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

HS = 3.398

VS = 2.456

GS = 3.663


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.272	1.036	.775
MINIMUM X	-2.126	-2.082	-1.746
MAXIMUM Y	1.007	.846	.850
MINIMUM Y	-1.449	-1.283	-1.279
CENTROID X	-.389	-.153	.100
CENTROID Y	.127	.288	.284
POA TO CENTROID (in)	.409	.326	.304
MIN RADIUS	.465	.278	.426
MEAN RADIUS	1.214	.973	.803
MAX RADIUS	2.573	2.083	1.295
HORIZONTAL SPREAD	3.398	3.118	1.521
VERTICAL SPREAD	2.456	2.129	2.129
EXTREME SPREAD	3.663	3.130	2.197
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

25 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/C8B11573

CENTERFIRE PATTERNS

2

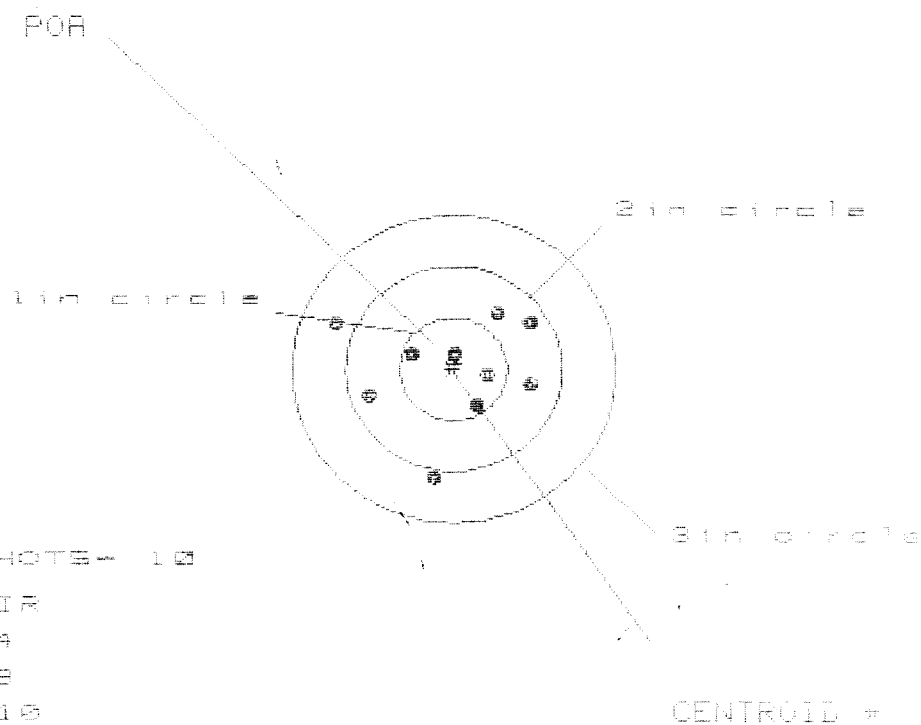

OF SHOTS - 10

IN CIR

1in = 4

2in = 8

3in = 10

HS = 1.811

VS = 1.591


GS = 1.894

PATTERN #	2		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.735	.616	.575
MINIMUM X	-1.076	-.863	-.904
MAXIMUM Y	.568	.610	.488
MINIMUM Y	-1.031	-.981	-.384
CENTROID X	-.011	.108	.149
CENTROID Y	-.051	-.101	.021
POA TO CENTROID in.	.052	.148	.151
MIN RADIUS	.189	.227	.207
MEAN RADIUS	.661	.589	.531
MAX RADIUS	1.167	1.034	.952
HORIZONTAL SPREAD	1.811	1.479	1.479
VERTICAL SPREAD	1.591	1.591	.872
EXTREME SPREAD	1.894	1.764	1.629
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	10		

25 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/06611573

CENTERFIRE PATTERNS # 3

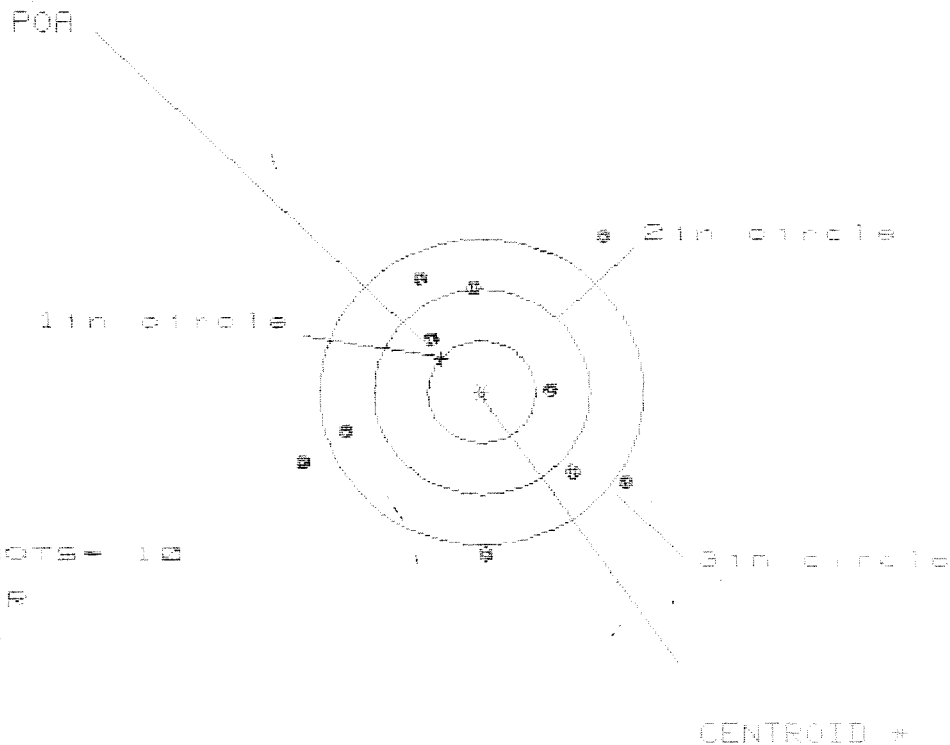

OF SHOTS- 10

IN CIR

1in = 2

2in = 2

3in = 6

HS= 2.999

VS= 3.148

GS= 3.528


CENTROID +

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.346	1.469	1.278
MINIMUM X	-1.653	-1.530	-1.308
MAXIMUM Y	1.541	1.268	1.207
MINIMUM Y	-1.687	-1.436	-1.497
CENTROID X	.369	.246	.437
CENTROID Y	-.320	-.491	-.438
POA TO CENTROID IN.	.488	.549	.613
MIN RADIUS	.680	.815	.616
MEAN RADIUS	1.300	1.236	1.166
MAX RADIUS	1.897	1.620	1.497
HORIZONTAL SPREAD	2.999	2.999	2.586
VERTICAL SPREAD	3.148	2.704	2.704
EXTREME SPREAD	3.528	3.005	2.785
NUMBER IN ONE INCH CIRCLE =	2	2	2
NUMBER IN TWO INCH CIRCLE =	2	2	2
NUMBER IN THREE INCH CIRCLE =	6	6	6

25 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611573

CENTERFIRE PATTERNS # 4

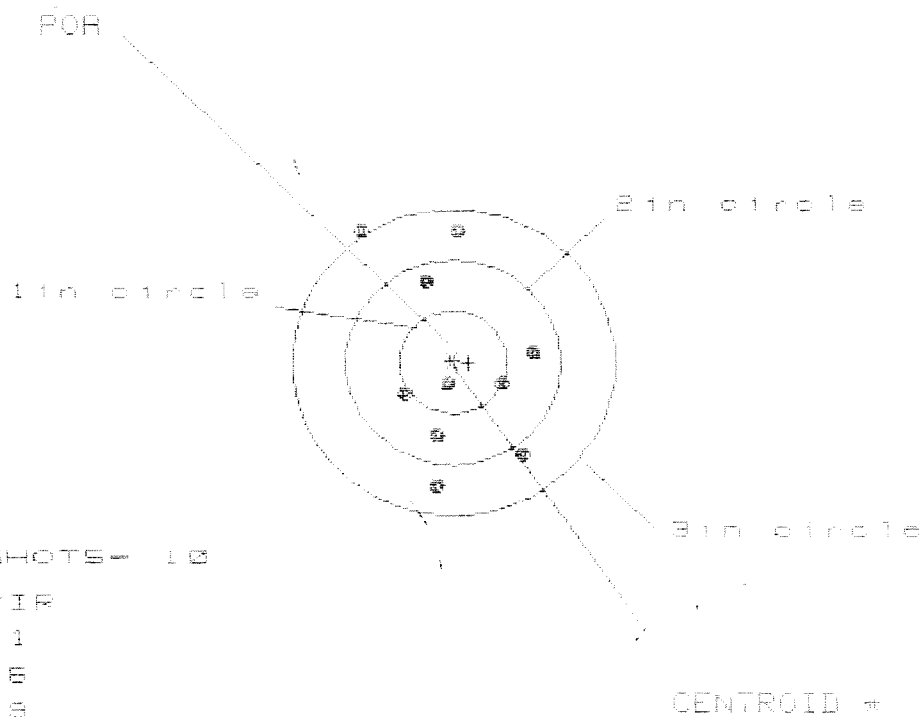

OF SHOTS- 10

IN CIR

1in = 1

2in = 6

3in = 8

HS= 1.612

VS= 2.483


GS= 2.666

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.777	.685	.675
MINIMUM X	-.835	-.530	-.548
MAXIMUM Y	1.328	1.470	1.141
MINIMUM Y	-1.155	-1.013	-.829
CENTROID X	-.147	-.055	-.043
CENTROID Y	.004	-.130	-.322
POA TO CENTROID (in.)	.148	.149	.325
MIN RADIUS	.186	.146	.210
MEAN RADIUS	.877	.772	.662
MAX RADIUS	1.525	1.472	1.183
HORIZONTAL SPREAD	1.612	1.215	1.215
VERTICAL SPREAD	2.483	2.483	1.970
EXTREME SPREAD	2.666	2.492	1.970
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	8		

25 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/08611573

CENTERFIRE PATTERNS # 5

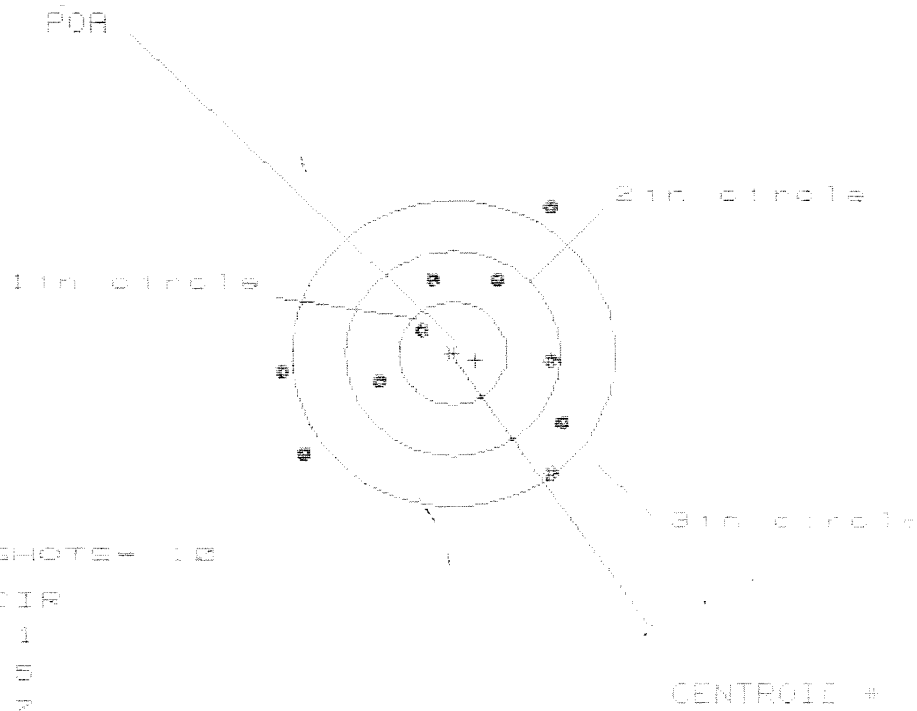

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 5

3 in = 7

HE = 2.598

VE = 2.594

GE = 3.384

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.999	1.100	.934
MINIMUM X	-1.605	-1.498	-1.664
MAXIMUM Y	1.463	.941	.845
MINIMUM Y	-1.131	-.963	-1.063
CENTROID X	-.212	-.319	-.153
CENTROID Y	.070	-.093	.082
POA TO CENTROID in.	.223	.332	.153
MIN RADIUS	.346	.397	.401
MEAN RADIUS	1.129	1.064	.921
MAX RADIUS	1.751	1.533	1.687
HORIZONTAL SPREAD	2.598	2.598	2.598
VERTICAL SPREAD	2.594	1.909	1.909
EXTREME SPREAD	3.384	2.698	2.598
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		