

GCS7 7084
Raphed
E 641 3471

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413471.___0
FILE DATE AND TIME: 03/13/2002 11:14


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.105
The Average Y Centroid of the Five Target Set:	0.013
The Average Point of Impact of the Five Target Set:	0.105
The Average Mean Radius of the Five Target Set:	0.937
The Distance from POA to Centroid Target #1:	0.221
The Distance from Centroid Target #2 to Centroid Target #1:	0.276
The Distance from Centroid Target #3 to Centroid Target #1:	0.562
The Distance from Centroid Target #4 to Centroid Target #1:	0.454
The Distance from Centroid Target #5 to Centroid Target #1:	0.021

SERIAL NUMBER: E6413471. __ 0
 TARGET NUMBER: 1
 FILE DATE: 03/13/2002
 FILE TIME: 11:14

POINT#	X	Y
1:	0.878	-2.340
2:	0.801	-1.240
3:	-0.017	-0.618
4:	0.144	-0.330
5:	0.164	0.703
6:	-0.063	1.532
7:	-0.403	1.589
8:	-0.609	1.080
9:	-0.397	0.702
10:	-0.513	1.128

X CENTROID: -0.002
 Y CENTROID: 0.221
 POA TO CENTROID: 0.221
 HORZ SPREAD: 1.487
 VERT SPREAD: 3.929
 GROUP SPREAD: 4.133
 MIN RADIUS: 0.510
 MAX RADIUS: 2.707
 MEAN RADIUS: 1.175
 # IN 1 IN DIAMETER: 0
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 8

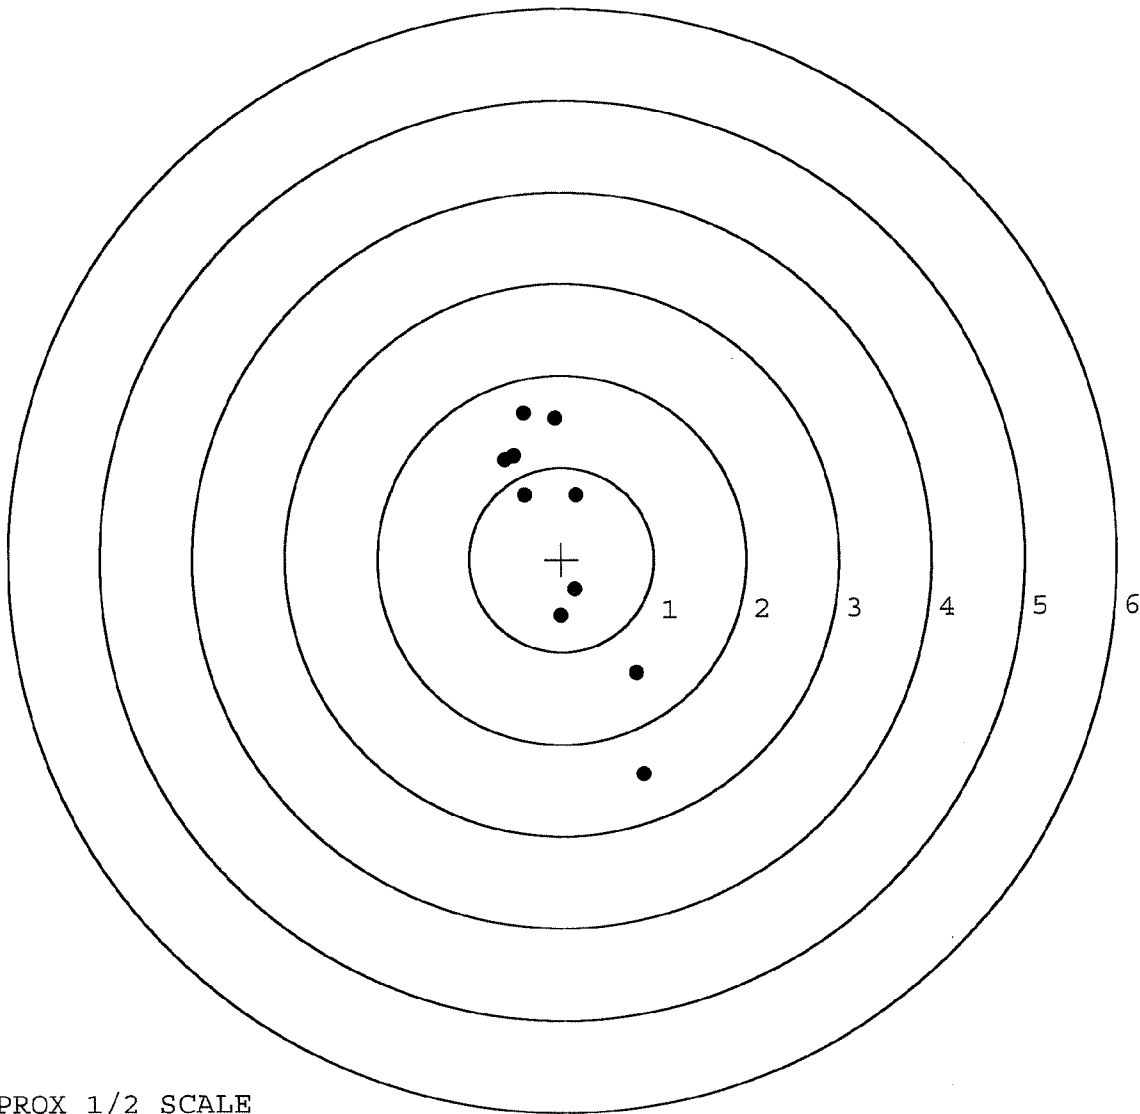

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. 0

TARGET NUMBER: 2

FILE DATE: 03/13/2002

FILE TIME: 11:14

POINT#	X	Y
1:	0.100	-3.109
2:	0.346	-1.798
3:	0.373	-1.286
4:	0.886	0.122
5:	0.436	0.194
6:	0.544	1.129
7:	-0.044	1.092
8:	0.565	2.614
9:	-1.699	0.498
10:	-1.503	-0.005

X CENTROID: 0.000

Y CENTROID: -0.055

POA TO CENTROID: 0.055

HORZ SPREAD: 2.585

VERT SPREAD: 5.723

GROUP SPREAD: 5.742

MIN RADIUS: 0.502


MAX RADIUS: 3.056

MEAN RADIUS: 1.599

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 2

in 3 IN DIAMETER: 5

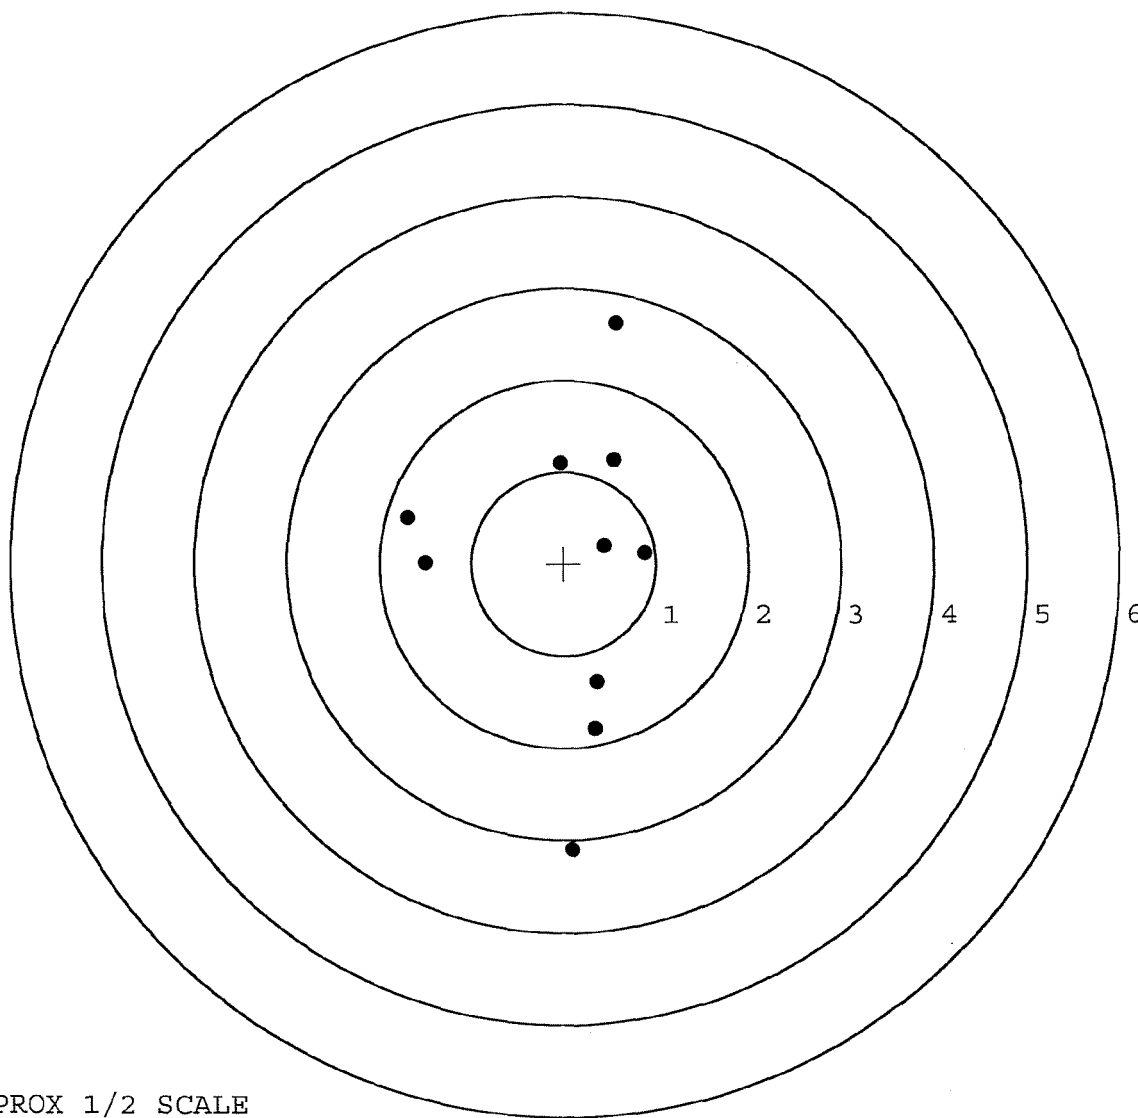

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. 0

TARGET NUMBER: 3

FILE DATE: 03/13/2002

FILE TIME: 11:14

X CENTROID: 0.465

Y CENTROID: -0.092

POA TO CENTROID: 0.474

HORZ SPREAD: 0.985

VERT SPREAD: 1.449

GROUP SPREAD: 1.460

MIN RADIUS: 0.149

MAX RADIUS: 0.955


MEAN RADIUS: 0.431

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.912	-0.770
2:	0.143	-0.481
3:	0.237	-0.351
4:	0.044	-0.254
5:	0.288	-0.128
6:	0.288	0.017
7:	0.685	-0.068
8:	0.456	0.056
9:	0.570	0.376
10:	1.029	0.679

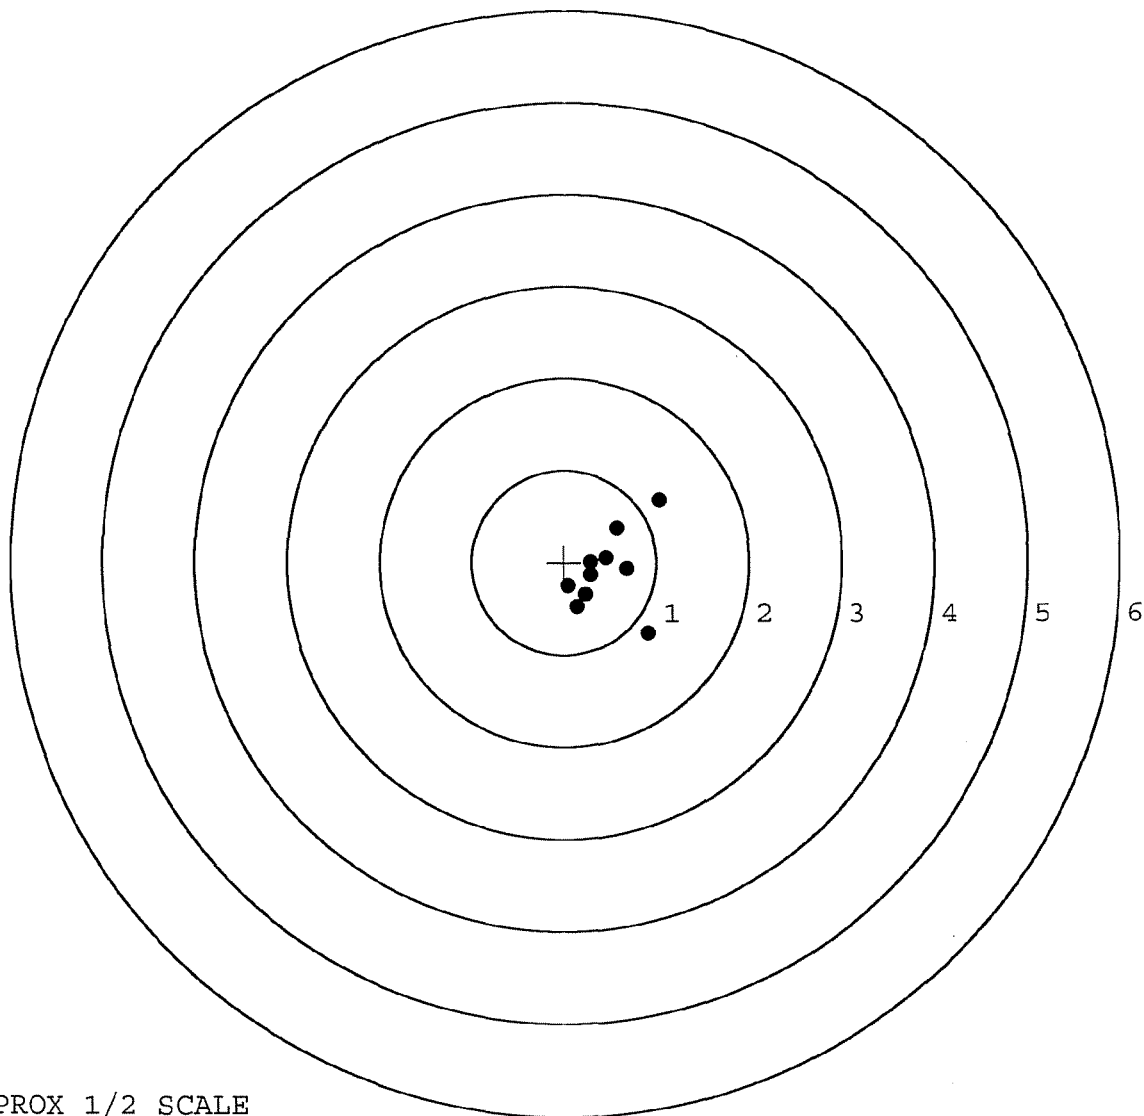


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. __0
 TARGET NUMBER: 4
 FILE DATE: 03/13/2002
 FILE TIME: 11:14

POINT#	X	Y
1:	0.979	-0.278
2:	0.230	-0.865
3:	0.042	-0.962
4:	-0.086	-0.634
5:	-0.786	-0.717
6:	0.253	0.167
7:	0.160	0.386
8:	-0.150	0.609
9:	0.068	1.015
10:	0.105	-0.983

X CENTROID: 0.082
 Y CENTROID: -0.226
 POA TO CENTROID: 0.240
 HORZ SPREAD: 1.765
 VERT SPREAD: 1.998
 GROUP SPREAD: 1.998
 MIN RADIUS: 0.429
 MAX RADIUS: 1.241
 MEAN RADIUS: 0.764
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

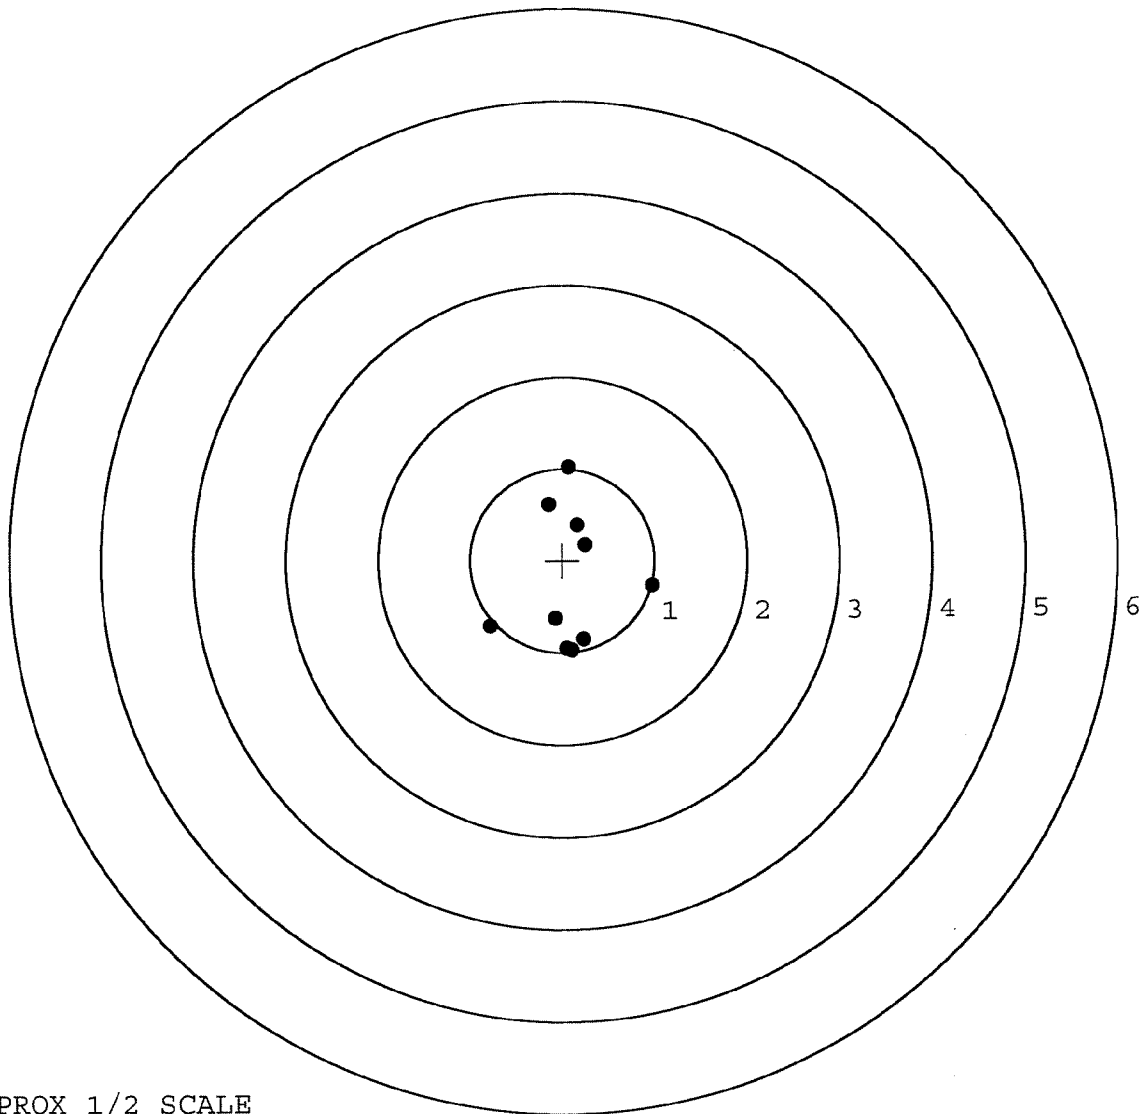

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. 0

TARGET NUMBER: 5

FILE DATE: 03/13/2002

FILE TIME: 11:14

X CENTROID: -0.022

Y CENTROID: 0.219

POA TO CENTROID: 0.221

HORZ SPREAD: 2.206

VERT SPREAD: 1.282

GROUP SPREAD: 2.527

MIN RADIUS: 0.206

MAX RADIUS: 1.410


MEAN RADIUS: 0.716

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.887	0.617
2:	0.110	0.707
3:	-0.423	0.427
4:	-1.319	0.774
5:	0.175	0.162
6:	0.859	-0.508
7:	-0.138	-0.409
8:	-0.912	-0.431
9:	0.172	0.381
10:	0.365	0.474

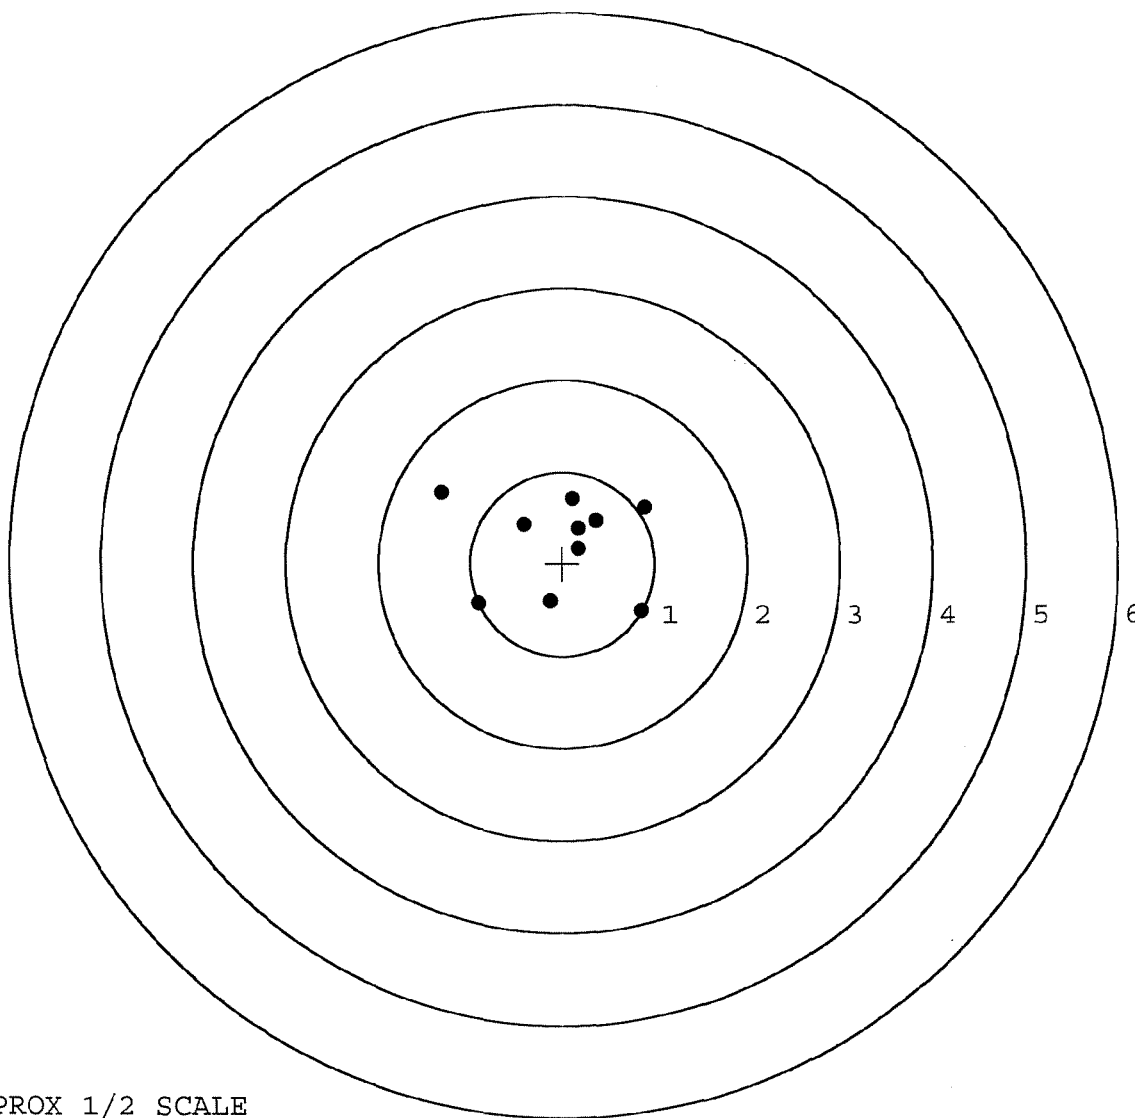

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 42308			
SERIAL NUMBER C10498731		New # P6413471	
LOG-IN DATE 2/26/02			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	2/27/02	RH
560 A	RE-BARREL AT CUSTOM SHOP	3/5/02	RH
B	DRILL AND TAP	3/5/02	RH
C	POLISH		
575	ASSEMBLE	3/6/02	RH
600	PROOF	3-6-02	MAGNAFLUX
605	CHECK HEADSPACE	3-6-02	INSPECTED
610	DIS-ASSEMBLE GUN	3/6/02	MAR 2002
612	MAGNAFLUX		OPERATOR AL
615	ROLLMARK CALIBER	3/7/02	TVD
618	ROTO-BLAST	3/8	JW
620	APPLY COATINGS	3-8	TA
625 A	FINAL ASSEMBLY	3/13/02	RH
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	3-14-02	RW
655	FINAL INSPECT	3-14-02	RW
660	PACK	3-15-02	RA
		SHIP DATE	
		QAR INSPECTION DATE	

Repair Inquiry

Repair Number: RE00070741

Serial: E6413471 Model 700 Center Fire Caliber 7
62 NATO M/24 SWS

Repairman:

Verify Repair

Status:

Closed 9/30/2003 7:46:07 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: C CO SPT BN

C CO SPT BN

Address 1: SWC

SWC

Address 2:

PO Box:

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A017	Scope Base	1
C000	FRT AND REAR BASE	1

Repair Search

Refresh

Close

naglelj

9/30/2003

8:41 AM

CAPS

NUM

INS

SCFL



3 Micro...

4 Micro...

1M Excl...

Search fo...

Arms Ser...

Part Ser...

8:41 AM

Serial Number: E6413471

Model: 700



RE00070741

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413471.___0
FILE DATE AND TIME: 03/13/2002 11:14

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.105
The Average Y Centroid of the Five Target Set:	0.013
The Average Point of Impact of the Five Target Set:	0.105
The Average Mean Radius of the Five Target Set:	0.937
The Distance from POA to Centroid Target #1:	0.221
The Distance from Centroid Target #2 to Centroid Target #1:	0.276
The Distance from Centroid Target #3 to Centroid Target #1:	0.562
The Distance from Centroid Target #4 to Centroid Target #1:	0.454
The Distance from Centroid Target #5 to Centroid Target #1:	0.021

SERIAL NUMBER: E6413471. __0

TARGET NUMBER: 1

FILE DATE: 03/13/2002

FILE TIME: 11:14

POINT#	X	Y
1:	0.878	-2.340
2:	0.801	-1.240
3:	-0.017	-0.618
4:	0.144	-0.330
5:	0.164	0.703
6:	-0.063	1.532
7:	-0.403	1.589
8:	-0.609	1.080
9:	-0.397	0.702
10:	-0.513	1.128

X CENTROID: -0.002

Y CENTROID: 0.221

POA TO CENTROID: 0.221

HORZ SPREAD: 1.487

VERT SPREAD: 3.929

GROUP SPREAD: 4.133

MIN RADIUS: 0.510


MAX RADIUS: 2.707

MEAN RADIUS: 1.175

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 8

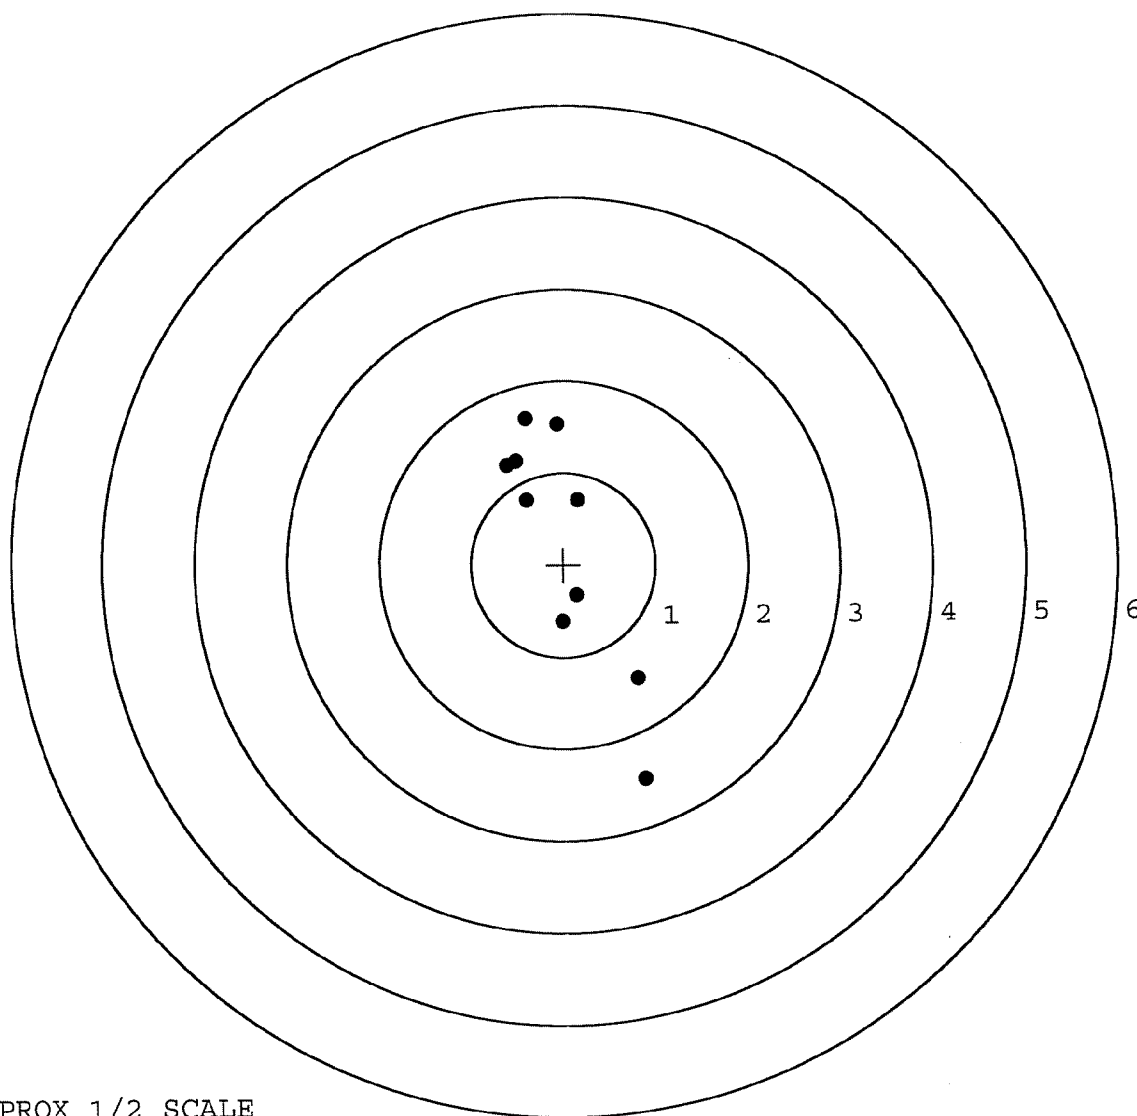


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. __0
 TARGET NUMBER: 2
 FILE DATE: 03/13/2002
 FILE TIME: 11:14

POINT#	X	Y
1:	0.100	-3.109
2:	0.346	-1.798
3:	0.373	-1.286
4:	0.886	0.122
5:	0.436	0.194
6:	0.544	1.129
7:	-0.044	1.092
8:	0.565	2.614
9:	-1.699	0.498
10:	-1.503	-0.005

X CENTROID: 0.000
 Y CENTROID: -0.055
 POA TO CENTROID: 0.055
 HORZ SPREAD: 2.585
 VERT SPREAD: 5.723
 GROUP SPREAD: 5.742
 MIN RADIUS: 0.502
 MAX RADIUS: 3.056
 MEAN RADIUS: 1.599
 # IN 1 IN DIAMETER: 0
 # IN 2 IN DIAMETER: 2
 # in 3 IN DIAMETER: 5

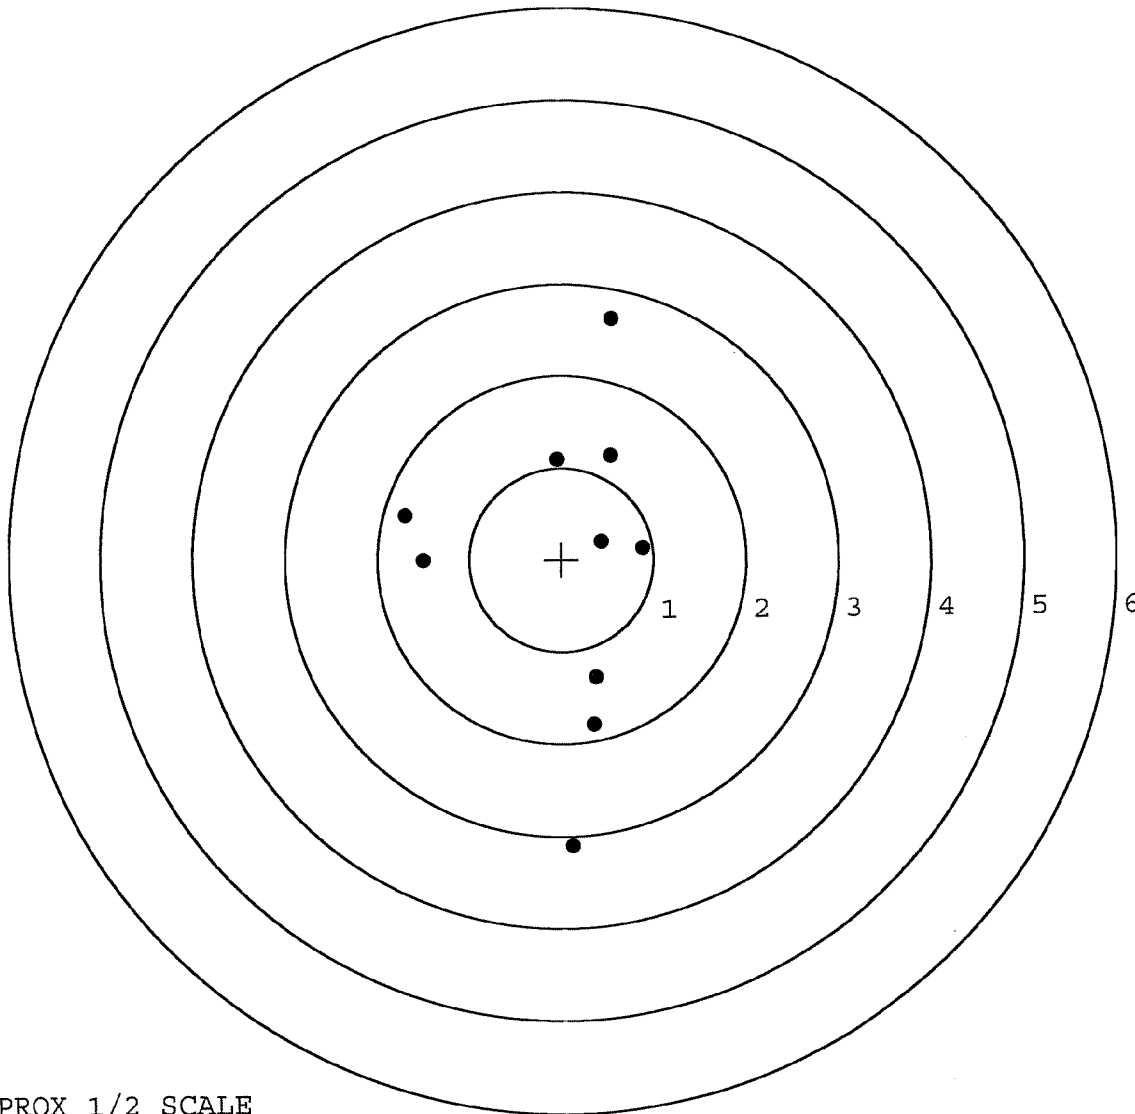

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. __ 0

TARGET NUMBER: 3

FILE DATE: 03/13/2002

FILE TIME: 11:14

X CENTROID: 0.465

Y CENTROID: -0.092

POA TO CENTROID: 0.474

HORZ SPREAD: 0.985

VERT SPREAD: 1.449

GROUP SPREAD: 1.460

MIN RADIUS: 0.149

MAX RADIUS: 0.955


MEAN RADIUS: 0.431

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.912	-0.770
2:	0.143	-0.481
3:	0.237	-0.351
4:	0.044	-0.254
5:	0.288	-0.128
6:	0.288	0.017
7:	0.685	-0.068
8:	0.456	0.056
9:	0.570	0.376
10:	1.029	0.679

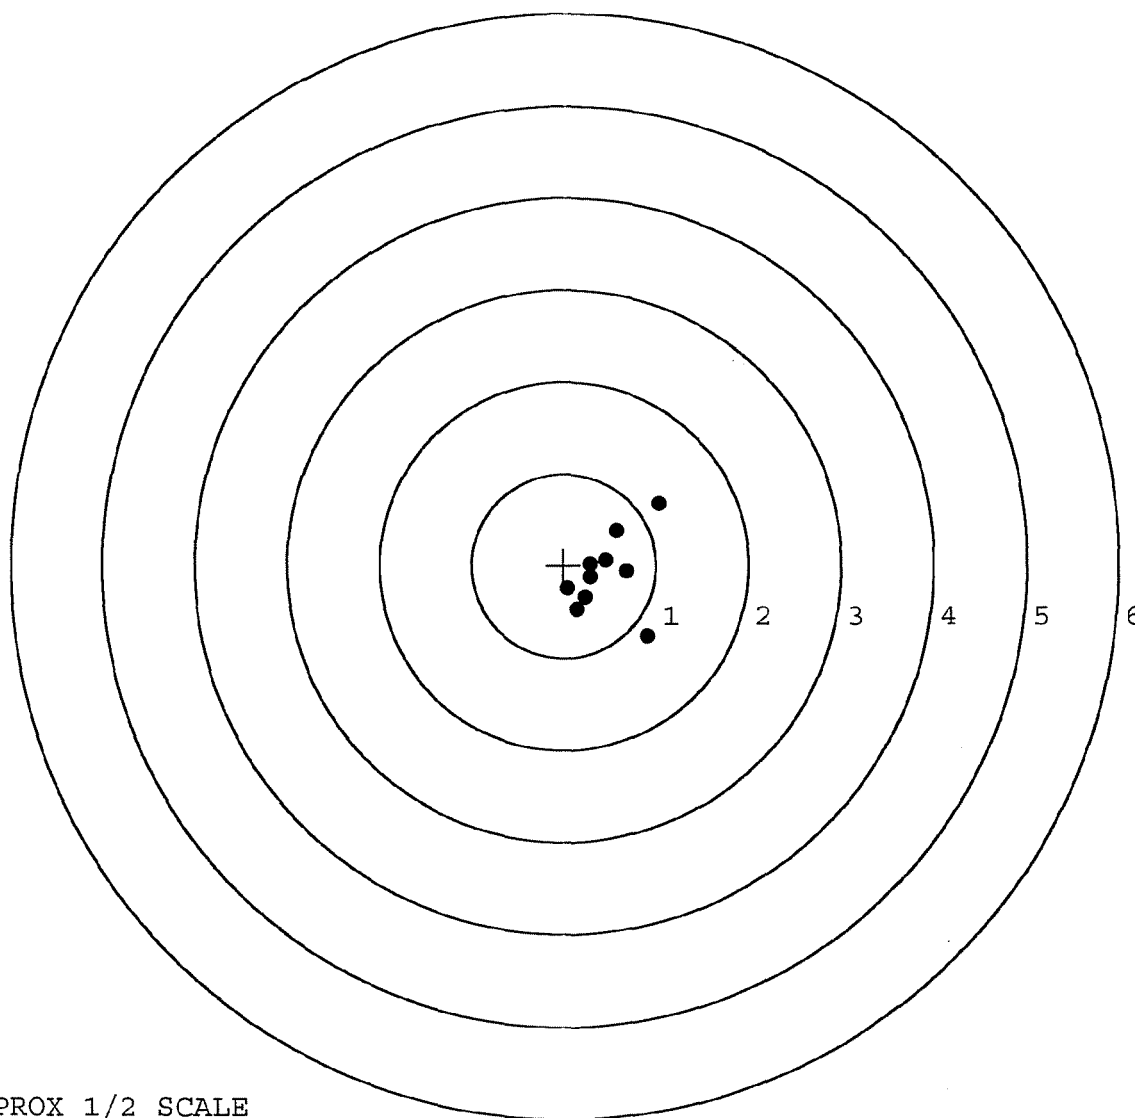

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. 0

TARGET NUMBER: 4

FILE DATE: 03/13/2002

FILE TIME: 11:14

X CENTROID: 0.082

Y CENTROID: -0.226

POA TO CENTROID: 0.240

HORZ SPREAD: 1.765

VERT SPREAD: 1.998

GROUP SPREAD: 1.998

MIN RADIUS: 0.429

MAX RADIUS: 1.241


MEAN RADIUS: 0.764

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.979	-0.278
2:	0.230	-0.865
3:	0.042	-0.962
4:	-0.086	-0.634
5:	-0.786	-0.717
6:	0.253	0.167
7:	0.160	0.386
8:	-0.150	0.609
9:	0.068	1.015
10:	0.105	-0.983

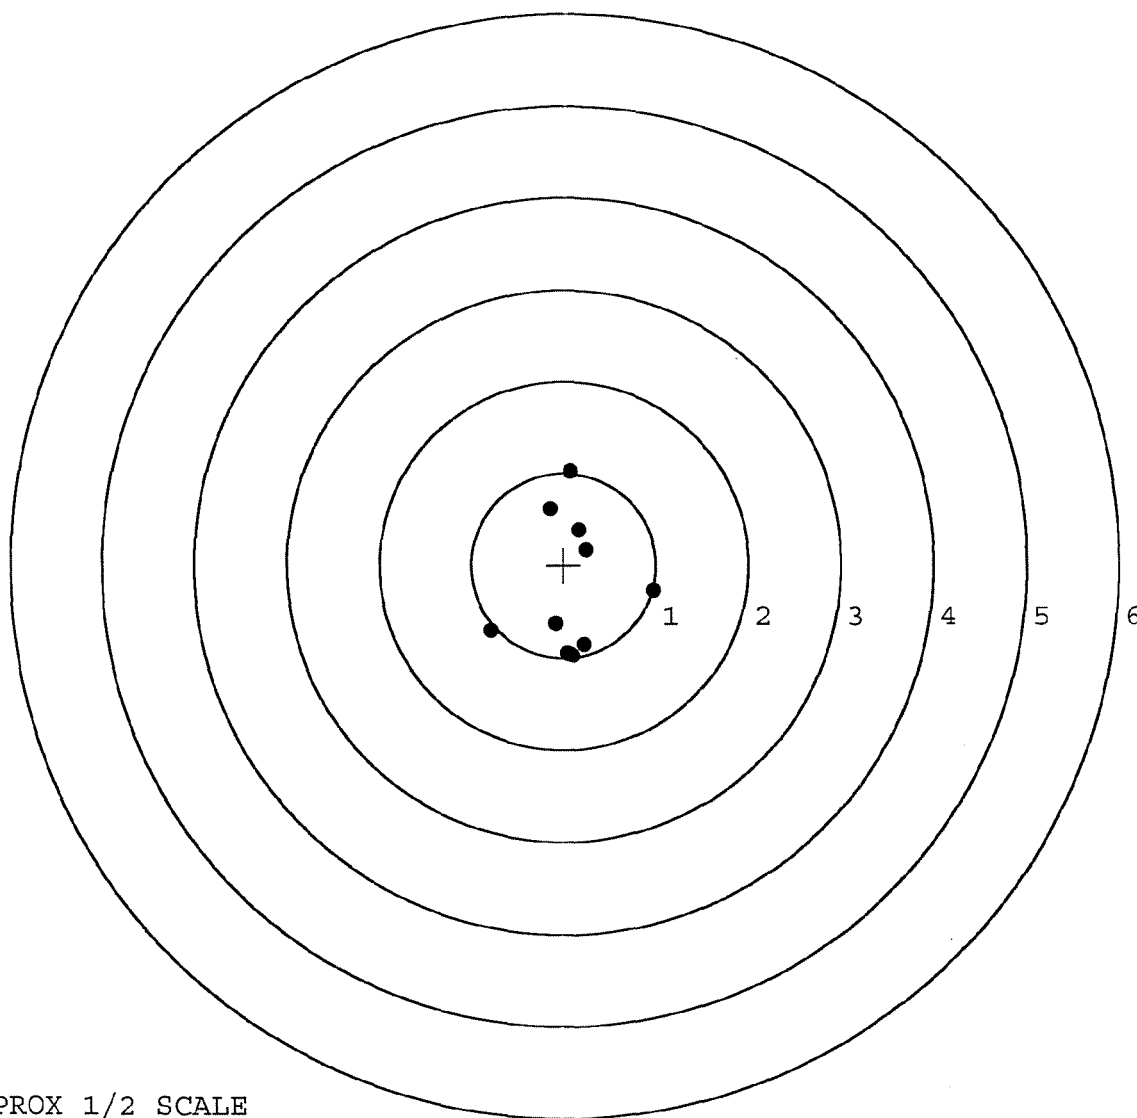

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413471. __0

TARGET NUMBER: 5

FILE DATE: 03/13/2002

FILE TIME: 11:14

X CENTROID: -0.022

Y CENTROID: 0.219

POA TO CENTROID: 0.221

HORZ SPREAD: 2.206

VERT SPREAD: 1.282

GROUP SPREAD: 2.527

MIN RADIUS: 0.206

MAX RADIUS: 1.410


MEAN RADIUS: 0.716

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.887	0.617
2:	0.110	0.707
3:	-0.423	0.427
4:	-1.319	0.774
5:	0.175	0.162
6:	0.859	-0.508
7:	-0.138	-0.409
8:	-0.912	-0.431
9:	0.172	0.381
10:	0.365	0.474

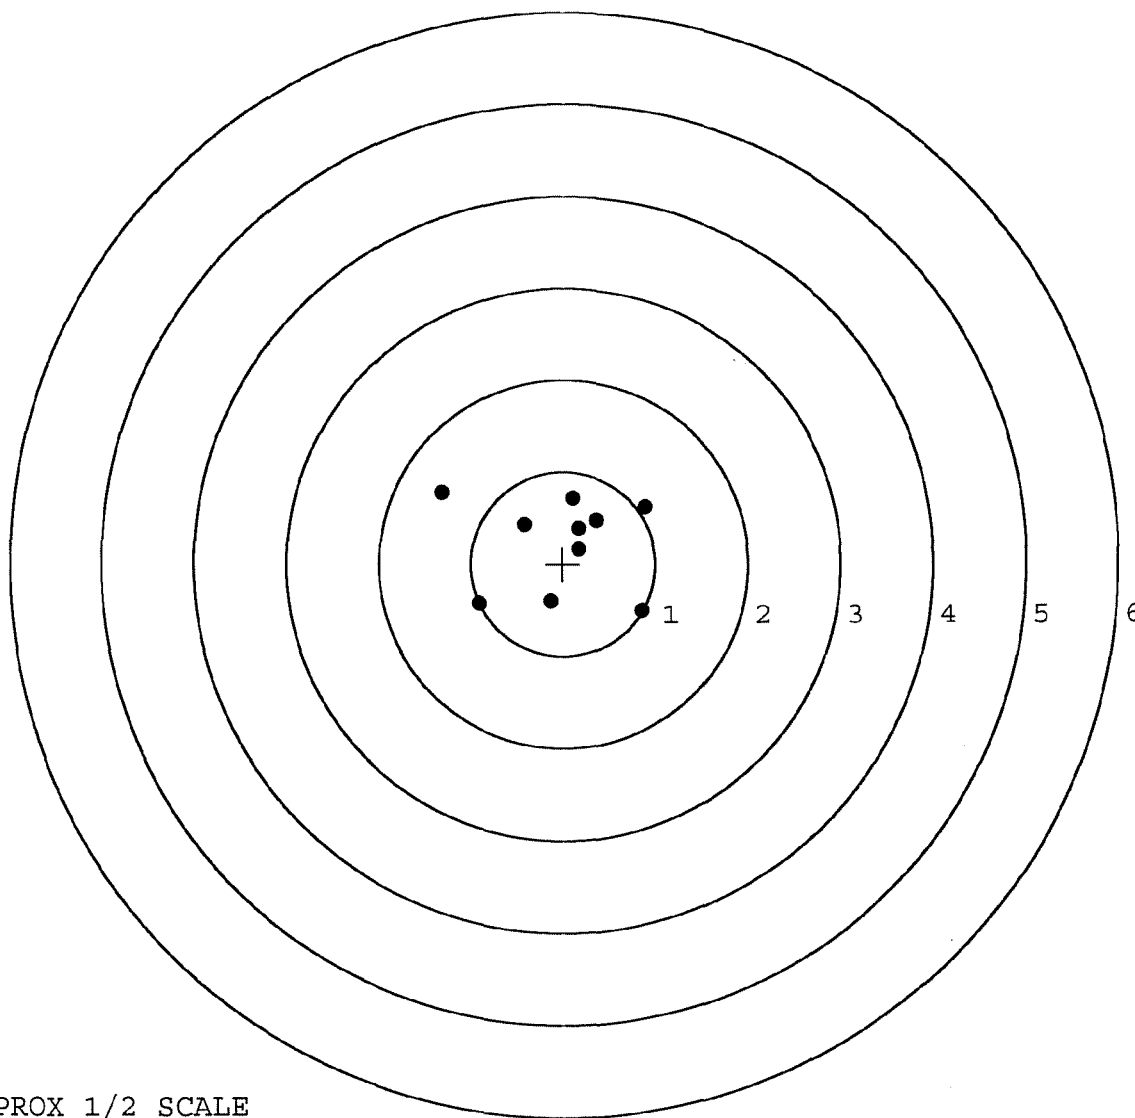

TARGET APPROX 1/2 SCALE

BARBER - M24 0085075 INSPECTION CHECKLIST M-24 REPAIRS
CONTRACT #: DAAE-20-02-D-0127

SERIAL # E6413471 INSPECTED BY: RJL

DATE REC'D: 9-30-03 DATE RET'D: 10-30-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☐ SCOPE
☐ SCOPE RINGS
☐ MOUNTING SCREWS
☐ MOUNTING BASE
☐ SCREWS
☐ FINISH
☐ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☐ SCOPE CASE
☐ IRON SIGHTS
☐ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☐ RE-SET TO FACTORY SPECS

COMMENTS:

2.50 LBS (plus or minus 0.50 LBS)
3.00 LBS (plus or minus 0.75 LBS)
4.00 LBS (plus or minus 1.00 LBS)

DATE 10-23-03

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.57	2.65		2.23	
PULL #2	2.41	2.70		2.22	
PULL #3	2.65	2.81		2.21	
PULL #4	2.73	2.80		2.20	
PULL #5	2.79	2.69		2.22	
TOTAL	13.15	13.65		11.08	
AVERAGE	2.63	2.73		2.21	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.22	3.13		
PULL #2	3.18	3.09		
PULL #3	3.23	3.05		
PULL #4	3.02	3.14		
PULL #5	2.98	3.11		
TOTAL	15.63	15.52		
AVERAGE	3.12	3.10		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.00	4.18		4.13
PULL #2	4.01	4.25		4.11
PULL #3	4.13	4.23		4.18
PULL #4	4.16	4.22		4.20
PULL #5	4.13	4.24		4.18
TOTAL	20.43	21.12		20.80
AVERAGE	4.08	4.22		4.16

R & E NUMBER	20741		
SERIAL NUMBER	E6413471		
LOG-IN DATE	9-30-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-3-03	RTL
560 A	RE-BARREL	10-8-03	RTL
B	DRILL AND TAP	10-9-03	TRW
575	ASSEMBLE	10-7-03	RTL
600	PROOF		
605	CHECK HEADSPACE	10-8-03	RTL
610	DIS-ASSEMBLE GUN	10-8-03	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	10-11-03	B
618	ROTO-BLAST	10/13/2003	Dams
620	APPLY COATINGS	10-14	TA
625 A	FINAL ASSEMBLY	10-23-03	RTL
B	TRIGGER PULL TEST	10-30-03	RTL
C	SAFETY "ON" FORCE	10-30-03	RTL
D	SAFETY "OFF" FORCE	10-30-03	RTL
E	FIRING PIN INDENT		
640	TARGET	10-29-03	RW
655	FINAL INSPECT	10-30-03	RTL
660	PACK	10-30-03	DA
		SHIP DATE	
QAR INSPECTION DATE			

Repair Inquiry

Repair Number: RE00112966

Serial: E6413471 Model: M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

New 5/30/2006 10:50:51 AM

Address Information

Customer:

Received From

Return To

Received From

Name: C CO SPT BN SWTG (A) POC JERRY SCREEN

C CO SPT BN SWTG (A) POC JERRY SCREEN

Address 1: ARMAMENT FACILITY BLDG D-1307

ARMAMENT FACILITY BLDG D-1307

Address 2: GRUBER ROAD

PO Box:

GRUBER ROAD

PO Box:

City: FORT BRAGG

FORT BRAGG

State: NC

Zip Code: 28310

Country: US

State: NC

Zip Code: 28310

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

naglej

5/31/2006

10:28 AM

CAPS

NUM

INS

SCRL

start

2 Micros...

2 Micros...

3 Intern...

Arms Ser...

Part Sear...

10:26 AM

G657 7084 (New)

E6413471

Model: M24 SWS

RE00112966

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6577084. __0
FILE DATE AND TIME: 06/29/2006 08:53

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.013
The Average Y Centroid of the Five Target Set:	0.032
The Average Point of Impact of the Five Target Set:	0.034
The Average Mean Radius of the Five Target Set:	0.658
The Distance from POA to Centroid Target #1:	0.183
The Distance from Centroid Target #2 to Centroid Target #1:	0.097
The Distance from Centroid Target #3 to Centroid Target #1:	0.264
The Distance from Centroid Target #4 to Centroid Target #1:	0.242
The Distance from Centroid Target #5 to Centroid Target #1:	0.177

SERIAL NUMBER: G6577084. __0

TARGET NUMBER: 1

FILE DATE: 06/29/2006

FILE TIME: 08:53

POINT#	X	Y
1:	-0.116	-1.622
2:	0.401	-0.742
3:	0.449	0.088
4:	0.223	-0.049
5:	0.131	0.061
6:	-0.012	0.277
7:	0.136	0.379
8:	-0.285	0.577
9:	-0.135	0.908
10:	-0.774	1.953

X CENTROID: 0.002

Y CENTROID: 0.183

POA TO CENTROID: 0.183

HORZ SPREAD: 1.223

VERT SPREAD: 3.575

GROUP SPREAD: 3.635

MIN RADIUS: 0.095


MAX RADIUS: 1.933

MEAN RADIUS: 0.726

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 8

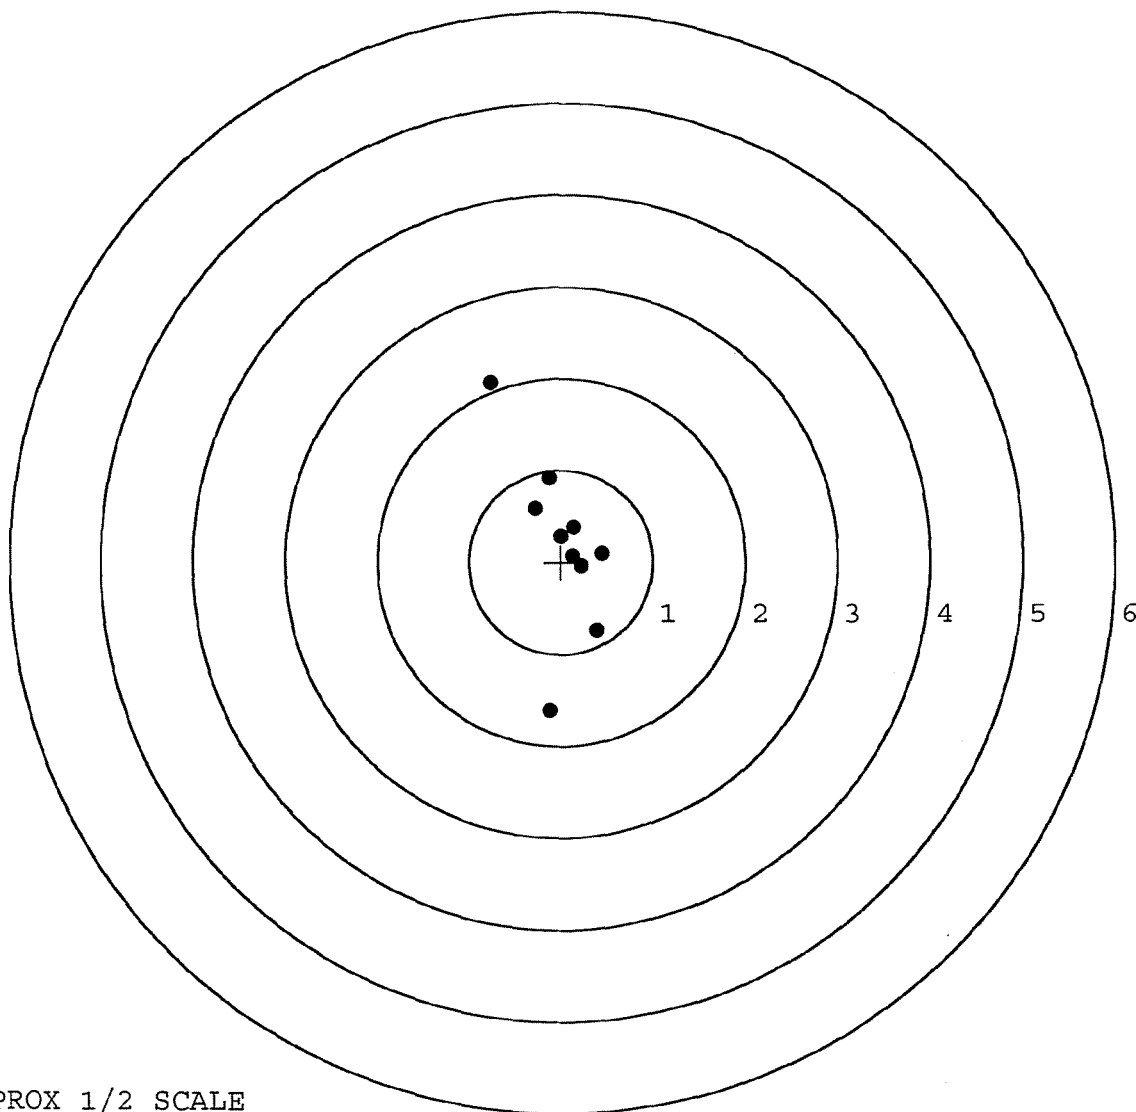

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577084. 0

TARGET NUMBER: 2

FILE DATE: 06/29/2006

FILE TIME: 08:53

X CENTROID: -0.052

Y CENTROID: 0.102

POA TO CENTROID: 0.114

HORZ SPREAD: 1.716

VERT SPREAD: 1.034

GROUP SPREAD: 1.816

MIN RADIUS: 0.177

MAX RADIUS: 1.068


MEAN RADIUS: 0.564

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.586	0.680
2:	0.597	0.433
3:	0.408	-0.354
4:	-0.518	0.501
5:	-0.468	-0.198
6:	-1.119	0.054
7:	0.141	0.216
8:	-0.181	0.223
9:	-0.124	-0.326
10:	0.162	-0.210

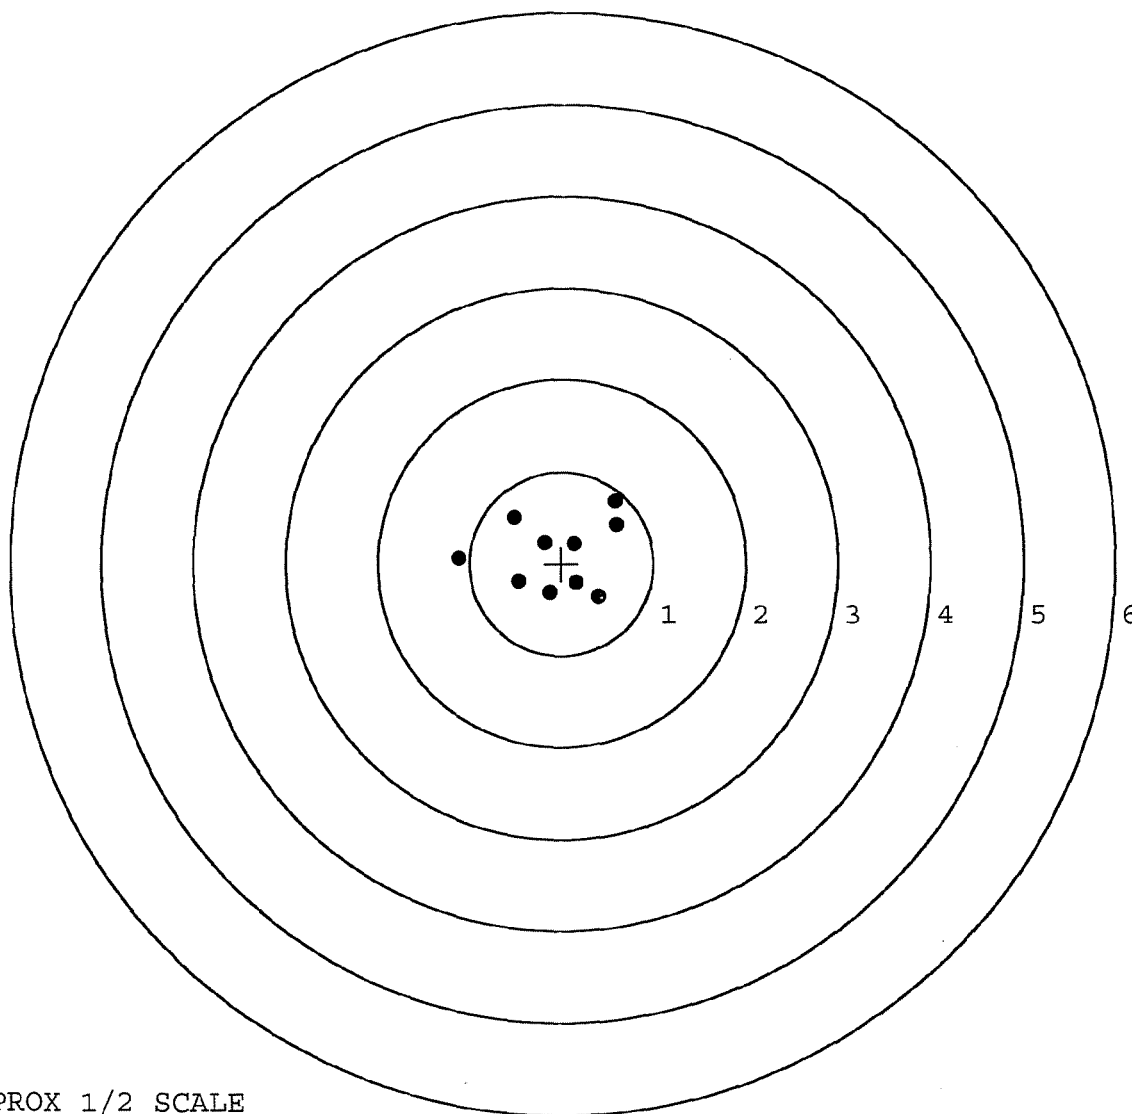


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577084. __0
 TARGET NUMBER: 3
 FILE DATE: 06/29/2006
 FILE TIME: 08:53

POINT#	X	Y
1:	-0.178	0.771
2:	0.012	0.507
3:	-0.332	0.161
4:	-0.491	-0.251
5:	-1.002	1.125
6:	-0.236	-0.820
7:	-0.023	-0.572
8:	0.499	-0.775
9:	0.661	-0.510
10:	0.516	-0.374

X CENTROID: -0.057
 Y CENTROID: -0.074
 POA TO CENTROID: 0.093
 HORZ SPREAD: 1.663
 VERT SPREAD: 1.945
 GROUP SPREAD: 2.421
 MIN RADIUS: 0.361
 MAX RADIUS: 1.526
 MEAN RADIUS: 0.744
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 9

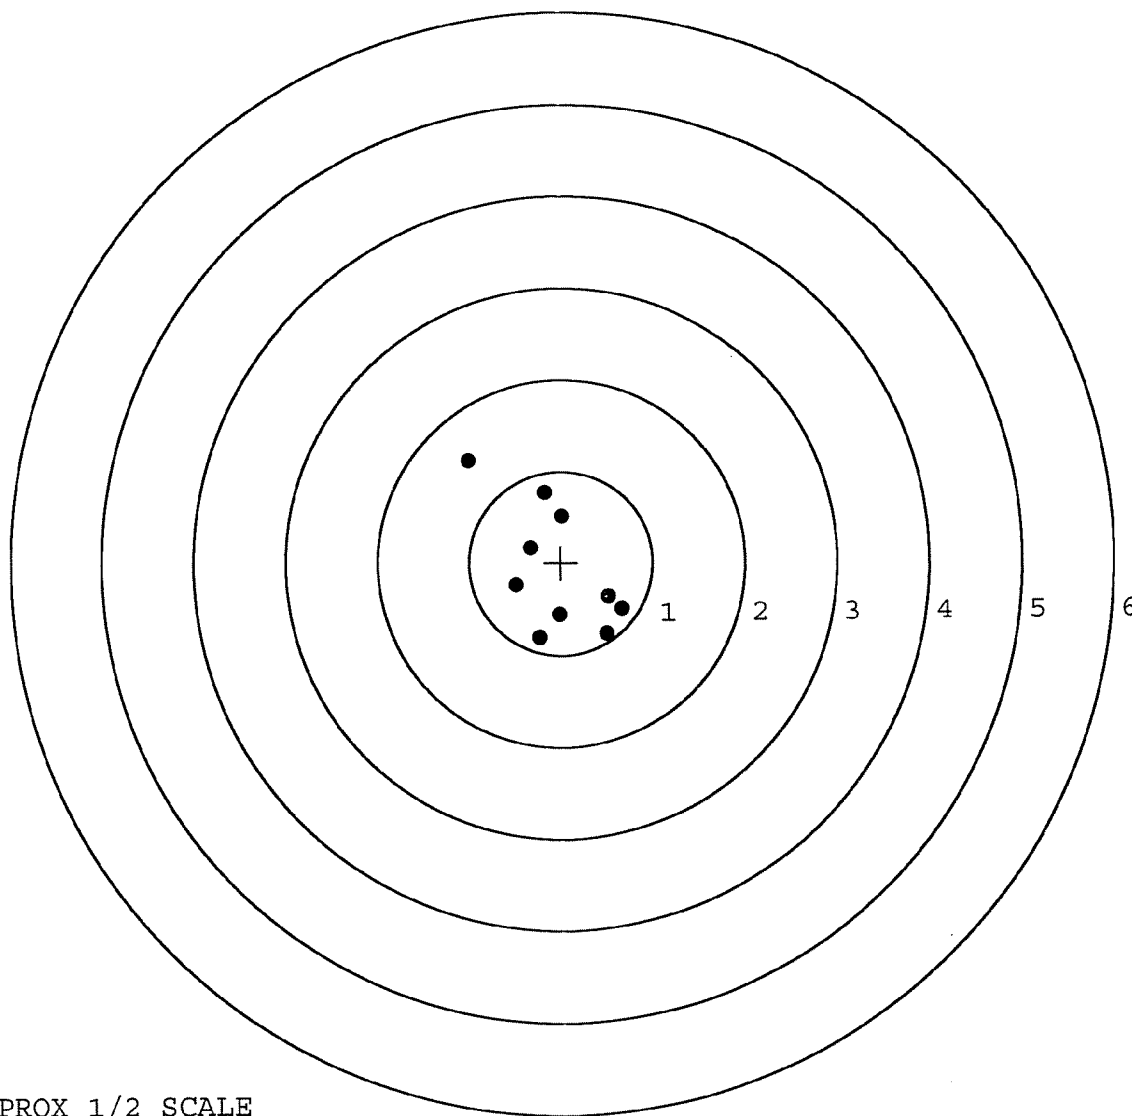


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577084. __0
 TARGET NUMBER: 4
 FILE DATE: 06/29/2006
 FILE TIME: 08:53

POINT#	X	Y
1:	0.510	-0.730
2:	0.692	-0.484
3:	0.967	-0.105
4:	0.386	0.419
5:	-0.677	0.405
6:	-0.845	0.247
7:	-0.017	0.005
8:	-0.164	-0.387
9:	-0.394	0.036
10:	-0.187	0.016

X CENTROID: 0.027
 Y CENTROID: -0.058
 POA TO CENTROID: 0.064
 HORZ SPREAD: 1.812
 VERT SPREAD: 1.149
 GROUP SPREAD: 1.846
 MIN RADIUS: 0.077
 MAX RADIUS: 0.941
 MEAN RADIUS: 0.604
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

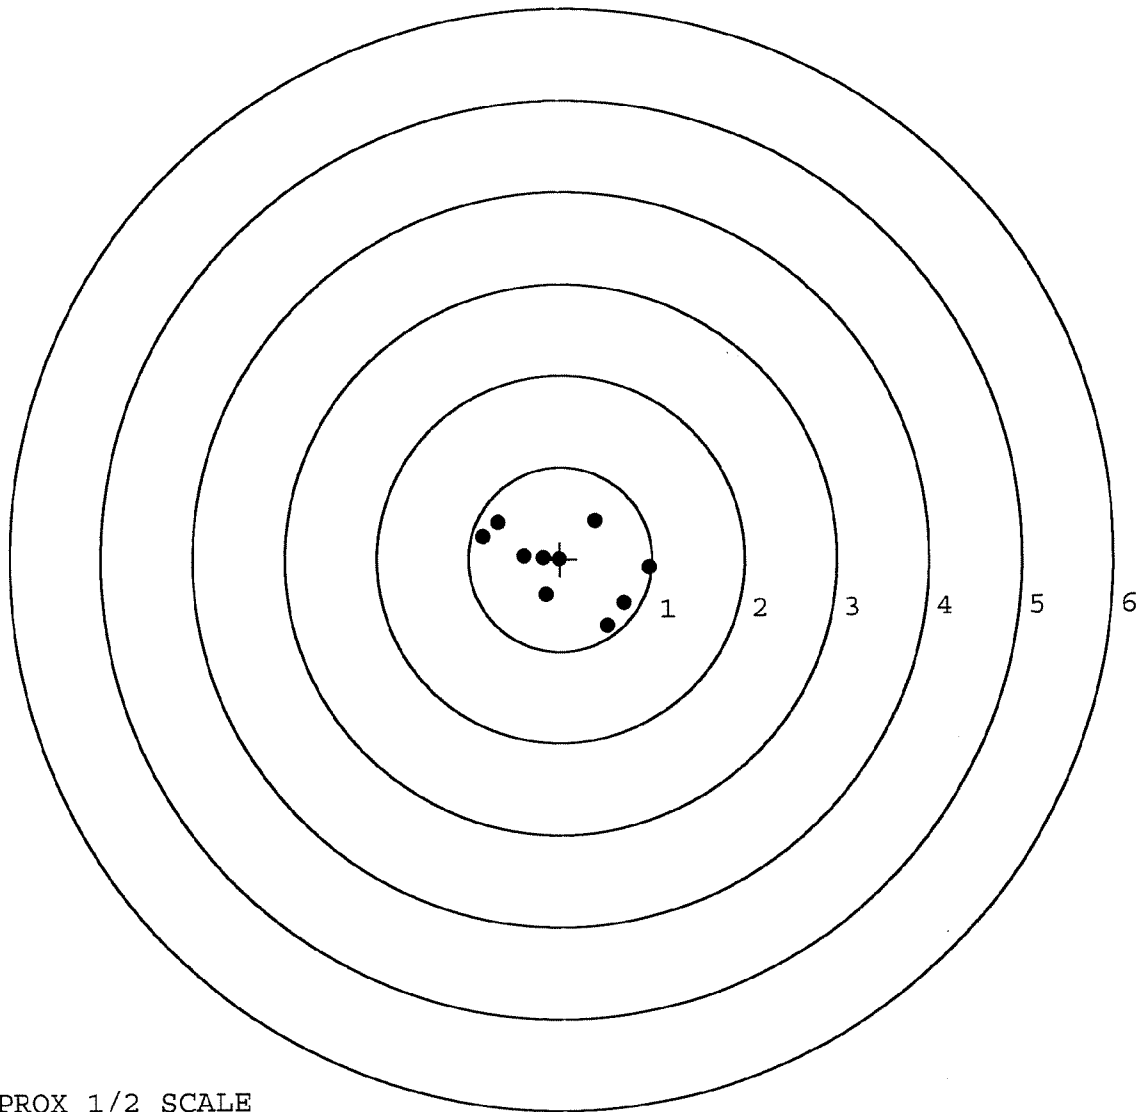

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6577084. 0

TARGET NUMBER: 5

FILE DATE: 06/29/2006

FILE TIME: 08:53

POINT#	X	Y
1:	0.669	-0.095
2:	0.280	0.408
3:	0.251	-0.351
4:	-0.072	-0.533
5:	-0.172	-0.693
6:	-0.260	-0.053
7:	-0.351	0.187
8:	-0.298	0.541
9:	0.358	1.457
10:	-0.236	-0.801

X CENTROID: 0.017

Y CENTROID: 0.007

POA TO CENTROID: 0.018

HORZ SPREAD: 1.020

VERT SPREAD: 2.258

GROUP SPREAD: 2.335

MIN RADIUS: 0.283


MAX RADIUS: 1.490

MEAN RADIUS: 0.649

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

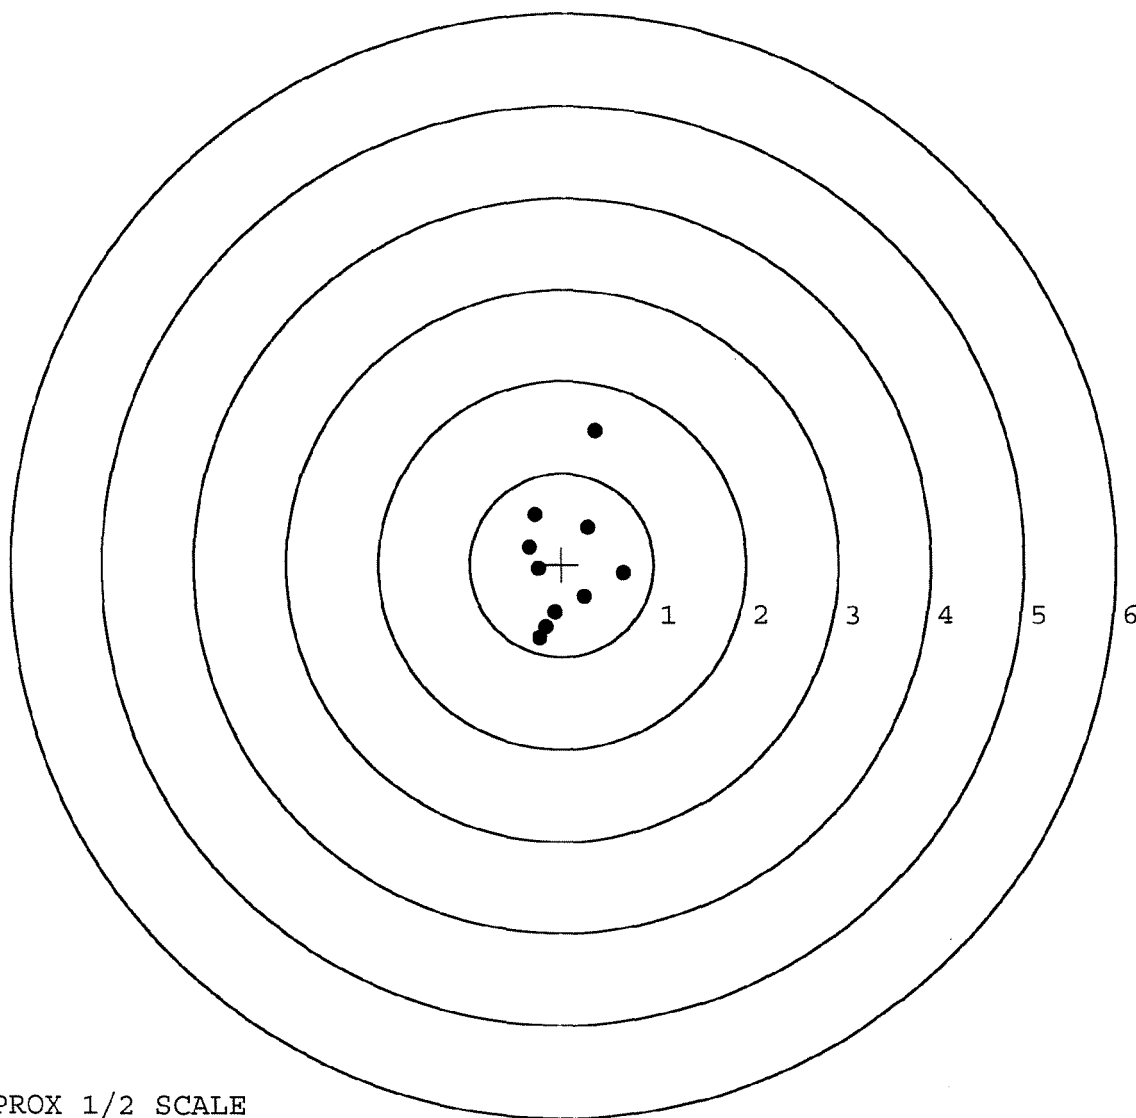

TARGET APPROX 1/2 SCALE

R & E NUMBER			
SERIAL NUMBER	E6413471		
LOG-IN DATE	5-30-06		
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	6-15-06	RTZ
505	RE-BARREL	6-20-06	RTZ
560	ASSEMBLE	6-20-06	RTZ
600	PROOF	MAGNA-FLUX INSPECTED JUN 21 2006	TRW
605	CHECK HEADSPACE	6-20-06	TRW
610	DIS-ASSEMBLE GUN	6-21-06	RTZ
612	MAGNAFLUX	OPERATOR <i>curv</i> 6/23/06	<i>curv</i>
510	DRILL AND TAP	6-22-06	TRW
615	ROLLMARK CALIBER	6-22-06	CIN
618	ROTO-BLAST	6-23-06	LB
620	APPLY COATINGS	6/28/06	TRW
625	FINAL ASSEMBLY	7-29-06	RTZ
640	FUNCTION TEST AND	(PASS) FAIL	6-29-06 TRW
650	TARGET	(PASS) FAIL	6-29-06 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	(PASS) FAIL	6-29-06 R.P.
	A) HEADSPACE	(PASS) FAIL	6-30-06 AC
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	6-30-06 AC
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6 lbs. 6 lbs. 6 lbs.
	G) SAFETY OFF FORCE	2 LBS MIN	3 lbs. 3 lbs. 3 lbs.
	I) FIRING PIN INDENT	.020	.021 .021 .021
690	PACK		8-406 RA