

G 653 5194  
Replica  
E 641 3466



SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6535194.\_\_\_0

FILE DATE AND TIME: 05/16/2006 16:43

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | 0.020  |
| The Average Y Centroid of the Five Target Set:              | -0.003 |
| The Average Point of Impact of the Five Target Set:         | 0.020  |
| The Average Mean Radius of the Five Target Set:             | 0.643  |
| The Distance from POA to Centroid Target #1:                | 0.262  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.377  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.409  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.269  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.289  |

**BARBER - M24 0089355**

SERIAL NUMBER: G6535194. \_\_0

TARGET NUMBER: 1

FILE DATE: 05/16/2006

FILE TIME: 16:43

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.206 | 0.566  |
| 2:     | -0.118 | 0.280  |
| 3:     | -0.451 | -0.049 |
| 4:     | 0.277  | 0.722  |
| 5:     | 0.223  | -0.037 |
| 6:     | 0.541  | -0.203 |
| 7:     | 0.105  | -0.563 |
| 8:     | 0.686  | -0.877 |
| 9:     | 0.949  | -0.338 |
| 10:    | 0.312  | 1.711  |

X CENTROID: 0.232

Y CENTROID: 0.121

POA TO CENTROID: 0.262

HORZ SPREAD: 1.400

VERT SPREAD: 2.588

GROUP SPREAD: 2.615

MIN RADIUS: 0.158


MAX RADIUS: 1.592

MEAN RADIUS: 0.716

# IN 1 IN DIAMETER: 3

# IN 2 IN DIAMETER: 8

# in 3 IN DIAMETER: 9

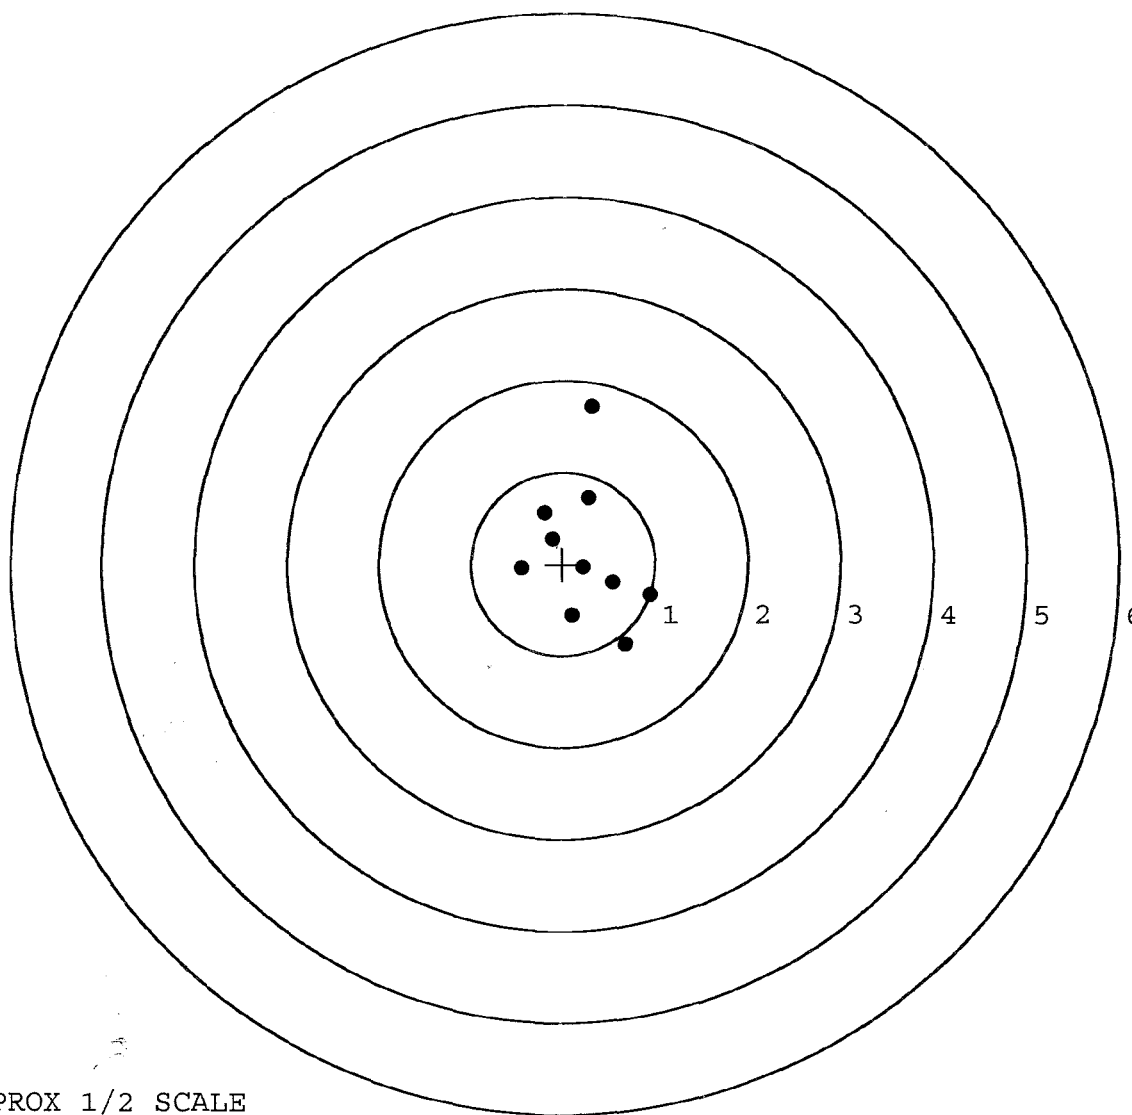


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089356**

SERIAL NUMBER: G6535194. \_\_ 0  
 TARGET NUMBER: 2  
 FILE DATE: 05/16/2006  
 FILE TIME: 16:43

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 1.257  | 0.212  |
| 2:     | -0.376 | 0.675  |
| 3:     | -0.603 | 0.316  |
| 4:     | -0.233 | 0.221  |
| 5:     | -0.281 | -0.060 |
| 6:     | -0.307 | -0.402 |
| 7:     | 0.138  | -0.180 |
| 8:     | 0.125  | -0.480 |
| 9:     | -0.051 | -0.670 |
| 10:    | -0.075 | -1.022 |

X CENTROID: -0.041  
 Y CENTROID: -0.139  
 POA TO CENTROID: 0.145  
 HORZ SPREAD: 1.860  
 VERT SPREAD: 1.697  
 GROUP SPREAD: 1.863  
 MIN RADIUS: 0.183  
 MAX RADIUS: 1.344  
 MEAN RADIUS: 0.596  
 # IN 1 IN DIAMETER: 5  
 # IN 2 IN DIAMETER: 9  
 # in 3 IN DIAMETER: 10

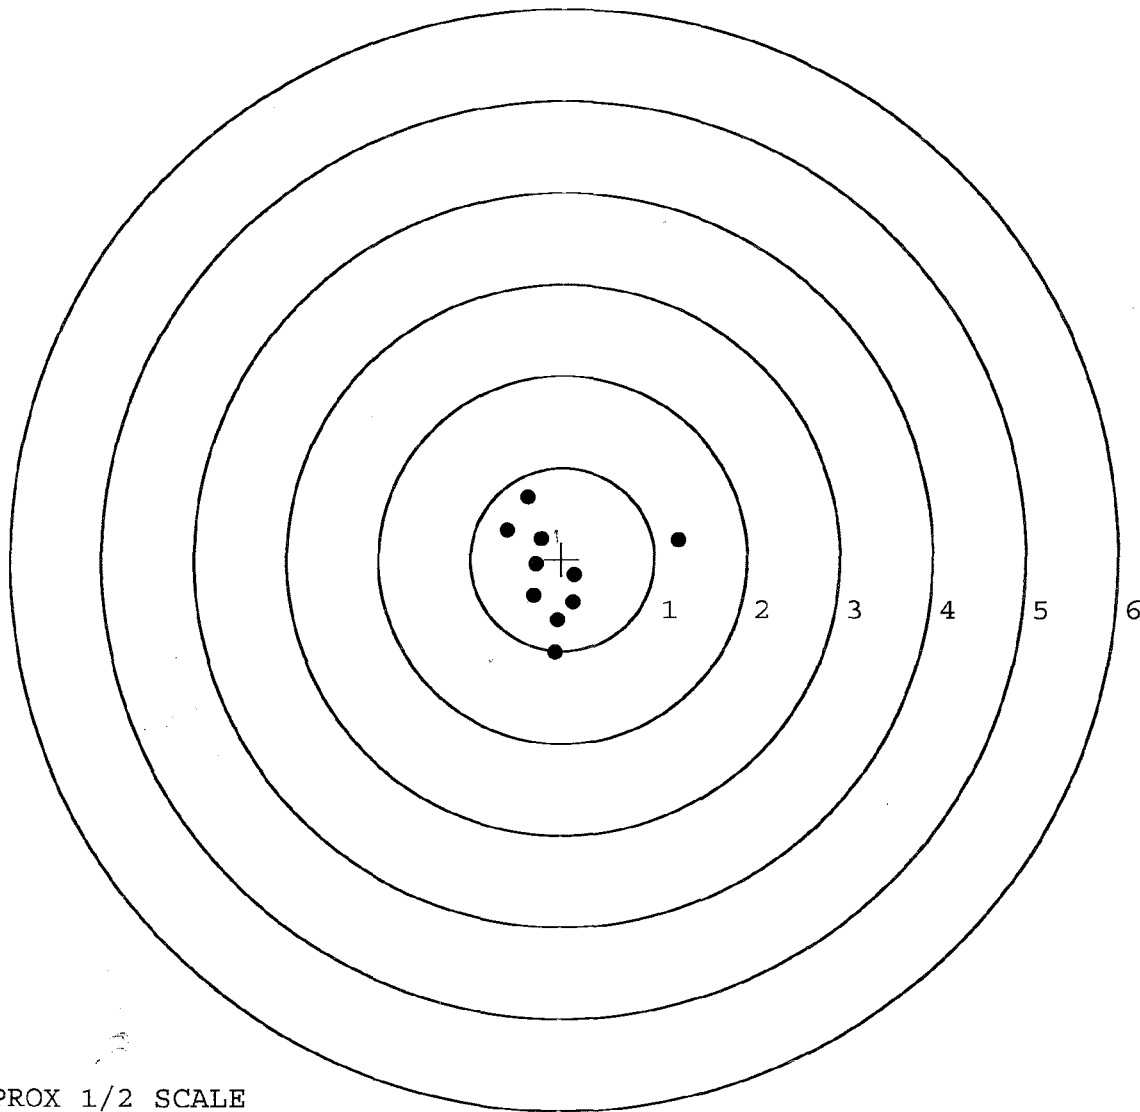


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089357**

SERIAL NUMBER: G6535194. \_\_0  
 TARGET NUMBER: 3  
 FILE DATE: 05/16/2006  
 FILE TIME: 16:43

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.866 | 0.949  |
| 2:     | -0.716 | 0.379  |
| 3:     | -0.617 | -0.600 |
| 4:     | 0.455  | -0.914 |
| 5:     | -0.087 | -0.215 |
| 6:     | -0.100 | 0.096  |
| 7:     | -0.023 | 0.321  |
| 8:     | 0.128  | 0.309  |
| 9:     | 0.195  | 0.510  |
| 10:    | -0.123 | 0.741  |

X CENTROID: -0.175  
 Y CENTROID: 0.158  
 POA TO CENTROID: 0.236  
 HORZ SPREAD: 1.321  
 VERT SPREAD: 1.863  
 GROUP SPREAD: 2.284  
 MIN RADIUS: 0.097  
 MAX RADIUS: 1.243  
 MEAN RADIUS: 0.589  
 # IN 1 IN DIAMETER: 4  
 # IN 2 IN DIAMETER: 8  
 # in 3 IN DIAMETER: 10

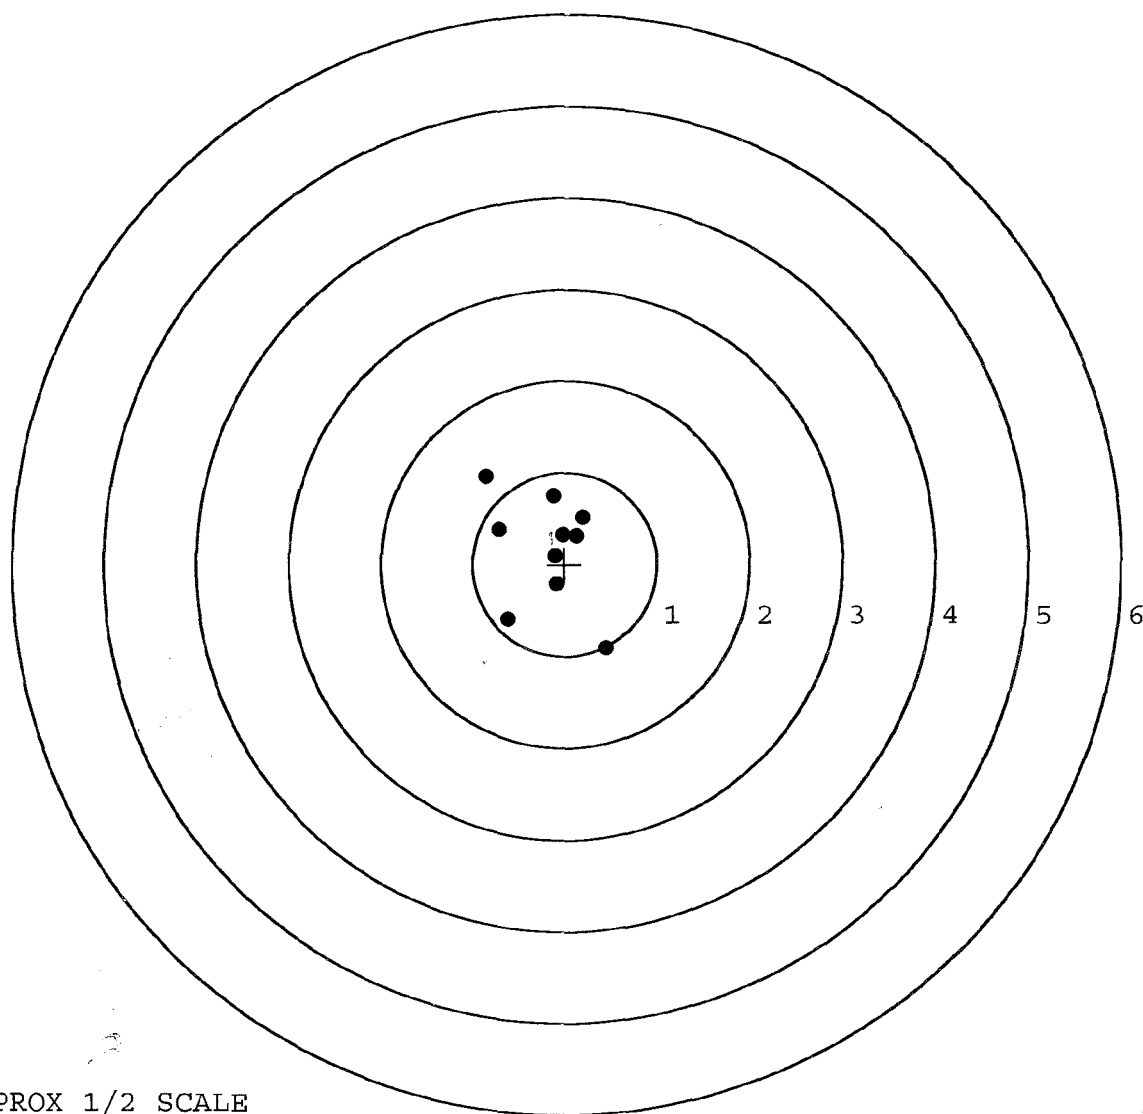


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089358**

SERIAL NUMBER: G6535194. 0  
 TARGET NUMBER: 4  
 FILE DATE: 05/16/2006  
 FILE TIME: 16:43

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.173 | 0.031  |
| 2:     | -0.472 | 0.004  |
| 3:     | -0.788 | -0.188 |
| 4:     | -0.550 | -1.105 |
| 5:     | 0.204  | -0.418 |
| 6:     | 0.527  | -0.788 |
| 7:     | 1.131  | -0.306 |
| 8:     | 0.450  | 0.211  |
| 9:     | 0.574  | 0.813  |
| 10:    | -0.057 | 0.703  |

X CENTROID: 0.085  
 Y CENTROID: -0.104  
 POA TO CENTROID: 0.134  
 HORZ SPREAD: 1.919  
 VERT SPREAD: 1.918  
 GROUP SPREAD: 2.223  
 MIN RADIUS: 0.291  
 MAX RADIUS: 1.185  
 MEAN RADIUS: 0.748  
 # IN 1 IN DIAMETER: 3  
 # IN 2 IN DIAMETER: 7  
 # in 3 IN DIAMETER: 10

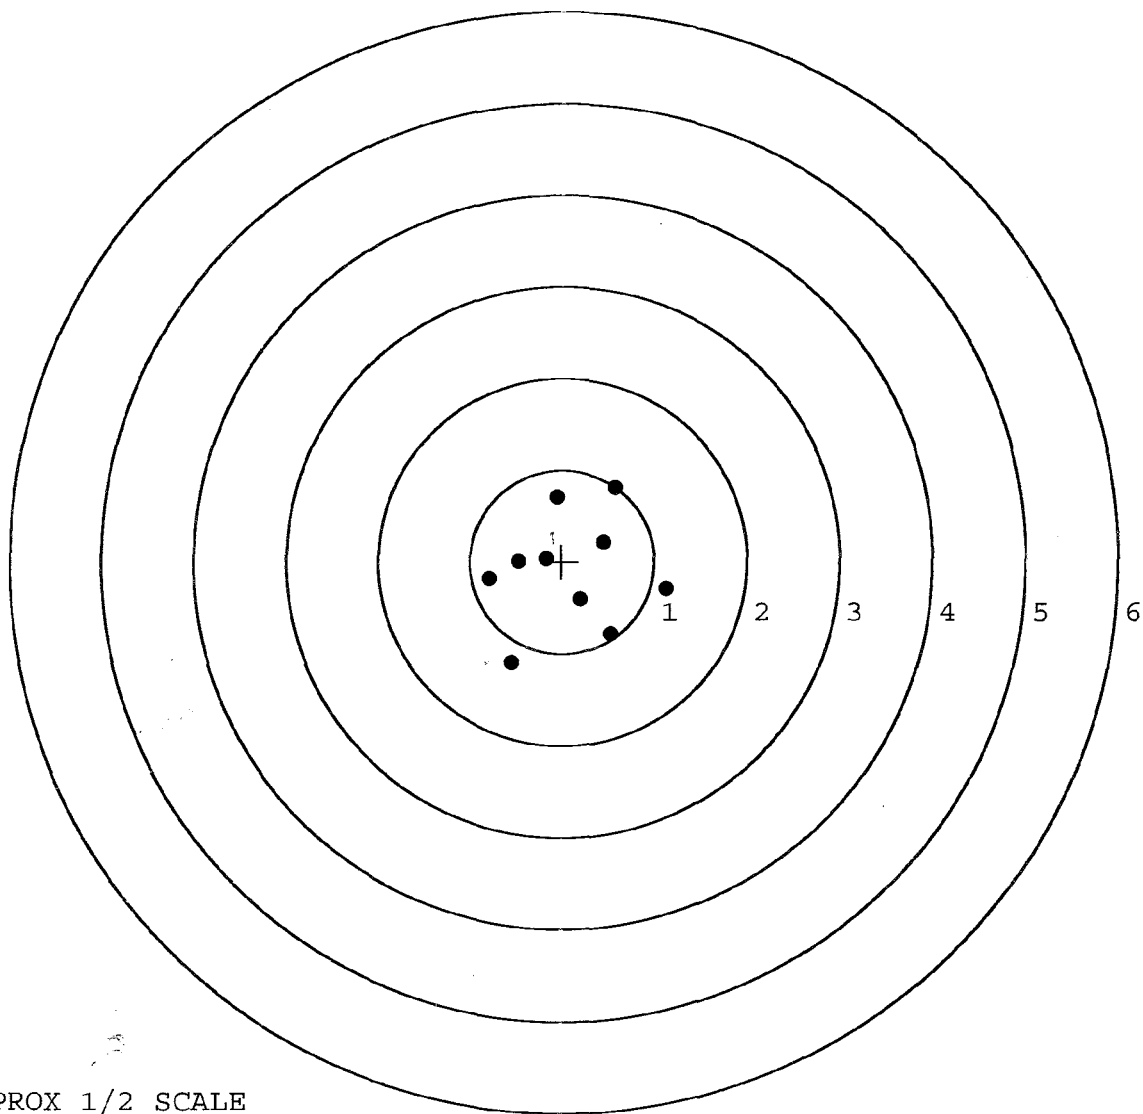

TARGET APPROX 1/2 SCALE

**BARBER - M24 0089359**

SERIAL NUMBER: G6535194. 0

TARGET NUMBER: 5

FILE DATE: 05/16/2006

FILE TIME: 16:43

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.014 | 0.462  |
| 2:     | 0.414  | 0.498  |
| 3:     | 0.693  | 0.048  |
| 4:     | 0.273  | -0.061 |
| 5:     | 0.246  | -0.316 |
| 6:     | 0.146  | -0.744 |
| 7:     | -0.583 | -0.783 |
| 8:     | -0.261 | -0.001 |
| 9:     | -0.854 | 0.092  |
| 10:    | -0.063 | 0.300  |

X CENTROID: 0.000

Y CENTROID: -0.050

POA TO CENTROID: 0.051

HORZ SPREAD: 1.547

VERT SPREAD: 1.281

GROUP SPREAD: 1.623

MIN RADIUS: 0.265


MAX RADIUS: 0.936

MEAN RADIUS: 0.567

# IN 1 IN DIAMETER: 4

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

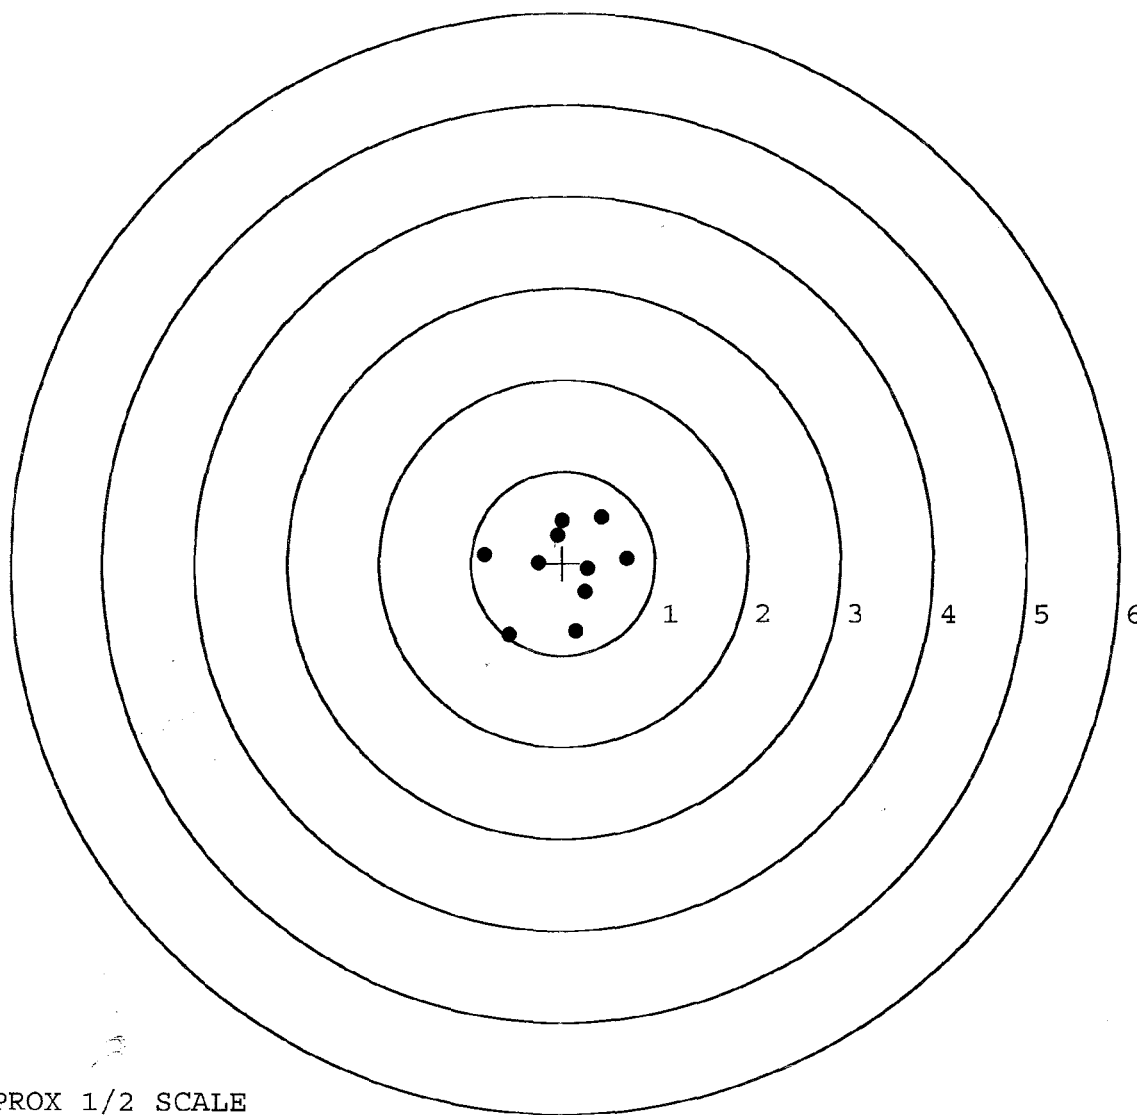

TARGET APPROX 1/2 SCALE



**BARBER - M24 0089360**

AVERAGE PULL FORCE BETWEEN

INITIAL &amp; CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

 DATE 4-21-06

 TESTER R.P.

|         | 2.50 LBS<br>INITIAL | 2.50 LBS AFTER<br>50 CYCLES | FINAL TEST & TO RESET<br>2.50 LBS |      | COMMENTS |
|---------|---------------------|-----------------------------|-----------------------------------|------|----------|
| PULL #1 | 246                 | 248                         |                                   | 257  |          |
| PULL #2 | 240                 | 244                         |                                   | 246  |          |
| PULL #3 | 262                 | 245                         |                                   | 243  |          |
| PULL #4 | 248                 | 244                         |                                   | 243  |          |
| PULL #5 | 240                 | 255                         |                                   | 251  |          |
| TOTAL   | 1236                | 1236                        |                                   | 1240 |          |
| AVERAGE | 247                 | 247                         |                                   | 248  |          |

|         | 3.00 LBS<br>INITIAL | 3.00 LBS AFTER<br>20 CYCLES |  | COMMENTS |
|---------|---------------------|-----------------------------|--|----------|
| PULL #1 | 308                 | 320                         |  |          |
| PULL #2 | 300                 | 319                         |  |          |
| PULL #3 | 303                 | 307                         |  |          |
| PULL #4 | 307                 | 314                         |  |          |
| PULL #5 | 309                 | 317                         |  |          |
| TOTAL   | 1527                | 1577                        |  |          |
| AVERAGE | 305                 | 315                         |  |          |

|         | 4.00 LBS<br>INITIAL | 4.00 LBS AFTER<br>20 CYCLES | MAX SETTING GREATER<br>THAN 4 LBS | RESET TO 4 LBS FOR<br>TARGET & ACCURACY |
|---------|---------------------|-----------------------------|-----------------------------------|-----------------------------------------|
| PULL #1 | 402                 | 402                         |                                   | 420                                     |
| PULL #2 | 402                 | 403                         |                                   | 423                                     |
| PULL #3 | 410                 | 411                         |                                   | 410                                     |
| PULL #4 | 412                 | 402                         |                                   | 402                                     |
| PULL #5 | 411                 | 405                         |                                   | 414                                     |
| TOTAL   | 2037                | 2023                        |                                   | 2069                                    |
| AVERAGE | 407                 | 404                         |                                   | 413                                     |

| R & E NUMBER  | 111262               |                                           |                          |         |
|---------------|----------------------|-------------------------------------------|--------------------------|---------|
| SERIAL NUMBER | 66113466             |                                           | 66535194 (New)           |         |
| LOG-IN DATE   | 4-19-06              |                                           |                          |         |
| OPERATION #   | OPERATION NAME       |                                           | DATE                     | INITIAL |
| 500           | DIS-ASSEMBLE GUN     |                                           | 5-2-06                   | RTZ     |
| 505           | RE-BARREL            |                                           | 5-3-06                   | RTZ     |
| 560           | ASSEMBLE             |                                           | 5-3-06                   | RTZ     |
| 600           | PROOF                | REWORK - FLUX                             | 5-3-06                   | MTM     |
| 605           | CHECK HEADSPACE      | TRANSFERRED                               | 5-3-06                   | MTM     |
| 610           | DIS-ASSEMBLE GUN     | REWORK - FLUX                             |                          |         |
| 612           | MAGNAFLUX            | OPERATOR <u>APD</u>                       | 5-8-06                   | APD     |
| 510           | DRILL AND TAP        |                                           | 5-5-06                   | TRW     |
| 615           | ROLLMARK CALIBER     |                                           | 5-8-06                   | CW      |
| 618           | ROTO-BLAST           |                                           | 5-8-06                   | LB      |
| 620           | APPLY COATINGS       |                                           | 5-11-06                  | RTZ     |
| 625           | FINAL ASSEMBLY       |                                           | 5-15-06                  | RTZ     |
| 640           | FUNCTION TEST AND    | PASS FAIL                                 | 5-16-06                  | APD     |
| 650           | TARGET               | PASS FAIL                                 | 5-16-06                  | APD     |
|               | MALFUNCTION          | CORRECTION                                |                          |         |
|               | MALFUNCTION          | CORRECTION                                |                          |         |
|               | MALFUNCTION          | CORRECTION                                |                          |         |
|               | MALFUNCTION          | CORRECTION                                |                          |         |
| 670           | FINAL INSPECTION     |                                           | 5-23-06                  | MTM     |
|               | A) HEADSPACE         | PASS FAIL                                 | 5-23-06                  | MTM     |
|               | B) TRIGGER PULL      | +/- .5 LBS<br>MIN 2.50 LBS<br>MAX 4.0 LBS | 2.88 2.86 2.91 2.91 2.98 | APD     |
| 680           | F) SAFETY ON FORCE   | 2 LBS MIN<br>10 LBS MAX                   | 8 lbs. 8 lbs. 8 lbs.     | MTM     |
|               | G) SAFETY OFF FORCE  | 2 LBS<br>MIN                              | 4 lbs. 4 lbs. 4 lbs.     | MTM     |
|               | I) FIRING PIN INDENT | .020                                      | .024 .024 .024           | MTM     |
| 690           | PACK                 |                                           | 5-24-06                  | RTZ     |

## Repair Inquiry

Repair Number: **RE00066080**Serial: C6349002 Model 700 Center Fire Caliber: 7  
62 NATO M24 SWS

Repairman:

Verify Repair

Status:

Closed 6/2/2003 11:22:24 AM

## Address Information

Customer:

☒ Received From

Return To:

☐ Received FromName: **SUPPLY DIVISION US AIC****SUPPLY DIVISION US AIC**Address 1: **BLDG 400****BLDG 400**Address 2: **PO Box:****PO Box:**City: **FORT BENNING****FORT BENNING**State: **GA**Zip Code: **31905**Country: **US**State: **GA**Zip Code: **31905**Country: **US**FFL: ☐

## Contact / Condition

## Problems

## Estimate

## History / Status

## Shipping / Billing

## Contact Information

Phone:

Fax:

Email:

Comments:

## Received Condition

Fair

Condition  
Notes:CSR  
Notes:

## Accessories Received

| Code | Desc       | Qty |
|------|------------|-----|
| A007 | With Studs | 3   |
| A010 | Hard Case  | 1   |
| A017 | Scope Base | 2   |
| A026 | Scope      | 1   |

Repair Search

Refresh

Close

nagletj

6/2/2003

11:46 AM

CAPS

NUM

INS

SCPL

start

11:46 AM

ECott 3464

**C6349002**

Model: **700****RE00066080**

DATE 6-4-03

TESTER TRW

|         | 2.50#<br>INITIAL | 2.50# AFTER<br>50 CYCLES | FINAL TEST &<br>TO RESET 2.50# |       | COMMENTS         |
|---------|------------------|--------------------------|--------------------------------|-------|------------------|
| PULL #1 | 2.48             | 2.70                     |                                | 2.40  | MIN. SETTING,    |
| PULL #2 | 2.60             | 2.46                     |                                | 2.35  | NO AVG. OF 5     |
| PULL #3 | 2.61             | 2.56                     |                                | 2.40  | READINGS ACCEPT- |
| PULL #4 | 2.70             | 2.62                     |                                | 2.41  | ABLE LESS THAN 2 |
| PULL #5 | 2.59             | 2.57                     |                                | 2.40  |                  |
| TOTAL   | 12.98            | 12.91                    |                                | 11.96 |                  |
| AVG.    | 2.59             | 2.58                     |                                | 2.39  |                  |

|         | 3.00#<br>INITIAL | 3.00# AFTER<br>20 CYCLES |  | COMMENTS |
|---------|------------------|--------------------------|--|----------|
| PULL #1 | 3.37             | 3.34                     |  |          |
| PULL #2 | 3.28             | 3.33                     |  |          |
| PULL #3 | 3.25             | 3.30                     |  |          |
| PULL #4 | 3.29             | 3.03                     |  |          |
| PULL #5 | 3.26             | 3.19                     |  |          |
| TOTAL   | 16.45            | 16.19                    |  |          |
| AVG.    | 3.29             | 3.23                     |  |          |

|         | 4.00#<br>INITIAL | 4.00# AFTER<br>20 CYCLES | MAX SETTING<br>GREATER THAN 4# | RESET TO 4# FOR<br>TARGET & ACCUR |
|---------|------------------|--------------------------|--------------------------------|-----------------------------------|
| PULL #1 | 4.09             | 4.37                     |                                | 4.46                              |
| PULL #2 | 4.28             | 4.35                     |                                | 4.45                              |
| PULL #3 | 4.43             | 4.36                     |                                | 4.49                              |
| PULL #4 | 4.44             | 4.40                     |                                | 4.02                              |
| PULL #5 | 4.43             | 4.39                     |                                | 4.40                              |
| TOTAL   | 21.67            | 21.87                    |                                | 21.82                             |
| AVG.    | 4.33             | 4.37                     |                                | 4.36                              |

SERIAL # E6413466INSPECTED BY: RTLDATE REC'D: 6-2-03DATE RET'D: 6-26-03

## ITEM

## BARREL ASSEMBLY

☒ BARREL  
☒ RECEIVER  
☒ FRONT SIGHT BASE  
☒ REAR SIGHT BASE  
☒ SCREWS  
☒ FINISH

## SCOPE ASSEMBLY

☒ SCOPE  
☒ SCOPE RINGS  
☒ MOUNTING SCREWS  
☒ MOUNTING BASE  
☒ SCREWS  
☒ FINISH  
☒ CLARITY

## ITEM

## STOCK ASSEMBLY

☒ STOCK  
☒ SLING AWIVEL STUDS  
☒ ADJUSTABLE  
☒ BUTT PLATE  
☒ LOCK NUTS  
☒ BARREL CLEARANCE  
☒ COLOR / FINISH

## SYSTEMS CASE

☒ SCOPE CASE  
☒ IRON SIGHTS  
☒ DEPLOYMENT KIT

## TRIGGER ASSEMBLY

☒ SAFETY OPERATION  
☒ RE-SET TO FACTORY SPECS

## COMMENTS:

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413466.\_\_\_0

FILE DATE AND TIME: 06/24/2003 06:55

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | 0.143  |
| The Average Y Centroid of the Five Target Set:              | -0.077 |
| The Average Point of Impact of the Five Target Set:         | 0.162  |
| The Average Mean Radius of the Five Target Set:             | 0.647  |
| The Distance from POA to Centroid Target #1:                | 0.087  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.160  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.286  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.368  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.754  |

**BARBER - M24 0089366**

SERIAL NUMBER: E6413466. \_\_0  
 TARGET NUMBER: 1  
 FILE DATE: 06/24/2003  
 FILE TIME: 06:55

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.146  | 0.483  |
| 2:     | -0.018 | 0.387  |
| 3:     | -0.404 | 0.409  |
| 4:     | -0.935 | 0.509  |
| 5:     | -0.658 | -0.526 |
| 6:     | -0.394 | -0.341 |
| 7:     | 0.393  | -0.107 |
| 8:     | 0.437  | -0.388 |
| 9:     | 0.635  | -0.457 |
| 10:    | 0.012  | 0.414  |

X CENTROID: -0.079  
 Y CENTROID: 0.038  
 POA TO CENTROID: 0.087  
 HORZ SPREAD: 1.570  
 VERT SPREAD: 1.035  
 GROUP SPREAD: 1.843  
 MIN RADIUS: 0.354  
 MAX RADIUS: 0.977  
 MEAN RADIUS: 0.604  
 # IN 1 IN DIAMETER: 6  
 # IN 2 IN DIAMETER: 10  
 # in 3 IN DIAMETER: 10

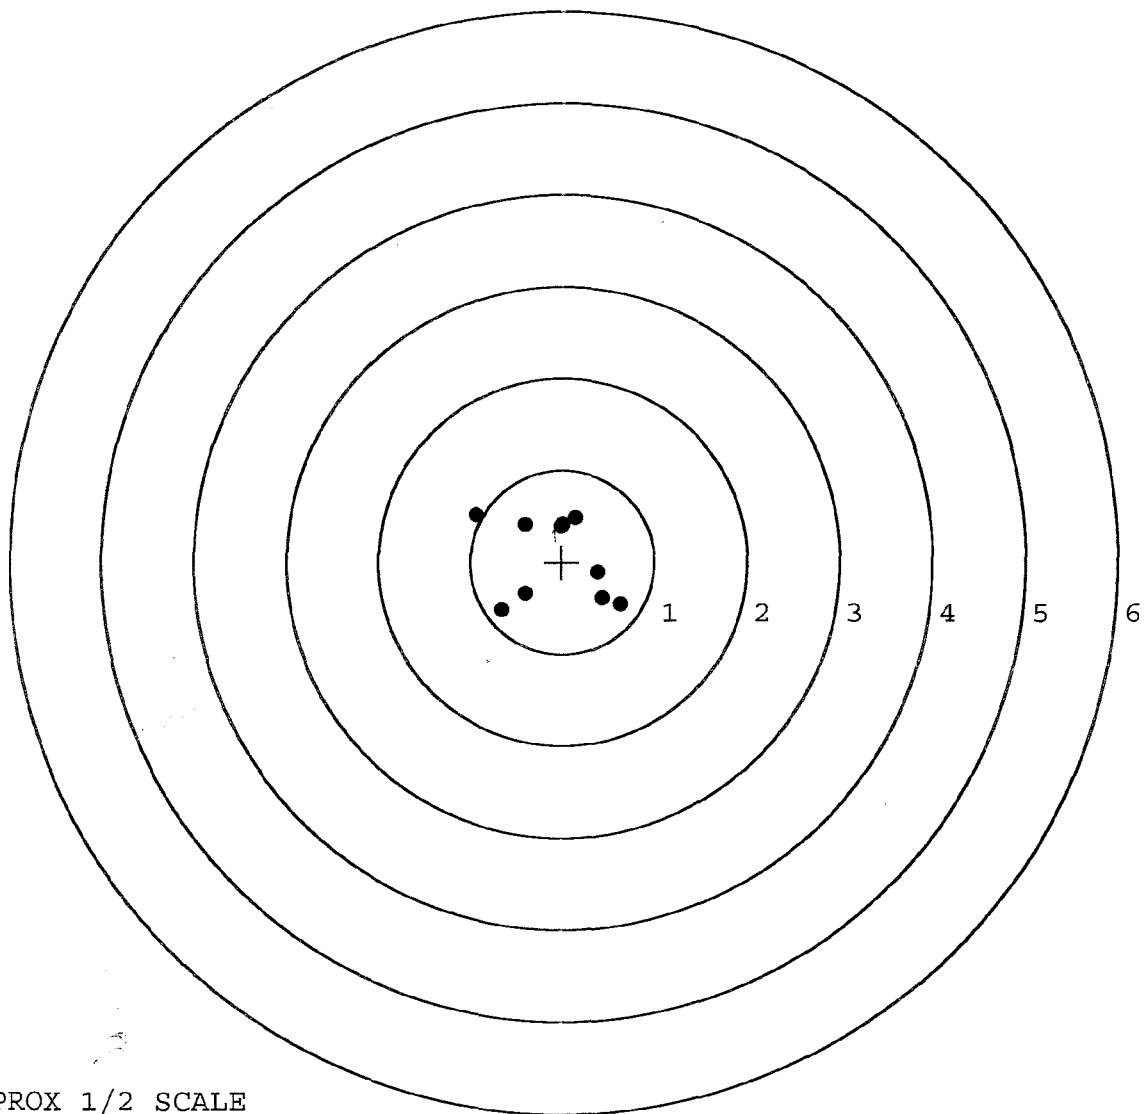


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089367**

SERIAL NUMBER: E6413466. \_\_0  
 TARGET NUMBER: 2  
 FILE DATE: 06/24/2003  
 FILE TIME: 06:55

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.013 | 0.003  |
| 2:     | 0.904  | 0.387  |
| 3:     | 0.313  | 0.339  |
| 4:     | -0.093 | 0.810  |
| 5:     | -0.731 | 0.528  |
| 6:     | -0.683 | 0.010  |
| 7:     | -0.931 | -0.238 |
| 8:     | -0.562 | -0.865 |
| 9:     | -0.512 | -0.556 |
| 10:    | 0.433  | -1.214 |

X CENTROID: -0.188  
 Y CENTROID: -0.080  
 POA TO CENTROID: 0.204  
 HORZ SPREAD: 1.835  
 VERT SPREAD: 2.024  
 GROUP SPREAD: 2.095  
 MIN RADIUS: 0.193  
 MAX RADIUS: 1.293  
 MEAN RADIUS: 0.775  
 # IN 1 IN DIAMETER: 1  
 # IN 2 IN DIAMETER: 8  
 # in 3 IN DIAMETER: 10

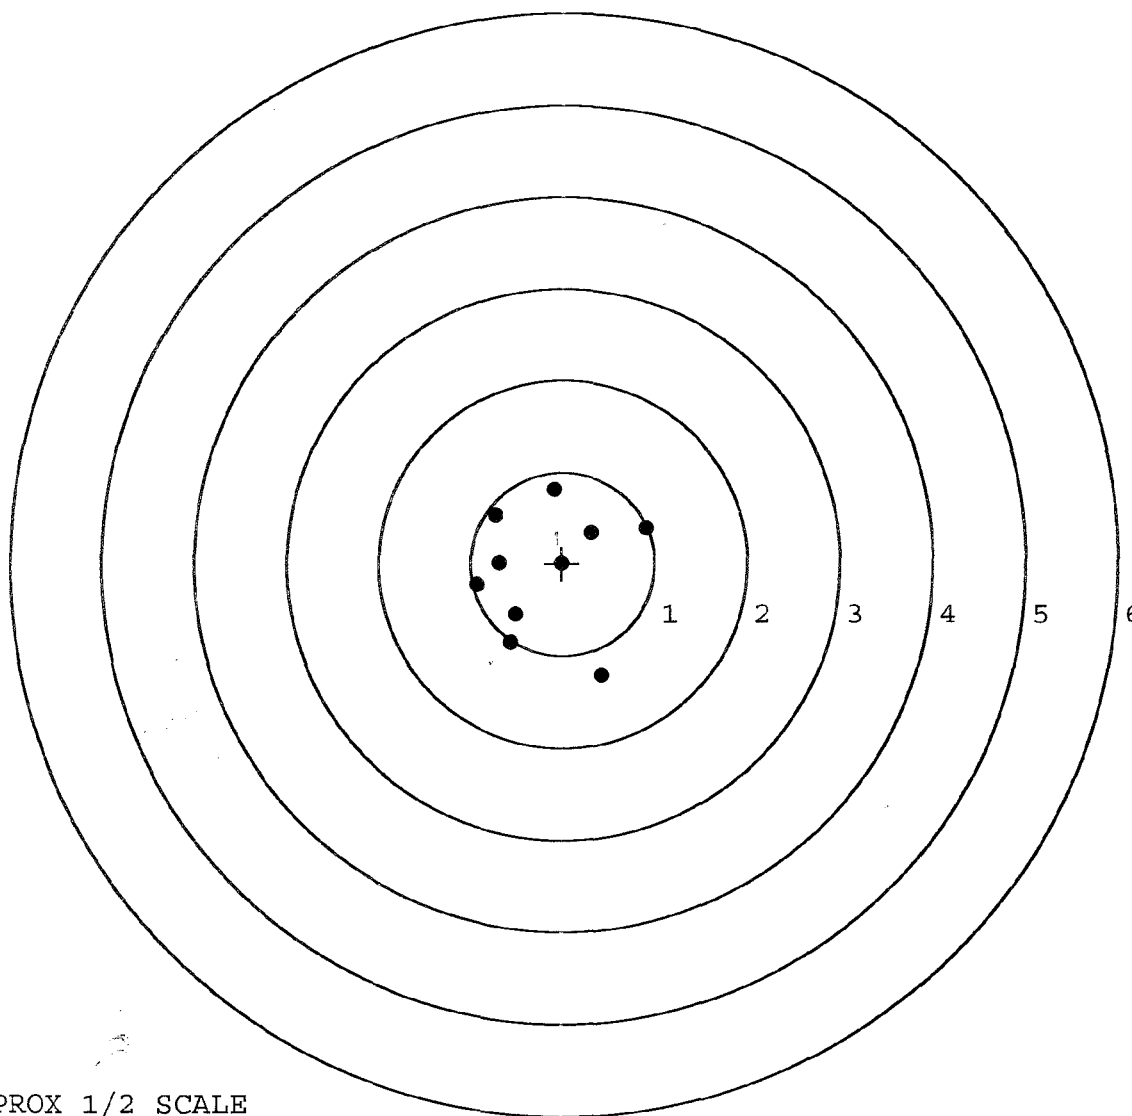


TARGET APPROX 1/2 SCALE



**BARBER - M24 0089368**

|                            |        |        |        |
|----------------------------|--------|--------|--------|
| SERIAL NUMBER: E6413466. 0 | POINT# | X      | Y      |
| TARGET NUMBER: 3           | 1:     | 0.896  | -0.017 |
| FILE DATE: 06/24/2003      | 2:     | 0.619  | -0.432 |
| FILE TIME: 06:55           | 3:     | 0.008  | -0.510 |
|                            | 4:     | -0.833 | 0.002  |
| X CENTROID: 0.190          | 5:     | 0.086  | 0.243  |
| Y CENTROID: -0.062         | 6:     | 0.034  | 0.003  |
| POA TO CENTROID: 0.200     | 7:     | 0.166  | -0.137 |
| HORZ SPREAD: 1.729         | 8:     | 0.394  | -0.056 |
| VERT SPREAD: 0.753         | 9:     | 0.246  | 0.133  |
| GROUP SPREAD: 1.729        | 10:    | 0.281  | 0.151  |
| MIN RADIUS: 0.079          |        |        |        |
| MAX RADIUS: 1.025          |        |        |        |
| MEAN RADIUS: 0.399         |        |        |        |
| # IN 1 IN DIAMETER: 7      |        |        |        |
| # IN 2 IN DIAMETER: 9      |        |        |        |
| # in 3 IN DIAMETER: 10     |        |        |        |

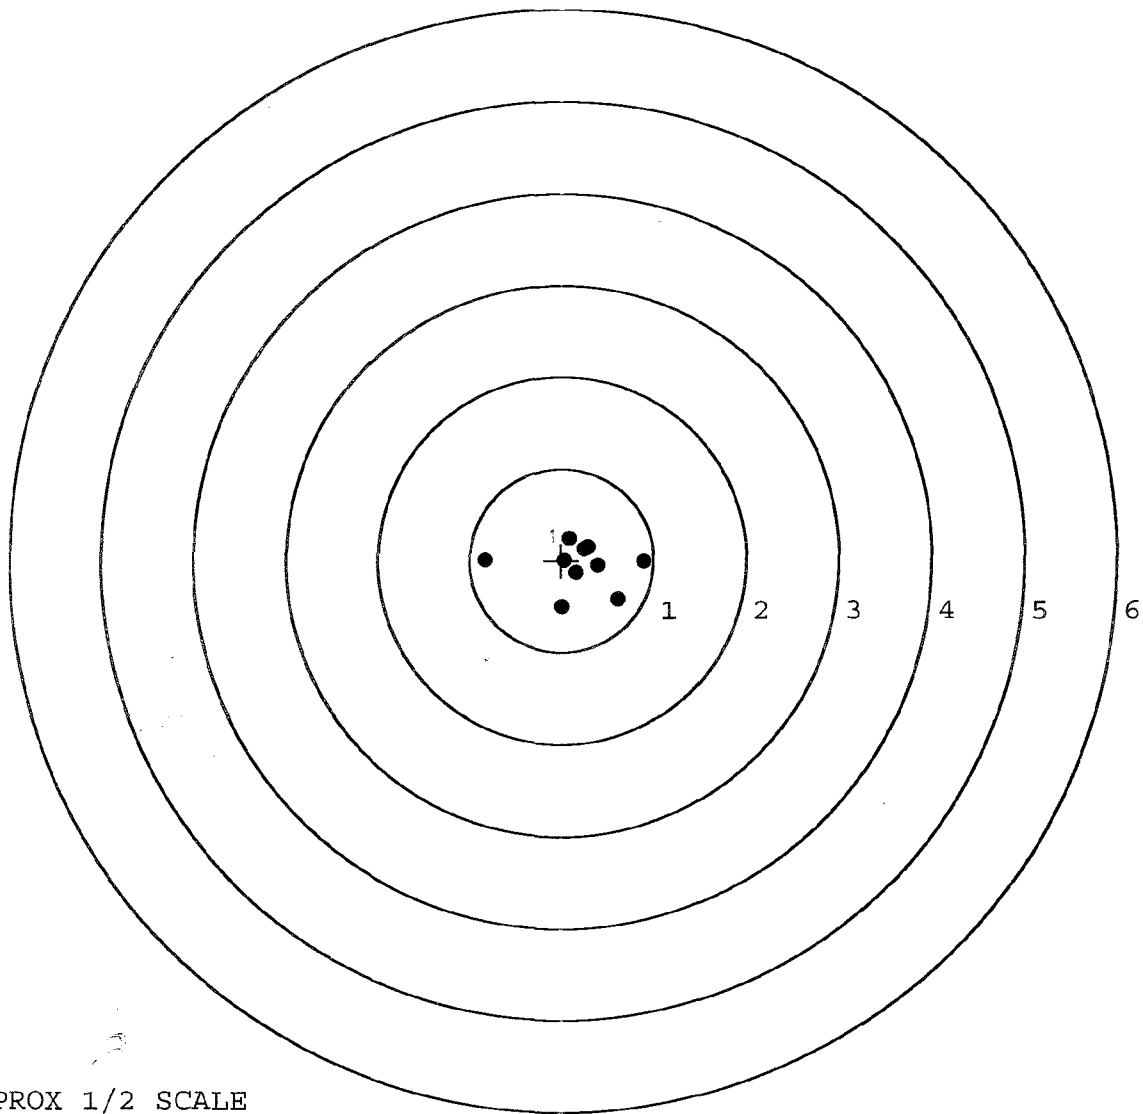


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089369**

SERIAL NUMBER: E6413466. \_\_0  
 TARGET NUMBER: 4  
 FILE DATE: 06/24/2003  
 FILE TIME: 06:55

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.217 | -0.119 |
| 2:     | 0.018  | 0.221  |
| 3:     | -0.513 | 0.109  |
| 4:     | -0.589 | -0.278 |
| 5:     | -0.393 | -0.802 |
| 6:     | 1.123  | -1.410 |
| 7:     | 0.791  | -0.502 |
| 8:     | 0.716  | 0.098  |
| 9:     | 0.250  | -0.252 |
| 10:    | -0.021 | 0.201  |

X CENTROID: 0.116  
 Y CENTROID: -0.273  
 POA TO CENTROID: 0.297  
 HORZ SPREAD: 1.712  
 VERT SPREAD: 1.631  
 GROUP SPREAD: 2.232  
 MIN RADIUS: 0.135  
 MAX RADIUS: 1.518  
 MEAN RADIUS: 0.661  
 # IN 1 IN DIAMETER: 3  
 # IN 2 IN DIAMETER: 9  
 # in 3 IN DIAMETER: 9

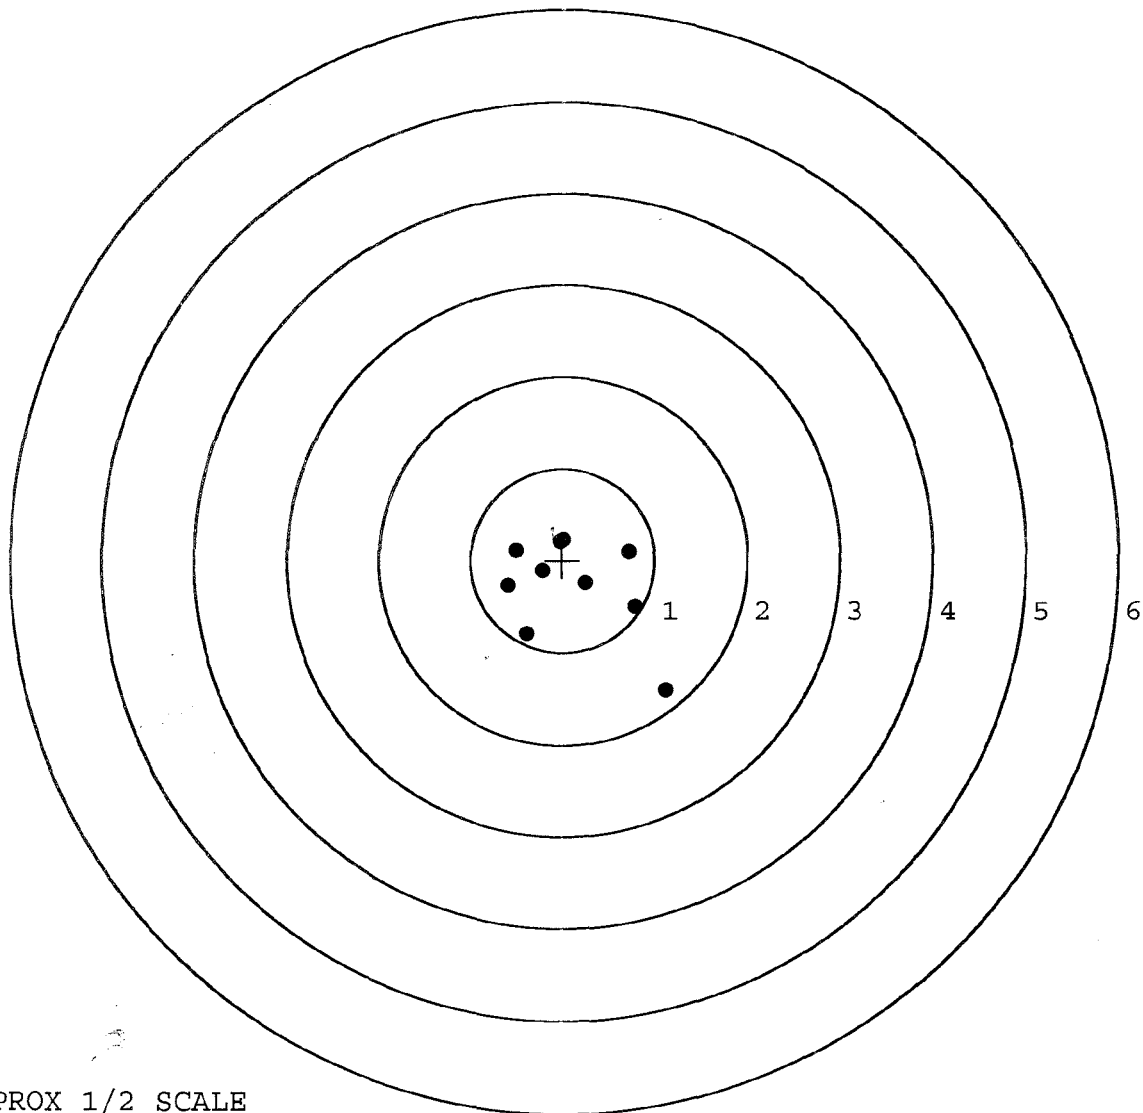


TARGET APPROX 1/2 SCALE

**BARBER - M24 0089370**

SERIAL NUMBER: E6413466. \_\_0  
 TARGET NUMBER: 5  
 FILE DATE: 06/24/2003  
 FILE TIME: 06:55

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.403 | 0.043  |
| 2:     | -0.201 | 0.339  |
| 3:     | 0.268  | 0.620  |
| 4:     | 0.678  | 0.300  |
| 5:     | 0.717  | -0.464 |
| 6:     | 1.833  | -0.488 |
| 7:     | 2.400  | 0.083  |
| 8:     | -0.018 | -0.412 |
| 9:     | 0.843  | 0.244  |
| 10:    | 0.625  | -0.333 |

X CENTROID: 0.674  
 Y CENTROID: -0.007  
 POA TO CENTROID: 0.674  
 HORZ SPREAD: 2.803  
 VERT SPREAD: 1.108  
 GROUP SPREAD: 2.803  
 MIN RADIUS: 0.302  
 MAX RADIUS: 1.728  
 MEAN RADIUS: 0.795  
 # IN 1 IN DIAMETER: 4  
 # IN 2 IN DIAMETER: 7  
 # in 3 IN DIAMETER: 9

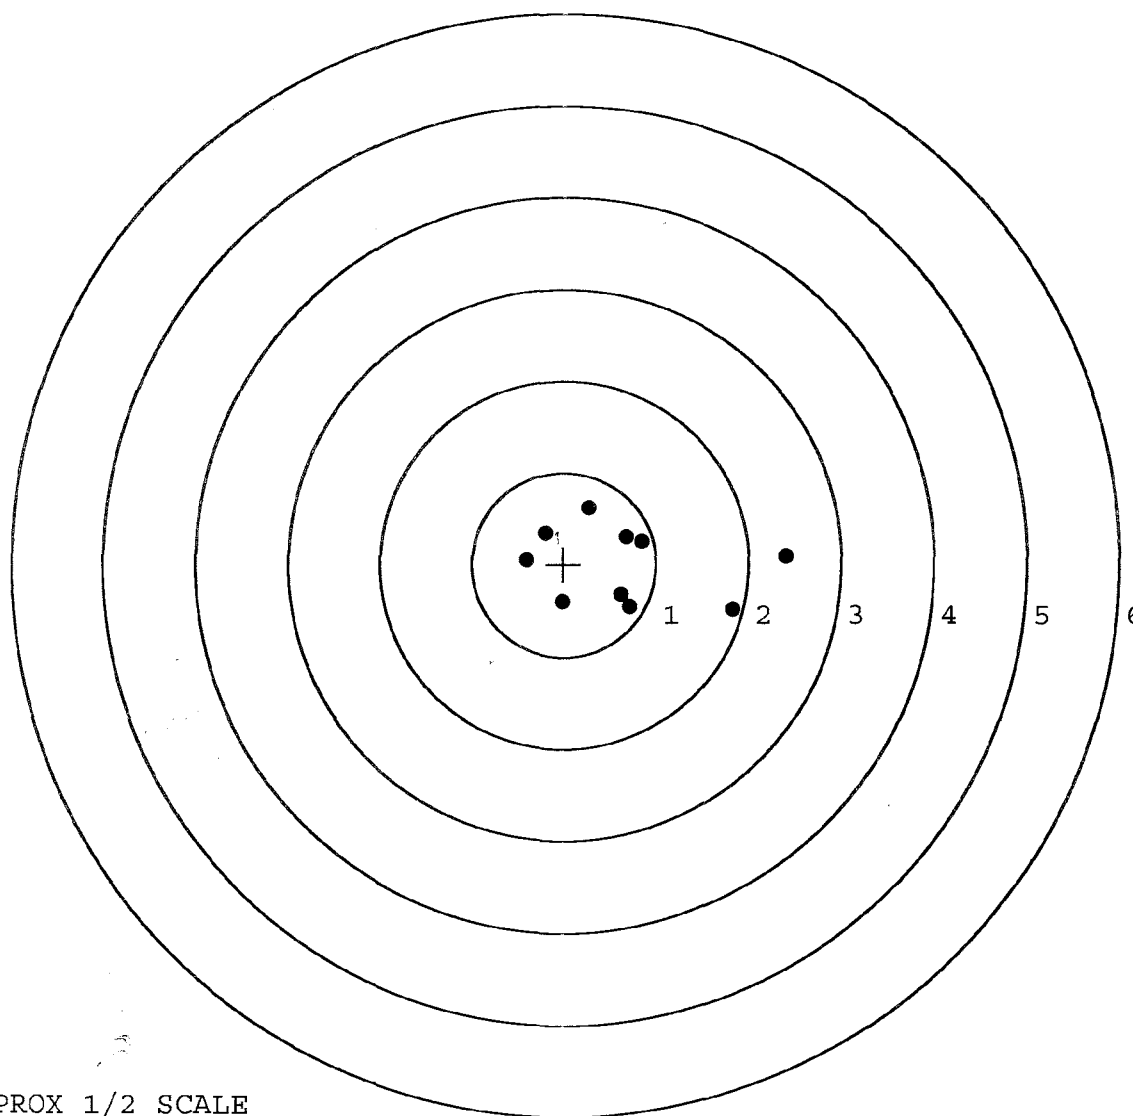

TARGET APPROX 1/2 SCALE

|                     |                        |           |         |
|---------------------|------------------------|-----------|---------|
| R & E NUMBER        | C66080                 |           |         |
| SERIAL NUMBER       | C6349002 E643466 (NEW) |           |         |
| LOG-IN DATE         | 6/2/03                 |           |         |
| INSPECT AND VERIFY: |                        |           |         |
| OPERATION #         | OPERATION NAME         | DATE      | INITIAL |
| 550                 | DIS-ASSEMBLE GUN       | 6/4/03    | RTL     |
| 560 A               | RE-BARREL              | 6/5/03    | RTL     |
| B                   | DRILL AND TAP          | 6-5-03    | TRW     |
| 575                 | ASSEMBLE               | 6-5/03    | RTL     |
| 600                 | PROOF                  | 6-5-03    | AC      |
| 605                 | CHECK HEADSPACE        | 6-5-03    | AC      |
| 610                 | DIS-ASSEMBLE GUN       | 6-5-03    | RTL     |
| 612                 | MAGNAFLUX              | PK        |         |
| 615                 | ROLLMARK CALIBER       | 6-17-03   | B       |
| 618                 | ROTO-BLAST             | 6-17-03   | DB      |
| 620                 | APPLY COATINGS         | 6-19-03   | TA      |
| 625 A               | FINAL ASSEMBLY         | 6-23-03   | RTL     |
| B                   | TRIGGER PULL TEST      | 6-26-03   | TRW     |
| C                   | SAFETY "ON" FORCE      | 6-26-03   | DA      |
| D                   | SAFETY "OFF" FORCE     | 6-26-03   | DA      |
| E                   | FIRING PIN INDENT      | 6-26-03   | DA      |
| 640                 | TARGET                 | 6-24-03   | AC      |
| 655                 | FINAL INSPECT          | 6-26-03   | RTL     |
| 660                 | PACK                   | 6-26-03   | DA      |
|                     |                        |           |         |
|                     |                        |           |         |
|                     |                        |           |         |
|                     |                        |           |         |
|                     |                        |           |         |
|                     |                        | SHIP DATE |         |
|                     |                        |           |         |
|                     | QAR INSPECTION DATE    |           |         |