

G653530C

**M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)**  
BOLT ACTION CENTERFIRE RIFLE  
24" BARREL 7.62 NATO


- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

**G6535306**

**UPC**



BARBER - M24 0090812

**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTE

**UPC**



0 47700 25716 7

**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTE

**UPC**



0 47700 25716 7

SERIAL NO.



G6535306

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
REMINGTON

BARBER - M24 0090812  
M2400990851

## INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G653 5306

| OP #         | OPERATION NAME                                                                                                                         | READINGS                           | DATE    | INITIAL |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|---------|---------|
| 420 &<br>430 | ASSEMBLE ACTION<br>ASSEMBLE TO STOCK                                                                                                   |                                    | 1-26-06 | RTZ     |
| 440          | PROOF                                                                                                                                  |                                    | 1-26-06 | AC      |
| 460          | CHECK HEADSPACE                                                                                                                        | MAGNA-FLUX<br>INSPECTED            | 1-26-06 | AC      |
| 470          | DIS-ASSEMBLE ACTION                                                                                                                    | JAN 30 2006                        | 1-27-06 | RTZ     |
| 480 &<br>490 | MAGNAFLUX BBL ACTION<br>MAGNAFLUX BOLT                                                                                                 | OP #<br>480<br>OPERATOR <u>CPD</u> | 1-30-06 | APD     |
| 500          | ROLLMARK CALIBER                                                                                                                       |                                    | 1-30-06 | CW      |
| 510          | DRILL AND TAP<br>SIGHT HOLES                                                                                                           |                                    | 1-27-06 | TRW     |
| 520          | GOFF BLAST BBL / REC                                                                                                                   |                                    | 1-31-06 | WB      |
| 530 &<br>540 | APPLY COATINGS<br>(BARREL ACTION)                                                                                                      |                                    |         |         |
|              | (BOLT)                                                                                                                                 |                                    | 2/3/06  | RB      |
| 560          | RE-ASSEMBLE ACTION                                                                                                                     |                                    |         |         |
|              | A) CLEAN INSIDE OF<br>BOLT ASSEMBLY                                                                                                    |                                    | 2/7/06  | mgf     |
|              | B) INSPECT REAR FIRING<br>PIN HOLE FOR CHAMFER<br>IN BOLT HEAD                                                                         |                                    | 2/7/06  | mgf     |
|              | C) INSPECT EJECTOR<br>HOLE FOR CHAMFER                                                                                                 |                                    | 2/7/06  | mgf     |
|              | D) OIL FIRING PIN ASSEMBLY                                                                                                             |                                    | 2-9-06  | AC      |
|              | E) ADJUST TRIGGER PULL<br>TO MIN. SETTING AND<br>STAKE <span style="border: 1px solid black; padding: 2px;">2.50 LBS +/- .5 LBS</span> |                                    |         |         |

REV-8405

| OP # OPERATION NAME |                                                                        | READINGS        |              |              | DATE        | INITIAL     |         |     |
|---------------------|------------------------------------------------------------------------|-----------------|--------------|--------------|-------------|-------------|---------|-----|
| 560                 | F) SAFETY ON FORCE <div>2 LBS MIN<br/>10 LBS MAX</div>                 | <u>4.0</u>      | <u>4.0</u>   | <u>4.0</u>   | 3-15-06     | RA          |         |     |
| CONT.               | G) SAFETY OFF FORCE <div>2 LBS MIN</div>                               | <u>2.0</u>      | <u>2.0</u>   | <u>2.0</u>   | 3-15-06     | RA          |         |     |
|                     | H) TRIGGER PULL TEST<br>AND RETAINABILITY                              |                 |              |              |             |             |         |     |
|                     | I) FIRING PIN INDENT <div>.020 MIN</div>                               | <u>1.024</u>    | <u>1.023</u> | <u>1.023</u> | 3-15-06     | RA          |         |     |
|                     | J) ASSEMBLE STOCK                                                      |                 |              |              | 2-16-06     | RT          |         |     |
|                     | K) ASSEMBLE SWIVEL<br>STUDS                                            |                 |              |              | 3/27/06     | MTJ         |         |     |
|                     | L) ATTACH FRONT AND<br>REAR SIGHT ASSY'S                               |                 |              |              | 2-16-06     | RT          |         |     |
|                     | M) IRON SIGHT<br>ALIGNMENT                                             |                 |              |              | 2-16-06     | RT          |         |     |
|                     | N) DETACH FRONT AND<br>REAR SIGHTS AND PLACE<br>IN NUMBERED CONTAINER  |                 |              |              | 2-16-06     | RT          |         |     |
| 640 &<br>650        | FUNCTION TEST AND<br>TARGET                                            | <div>PASS</div> | FAIL         |              | 2-17-06     | TRW         |         |     |
|                     |                                                                        | <div>PASS</div> | FAIL         |              |             |             |         |     |
|                     | MALFUNCTION                                                            | CORRECTION      |              |              |             |             |         |     |
|                     | MALFUNCTION                                                            | CORRECTION      |              |              |             |             |         |     |
|                     | MALFUNCTION                                                            | CORRECTION      |              |              |             |             |         |     |
|                     | MALFUNCTION                                                            | CORRECTION      |              |              |             |             |         |     |
| 660                 | INSPECT FOR LIVE AMMO                                                  |                 |              |              | 2/17/06     | R.P.        |         |     |
| 670                 | FINAL INSPECTION<br>A) HEADSPACE                                       |                 |              |              | 3/27/06     | MTJ         |         |     |
|                     | B) TRIGGER PULL <div>+/- .5 LBS<br/>MIN 2.50 LBS<br/>MAX 4.0 LBS</div> | <u>2.35</u>     | <u>2.35</u>  | <u>2.33</u>  | <u>2.47</u> | <u>2.33</u> | 2-22-06 | MTJ |
|                     | C) FUNCTION                                                            |                 |              |              | 3/27/06     | MTJ         |         |     |
| 690                 | PACK                                                                   |                 |              |              | 3-28-06     | RA          |         |     |

**BARBER - M24 0090815**
**AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS**

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

 DATE 2/8/06

 TESTER MTM + R.P.

|         | 2.50 LBS<br>INITIAL | 2.50 LBS AFTER<br>50 CYCLES | FINAL TEST & TO RESET<br>2.50 LBS |       | COMMENTS |
|---------|---------------------|-----------------------------|-----------------------------------|-------|----------|
| PULL #1 | 2.66                | 2.35                        |                                   | 2.77  |          |
| PULL #2 | 2.61                | 2.57                        |                                   | 2.57  |          |
| PULL #3 | 2.51                | 2.49                        |                                   | 2.74  |          |
| PULL #4 | 2.61                | 2.56                        |                                   | 2.65  |          |
| PULL #5 | 2.50                | 2.57                        |                                   | 2.49  |          |
| TOTAL   | 12.89               | 12.54                       |                                   | 13.22 |          |
| AVERAGE | 2.58                | 2.51                        |                                   | 2.64  |          |

|         | 3.00 LBS<br>INITIAL | 3.00 LBS AFTER<br>20 CYCLES |  | COMMENTS |
|---------|---------------------|-----------------------------|--|----------|
| PULL #1 | 3.15                | 3.01                        |  |          |
| PULL #2 | 3.14                | 3.09                        |  |          |
| PULL #3 | 3.10                | 3.03                        |  |          |
| PULL #4 | 3.12                | 3.09                        |  |          |
| PULL #5 | 3.13                | 3.05                        |  |          |
| TOTAL   | 15.64               | 15.27                       |  |          |
| AVERAGE | 3.13                | 3.05                        |  |          |

|         | 4.00 LBS<br>INITIAL | 4.00 LBS AFTER<br>20 CYCLES | MAX SETTING GREATER<br>THAN 4 LBS | RESET TO 4 LBS FOR<br>TARGET & ACCURACY |
|---------|---------------------|-----------------------------|-----------------------------------|-----------------------------------------|
| PULL #1 | 4.17                | 3.91                        |                                   | 4.10                                    |
| PULL #2 | 4.08                | 3.71                        |                                   | 4.11                                    |
| PULL #3 | 3.95                | 4.35                        |                                   | 3.87                                    |
| PULL #4 | 4.00                | 3.83                        |                                   | 4.04                                    |
| PULL #5 | 3.80                | 4.16                        |                                   | 3.96                                    |
| TOTAL   | 20.00               | 19.96                       |                                   | 20.08                                   |
| AVERAGE | 4.00                | 3.99                        |                                   | 4.01                                    |

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6535306.\_\_\_0

FILE DATE AND TIME: 02/17/2006 06:46

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.080 |
| The Average Y Centroid of the Five Target Set:              | -0.012 |
| The Average Point of Impact of the Five Target Set:         | 0.081  |
| The Average Mean Radius of the Five Target Set:             | 0.748  |
| The Distance from POA to Centroid Target #1:                | 0.141  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.263  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.040  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.338  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.207  |

**BARBER - M24 0090817**

SERIAL NUMBER: G6535306. 0  
 TARGET NUMBER: 1  
 FILE DATE: 02/17/2006  
 FILE TIME: 06:46

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.212 | -1.066 |
| 2:     | -0.954 | 0.668  |
| 3:     | -0.684 | -0.421 |
| 4:     | -0.339 | -0.225 |
| 5:     | -0.045 | 0.304  |
| 6:     | 0.224  | 0.076  |
| 7:     | 0.381  | 0.036  |
| 8:     | 0.495  | -0.170 |
| 9:     | 0.627  | -0.274 |
| 10:    | 0.832  | -0.305 |

X CENTROID: 0.033  
 Y CENTROID: -0.138  
 POA TO CENTROID: 0.141  
 HORZ SPREAD: 1.786  
 VERT SPREAD: 1.734  
 GROUP SPREAD: 2.034  
 MIN RADIUS: 0.287  
 MAX RADIUS: 1.274  
 MEAN RADIUS: 0.640  
 # IN 1 IN DIAMETER: 5  
 # IN 2 IN DIAMETER: 9  
 # in 3 IN DIAMETER: 10

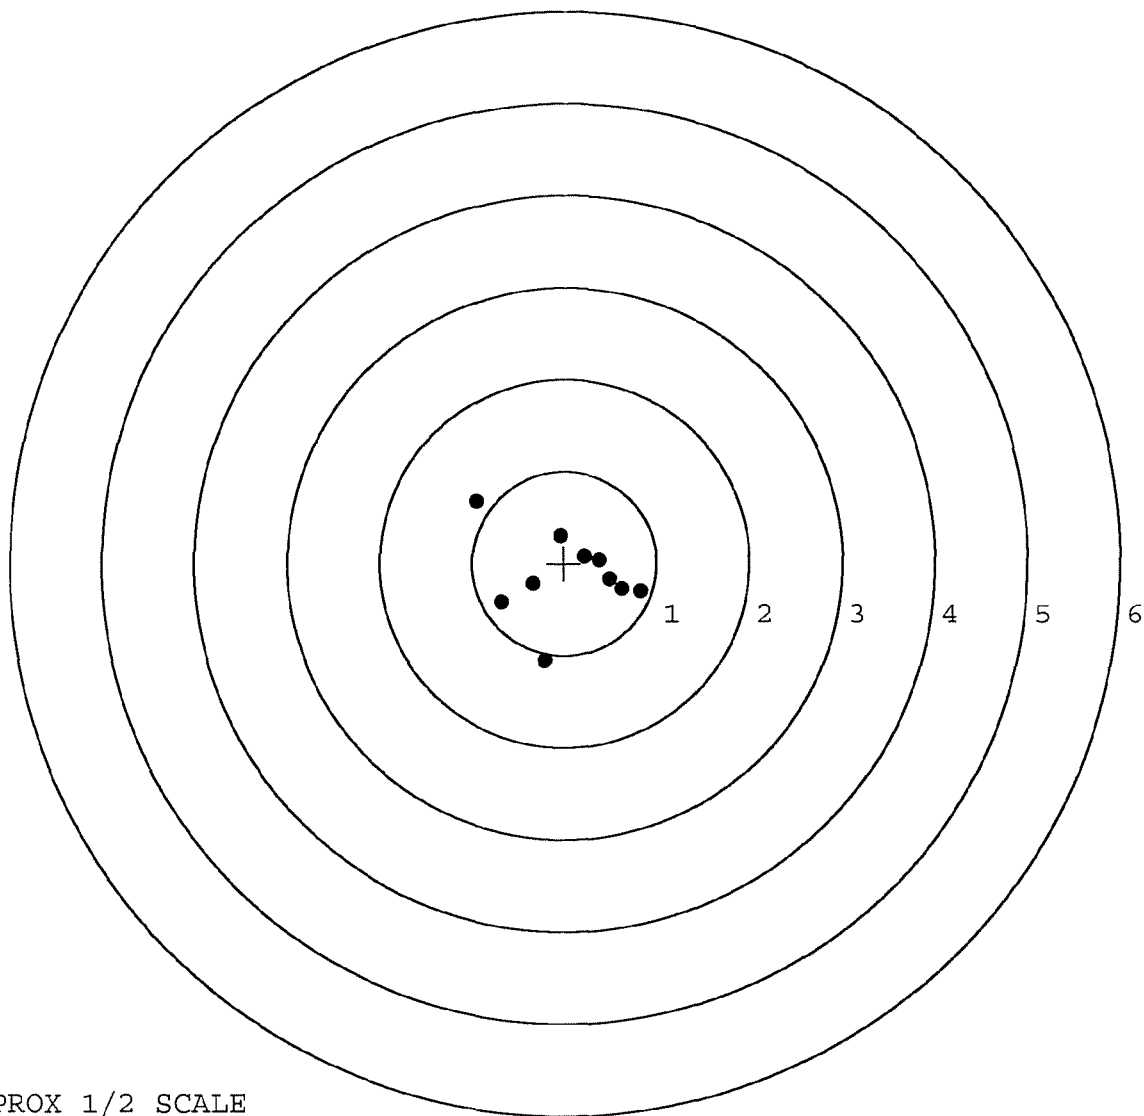

TARGET APPROX 1/2 SCALE

**BARBER - M24 0090818**

SERIAL NUMBER: G6535306. 0

TARGET NUMBER: 2

FILE DATE: 02/17/2006

FILE TIME: 06:46

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.546  | -0.755 |
| 2:     | 0.326  | -1.097 |
| 3:     | -0.785 | -1.299 |
| 4:     | 0.052  | 1.282  |
| 5:     | -0.621 | 0.745  |
| 6:     | -0.609 | 0.158  |
| 7:     | -0.373 | 0.104  |
| 8:     | -0.263 | 0.390  |
| 9:     | 0.236  | 0.419  |
| 10:    | 0.113  | 0.679  |

X CENTROID: -0.138

Y CENTROID: 0.063

POA TO CENTROID: 0.151

HORZ SPREAD: 1.331

VERT SPREAD: 2.581

GROUP SPREAD: 2.713

MIN RADIUS: 0.239


MAX RADIUS: 1.508

MEAN RADIUS: 0.814

# IN 1 IN DIAMETER: 3

# IN 2 IN DIAMETER: 6


# in 3 IN DIAMETER: 9

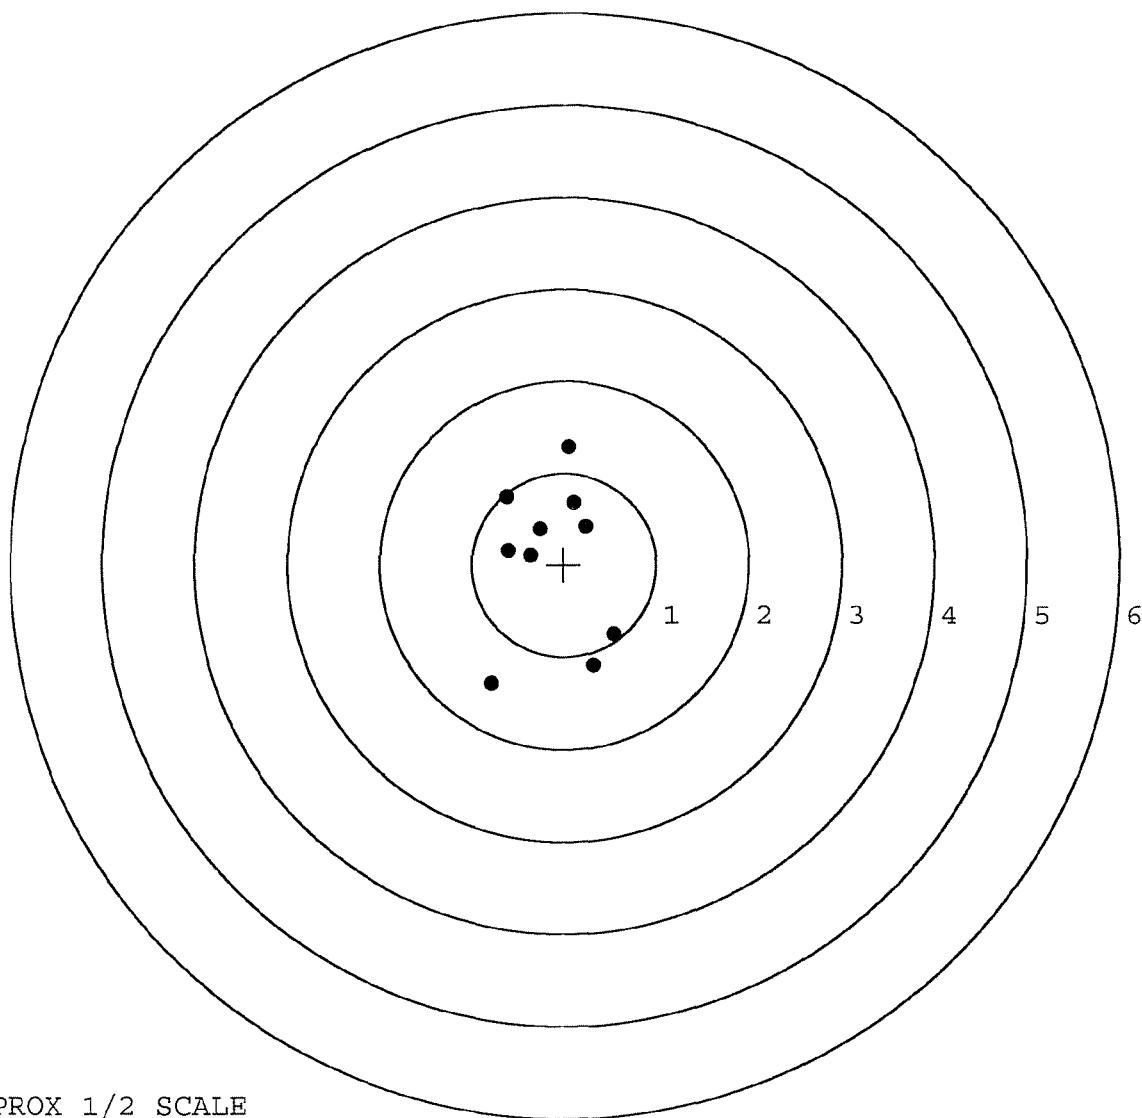

TARGET APPROX 1/2 SCALE

**BARBER - M24 0090819**

|                            |        |        |        |
|----------------------------|--------|--------|--------|
| SERIAL NUMBER: G6535306. 0 | POINT# | X      | Y      |
| TARGET NUMBER: 3           | 1:     | 0.082  | -1.050 |
| FILE DATE: 02/17/2006      | 2:     | -0.437 | -1.428 |
| FILE TIME: 06:46           | 3:     | -0.220 | -0.332 |
|                            | 4:     | 0.350  | -0.229 |
| X CENTROID: -0.002         | 5:     | -0.425 | 0.222  |
| Y CENTROID: -0.117         | 6:     | -1.014 | 0.093  |
| POA TO CENTROID: 0.117     | 7:     | 0.659  | -0.022 |
| HORZ SPREAD: 1.673         | 8:     | 0.618  | 0.250  |
| VERT SPREAD: 2.236         | 9:     | 0.337  | 0.515  |
| GROUP SPREAD: 2.285        | 10:    | 0.034  | 0.808  |
| MIN RADIUS: 0.306          |        |        |        |
| MAX RADIUS: 1.381          |        |        |        |
| MEAN RADIUS: 0.760         |        |        |        |
| # IN 1 IN DIAMETER: 2      |        |        |        |
| # IN 2 IN DIAMETER: 8      |        |        |        |
| # in 3 IN DIAMETER: 10     |        |        |        |

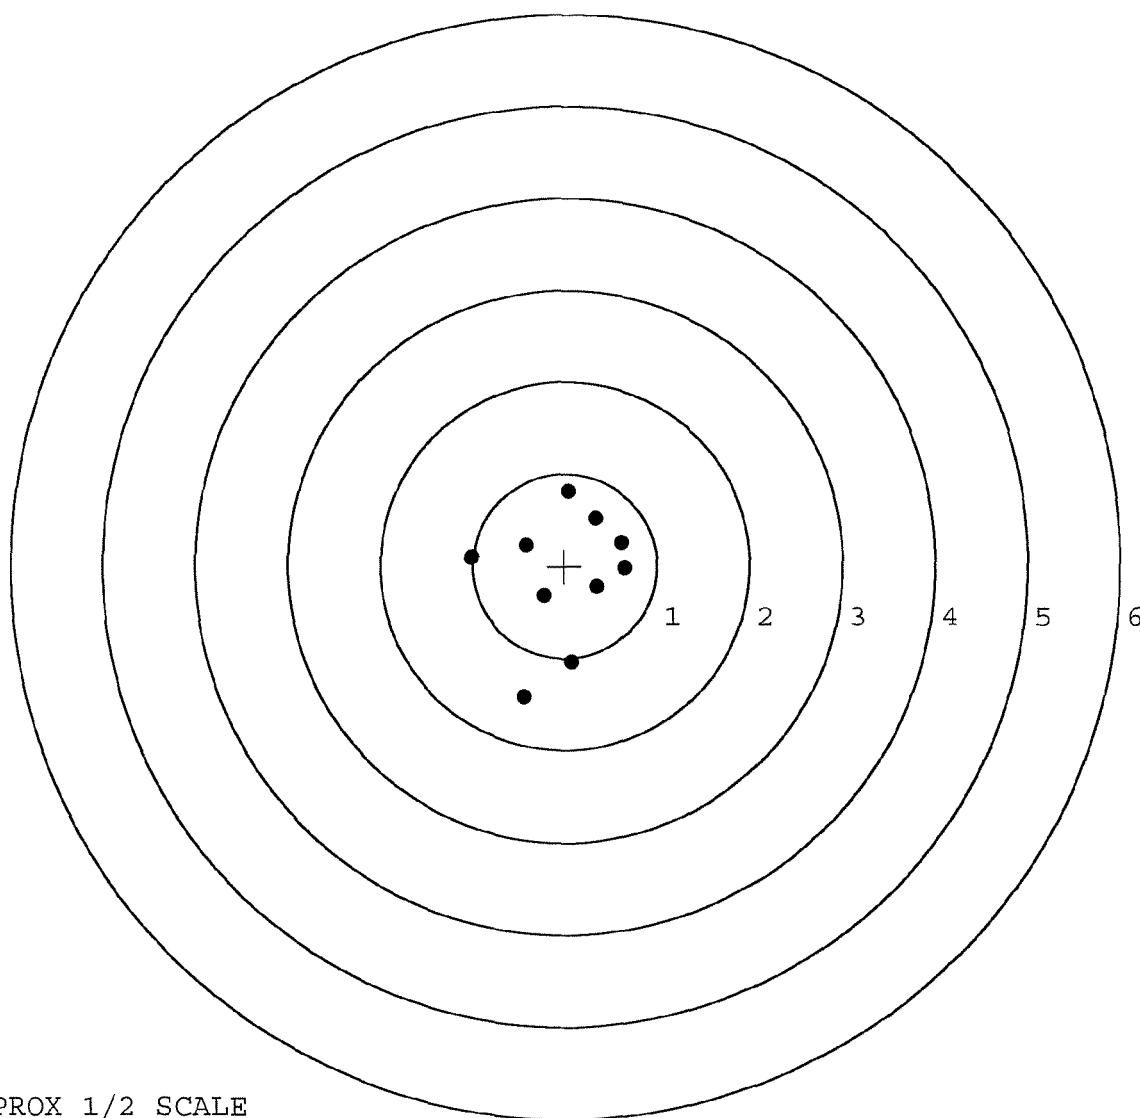

TARGET APPROX 1/2 SCALE

**BARBER - M24 0090820**

SERIAL NUMBER: G6535306. 0

TARGET NUMBER: 4

FILE DATE: 02/17/2006

FILE TIME: 06:46

| POINT# | X | Y |
|--------|---|---|
|--------|---|---|

|    |       |        |
|----|-------|--------|
| 1: | 0.688 | -0.357 |
|----|-------|--------|

|    |        |        |
|----|--------|--------|
| 2: | -0.123 | -0.848 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 3: | -1.092 | -0.647 |
|----|--------|--------|

|    |        |        |
|----|--------|--------|
| 4: | -0.189 | -0.292 |
|----|--------|--------|

|    |       |       |
|----|-------|-------|
| 5: | 0.197 | 0.229 |
|----|-------|-------|

|    |       |       |
|----|-------|-------|
| 6: | 0.085 | 0.314 |
|----|-------|-------|

|    |        |       |
|----|--------|-------|
| 7: | -0.141 | 0.411 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 8: | -0.255 | 0.052 |
|----|--------|-------|

|    |        |       |
|----|--------|-------|
| 9: | -0.461 | 0.080 |
|----|--------|-------|

|     |        |       |
|-----|--------|-------|
| 10: | -0.863 | 1.976 |
|-----|--------|-------|

X CENTROID: -0.215

Y CENTROID: 0.092

POA TO CENTROID: 0.234

HORZ SPREAD: 1.780

VERT SPREAD: 2.824

GROUP SPREAD: 2.919

MIN RADIUS: 0.056


MAX RADIUS: 1.992

MEAN RADIUS: 0.691

# IN 1 IN DIAMETER: 6

# IN 2 IN DIAMETER: 7

# in 3 IN DIAMETER: 9

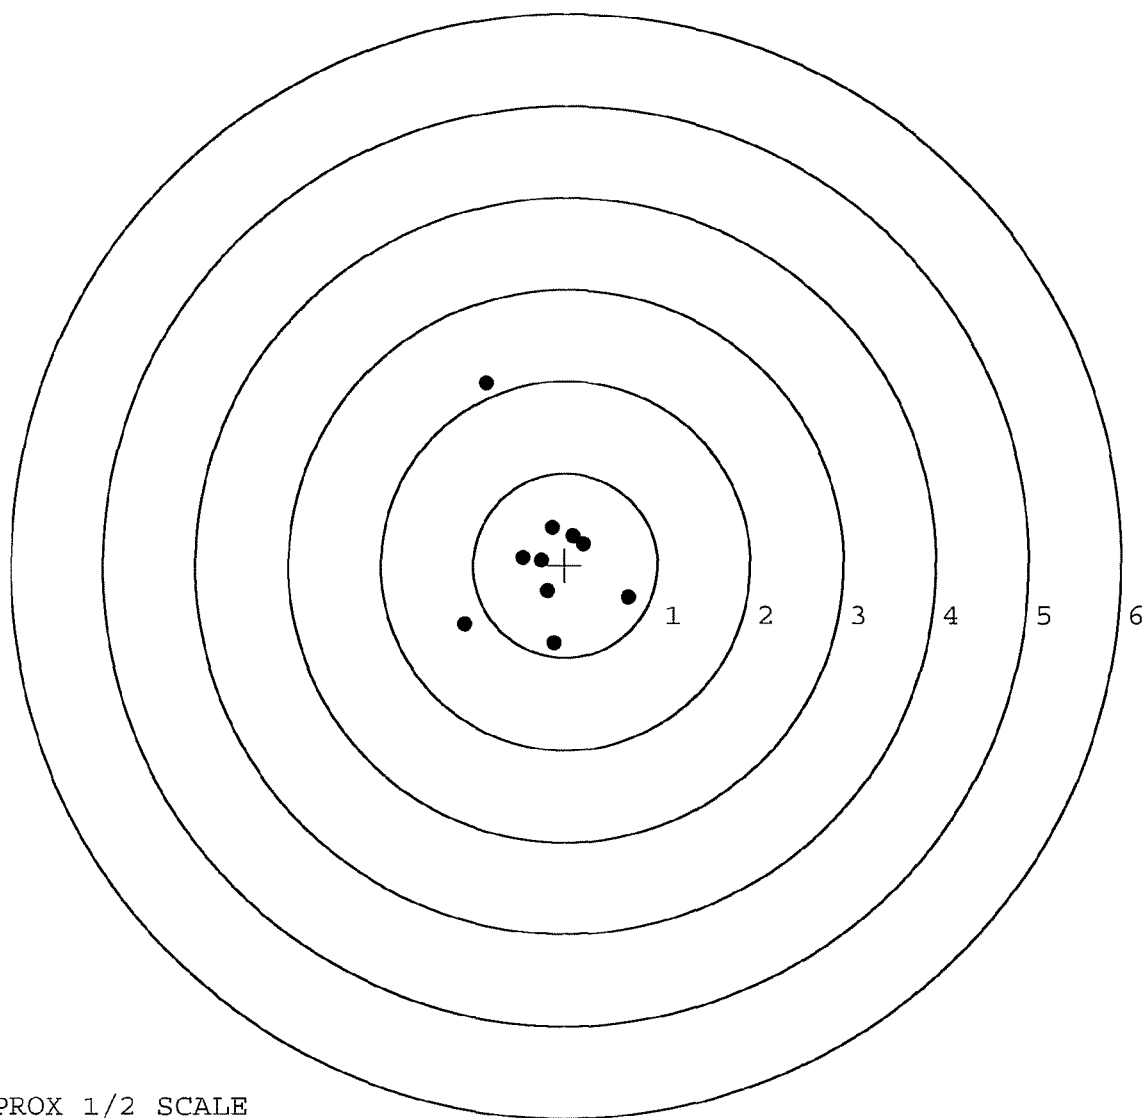


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6535306. 0  
 TARGET NUMBER: 5  
 FILE DATE: 02/17/2006  
 FILE TIME: 06:46

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.724  | -1.242 |
| 2:     | 0.374  | -0.853 |
| 3:     | 0.665  | -0.384 |
| 4:     | 0.171  | -0.141 |
| 5:     | -0.207 | -0.124 |
| 6:     | 0.398  | 0.259  |
| 7:     | -0.346 | 0.784  |
| 8:     | -0.633 | 0.476  |
| 9:     | -1.036 | 0.422  |
| 10:    | -0.876 | 1.187  |

X CENTROID: -0.077  
 Y CENTROID: 0.038  
 POA TO CENTROID: 0.086  
 HORZ SPREAD: 1.760  
 VERT SPREAD: 2.429  
 GROUP SPREAD: 2.909  
 MIN RADIUS: 0.208  
 MAX RADIUS: 1.510  
 MEAN RADIUS: 0.833  
 # IN 1 IN DIAMETER: 2  
 # IN 2 IN DIAMETER: 7  
 # in 3 IN DIAMETER: 9

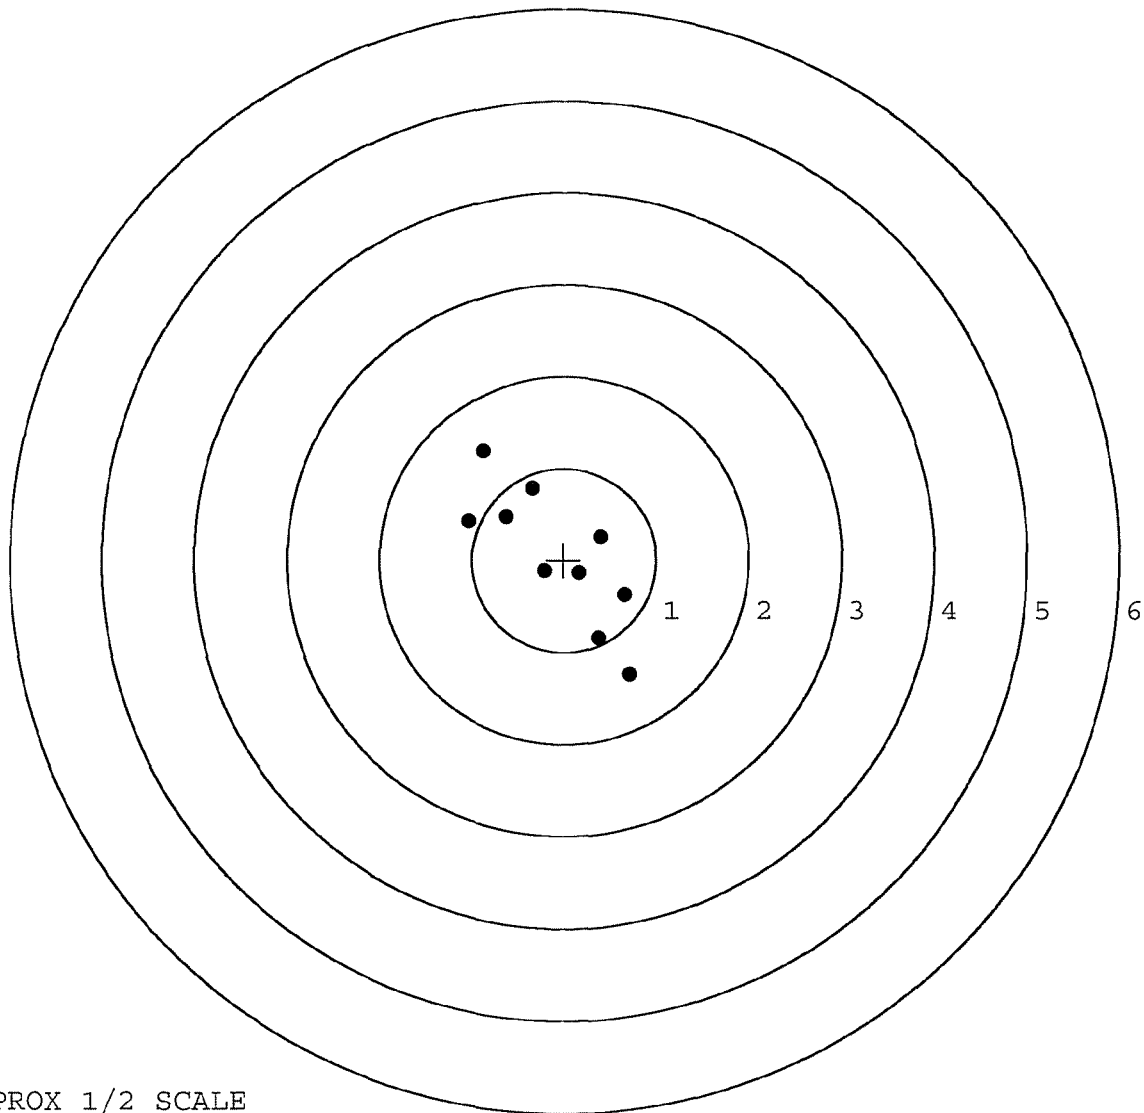

TARGET APPROX 1/2 SCALE