

G 6535410

BARBER - M24 0091992

**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

**UPC**



**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

**UPC**



SERIAL NO.



CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0091992 M2400992031

**M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)**  
**BOLT ACTION CENTERFIRE RIFLE**  
**24" BARREL 7.62 NATO**

- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

**G6535410**

**UPC**



## INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G6535410

| OP #         | OPERATION NAME                                                                                                                         | READINGS                                | DATE    | INITIAL |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|---------|---------|
| 420 &<br>430 | ASSEMBLE ACTION<br>ASSEMBLE TO STOCK                                                                                                   |                                         | 2-27-06 | RTZ     |
| 440          | PROOF                                                                                                                                  |                                         | 2/27/06 | MJP     |
| 460          | CHECK HEADSPACE                                                                                                                        | MAGNA-FLUX<br>INSPECTED                 | 2/27/06 | MJP     |
| 470          | DIS-ASSEMBLE ACTION                                                                                                                    |                                         | 2-28-06 | RTZ     |
| 480 &<br>490 | MAGNAFLUX BBL ACTION<br>MAGNAFLUX BOLT                                                                                                 | OP # 480<br>MAR 01 2006<br>OPERATOR APD | 3-1-06  | APD     |
| 500          | ROLLMARK CALIBER                                                                                                                       |                                         | 3-1-06  | CW      |
| 510          | DRILL AND TAP<br>SIGHT HOLES                                                                                                           |                                         | 2-28-06 | TRW     |
| 520          | GOFF BLAST BBL / REC                                                                                                                   |                                         | 3-2-06  | LB      |
| 530 &<br>540 | APPLY COATINGS<br>(BARREL ACTION)                                                                                                      |                                         | 3/10    | HP      |
|              | (BOLT)                                                                                                                                 |                                         |         |         |
| 560          | RE-ASSEMBLE ACTION                                                                                                                     |                                         |         |         |
|              | A) CLEAN INSIDE OF<br>BOLT ASSEMBLY                                                                                                    |                                         | 4/12/06 | MJP     |
|              | B) INSPECT REAR FIRING<br>PIN HOLE FOR CHAMFER<br>IN BOLT HEAD                                                                         |                                         | 4/12/06 | MJP     |
|              | C) INSPECT EJECTOR<br>HOLE FOR CHAMFER                                                                                                 |                                         | 4/12/06 | MJP     |
|              | D) OIL FIRING PIN ASSEMBLY                                                                                                             |                                         | 4-12-06 | Ac      |
|              | E) ADJUST TRIGGER PULL<br>TO MIN. SETTING AND<br>STAKE <span style="border: 1px solid black; padding: 2px;">2.50 LBS +/- .5 LBS</span> |                                         | 4-12-06 | Ac      |

REV-8405

| OP # OPERATION NAME |                                                                        | READINGS        |               |               | DATE        | INITIAL     |         |    |
|---------------------|------------------------------------------------------------------------|-----------------|---------------|---------------|-------------|-------------|---------|----|
| 560                 | F) SAFETY ON FORCE <div>2 LBS MIN<br/>10 LBS MAX</div>                 | <u>6 lbs.</u>   | <u>6 lbs.</u> | <u>6 lbs.</u> | 4-27-06     | L.P.D.      |         |    |
| CONT.               |                                                                        |                 |               |               |             |             |         |    |
|                     | G) SAFETY OFF FORCE <div>2 LBS MIN</div>                               | <u>2 lbs.</u>   | <u>2 lbs.</u> | <u>2 lbs.</u> | 4-27-06     | L.P.D.      |         |    |
|                     | H) TRIGGER PULL TEST<br>AND RETAINABILITY                              |                 |               |               | 4-27-06     | L.P.D.      |         |    |
|                     | I) FIRING PIN INDENT <div>.020 MIN</div>                               | <u>.023</u>     | <u>.022</u>   | <u>.022</u>   | 4-25-06     | AC          |         |    |
|                     | J) ASSEMBLE STOCK                                                      |                 |               |               | 4-12-06     | AC          |         |    |
|                     | K) ASSEMBLE SWIVEL<br>STUDS                                            |                 |               |               | 4-27-06     | L.P.D.      |         |    |
|                     | L) ATTACH FRONT AND<br>REAR SIGHT ASSY'S                               |                 |               |               | 4-12-06     | AC          |         |    |
|                     | M) IRON SIGHT<br>ALIGNMENT                                             |                 |               |               | 4-12-06     | AC          |         |    |
|                     | N) DETACH FRONT AND<br>REAR SIGHTS AND PLACE<br>IN NUMBERED CONTAINER  |                 |               |               | 4-12-06     | AC          |         |    |
| 640 &<br>650        | FUNCTION TEST AND<br>TARGET                                            | <div>PASS</div> | FAIL          |               |             |             |         |    |
|                     |                                                                        | <div>PASS</div> | FAIL          |               | 4-19-06     | L.P.D.      |         |    |
|                     | MALFUNCTION                                                            | CORRECTION      |               |               |             |             |         |    |
|                     | MALFUNCTION                                                            | CORRECTION      |               |               |             |             |         |    |
|                     | MALFUNCTION                                                            | CORRECTION      |               |               |             |             |         |    |
|                     | MALFUNCTION                                                            | CORRECTION      |               |               |             |             |         |    |
| 660                 | INSPECT FOR LIVE AMMO                                                  |                 |               |               | 4/19/06     | MTM         |         |    |
| 670                 | FINAL INSPECTION<br>A) HEADSPACE                                       |                 |               |               | 4-27-06     | L.P.D.      |         |    |
|                     | B) TRIGGER PULL <div>+/- .5 LBS<br/>MIN 2.50 LBS<br/>MAX 4.0 LBS</div> | <u>2.96</u>     | <u>2.54</u>   | <u>2.69</u>   | <u>2.98</u> | <u>2.94</u> | 4-26-06 | AC |
|                     | C) FUNCTION                                                            |                 |               |               | 4-27-06     | L.P.D.      |         |    |
| 690                 | PACK                                                                   |                 |               |               | 5-28-06     | DA          |         |    |

**AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS**

2.50 LBS (plus or minus 0.50 LBS)  
3.00 LBS (plus or minus 0.75 LBS)  
4.00 LBS (plus or minus 1.00 LBS)

DATE 4-12-06

TESTER R.P.

|         | 2.50 LBS<br>INITIAL | 2.50 LBS AFTER<br>50 CYCLES | FINAL TEST & TO RESET<br>2.50 LBS |      | COMMENTS |
|---------|---------------------|-----------------------------|-----------------------------------|------|----------|
| PULL #1 | 252                 | 250                         |                                   | 259  |          |
| PULL #2 | 241                 | 255                         |                                   | 253  |          |
| PULL #3 | 242                 | 249                         |                                   | 252  |          |
| PULL #4 | 246                 | 247                         |                                   | 249  |          |
| PULL #5 | 252                 | 244                         |                                   | 253  |          |
| TOTAL   | 1233                | 1245                        |                                   | 1266 |          |
| AVERAGE | 246                 | 249                         |                                   | 253  |          |

|         | 3.00 LBS<br>INITIAL | 3.00 LBS AFTER<br>20 CYCLES |  | COMMENTS |
|---------|---------------------|-----------------------------|--|----------|
| PULL #1 | 301                 | 312                         |  |          |
| PULL #2 | 305                 | 301                         |  |          |
| PULL #3 | 318                 | 310                         |  |          |
| PULL #4 | 315                 | 310                         |  |          |
| PULL #5 | 320                 | 301                         |  |          |
| TOTAL   | 1559                | 1534                        |  |          |
| AVERAGE | 311                 | 306                         |  |          |

|         | 4.00 LBS<br>INITIAL | 4.00 LBS AFTER<br>20 CYCLES | MAX SETTING GREATER<br>THAN 4 LBS | RESET TO 4 LBS FOR<br>TARGET & ACCURACY |
|---------|---------------------|-----------------------------|-----------------------------------|-----------------------------------------|
| PULL #1 | 400                 | 418                         |                                   | 401                                     |
| PULL #2 | 402                 | 422                         |                                   | 417                                     |
| PULL #3 | 415                 | 423                         |                                   | 417                                     |
| PULL #4 | 401                 | 413                         |                                   | 414                                     |
| PULL #5 | 411                 | 408                         |                                   | 414                                     |
| TOTAL   | 2029                | 2084                        |                                   | 2063                                    |
| AVERAGE | 405                 | 416                         |                                   | 412                                     |

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION


FIREARM SERIAL NUMBER / DATASET NAME: G6535410.\_\_\_0

FILE DATE AND TIME: 04/19/2006 16:29

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.045 |
| The Average Y Centroid of the Five Target Set:              | 0.074  |
| The Average Point of Impact of the Five Target Set:         | 0.087  |
| The Average Mean Radius of the Five Target Set:             | 0.557  |
| The Distance from POA to Centroid Target #1:                | 0.096  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.105  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.123  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.275  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.205  |

|                            |        |        |        |
|----------------------------|--------|--------|--------|
| SERIAL NUMBER: G6535410. 0 | POINT# | X      | Y      |
| TARGET NUMBER: 1           | 1:     | 0.337  | 0.477  |
| FILE DATE: 04/19/2006      | 2:     | 0.151  | 0.600  |
| FILE TIME: 16:29           | 3:     | 0.152  | 0.855  |
|                            | 4:     | -0.063 | 0.833  |
| X CENTROID: 0.034          | 5:     | -0.822 | 0.450  |
| Y CENTROID: 0.090          | 6:     | -0.619 | 0.129  |
| POA TO CENTROID: 0.096     | 7:     | -0.336 | -0.276 |
| HORZ SPREAD: 1.528         | 8:     | 0.381  | -0.468 |
| VERT SPREAD: 1.901         | 9:     | 0.451  | -0.656 |
| GROUP SPREAD: 2.138        | 10:    | 0.706  | -1.046 |
| MIN RADIUS: 0.492          |        |        |        |
| MAX RADIUS: 1.320          |        |        |        |
| MEAN RADIUS: 0.747         |        |        |        |
| # IN 1 IN DIAMETER: 1      |        |        |        |
| # IN 2 IN DIAMETER: 9      |        |        |        |
| # in 3 IN DIAMETER: 10     |        |        |        |

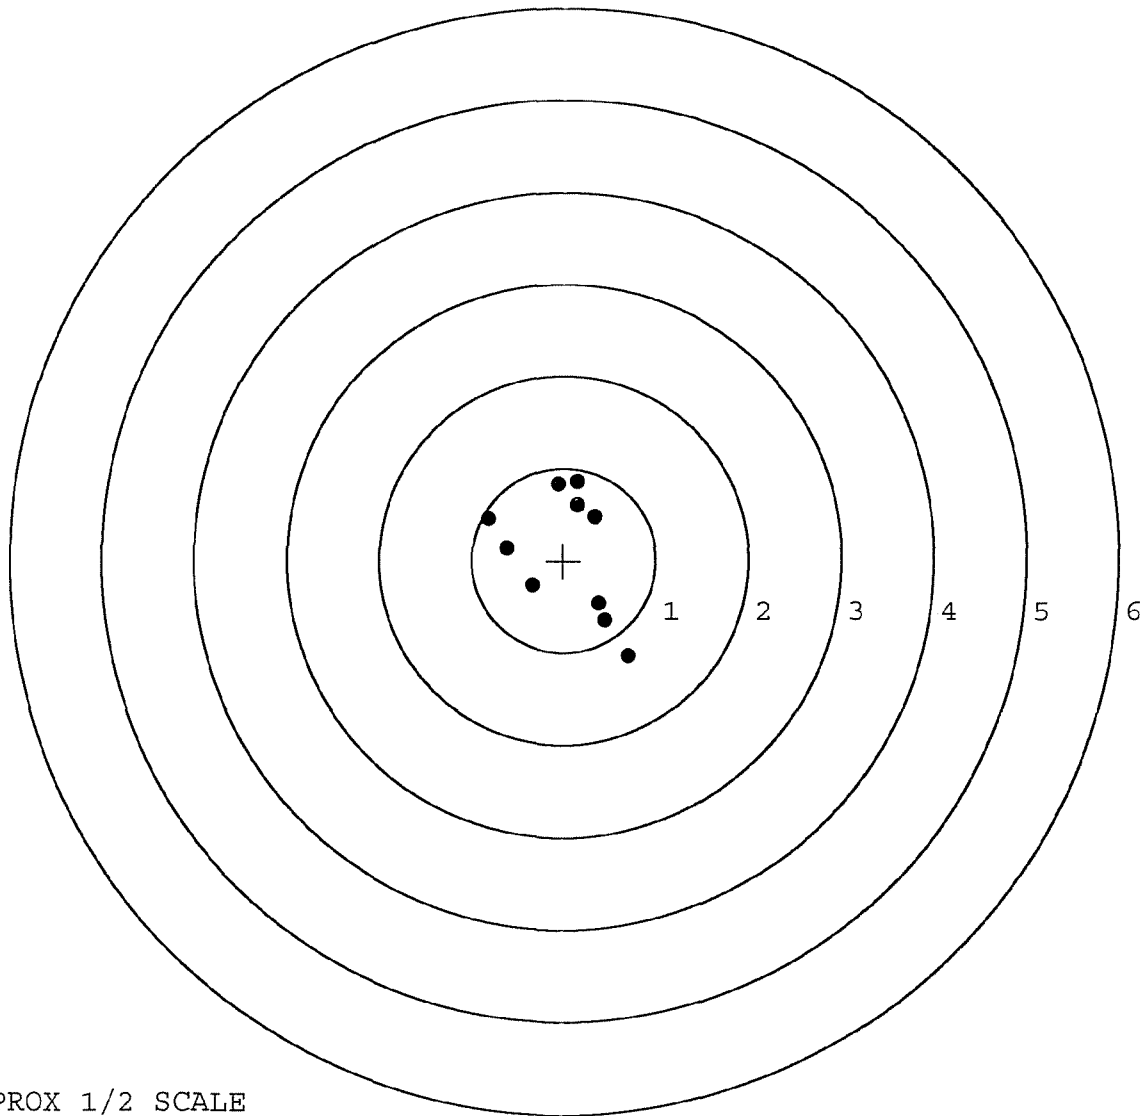


TARGET APPROX 1/2 SCALE

**BARBER - M24 0091999**

SERIAL NUMBER: G6535410. \_\_0  
 TARGET NUMBER: 2  
 FILE DATE: 04/19/2006  
 FILE TIME: 16:29

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.142  | 0.205  |
| 2:     | -0.055 | 0.252  |
| 3:     | 0.131  | 0.603  |
| 4:     | 0.026  | 0.189  |
| 5:     | -0.166 | -0.206 |
| 6:     | -0.351 | -0.413 |
| 7:     | -0.725 | -0.178 |
| 8:     | -0.062 | -0.139 |
| 9:     | 0.340  | -0.176 |
| 10:    | 0.828  | -0.267 |

X CENTROID: 0.011  
 Y CENTROID: -0.013  
 POA TO CENTROID: 0.017  
 HORZ SPREAD: 1.553  
 VERT SPREAD: 1.016  
 GROUP SPREAD: 1.556  
 MIN RADIUS: 0.146  
 MAX RADIUS: 0.856  
 MEAN RADIUS: 0.428  
 # IN 1 IN DIAMETER: 6  
 # IN 2 IN DIAMETER: 10  
 # in 3 IN DIAMETER: 10

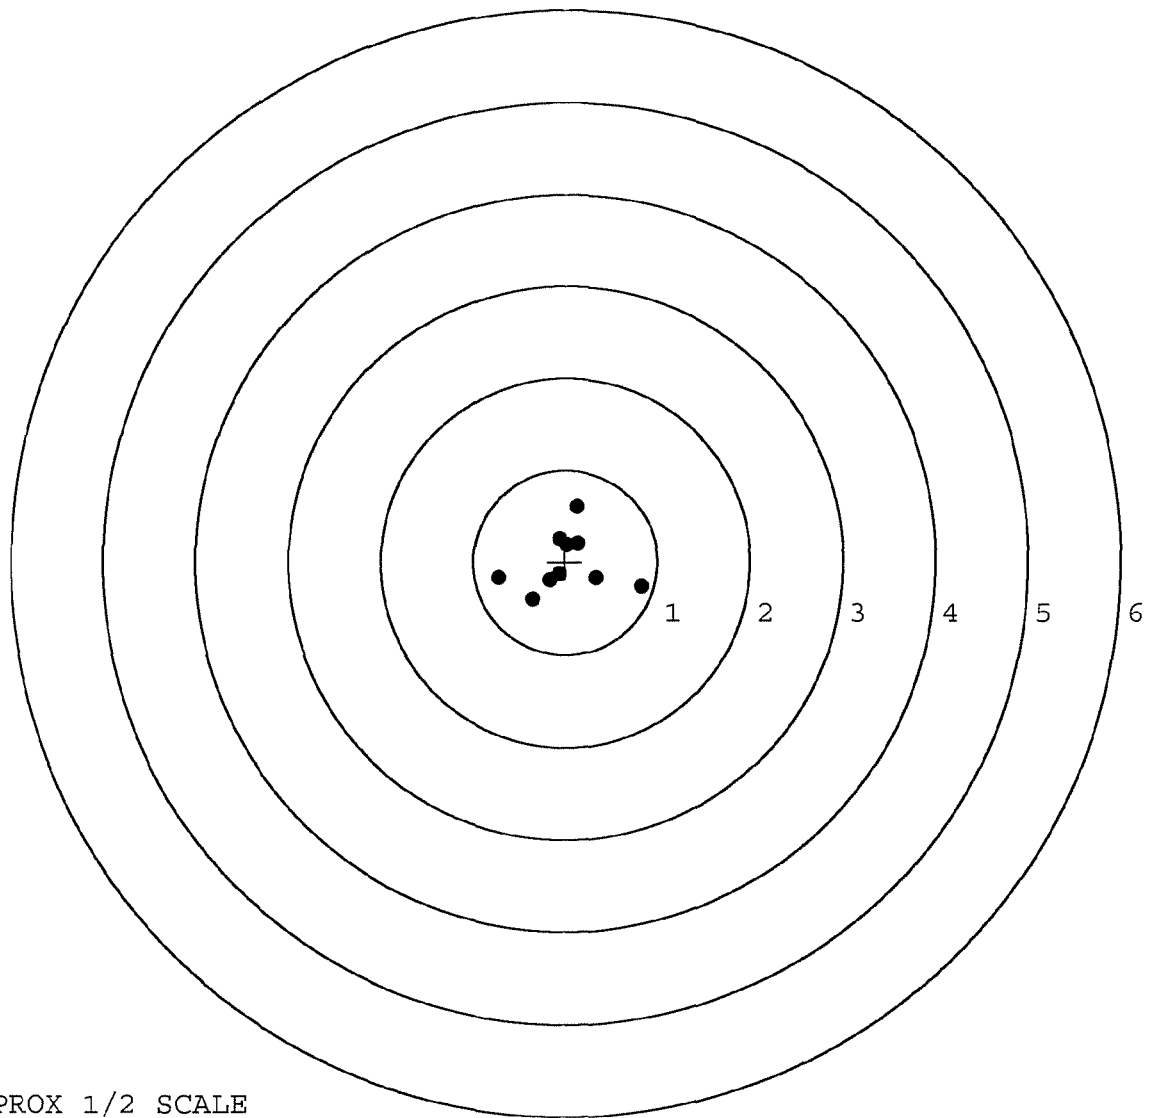

TARGET APPROX 1/2 SCALE

**BARBER - M24 0092000**

SERIAL NUMBER: G6535410. 0

TARGET NUMBER: 3

FILE DATE: 04/19/2006

FILE TIME: 16:29

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.314  | 0.225  |
| 2:     | -0.096 | 0.312  |
| 3:     | 0.282  | 0.637  |
| 4:     | 0.323  | 0.433  |
| 5:     | -0.065 | 0.044  |
| 6:     | -0.205 | -0.229 |
| 7:     | -0.080 | -0.390 |
| 8:     | 0.172  | -0.454 |
| 9:     | 0.209  | -0.498 |
| 10:    | 0.356  | -0.051 |

X CENTROID: 0.121

Y CENTROID: 0.003

POA TO CENTROID: 0.121

HORZ SPREAD: 0.561

VERT SPREAD: 1.135

GROUP SPREAD: 1.137

MIN RADIUS: 0.190


MAX RADIUS: 0.654

MEAN RADIUS: 0.404

# IN 1 IN DIAMETER: 8

# IN 2 IN DIAMETER: 10

# in 3 IN DIAMETER: 10

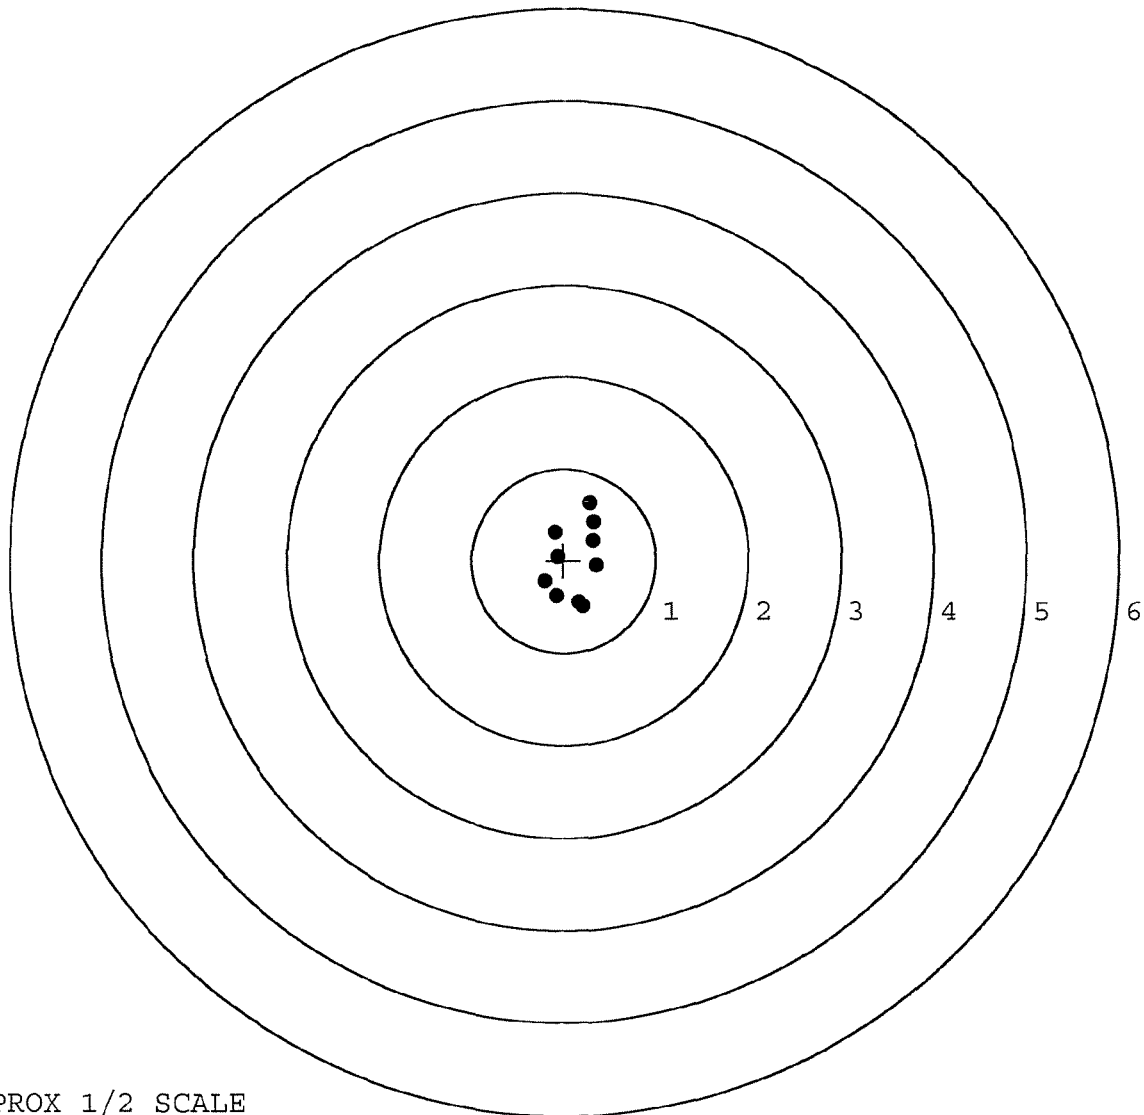

TARGET APPROX 1/2 SCALE

**BARBER - M24 0092001**

SERIAL NUMBER: G6535410. 0

TARGET NUMBER: 4

FILE DATE: 04/19/2006

FILE TIME: 16:29

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.054 | 1.194  |
| 2:     | -0.379 | 1.393  |
| 3:     | 0.078  | 0.376  |
| 4:     | -0.116 | 0.481  |
| 5:     | -0.394 | 0.147  |
| 6:     | -0.929 | 0.108  |
| 7:     | -0.218 | -0.411 |
| 8:     | -0.579 | -0.733 |
| 9:     | -0.095 | -0.307 |
| 10:    | 0.497  | -0.275 |

X CENTROID: -0.219

Y CENTROID: 0.197

POA TO CENTROID: 0.295

HORZ SPREAD: 1.426

VERT SPREAD: 2.126

GROUP SPREAD: 2.135

MIN RADIUS: 0.182


MAX RADIUS: 1.206

MEAN RADIUS: 0.675

# IN 1 IN DIAMETER: 3

# IN 2 IN DIAMETER: 8

# in 3 IN DIAMETER: 10

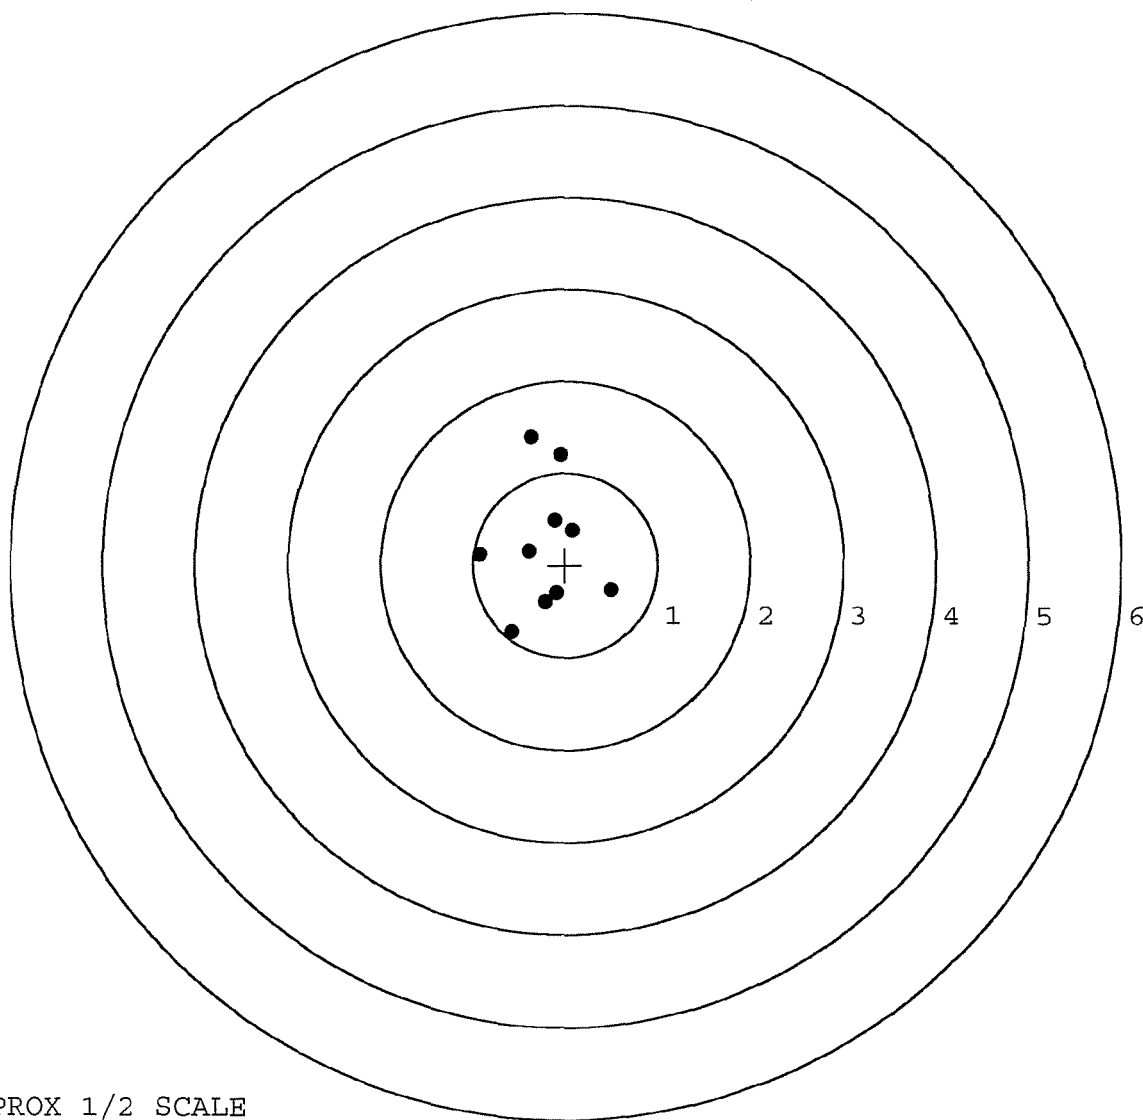


TARGET APPROX 1/2 SCALE

**BARBER - M24 0092002**

SERIAL NUMBER: G6535410. 0  
 TARGET NUMBER: 5  
 FILE DATE: 04/19/2006  
 FILE TIME: 16:29

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.881 | 0.515  |
| 2:     | -0.434 | 0.460  |
| 3:     | -0.177 | 0.310  |
| 4:     | 0.158  | 0.645  |
| 5:     | 0.279  | 0.402  |
| 6:     | 0.378  | 0.166  |
| 7:     | 0.010  | -0.179 |
| 8:     | -0.357 | -0.154 |
| 9:     | -0.363 | -0.520 |
| 10:    | -0.329 | -0.703 |

X CENTROID: -0.172  
 Y CENTROID: 0.094  
 POA TO CENTROID: 0.196  
 HORZ SPREAD: 1.259  
 VERT SPREAD: 1.348  
 GROUP SPREAD: 1.337  
 MIN RADIUS: 0.216  
 MAX RADIUS: 0.825  
 MEAN RADIUS: 0.533  
 # IN 1 IN DIAMETER: 4  
 # IN 2 IN DIAMETER: 10  
 # in 3 IN DIAMETER: 10

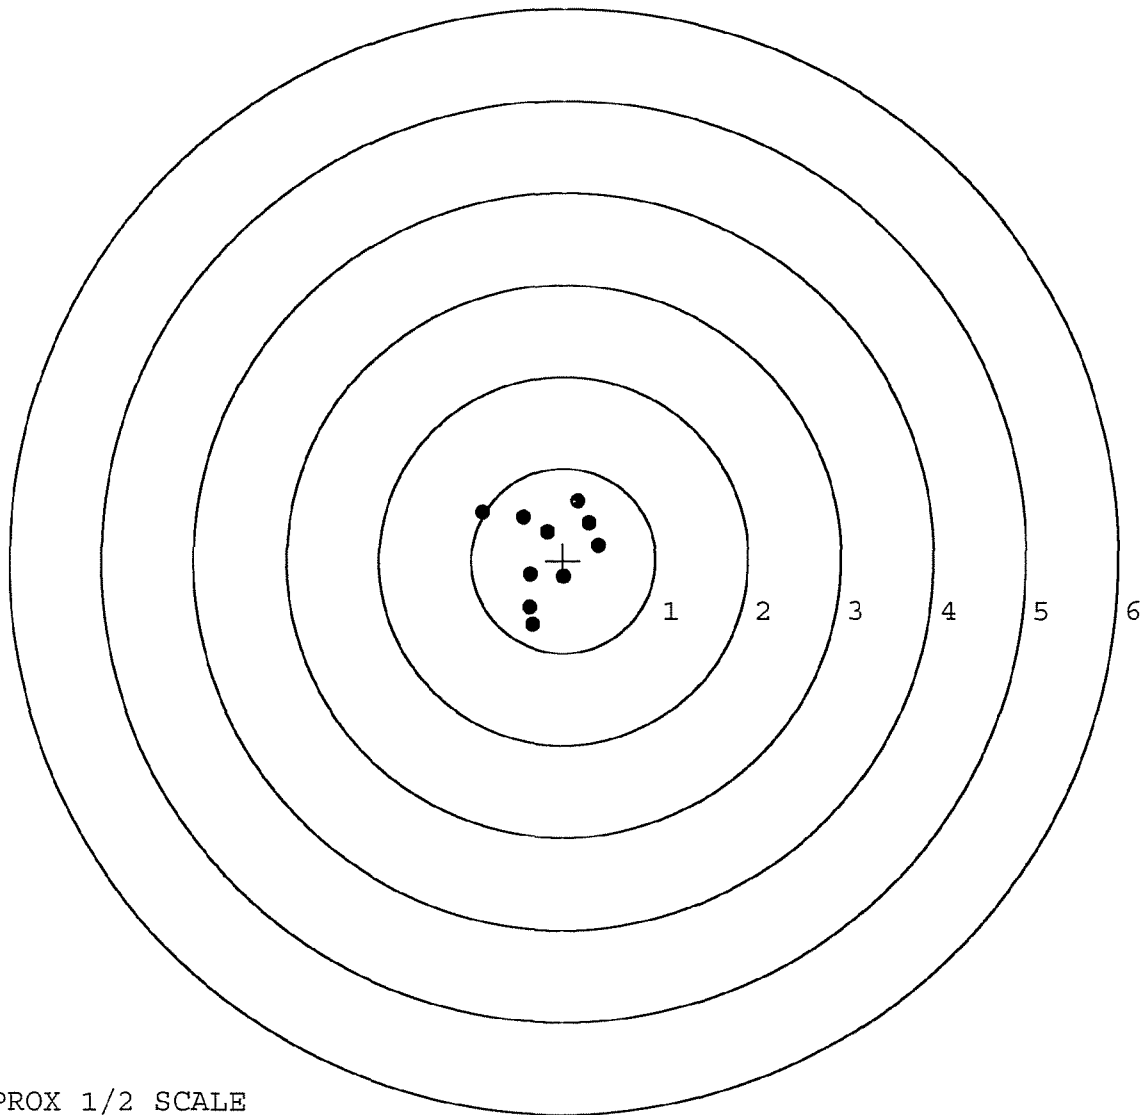

TARGET APPROX 1/2 SCALE