


6863582

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO
WITH BIPOD

proof of purchase



owner registration sticker




BM FORM

ORDER NO.	86470
BARREL LENGTH	24"
CAPACITY	6

G6863582

UPC



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL #

G 6863582

OP #	OPERATION NAME	READINGS	DATE	INITIAL
420	ASSEMBLE ACTION		5/28/09	SPD
430	ASSEMBLE TO STOCK		5-28-09	SP
440	PROOF		5-27-09	SPD
460	CHECK HEADSPACE	MAGNA - FLUX	5-27-09	SPD
470	DIS-ASSEMBLE ACTION		5-27-09	SPD
472	SERIALIZE BOLT HANDLE		5-28-09	RT
480	MAGNAFLUX BBL ACTION	OPERATOR (133)	5/30/09	(133)
490	MAGNAFLUX BOLT			
500	ROLLMARK CALIBER		6/1/09	RT
510	DRILL AND TAP SIGHT HOLES		5-28-09	SP
520	GOFF BLAST BBL / REC		6-1-09	PWD
540	APPLY COATINGS (BARREL ACTION)		6/11	—
545	(BOLT)			
560	RE-ASSEMBLE ACTION			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		6-12-09	SP
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		6-12-09	SP
	C) INSPECT EJECTOR HOLE FOR CHAMFER	INSPECT FOR LIVE AMMO	6-12-09	SP
	D) OIL FIRING PIN ASSEMBLY		6-29-09	SPD
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

F004 REV 5/2006


OP #	OPERATION NAME	READINGS	DATE	INITIAL
560	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>80</u> <u>80</u> <u>80</u>	8-10-09	LN
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>70</u> <u>70</u> <u>70</u>	8-10-09	LN
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.024</u> <u>.024</u> <u>.024</u>	8-10-09	LN
	J) ASSEMBLE STOCK		6-29-09	LPD
	K) ASSEMBLE SWIVEL STUDS		8-10-09	LN
	L) ATTACH FRONT AND REAR SIGHT ASSY'S			
	M) IRON SIGHT ALIGNMENT			
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER			
640 & 650	FUNCTION TEST AND TARGET	<u>PASS</u> FAIL <u>PASS</u> FAIL	7/28	RR
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
660	INSPECT FOR LIVE AMMO		7/28	TAR
670	FINAL INSPECTION A) HEADSPACE		8-10-09	LN
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>243</u> <u>248</u> <u>235</u> <u>248</u> <u>243</u>	8-6-09	LN
	C) FUNCTION		8-10-09	LN
690	PACK		8/15/09	Fuj

F004 REV 5/2006

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. ini. +/- .50 lbs.

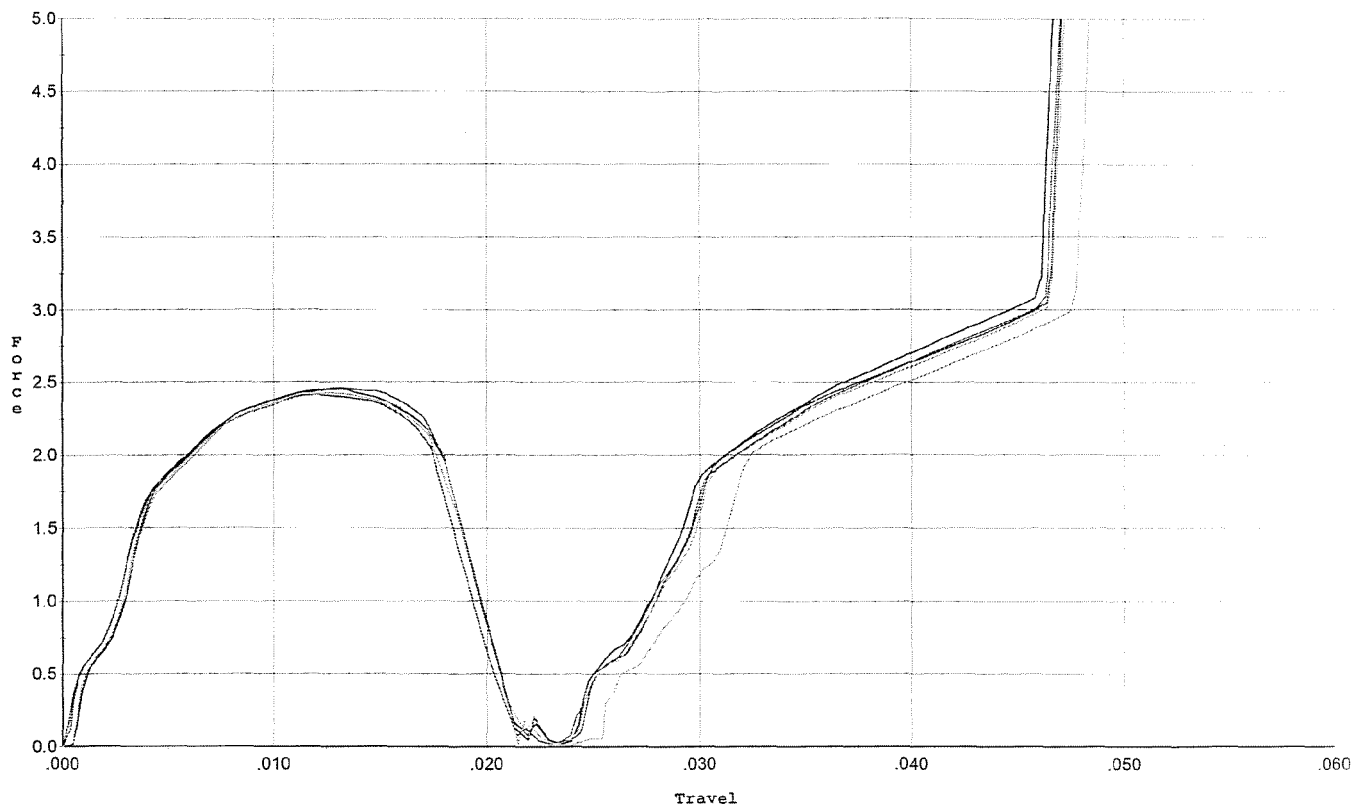


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.458	0.018	0.00	0.032	0.033		Set Trigger
2	2.458	0.018	0.00	0.032	0.032		Set Trigger
3	2.412	0.017	0.00	0.033	0.031		Set Trigger
4	2.415	0.019	0.00	0.033	0.033		Set Trigger
5	2.425	0.018	0.00	0.034	0.032		Set Trigger

Aug 2.43

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

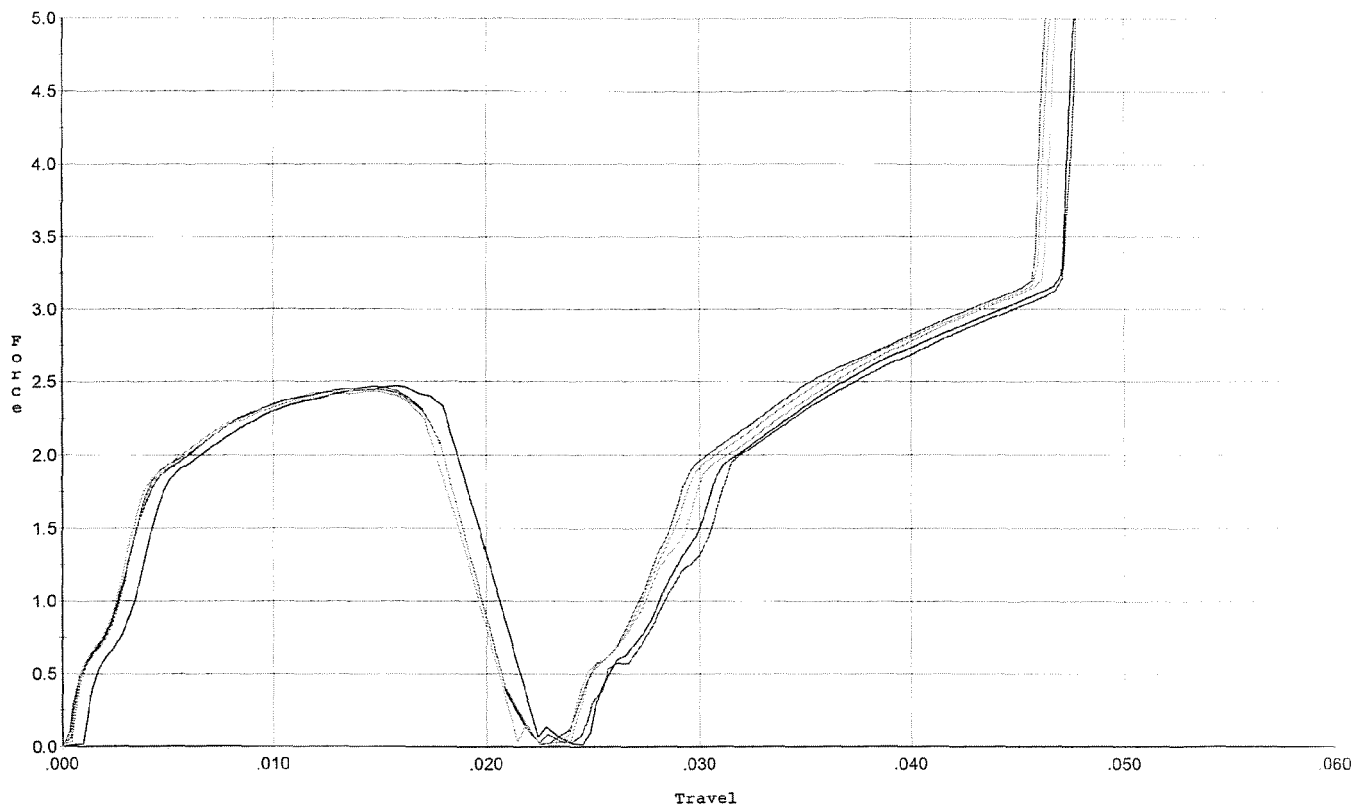


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.467	0.018	0.00	0.033	0.033		Set Trigger
2	2.469	0.020	0.00	0.032	0.035		Set Trigger
3	2.447	0.018	0.00	0.032	0.033		Set Trigger
4	2.439	0.019	0.00	0.032	0.034		Set Trigger
5	2.431	0.018	0.00	0.032	0.032		Set Trigger

Avg 2.45

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. ini. +/- .75 lbs.

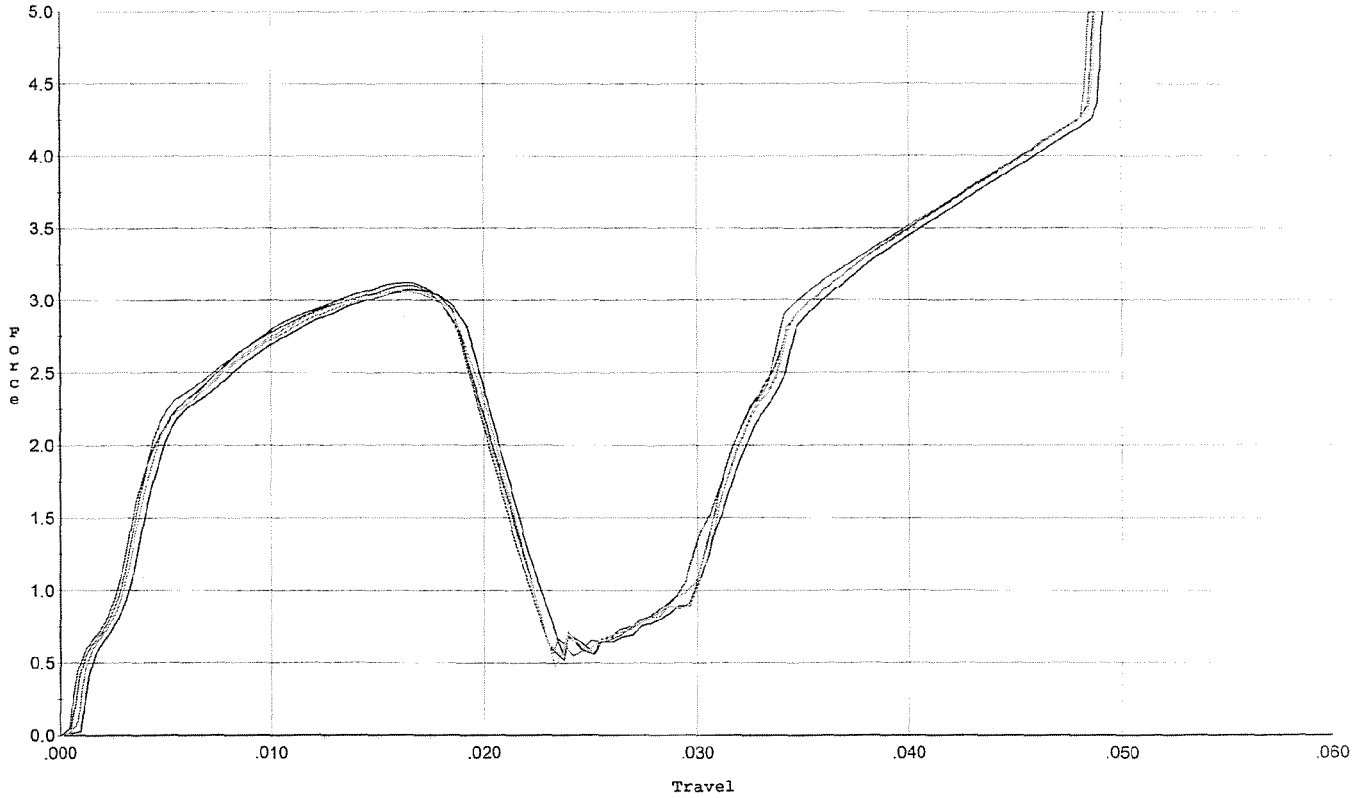


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.117	0.021	0.00	0.032	0.045		Set Trigger
2	3.072	0.019	0.00	0.032	0.041		Set Trigger
3	3.099	0.019	0.00	0.032	0.041		Set Trigger
4	3.064	0.020	0.00	0.032	0.043		Set Trigger
5	3.058	0.019	0.00	0.032	0.040		Set Trigger

Avg 3.08

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R.P. 6/18/09

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

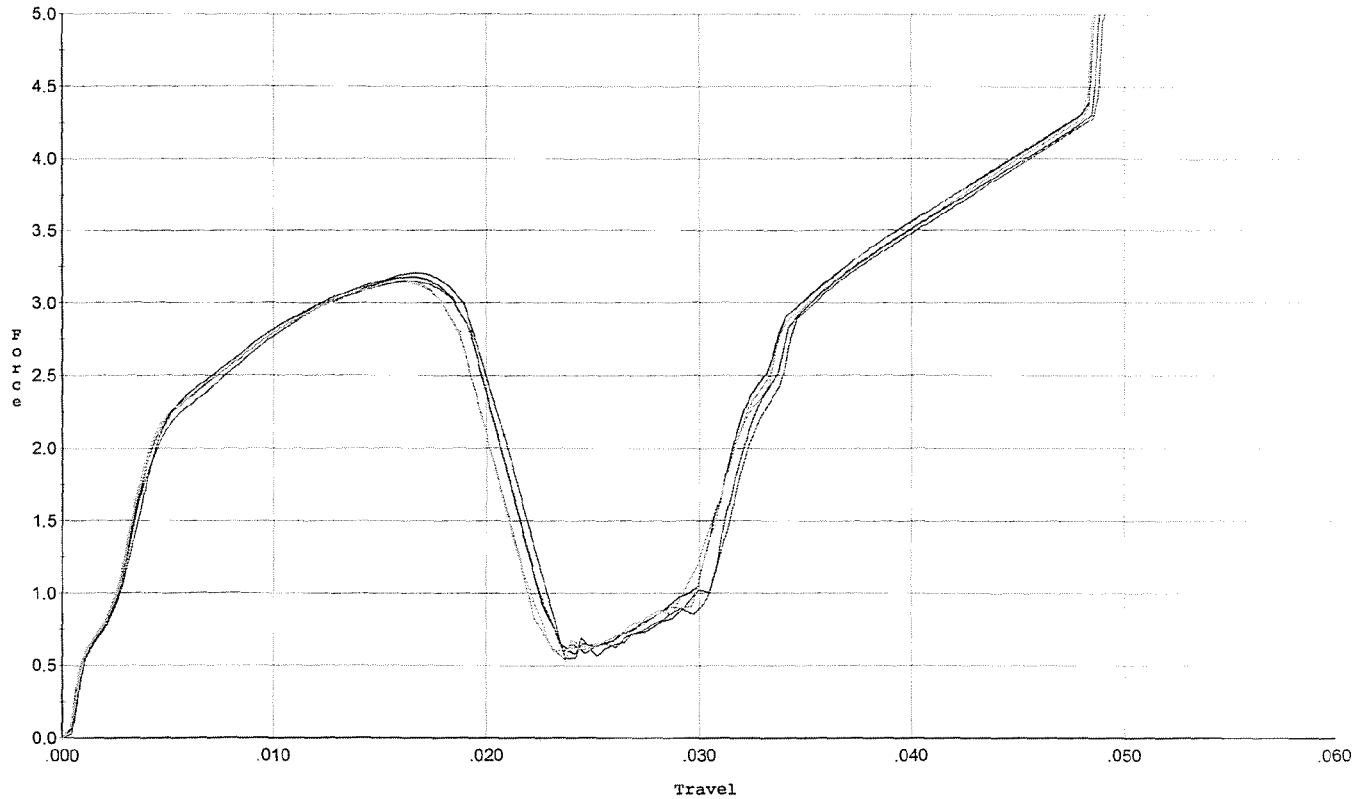


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.204	0.021	0.00	0.032	0.047		Set Trigger
2	3.175	0.019	0.00	0.032	0.043		Set Trigger
3	3.150	0.019	0.00	0.032	0.043		Set Trigger
4	3.142	0.019	0.00	0.032	0.042		Set Trigger
5	3.153	0.019	0.00	0.032	0.042		Set Trigger

Avg 3.16

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

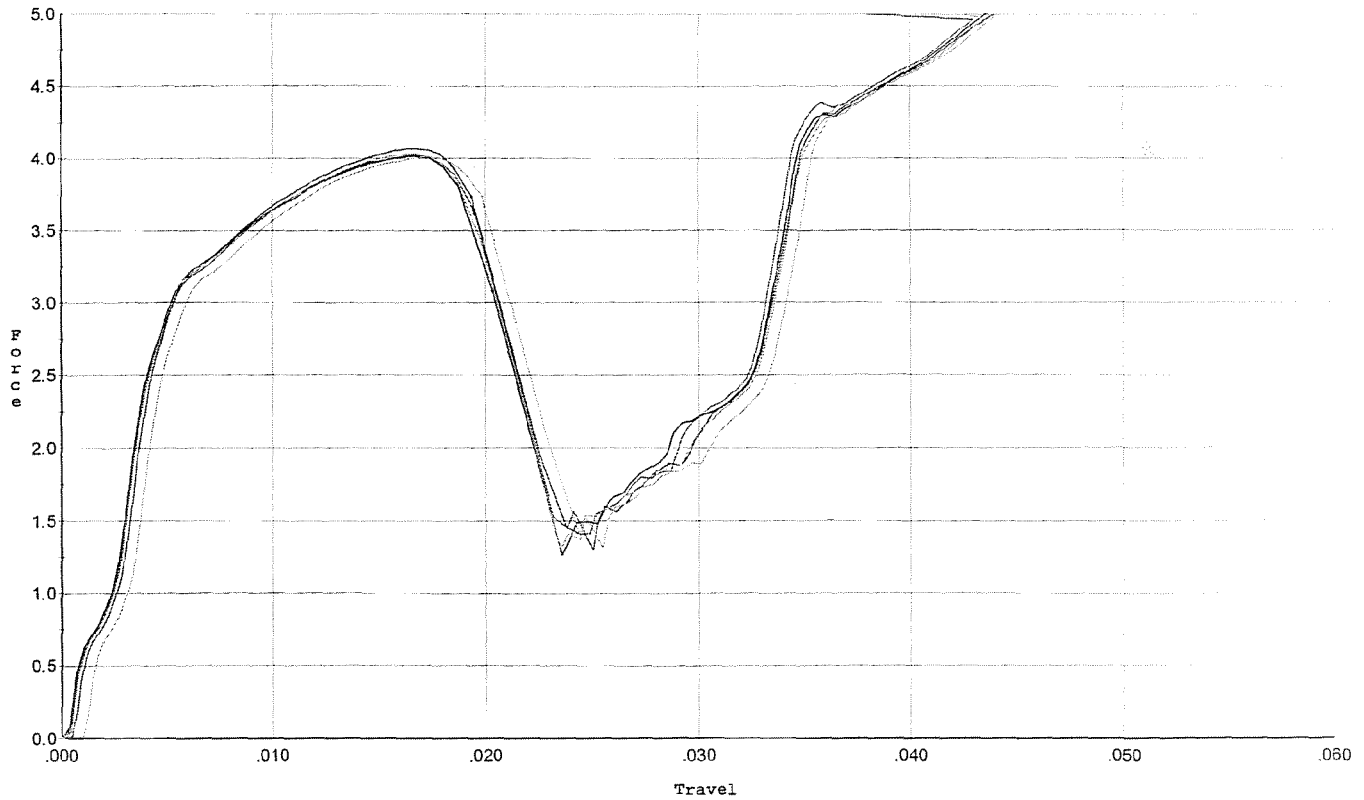


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.068	0.019	0.00	0.030	0.055		Set Trigger
2	4.014	0.020	0.00	0.030	0.058		Set Trigger
3	4.021	0.019	0.00	0.030	0.055		Set Trigger
4	4.010	0.020	0.00	0.030	0.055		Set Trigger
5	4.031	0.020	0.00	0.030	0.056		Set Trigger

Aug 4.02

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

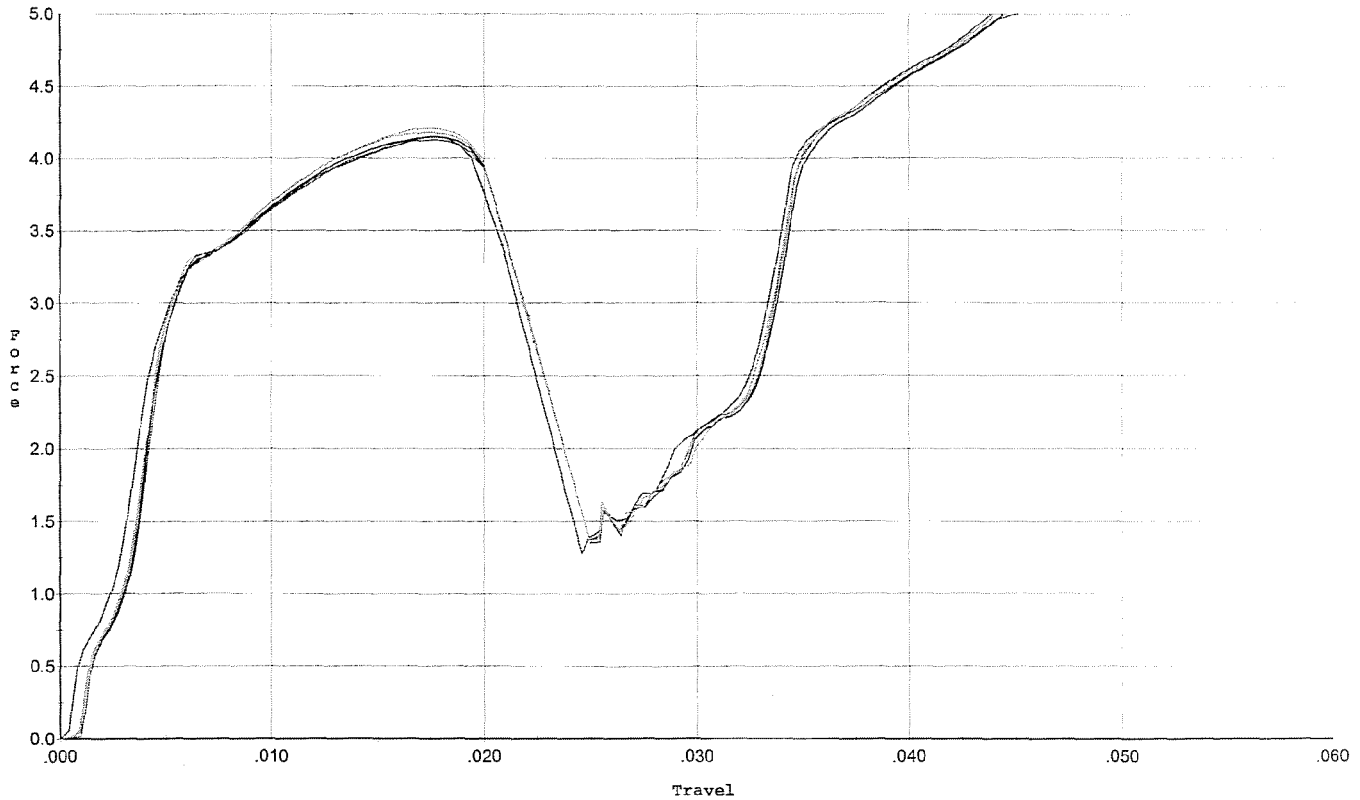


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.149	0.021	0.00	0.029	0.061		Set Trigger
2	4.148	0.022	0.00	0.030	0.064		Set Trigger
3	4.127	0.022	0.00	0.030	0.063		Set Trigger
4	4.179	0.022	0.00	0.029	0.065		Set Trigger
5	4.211	0.022	0.00	0.030	0.064		Set Trigger

Aug 4.16

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

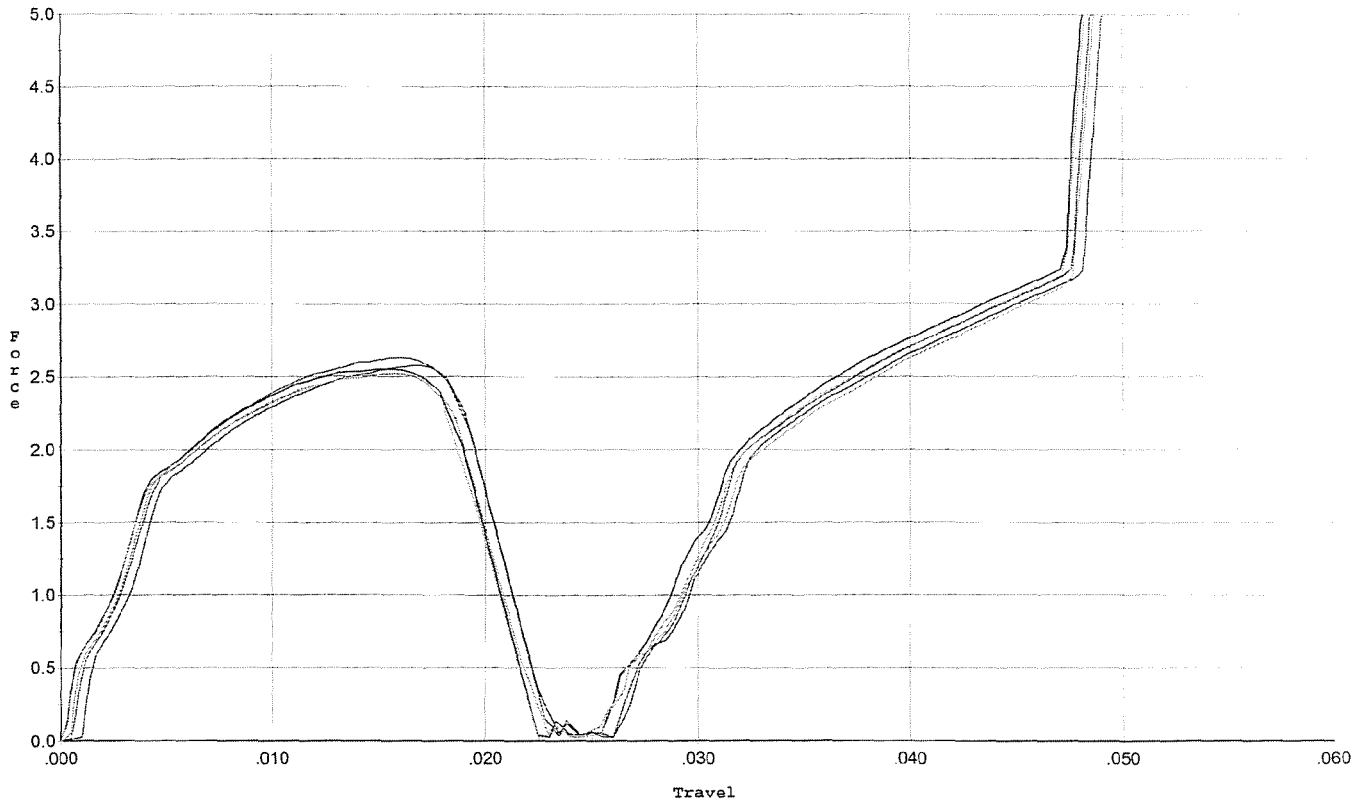


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.577	0.019	0.00	0.033	0.035		Set Trigger
2	2.554	0.019	0.00	0.033	0.036		Set Trigger
3	2.631	0.019	0.00	0.032	0.037		Set Trigger
4	2.520	0.020	0.00	0.033	0.036		Set Trigger
5	2.525	0.019	0.00	0.033	0.035		Set Trigger

Avg 2.56

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R.P. 6/18/09

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

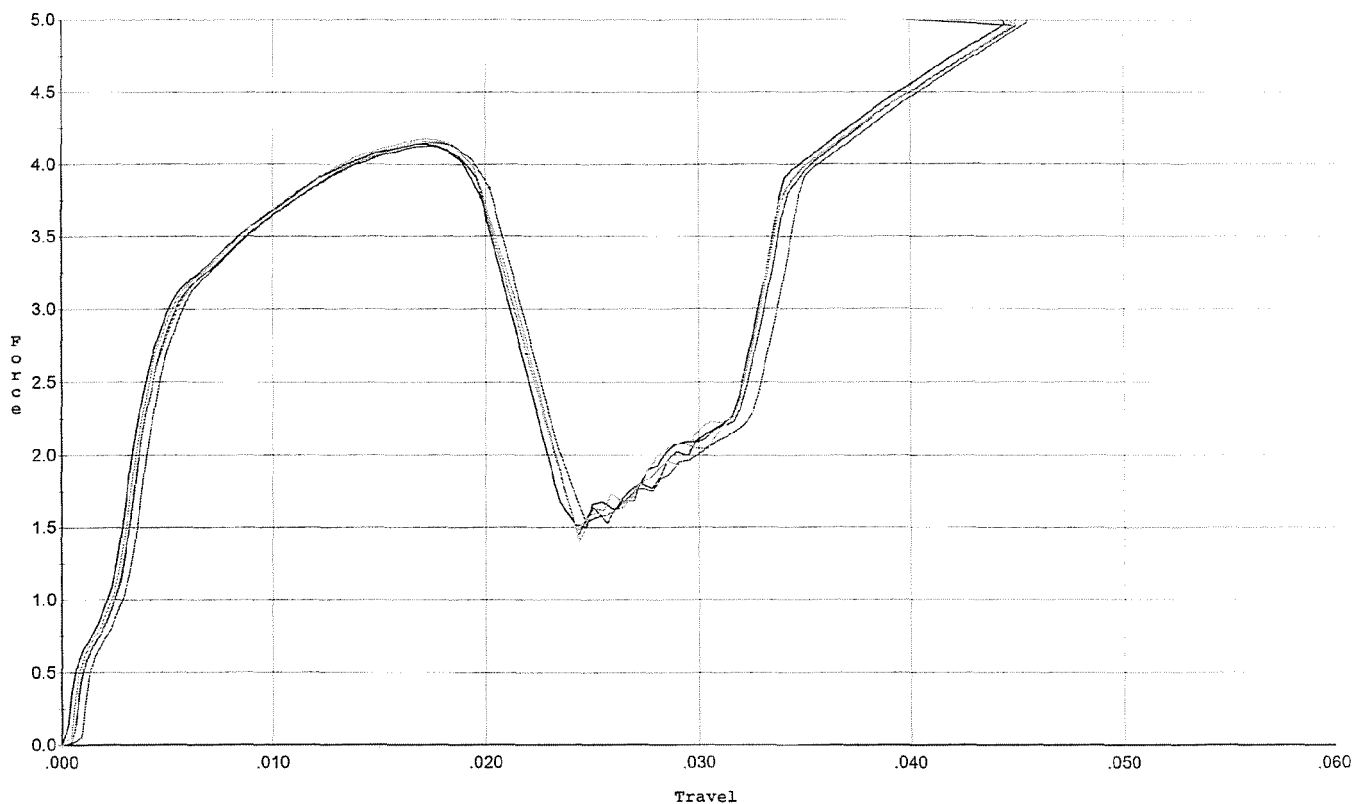

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.123	0.022	0.00	0.029	0.063		Set Trigger
2	4.136	0.020	0.00	0.029	0.058		Set Trigger
3	4.145	0.020	0.00	0.030	0.058		Set Trigger
4	4.160	0.019	0.00	0.030	0.057		Set Trigger
5	4.178	0.021	0.00	0.029	0.062		Set Trigger

Aug 4.14