

G 652 1189
Replaces
C-6225250

G652 1189 (New)

Serial Number: ~~C6225250~~

Model: M24 SWS



RE00105570

REPLY TO
ATTENTION OFDEPARTMENT OF THE ARMY
I TROOP, 3D SQUADRON, 2D CAVALRY REGIMENT
BLDG 3279, 2D DIVISION RD
FORT LEWIS, WASHINGTON 98433

105370

AFZH-CC-I

12 DEC 2005

MEMORANDUM FOR REMINGTON ARMS COMPANY

SUBJECT: M-24 Sniper Rifle

1. Enclosed is our M24 SWS (Remington model 700). We were issued the rifle through our military issuing system and the barrel is well worn. It has fired more than the maximum of 5,000 rounds and needs to be replaced. This causes the minute of angle to be off which in turn affects accuracy.
2. I understand Remington has a contract with the government to repair such deficiencies. As a sniper team leader it is very difficult to accomplish our training or a mission without the required equipment. We are a new unit standing up and are looking to get deployed within the year. We appreciate and thank you for any help or support you can provide. If you have any questions you can contact me at 253-967-3690, or e-mail me at justin.lendowski@us.army.mil. Thank you.

*Seal 390007
390006*
JUSTIN L. LENDOWSKI
SGT, IN
Sniper Team Leader
ROBERT J. FRINK
2LT, IN
Executive Officer

Printed on Recycled Paper

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 11-08-05TESTER S.F.

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.51	2.64		2.42	
PULL #2	2.48	2.63		2.53	
PULL #3	2.41	2.38		2.46	
PULL #4	2.56	2.50		2.54	
PULL #5	2.67	2.49		2.44	
TOTAL	12.63	12.64		12.39	
AVERAGE	2.53	2.52		2.48	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	2.98	3.06		
PULL #2	3.08	2.80		
PULL #3	3.11	2.94		
PULL #4	3.09	2.94		
PULL #5	3.04	2.96		
TOTAL	15.30	14.70		
AVERAGE	3.06	2.94		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	3.82	4.18		4.00
PULL #2	3.92	4.22		4.13
PULL #3	4.04	4.15		3.83
PULL #4	4.08	4.12		3.88
PULL #5	4.07	4.14		3.98
TOTAL	19.93	20.81		19.82
AVERAGE	3.99	4.16		3.96

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6521189.___0
FILE DATE AND TIME: 01/11/2006 09:41


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.026
The Average Y Centroid of the Five Target Set:	-0.016
The Average Point of Impact of the Five Target Set:	0.030
The Average Mean Radius of the Five Target Set:	0.792
The Distance from POA to Centroid Target #1:	0.140
The Distance from Centroid Target #2 to Centroid Target #1:	0.115
The Distance from Centroid Target #3 to Centroid Target #1:	0.260
The Distance from Centroid Target #4 to Centroid Target #1:	0.223
The Distance from Centroid Target #5 to Centroid Target #1:	0.252

SERIAL NUMBER: G6521189. 0
 TARGET NUMBER: 1
 FILE DATE: 01/11/2006
 FILE TIME: 09:41

POINT#	X	Y
1:	1.861	-0.443
2:	1.029	0.041
3:	0.740	0.571
4:	0.309	0.015
5:	0.449	-0.479
6:	-0.311	0.063
7:	-0.509	0.229
8:	-0.673	0.289
9:	-1.119	-0.186
10:	-0.715	-1.015

X CENTROID: 0.106
 Y CENTROID: -0.092
 POA TO CENTROID: 0.140
 HORZ SPREAD: 2.980
 VERT SPREAD: 1.586
 GROUP SPREAD: 2.991
 MIN RADIUS: 0.229
 MAX RADIUS: 1.790
 MEAN RADIUS: 0.886
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

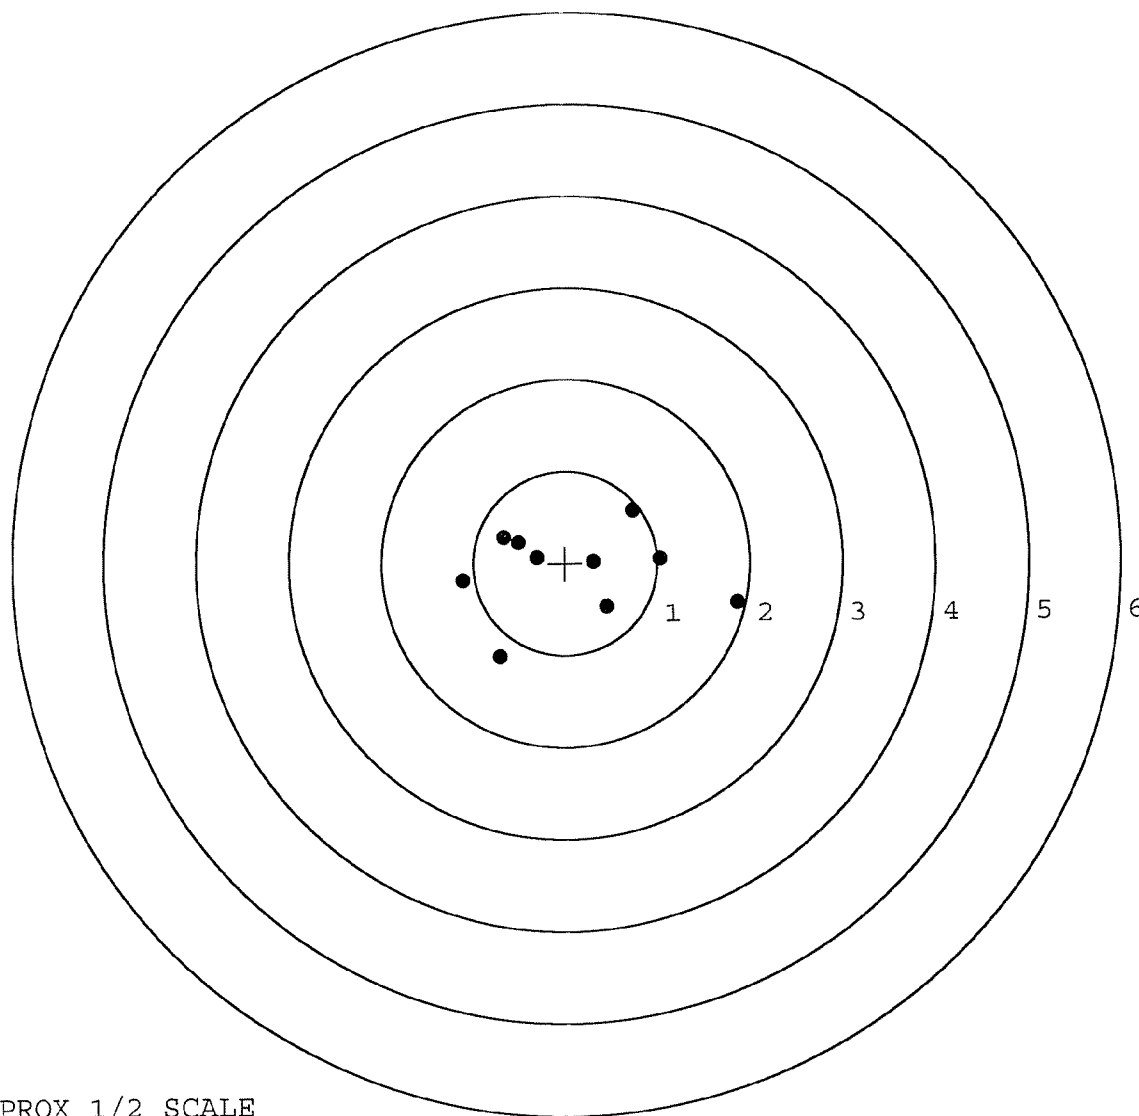


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521189. __0
 TARGET NUMBER: 2
 FILE DATE: 01/11/2006
 FILE TIME: 09:41

POINT#	X	Y
1:	0.327	-1.371
2:	-0.346	-1.029
3:	0.571	-0.441
4:	1.400	0.005
5:	0.771	0.629
6:	0.174	0.213
7:	-0.273	0.107
8:	-0.535	-0.036
9:	-0.840	0.896
10:	-1.304	0.396

X CENTROID: -0.005
 Y CENTROID: -0.063
 POA TO CENTROID: 0.063
 HORZ SPREAD: 2.704
 VERT SPREAD: 2.267
 GROUP SPREAD: 2.732
 MIN RADIUS: 0.317
 MAX RADIUS: 1.407
 MEAN RADIUS: 0.934
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 10

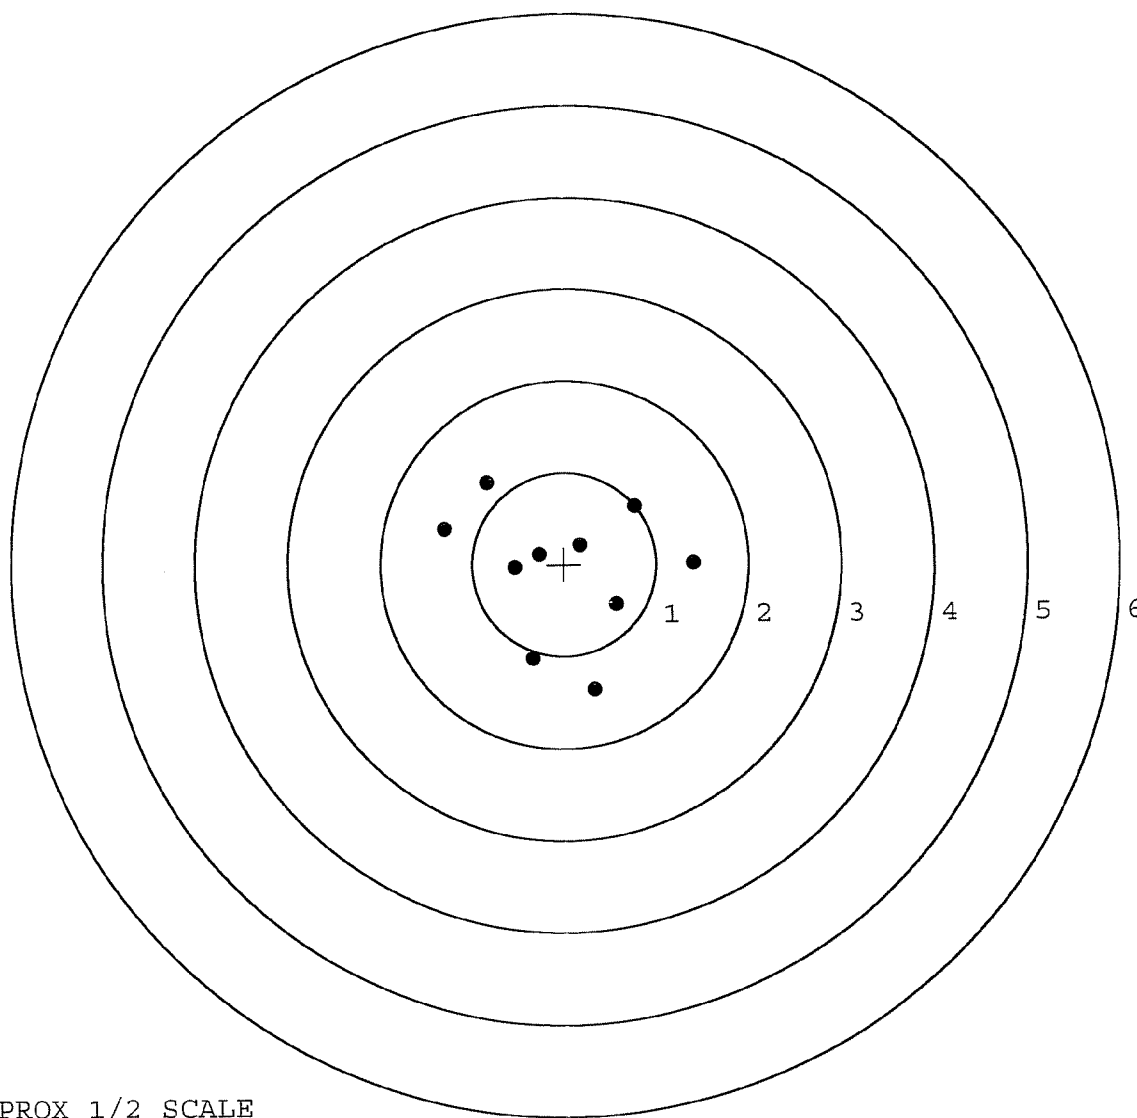


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521189. __0
 TARGET NUMBER: 3
 FILE DATE: 01/11/2006
 FILE TIME: 09:41

POINT#	X	Y
1:	0.118	-1.332
2:	-0.322	-0.746
3:	-0.608	-0.574
4:	-0.481	-0.807
5:	0.229	-0.172
6:	0.704	0.039
7:	0.346	1.008
8:	-0.538	0.624
9:	-0.177	0.341
10:	-0.714	-0.009

X CENTROID: -0.144
 Y CENTROID: -0.163
 POA TO CENTROID: 0.218
 HORZ SPREAD: 1.418
 VERT SPREAD: 2.340
 GROUP SPREAD: 2.351
 MIN RADIUS: 0.373
 MAX RADIUS: 1.269
 MEAN RADIUS: 0.764
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

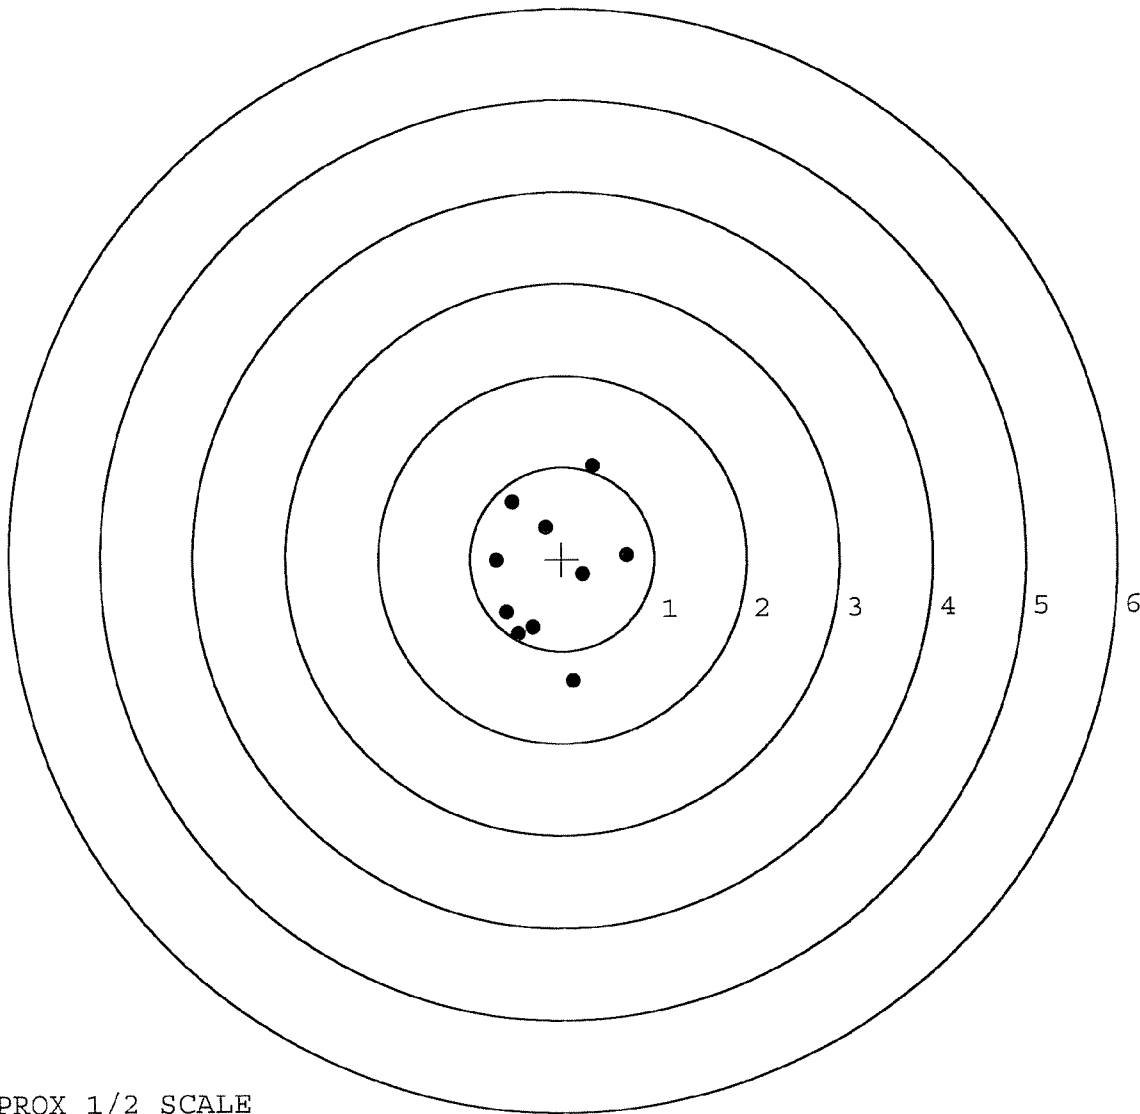

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521189. __ 0

TARGET NUMBER: 4

FILE DATE: 01/11/2006

FILE TIME: 09:41

POINT#	X	Y
1:	0.489	-1.409
2:	0.543	-0.774
3:	0.562	-0.320
4:	0.022	1.645
5:	-0.781	0.537
6:	-0.742	-0.083
7:	-0.224	0.207
8:	-0.214	0.372
9:	-0.068	0.374
10:	0.194	0.368

X CENTROID: -0.022

Y CENTROID: 0.092

POA TO CENTROID: 0.094

HORZ SPREAD: 1.343

VERT SPREAD: 3.054

GROUP SPREAD: 3.089

MIN RADIUS: 0.233


MAX RADIUS: 1.585

MEAN RADIUS: 0.772

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 8

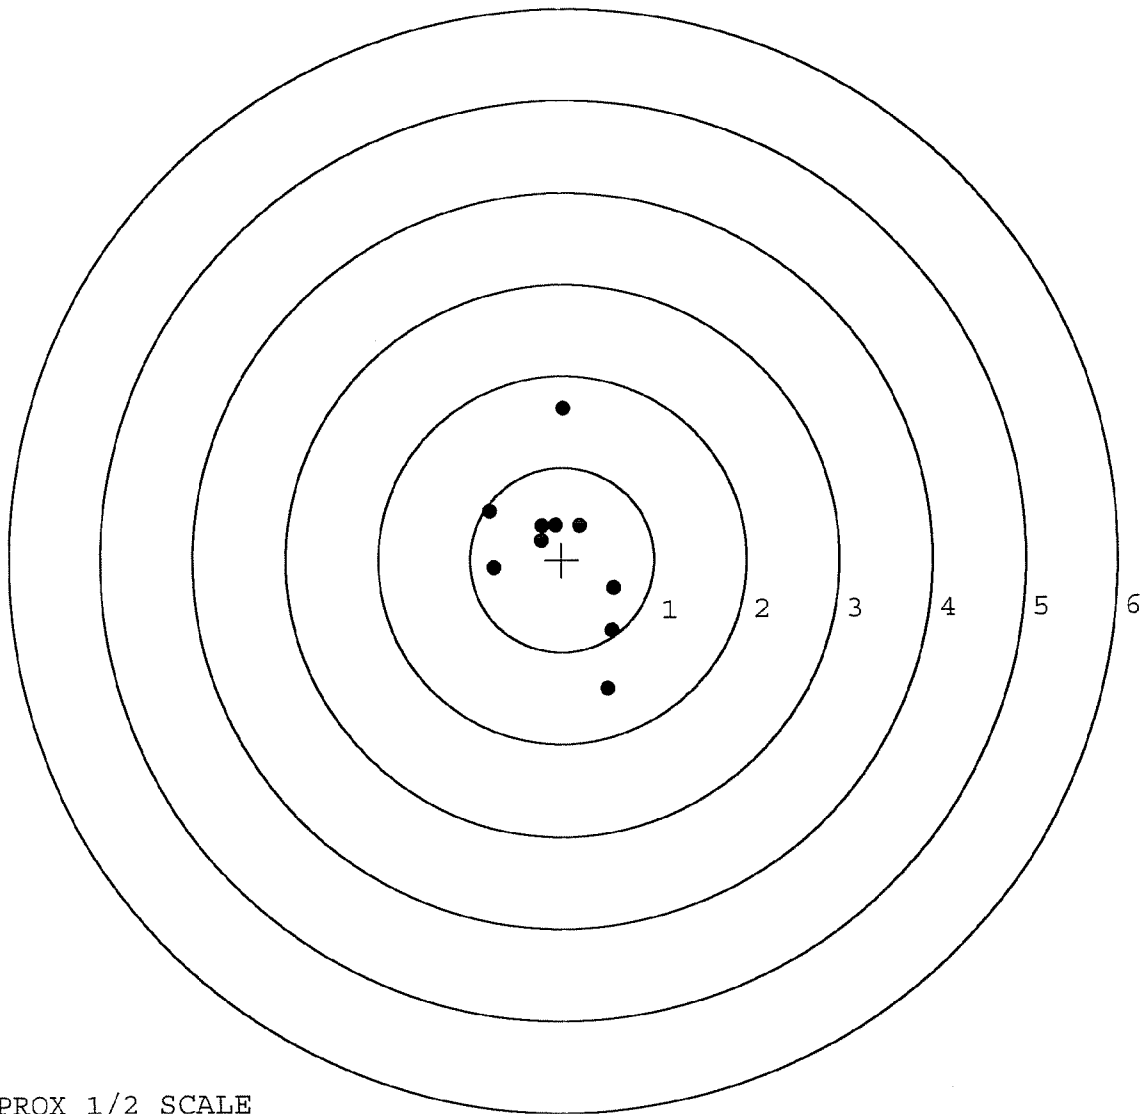


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6521189. __0
 TARGET NUMBER: 5
 FILE DATE: 01/11/2006
 FILE TIME: 09:41

X CENTROID: 0.194
 Y CENTROID: 0.145
 POA TO CENTROID: 0.242
 HORZ SPREAD: 1.552
 VERT SPREAD: 1.424
 GROUP SPREAD: 1.510
 MIN RADIUS: 0.196
 MAX RADIUS: 0.889
 MEAN RADIUS: 0.606
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.000	-0.026
2:	0.829	-0.104
3:	0.606	-0.058
4:	0.387	0.109
5:	-0.003	0.339
6:	-0.310	0.476
7:	-0.552	0.575
8:	-0.133	0.972
9:	-0.204	-0.382
10:	0.322	-0.452

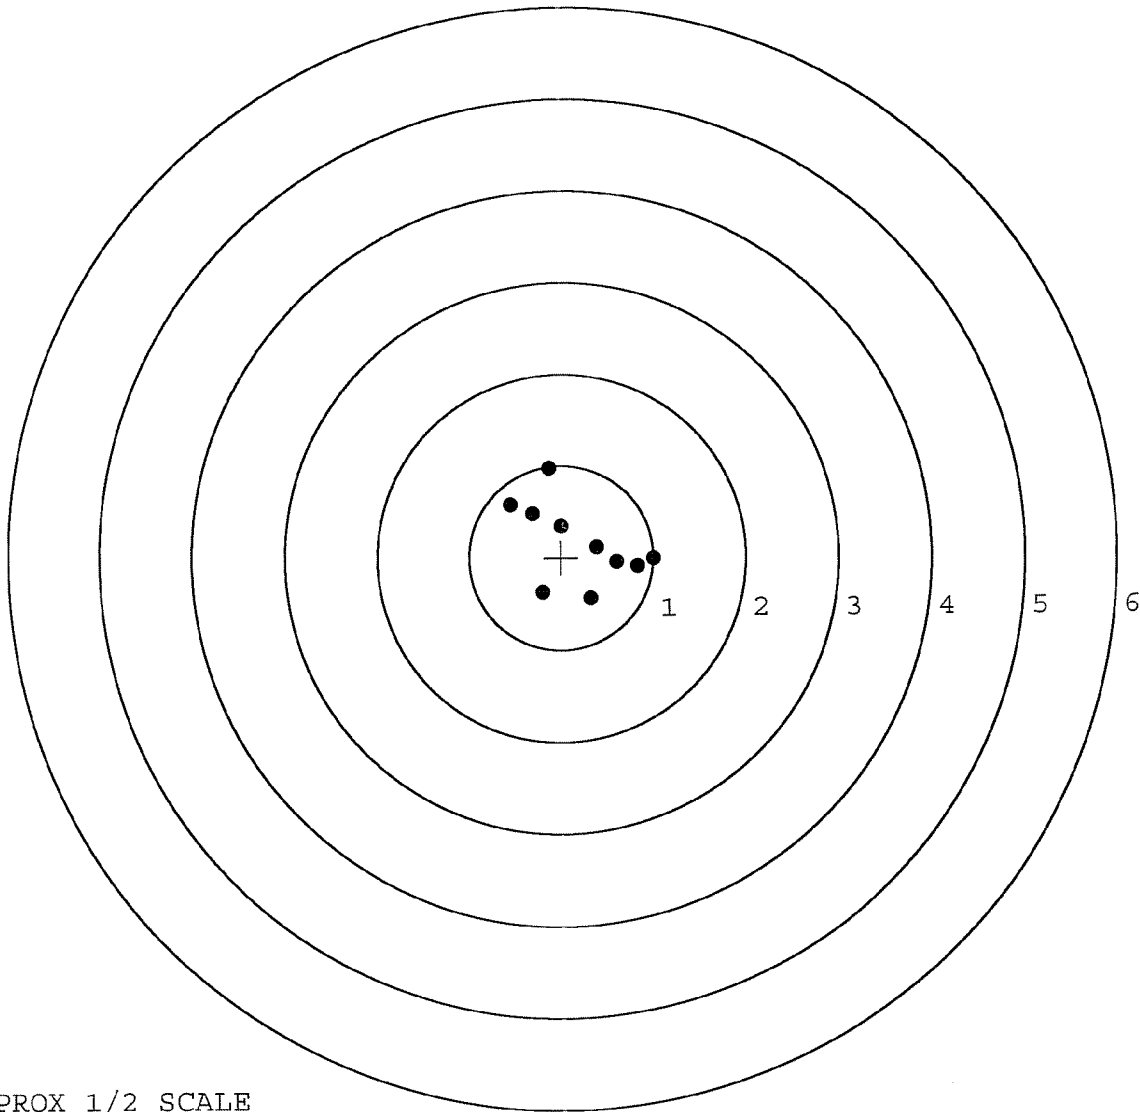

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	105570			
SERIAL NUMBER	E6225250		E6521189 (New)	
LOG-IN DATE	12-27-05			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		12-29-05	RTZ
505	RE-BARREL		1-4-06	RTZ
560	ASSEMBLE		1-4-06	RTZ
600	PROOF	MAGNA-FLUX INSPECTED JAN 01 2006	1-4-06	Ac
605	CHECK HEADSPACE		1-4-06	Ac
610	DIS-ASSEMBLE GUN		1-4-06	Ac
612	MAGNAFLUX	OPERATOR <i>unintelligible</i>	1/6/06	<i>unintelligible</i>
510	DRILL AND TAP		1-5-06	TRW
615	ROLLMARK CALIBER		1-6-06	CW
618	ROTO-BLAST		1-6-06	LB
620	APPLY COATINGS		1/10	HP
625	FINAL ASSEMBLY		1-11-06	RTZ
640	FUNCTION TEST AND	PASS FAIL	1-11-06	TRW
650	TARGET	PASS FAIL	1-11-06	TRW
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	1-11-06	TRW
670	FINAL INSPECTION		1-11-06	Ac
	A) HEADSPACE	PASS FAIL	1-11-06	Ac
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.56 2.65 2.48 2.69 2.58	Ac
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS	8/16s 8/16s 8/16s	Ac
	G) SAFETY OFF FORCE	2 LBS MIN	3/16s 3/16s 3/16s	Ac
	I) FIRING PIN INDENT	.020	.023 .023 .023	Ac
690	PACK		1-18-06	RTZ

M-24

CONTRACT # DAAA21-87-C-0086

*New Bolt*GUN SERIAL # *C6225250*

OPERATION		DATE	INT
#	NAME		
575- 580	ASSEMBLY <i>2</i>	<i>26</i>	<i>FB</i>
600	PROOF	<i>29</i>	<i>RW</i>
615	MAGNAFLUX BARREL	<i>5/13/88</i>	<i>PJR</i>
	MAGNAFLUX BOLT	<i>5/13/88</i>	<i>PJR</i>
620	COATING	<i>10/31/88</i>	<i>TJA</i>
625- 630	FINAL ASSEMBLY		
635	TEST		
640	TARGET		
	FIRING PIN INDENT		
660	PACK		

New Bolt

GUN SERIAL # C6225250

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock	9 12	88	FB
600	Proof	9 19	88	RW
607	Check Headspace	9 19	88	RW
610	Dis-assemble Gun	9 19	88	RW
612	Magnaflux Barrel Action		9-22-88	Pfc.
	Magnaflux Bolt		9-22-88	Pfc.
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coating (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/4/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/4/88	RW
	C) Inspect Ejector Hole for Chamfer		11/4/88	RW
	D) Oil Firing Pin Ass'y		11/4/88	RW
	E) Adjust Trigger Pull to Min Setting and Stake		7/10/88	Pfc.

BARBER - M24 0097776								
op. #	OP. NAME	READINGS			DATE	INITIAL		
625 cont.	F) Safety On Force	5	5	5	8Nov88	JS		
	G) Safety Off Force	3.5	3.5	3.5	8Nov88	JS		
	H) Trigger Pull Test & Retainability				7Nov88	Ju		
	I) Firing Pin Indent	.0205	.0205	.0205	8Nov88	JS		
	J) Assemble Stock				11/10/88	RW		
	K) Assemble Swivel Studs				29Nov88	JS		
	L) Attach Front and Rear Sight Assemblies				11/10/88	RW		
	M) Iron Sight Alignment				11/10/88	RW		
	N) Detach Front & Rear Sights & place in numbered container				11/10/88	RW		
	O) Attach Scope to Rifle				11/10/88	RW		
	P) Detach & Attach Scope 20 Times				11Nov88	JS		
640	Gallery Target & Test	57 R		94 L		A.C.		
	A) Time				11-11-88			
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope			OK	11-11-88	AC		
645	Inspect for Live Ammo			None	11-11-88	AC		
655	Final Inspection							
	A) Headspace				29Nov88	JS		
	B) Trigger Pull	2.54	2.50	2.50	2.50	2.48	29Nov88	JS
	C) Function						29Nov88	JS
660	Pack						15Dec88	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C 6225250

DATE 11-7-88

TESTER J.Y.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.53	2.36	2.48	2.54	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.31	2.33	2.48	2.50	
PULL #3	2.32	2.35	2.48	2.50	
PULL #4	2.37	2.37	2.46	2.50	
PULL #5	2.28	2.40	2.48	2.48	
TOTAL	11.81	11.80	12.38	2.52	
AVG.	2.362	2.36	2.476	2.504	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.34	3.32		
PULL #2	3.36	3.30		
PULL #3	3.40	3.39		
PULL #4	3.39	3.40		
PULL #5	3.39	3.39		
TOTAL	16.88	16.74		
AVG.	3.375	3.348		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.19	4.26		4.24
PULL #2	4.23	4.30		4.30
PULL #3	4.22	4.30		4.32
PULL #4	4.26	4.33		4.19
PULL #5	4.24	4.37		4.25
TOTAL	21.14	21.55		21.30
AVG.	4.228	4.312		4.250

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225259

CENTROIDAL DISTANCES

0 TO	1	.365978
1 TO	2	.81963
1 TO	3	.671658
1 TO	4	.586085
1 TO	5	.416163


$\frac{1}{49} \frac{1}{2} \leftarrow \text{FOR}$

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3582
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0364
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .360045
THE AMR FOR THIS RIFLE IS: .983

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225250

CENTERFIRE PATTERNS # 1

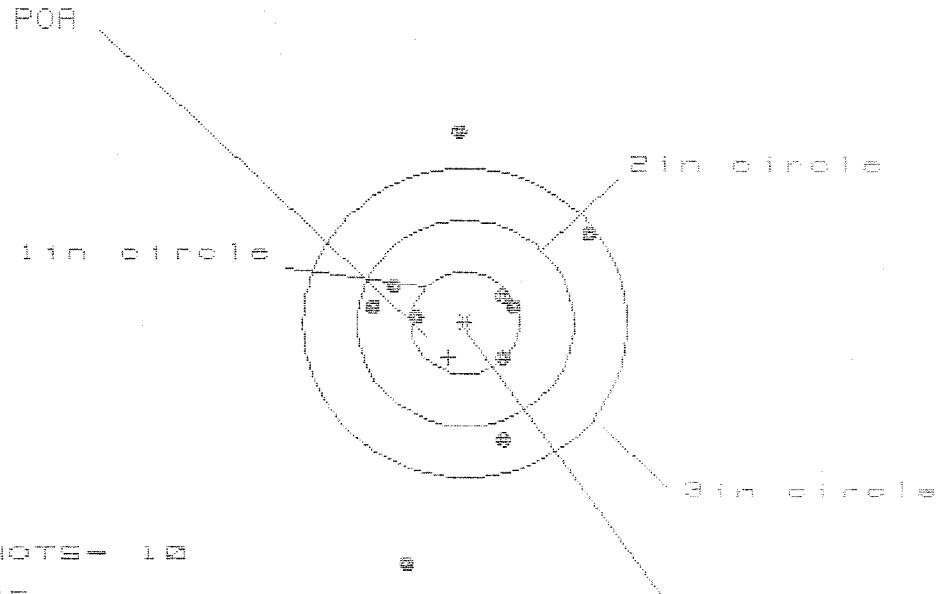

OF SHOTS - 10

IN CIR

1in = 4

2in = 6

3in = 8

HS = 1.966

VS = 4.230


GS = 4.263

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.111	1.045	1.029
MINIMUM X	-0.859	-0.924	-0.940
MAXIMUM Y	1.867	1.604	1.781
MINIMUM Y	-2.363	-1.375	-1.175
CENTROID X	.154	.219	.235
CENTROID Y	.332	.595	.394
POA TO CENTROID in.	.366	.634	.459
MIN RADIUS	.426	.297	.324
MEAN RADIUS	1.031	.854	.739
MAX RADIUS	2.437	1.609	1.292
HORIZONTAL SPREAD	1.969	1.969	1.969
VERTICAL SPREAD	4.230	2.979	1.956
EXTREME SPREAD	4.263	3.008	2.096
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	8		

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225250

CENTERFIRE PATTERNS # 2

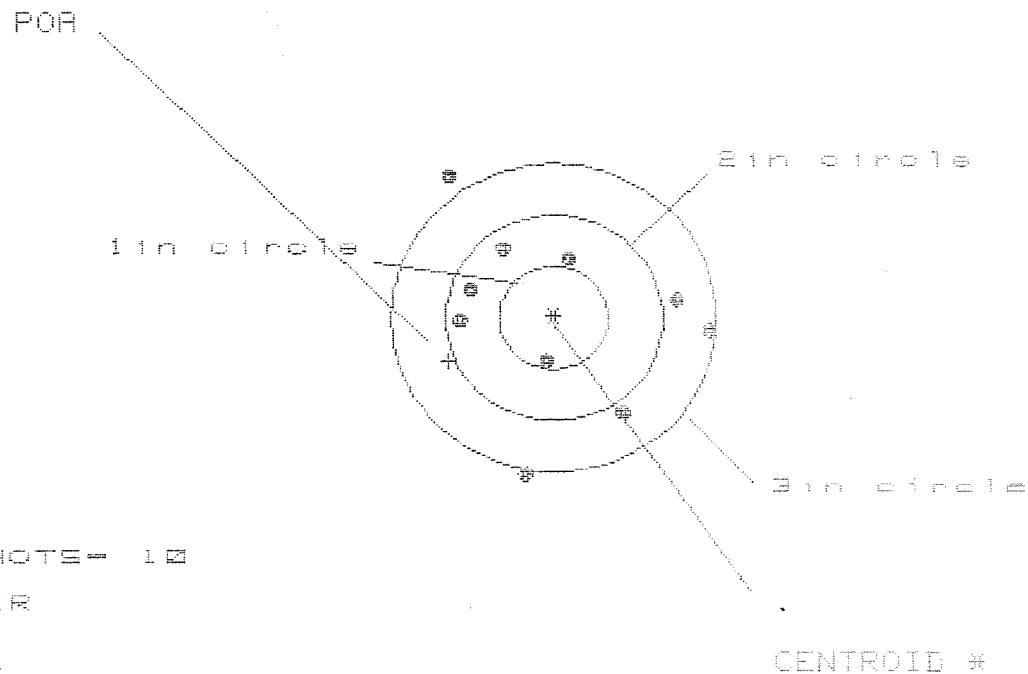

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 8

HS = 2.340

VS = 2.943

GS = 3.025

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.420	1.318	1.277
MINIMUM X	-1.920	-1.007	-1.048
MAXIMUM Y	1.410	.819	.647
MINIMUM Y	-1.533	-1.376	-.964
CENTROID X	.969	1.071	1.112
CENTROID Y	.419	.262	.434
POA TO CENTROID in.	1.056	1.103	1.193
MIN RADIUS	.422	.293	.467
MEAN RADIUS	1.039	.963	.898
MAX RADIUS	1.684	1.413	1.289
HORIZONTAL SPREAD	2.340	2.325	2.325
VERTICAL SPREAD	2.943	2.195	1.611
EXTREME SPREAD	3.025	2.329	2.329
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	8		

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225250

CENTERFIRE PATTERNS # 3

POR

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS = 10

IN CIR

1in = 1

2in = 5

3in = 7

HS= 2.602

VS= 2.447

GS= 3.343

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.479	1.106	.987
MINIMUM X	-1.123	-.959	-1.047
MAXIMUM Y	1.200	1.079	.908
MINIMUM Y	-1.247	-1.368	-.654
CENTROID X	.484	.320	.409
CENTROID Y	-.253	-.132	.009
POR TO CENTROID in.	.546	.346	.441
MIN RADIUS	.334	.441	.290
MEAN RADIUS	1.064	.973	.858
MAX RADIUS	1.839	1.670	1.205
HORIZONTAL SPREAD	2.602	2.065	2.004
VERTICAL SPREAD	2.447	2.447	1.562
EXTREME SPREAD	3.343	2.913	2.363
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	7		

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225250

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

CENTROID #

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 5

3 in = 7

HS= 3.320

VS= 1.746

GS= 3.750

PATTERN #	4
SHOTS (BEST OF)	10
MAXIMUM X	1.296
MINIMUM X	-2.024
MAXIMUM Y	.753
MINIMUM Y	-.993
CENTROID X	.164
CENTROID Y	-.254
POA TO CENTROID in.	.302
MIN RADIUS	.224
MEAN RADIUS	1.002
MAX RADIUS	2.159
HORIZONTAL SPREAD	3.320
VERTICAL SPREAD	1.746
EXTREME SPREAD	3.750
NUMBER IN ONE INCH CIRCLE	3
NUMBER IN TWO INCH CIRCLE	5
NUMBER IN THREE INCH CIRCLE	7

14 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225250

CENTERFIRE PATTERNS # 5

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS- 10

IN CIR

1in = 0

2in = 9

3in = 9

HS= 1.200

VS= 2.594

GS= 2.636

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	.526
MINIMUM X	-.674
MAXIMUM Y	1.801
MINIMUM Y	-.793
CENTROID X	.020
CENTROID Y	-.062
POA TO CENTROID in.	.065
MIN RADIUS	.509
MEAN RADIUS	.779
MAX RADIUS	1.849
HORIZONTAL SPREAD	1.200
VERTICAL SPREAD	2.594
EXTREME SPREAD	2.636
NUMBER IN ONE INCH CIRCLE =	0
NUMBER IN TWO INCH CIRCLE =	9
NUMBER IN THREE INCH CIRCLE =	9

BARBER M24-9097783 RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 94-22614

INITIAL
FPS

CUSTOMER ORDER NO.

M-24 ATTN: FRED MARTIN/PAINTED OUTSIDE SHOP

DATE RECEIVED
08/01/94

DATE OPENED
08/02/94

DATE CODE
KI 5-88

SERIAL NUMBER
C6225250

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE MNTS

SCOPE BASE

FROM:

DEPT OF THE ARMY
B CO ARMS
2/75 RANGER BATTALION
FT LEWIS WA 98433

SHIP TO:

DEPT OF THE ARMY
B CO ARMS
2/75 RANGER BATTALION
FT LEWIS WA 98433

CUST NO: 062072 C.O.D L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

New Barrel

PARTS

Barrel - 96003

COMMENTS

Repaired Coast Trigger Guard
Assy, Front & Rear Sight Bases
ReZink Scope Base, Rings &
Swivel Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

R66925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0637989
M24-90977822

BARBER - M24 0097784 PACKING LIST		PACKED BY <i>Ray Fuller</i> WG-10 Bn. Armorer.	1. NO. BOXES /	2a. REQUISITION NO. 92070	
3. END ITEM 7.62mm M24 Sniper Weapons System (SW5)		4. DATE 26 July 1994		2b. ORDER NO.	
5.		PAGE 1 OF 1 PAGES		6.	
BOX NO. (a)	CONTENTS - STOCK NUMBER AND NOMENCLATURE (b)	UNIT OF ISSUE (c)	QUANTITIES REQUIRED		
(a)	(b)	(c)	INITIAL OPERATION (d)	RUNNING SPARES (e)	TOTAL (f)
1	7.62mm M24 Sniper Weapon System (SW5) Serial No. <u>C622 5250</u> NSN: 1005-01-240-2136 <u>Note:</u> All Optic Scope Ring mounts packed	Ea			/
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES					
TYPED NAME AND TITLE Ray Fuller WG-10 Bn. Armorer			SIGNATURE 		

DD FORM 1 SEP 70 1750

DA FORM 2407
MAY 81

NMP COPY 2

BARBER - M24 ~~0097785~~ M2400097824

Final Inspection

In: C6225250 DATE REC'D: 8/1/94 DATE RET'D:
Inspector: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☐ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☐ FINISH☐ LOOSENESS☐ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ SCOPE CASE☐ IRON SIGHTS☐ DEPLOYMENT KIT

Trigger

☒ SAFETY OPERATION☒ SET

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06225250
10 Aug 1994

CENTROIDAL DISTANCES

0 TO	1	.503557
1 TO	2	.427834
1 TO	3	.574474
1 TO	4	.682739
1 TO	5	.451136

4
3
1 3 (---) POB


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0816
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0716
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .108559

THE AMR FOR THIS RIFLE IS: 1.023

18 Aug 1934

FILE:/PATTERNING/CENTERFIRE_PATT/06225250

CENTERFIRE PATTERNS # 1

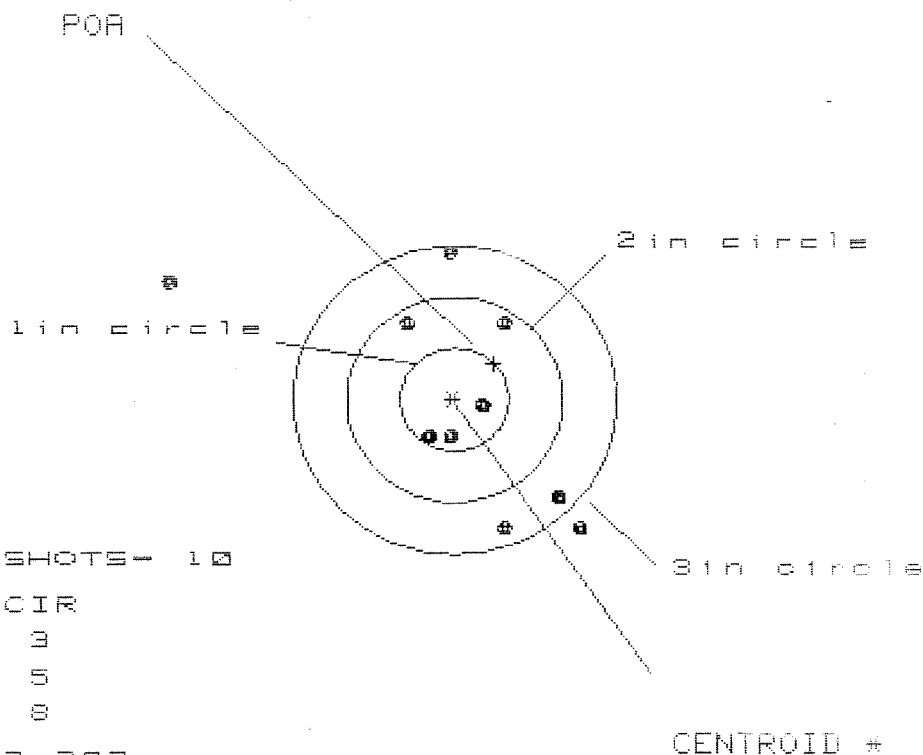

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 5

3 in = 8

HS= 3.792

VS= 2.733

GS= 4.517

CENTROID *

PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.141	.846	.821
MINIMUM X	:	-2.651	-.699	-.593
MAXIMUM Y	:	1.472	1.604	1.463
MINIMUM Y	:	-1.261	-1.129	-1.233
CENTROID X	:	-.363	-.068	-.174
CENTROID Y	:	-.349	-.481	-.340
POA TO CENTROID in.	:	.503	.486	.382
MIN RADIUS	:	.279	.066	.114
MEAN RADIUS	:	1.156	.921	.854
MAX RADIUS	:	2.907	1.635	1.478
HORIZONTAL SPREAD	:	3.792	1.545	1.414
VERTICAL SPREAD	:	2.733	2.733	2.696
EXTREME SPREAD	:	4.517	2.970	2.741
NUMBER IN ONE INCH CIRCLE =	:	3		
NUMBER IN TWO INCH CIRCLE =	:	5		
NUMBER IN THREE INCH CIRCLE =	:	8		

18 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/08225250

CENTERFIRE PATTERNS # 2

POA

1in circle

2in circle

3in circle

OF SHOTS- 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 2.041

VS= 1.711

GS= 2.436


CENTROID #

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.955	.834	.742
MINIMUM X	:	-1.086	-.999	-1.091
MAXIMUM Y	:	1.077	1.006	.873
MINIMUM Y	:	-.634	-.684	-.558
CENTROID X	:	-.024	.097	.189
CENTROID Y	:	-.088	-.017	-.143
POA TO CENTROID in.	:	.091	.098	.237
MIN RADIUS	:	.423	.439	.299
MEAN RADIUS	:	.917	.877	.797
MAX RADIUS	:	1.258	1.249	1.248
HORIZONTAL SPREAD	:	2.041	1.833	1.833
VERTICAL SPREAD	:	1.711	1.690	1.431
EXTREME SPREAD	:	2.436	2.272	2.144
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

18 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/06225250

CENTERFIRE PATTERNS # 3

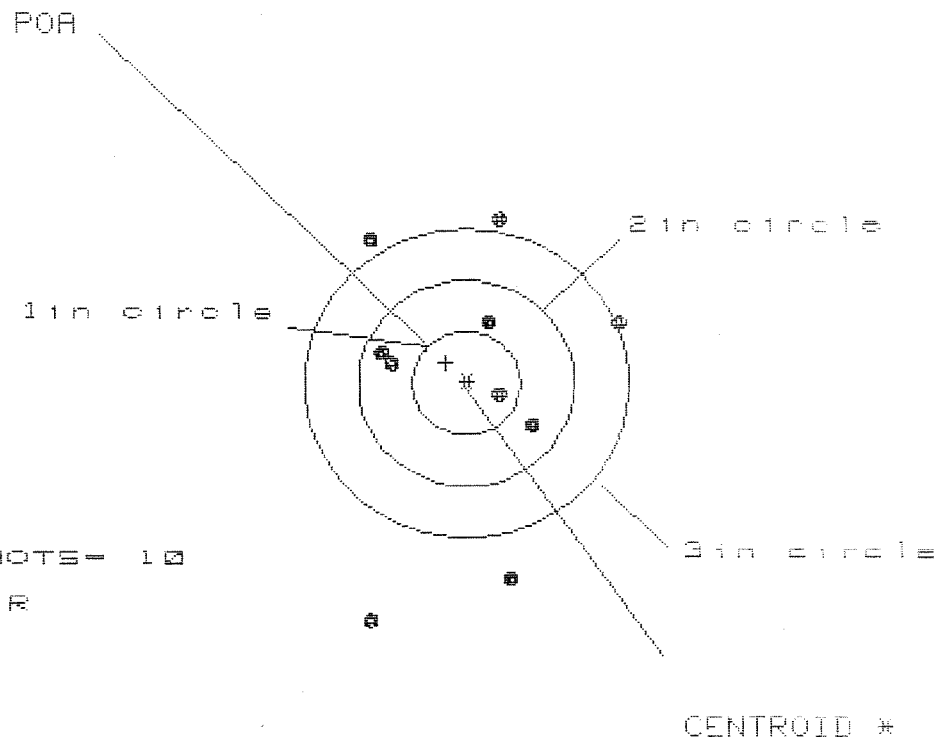

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 5

3 in = 5

HS= 2.249

VS= 3.874


GS= 4.863

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.383	1.286	1.321
MINIMUM X	-.866	-.941	-.907
MAXIMUM Y	1.619	1.368	1.093
MINIMUM Y	-2.255	-2.202	-.918
CENTROID X	.191	.288	.254
CENTROID Y	-.197	.054	.329
POA TO CENTROID in.	.274	.293	.416
MIN RADIUS	.321	.362	.159
MEAN RADIUS	1.242	1.075	.911
MAX RADIUS	2.416	2.219	1.325
HORIZONTAL SPREAD	2.249	2.227	2.227
VERTICAL SPREAD	3.874	3.570	2.011
EXTREME SPREAD	4.863	3.570	2.341
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	5		

18 Aug 1984

FILE:/PATTERNING/CENTERFIRE_PATT/06225250

CENTERFIRE PATTERNS # 4

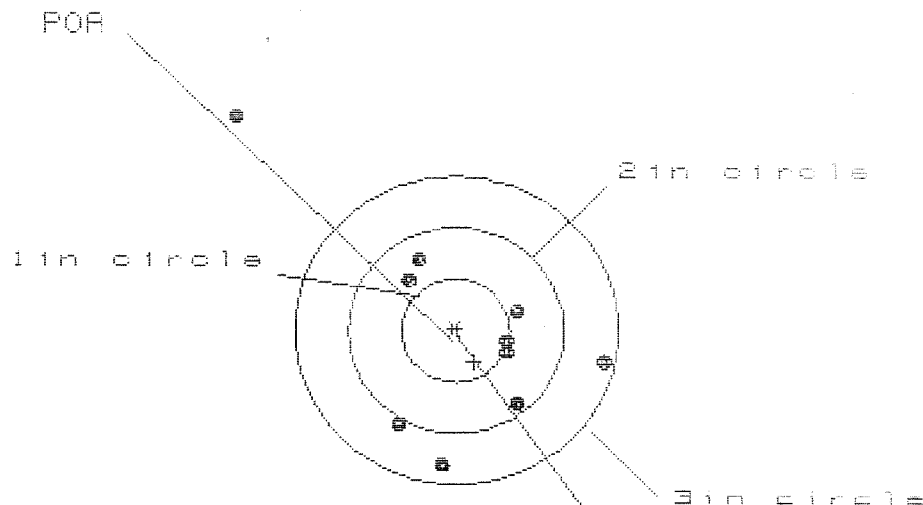

OF SHOTS - 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HDI = 3.422

VSI = 3.443

GSI = 4.221


CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.416	1.193	.524
MINIMUM X	:	-2.006	-.758	-.609
MAXIMUM Y	:	2.131	.910	.896
MINIMUM Y	:	-1.312	-1.075	-1.088
CENTROID X	:	-.167	.056	-.093
CENTROID Y	:	.305	.068	.082
POA TO CENTROID in.	:	.348	.088	.124
MIN RADIUS	:	.455	.205	.349
MEAN RADIUS	:	1.068	.789	.759
MAX RADIUS	:	2.926	1.198	1.107
HORIZONTAL SPREAD	:	3.422	1.951	1.133
VERTICAL SPREAD	:	3.443	1.985	1.985
EXTREME SPREAD	:	4.221	2.052	1.999
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		9	

18 Aug 1994

FILE:/PATTERNING/CENTERFIRE_PATT/08225250

CENTERFIRE PATTERNS # 5

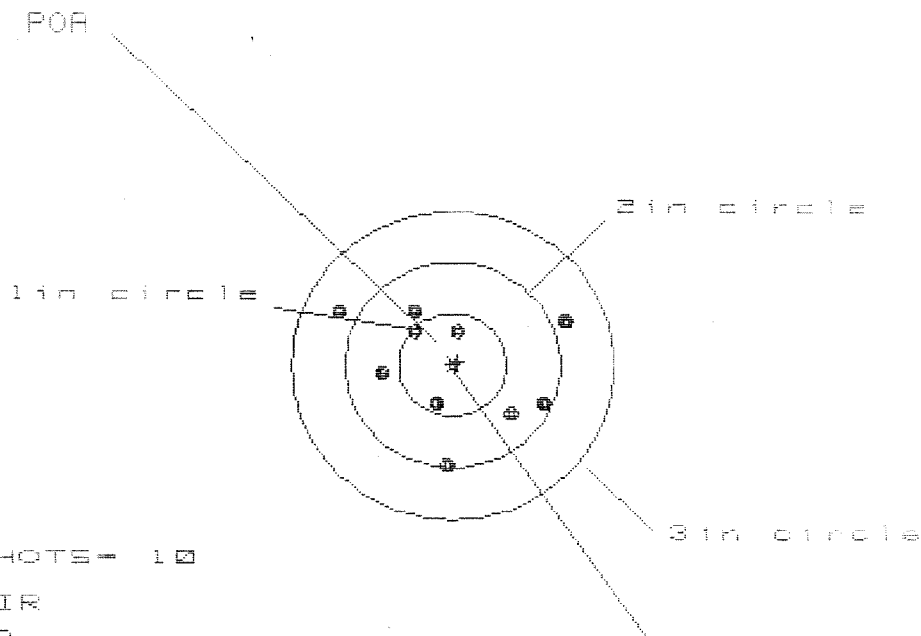

OF SHOTS = 10

IN CIR

1 in = 3

2 in = 8

3 in = 10

HS = 2.107

VS = 1.517

GS = 2.111

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	1.091
MINIMUM X	-1.016
MAXIMUM Y	.569
MINIMUM Y	-.948
CENTROID X	-.045
CENTROID Y	-.029
POA TO CENTROID in.	.054
MIN RADIUS	.343
MEAN RADIUS	.734
MAX RADIUS	1.175
HORIZONTAL SPREAD	2.107
VERTICAL SPREAD	1.517
EXTREME SPREAD	2.111
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	8
NUMBER IN THREE INCH CIRCLE =	10

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225250

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		8/3/94	RW
600	Proof		8/5/94	RW
607	Check Headspace		8/3/94	RW
610	Dis-assemble Gun		8/3/94	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		8/3/94	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		8/3/94	RW
	C) Inspect Ejector Hole for Chamfer		8/3/94	RW
	D) Oil Firing Pin Ass'y		8/3/94	RW
	E) Adjust Trigger Pull to Min Setting and Stake			RW

op. #	BARBER - M24 0097794 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force							
	G) Safety Off Force							
	H) Trigger Pull Test & Retainability							
	I) Firing Pin Indent							
	J) Assemble Stock							
	K) Assemble Swivel Studs							
	L) Attach Front and Rear Sight Assemblies							
	M) Iron Sight Alignment							
	N) Detach Front & Rear Sights & place in numbered container							
	O) Attach Scope to Rifle							
	P) Detach & Attach Scope 20 Times							
640	Gallery Target & Test						8/16/94	Ru
	A) Time							
	B) Malfunctions							
	C) Pierced Primers							
	D) Optical Clarity of Scope							
645	Inspect for Live Ammo						8/16/94	Ru
655	Final Inspection							
	A) Headspace						8/16/94	Ru
	B) Trigger Pull	2.46	2.33	2.32	2.37	2.43	8/16/94	Ru
	C) Function						8/16/94	Ru
660	Pack							