

**BARBER - M24 0098304**

G 652 1234


**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON**

**BARBER - M24 0098304** **M2400098343**


M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)  
BOLT ACTION CENTERFIRE RIFLE  
24" BARREL 7.62 NATO

- INSTUCTION BOOK 3518

proof of purchase



owner registration sticker



DD FORM


ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

G6521234

UPC



**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

**UPC**



**ORDER 25716**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

**UPC**



SERIAL NO.



## INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL #

G 6521234

| OP #         | OPERATION NAME                                                                                                                         | READINGS                          | DATE     | INITIAL      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|----------|--------------|
| 420 &<br>430 | ASSEMBLE ACTION<br>ASSEMBLE TO STOCK                                                                                                   |                                   | 10/12/05 | CD           |
| 440          | PROOF                                                                                                                                  |                                   | 10/12/05 | CD           |
| 460          | CHECK HEADSPACE                                                                                                                        |                                   | 10/12/05 | CD           |
| 470          | DIS-ASSEMBLE ACTION                                                                                                                    |                                   | 10/12/05 | CD           |
| 480 &<br>490 | MAGNAFLUX BBL ACTION<br>MAGNAFLUX BOLT                                                                                                 | <del>10/18/05</del> <i>unmet.</i> | 10/18/05 | <i>unmet</i> |
| 500          | ROLLMARK CALIBER                                                                                                                       |                                   | 10/18/05 | CW           |
| 510          | DRILL AND TAP<br>SIGHT HOLES                                                                                                           |                                   | 10/14/05 | BR           |
| 520          | GOFF BLAST BBL / REC                                                                                                                   |                                   | 10/15/05 | DC           |
| 530 &<br>540 | APPLY COATINGS<br>(BARREL ACTION)                                                                                                      |                                   | 10/24/05 | RB           |
|              | (BOLT)                                                                                                                                 |                                   | 10/24/05 | RB           |
| 560          | RE-ASSEMBLE ACTION<br>A) CLEAN INSIDE OF<br>BOLT ASSEMBLY                                                                              |                                   | 10/31/05 | MTM          |
|              | B) INSPECT REAR FIRING<br>PIN HOLE FOR CHAMFER<br>IN BOLT HEAD                                                                         |                                   | 10/31/05 | MTM          |
|              | C) INSPECT EJECTOR<br>HOLE FOR CHAMFER                                                                                                 |                                   | 10/31/05 | MTM          |
|              | D) OIL FIRING PIN ASSEMBLY                                                                                                             |                                   | 11-3-05  | RR           |
|              | E) ADJUST TRIGGER PULL<br>TO MIN. SETTING AND<br>STAKE <span style="border: 1px solid black; padding: 2px;">2.50 LBS +/- .5 LBS</span> |                                   |          |              |

REV-8405

| OPERATION NAME |                                                                       |                                           | READINGS    |             |             | DATE        | INITIAL     |          |    |
|----------------|-----------------------------------------------------------------------|-------------------------------------------|-------------|-------------|-------------|-------------|-------------|----------|----|
| 560            | F) SAFETY ON FORCE                                                    | 2 LBS MIN<br>10 LBS MAX                   | <u>6.0</u>  | <u>6.0</u>  | <u>6.5</u>  | 11/14/05    | DA          |          |    |
| CONT.          | G) SAFETY OFF FORCE                                                   | 2 LBS MIN                                 | <u>2.0</u>  | <u>2.0</u>  | <u>2.0</u>  | 11/14/05    | DA          |          |    |
|                | H) TRIGGER PULL TEST<br>AND RETAINABILITY                             |                                           |             |             |             |             |             |          |    |
|                | I) FIRING PIN INDENT                                                  | .020 MIN                                  | <u>1023</u> | <u>1023</u> | <u>1021</u> |             | DA          |          |    |
|                | J) ASSEMBLE STOCK                                                     |                                           |             |             |             | 11-3-05     | RTZ         |          |    |
|                | K) ASSEMBLE SWIVEL<br>STUDS                                           |                                           |             |             |             | 11-16-05    | AC          |          |    |
|                | L) ATTACH FRONT AND<br>REAR SIGHT ASSY'S                              |                                           |             |             |             | 11-16-05    | AC          |          |    |
|                | M) IRON SIGHT<br>ALIGNMENT                                            |                                           |             |             |             | 11-16-05    | AC          |          |    |
|                | N) DETACH FRONT AND<br>REAR SIGHTS AND PLACE<br>IN NUMBERED CONTAINER |                                           |             |             |             | 11-16-05    | AC          |          |    |
| 640 &<br>650   | FUNCTION TEST AND<br>TARGET                                           |                                           | <u>PASS</u> | FAIL        |             | 11/7/05     | MGJ         |          |    |
|                |                                                                       |                                           | PASS        | FAIL        |             |             |             |          |    |
|                | MALFUNCTION                                                           |                                           | CORRECTION  |             |             |             |             |          |    |
|                | MALFUNCTION                                                           |                                           | CORRECTION  |             |             |             |             |          |    |
|                | MALFUNCTION                                                           |                                           | CORRECTION  |             |             |             |             |          |    |
|                | MALFUNCTION                                                           |                                           | CORRECTION  |             |             |             |             |          |    |
| 660            | INSPECT FOR LIVE AMMO                                                 |                                           |             |             |             | 11/7/05     | MTM         |          |    |
| 670            | FINAL INSPECTION<br>A) HEADSPACE                                      |                                           |             |             |             | 11-16-05    | AC          |          |    |
|                | B) TRIGGER PULL                                                       | +/- .5 LBS<br>MIN 2.50 LBS<br>MAX 4.0 LBS | <u>2.79</u> | <u>2.70</u> | <u>2.50</u> | <u>2.82</u> | <u>2.66</u> | 11/14/05 | DA |
|                | C) FUNCTION                                                           |                                           |             |             |             | 11/16/05    | AC          |          |    |
| 690            | PACK                                                                  |                                           |             |             |             | 1/4/06      | DA          |          |    |

INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)  
 3.00 LBS (plus or minus 0.75 LBS)  
 4.00 LBS (plus or minus 1.00 LBS)

DATE 10-21-05

TESTER S.F.

|         | 2.50 LBS<br>INITIAL | 2.50 LBS AFTER<br>50 CYCLES | FINAL TEST & TO RESET<br>2.50 LBS |       | COMMENTS |
|---------|---------------------|-----------------------------|-----------------------------------|-------|----------|
| PULL #1 | 2.46                | 2.44                        |                                   | 2.43  |          |
| PULL #2 | 2.45                | 2.61                        |                                   | 2.45  |          |
| PULL #3 | 2.55                | 2.63                        |                                   | 2.56  |          |
| PULL #4 | 2.48                | 2.66                        |                                   | 2.48  |          |
| PULL #5 | 2.55                | 2.40                        |                                   | 2.53  |          |
| TOTAL   | 12.49               | 12.74                       |                                   | 12.45 |          |
| AVERAGE | 2.50                | 2.55                        |                                   | 2.49  |          |

|         | 3.00 LBS<br>INITIAL | 3.00 LBS AFTER<br>20 CYCLES |  | COMMENTS |
|---------|---------------------|-----------------------------|--|----------|
| PULL #1 | 3.10                | 3.07                        |  |          |
| PULL #2 | 3.12                | 3.26                        |  |          |
| PULL #3 | 3.20                | 3.23                        |  |          |
| PULL #4 | 2.94                | 3.22                        |  |          |
| PULL #5 | 3.11                | 3.16                        |  |          |
| TOTAL   | 15.47               | 15.94                       |  |          |
| AVERAGE | 3.09                | 3.19                        |  |          |

|         | 4.00 LBS<br>INITIAL | 4.00 LBS AFTER<br>20 CYCLES | MAX SETTING GREATER<br>THAN 4 LBS | RESET TO 4 LBS FOR<br>TARGET & ACCURACY |
|---------|---------------------|-----------------------------|-----------------------------------|-----------------------------------------|
| PULL #1 | 3.96                | 3.89                        |                                   | 4.00                                    |
| PULL #2 | 4.10                | 3.94                        |                                   | 4.03                                    |
| PULL #3 | 4.13                | 3.95                        |                                   | 4.16                                    |
| PULL #4 | 4.09                | 3.90                        |                                   | 4.17                                    |
| PULL #5 | 4.08                | 3.97                        |                                   | 4.27                                    |
| TOTAL   | 20.36               | 19.65                       |                                   | 20.63                                   |
| AVERAGE | 4.07                | 3.93                        |                                   | 4.13                                    |

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6521234.\_\_\_0  
FILE DATE AND TIME: 11/07/2005 19:04

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | -0.025 |
| The Average Y Centroid of the Five Target Set:              | 0.121  |
| The Average Point of Impact of the Five Target Set:         | 0.123  |
| The Average Mean Radius of the Five Target Set:             | 0.874  |
| The Distance from POA to Centroid Target #1:                | 0.222  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.221  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.169  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.339  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.353  |

**BARBER - M24 0098311**

SERIAL NUMBER: G6521234. \_\_0  
TARGET NUMBER: 1  
FILE DATE: 11/07/2005  
FILE TIME: 19:04

X CENTROID: 0.005  
Y CENTROID: 0.222  
POA TO CENTROID: 0.222  
HORZ SPREAD: 2.266  
VERT SPREAD: 2.978  
GROUP SPREAD: 3.110  
MIN RADIUS: 0.323  
MAX RADIUS: 1.607  
MEAN RADIUS: 1.139  
# IN 1 IN DIAMETER: 1  
# IN 2 IN DIAMETER: 4  
# in 3 IN DIAMETER: 7

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.113 | 0.523  |
| 2:     | -0.171 | 0.842  |
| 3:     | -0.632 | 1.589  |
| 4:     | -0.110 | 1.672  |
| 5:     | 0.292  | 1.098  |
| 6:     | 1.459  | 0.014  |
| 7:     | 0.295  | -0.749 |
| 8:     | 0.503  | -1.306 |
| 9:     | -0.807 | -1.097 |
| 10:    | -0.671 | -0.369 |

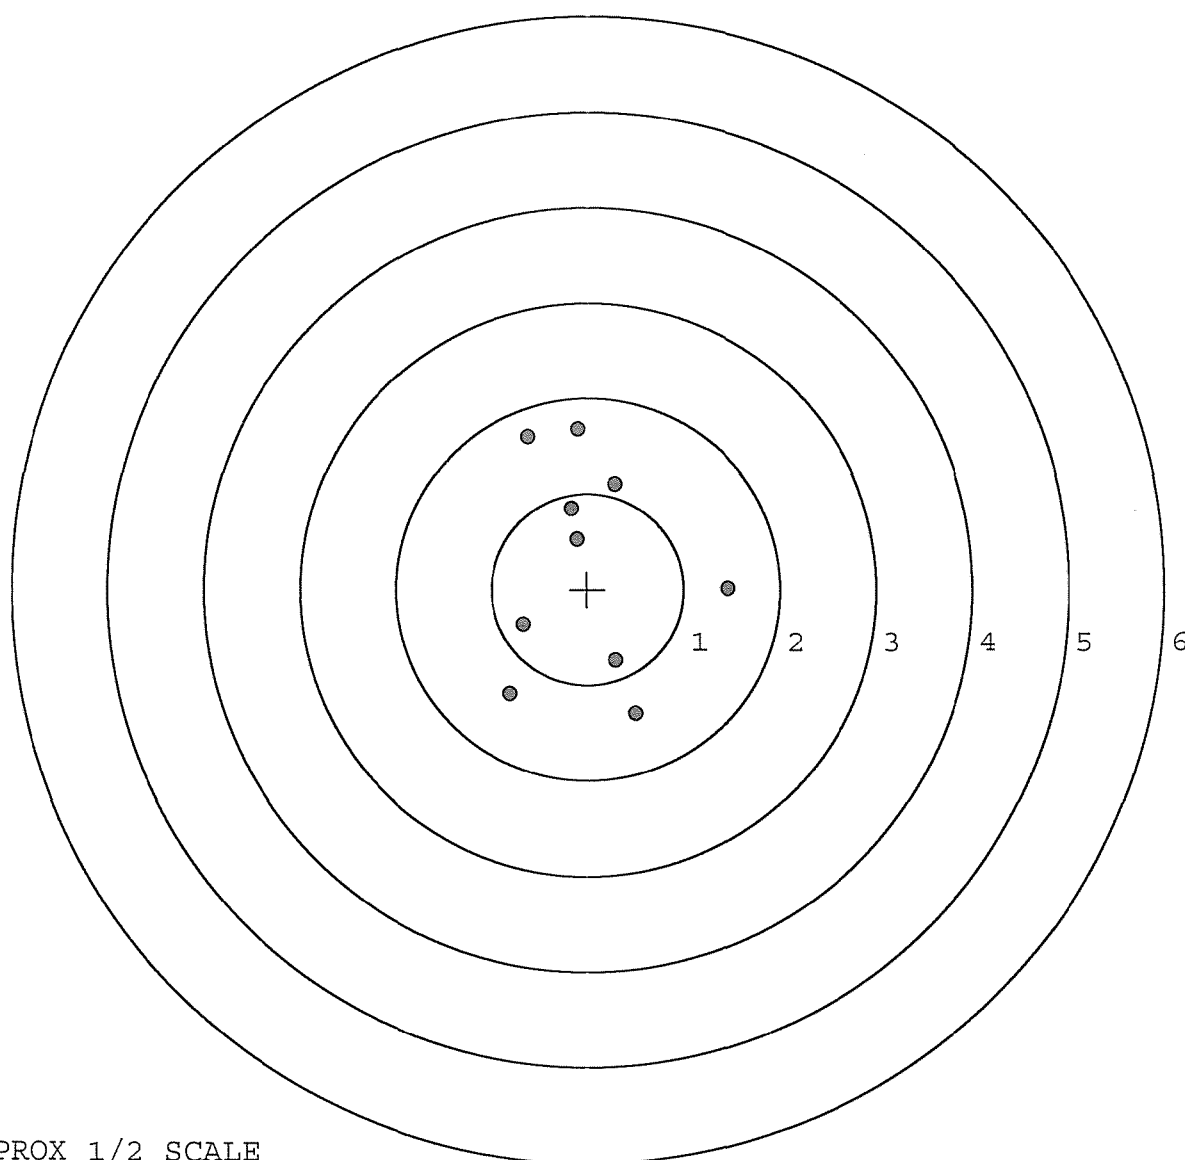


TARGET APPROX 1/2 SCALE

**BARBER - M24 0098312**

SERIAL NUMBER: G6521234.\_\_\_\_0  
TARGET NUMBER: 2  
FILE DATE: 11/07/2005  
FILE TIME: 19:04

X CENTROID: 0.016  
Y CENTROID: 0.442  
POA TO CENTROID: 0.442  
HORZ SPREAD: 1.908  
VERT SPREAD: 3.738  
GROUP SPREAD: 3.761  
MIN RADIUS: 0.393  
MAX RADIUS: 2.628  
MEAN RADIUS: 1.126  
# IN 1 IN DIAMETER: 1  
# IN 2 IN DIAMETER: 3  
# in 3 IN DIAMETER: 9

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.360 | 0.558  |
| 2:     | -0.369 | 0.854  |
| 3:     | -1.108 | 0.660  |
| 4:     | -0.039 | -0.604 |
| 5:     | 0.275  | -0.672 |
| 6:     | 0.382  | -0.615 |
| 7:     | 0.800  | -0.446 |
| 8:     | 0.605  | -0.070 |
| 9:     | 0.109  | 1.689  |
| 10:    | -0.138 | 3.066  |

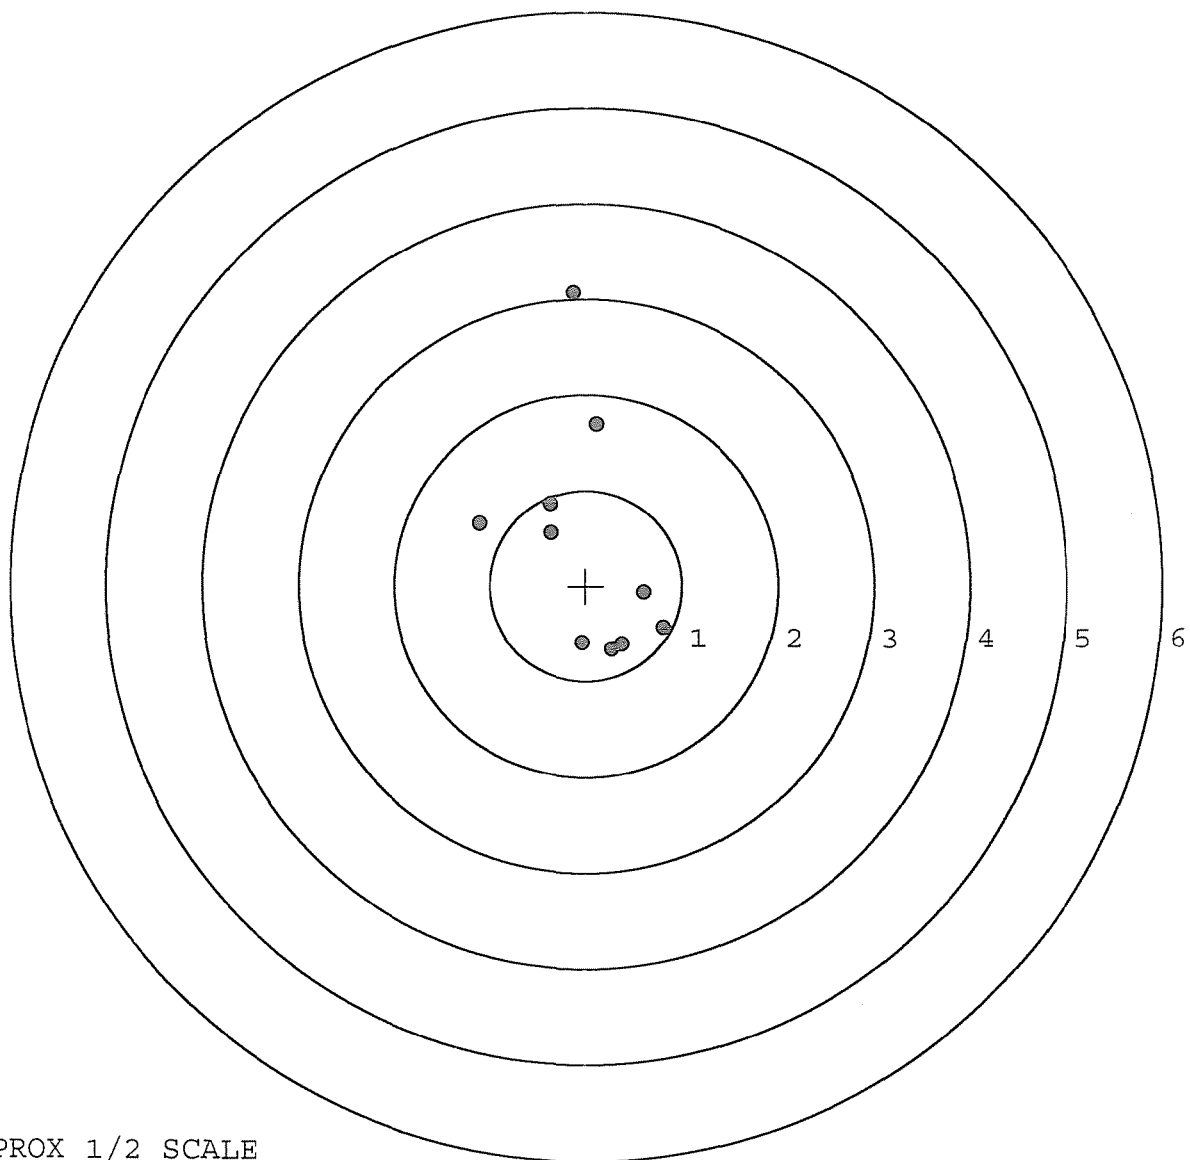


TARGET APPROX 1/2 SCALE

**BARBER - M24 0098313**

SERIAL NUMBER: G6521234. \_\_0  
TARGET NUMBER: 3  
FILE DATE: 11/07/2005  
FILE TIME: 19:04

X CENTROID: -0.008  
Y CENTROID: 0.053  
POA TO CENTROID: 0.054  
HORZ SPREAD: 1.693  
VERT SPREAD: 2.347  
GROUP SPREAD: 2.354  
MIN RADIUS: 0.375  
MAX RADIUS: 1.512  
MEAN RADIUS: 0.852  
# IN 1 IN DIAMETER: 2  
# IN 2 IN DIAMETER: 8  
# in 3 IN DIAMETER: 9

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.464  | 0.653  |
| 2:     | 0.808  | 0.477  |
| 3:     | 0.340  | 0.284  |
| 4:     | 0.206  | -0.255 |
| 5:     | 0.787  | -0.488 |
| 6:     | 0.017  | -0.659 |
| 7:     | -0.588 | -1.343 |
| 8:     | -0.885 | 0.216  |
| 9:     | -0.459 | 0.643  |
| 10:    | -0.771 | 1.004  |

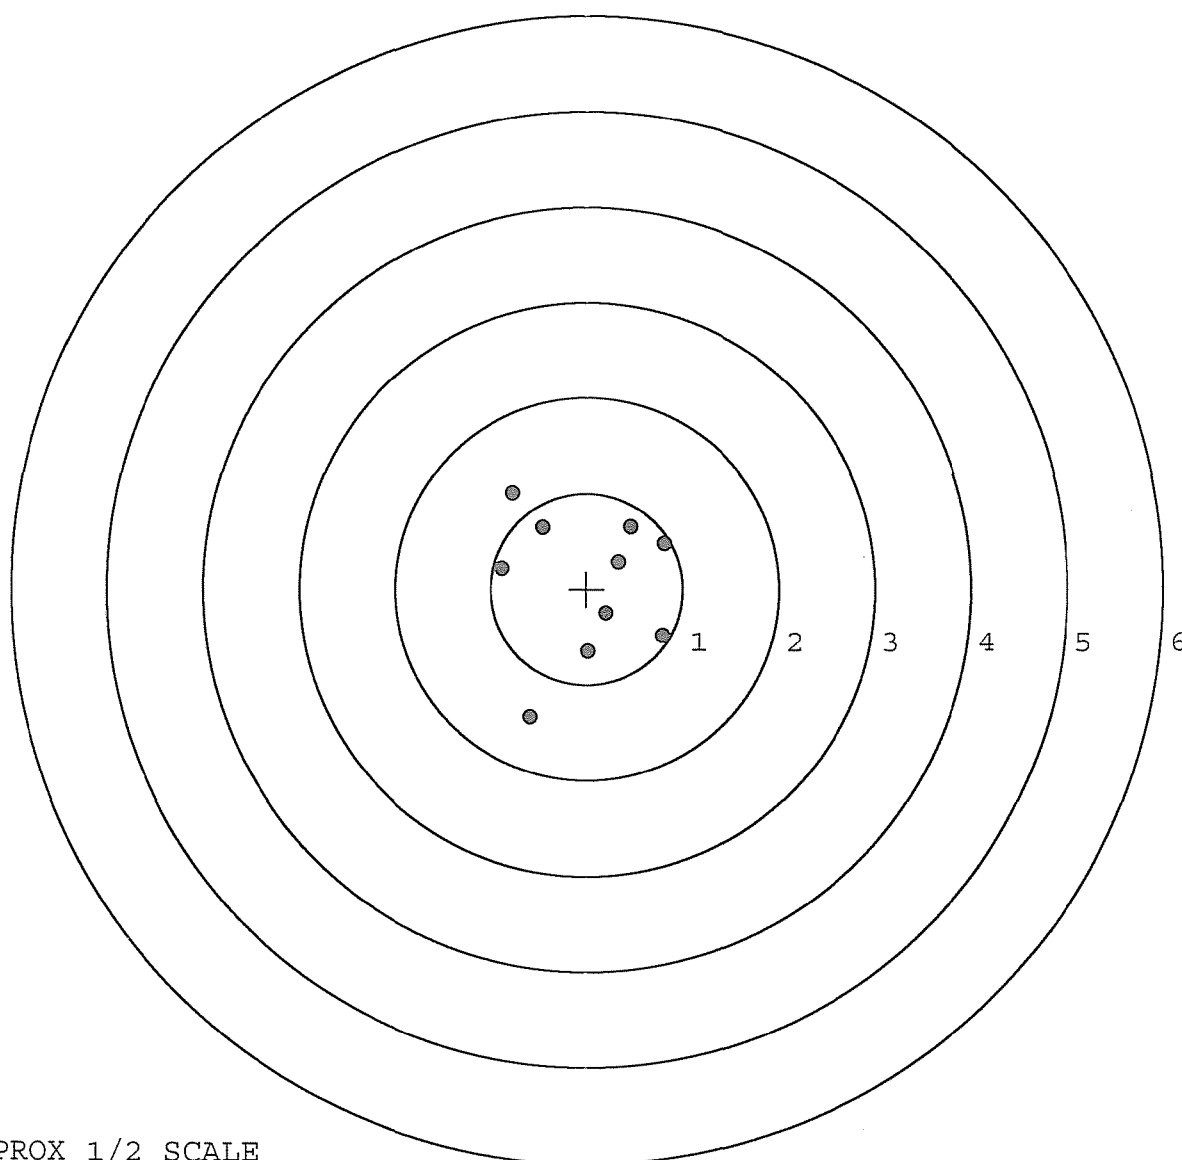


TARGET APPROX 1/2 SCALE

**BARBER - M24 0098314**

SERIAL NUMBER: G6521234. \_\_0  
TARGET NUMBER: 4  
FILE DATE: 11/07/2005  
FILE TIME: 19:04

X CENTROID: -0.253  
Y CENTROID: 0.001  
POA TO CENTROID: 0.253  
HORZ SPREAD: 1.781  
VERT SPREAD: 1.615  
GROUP SPREAD: 1.781  
MIN RADIUS: 0.159  
MAX RADIUS: 1.044  
MEAN RADIUS: 0.562  
# IN 1 IN DIAMETER: 4  
# IN 2 IN DIAMETER: 9  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | -0.079 | 0.531  |
| 2:     | -0.026 | 0.973  |
| 3:     | -0.505 | 0.057  |
| 4:     | -0.595 | -0.141 |
| 5:     | -0.219 | -0.154 |
| 6:     | -0.108 | -0.642 |
| 7:     | 0.271  | -0.224 |
| 8:     | 0.496  | -0.187 |
| 9:     | -1.285 | -0.159 |
| 10:    | -0.484 | -0.042 |

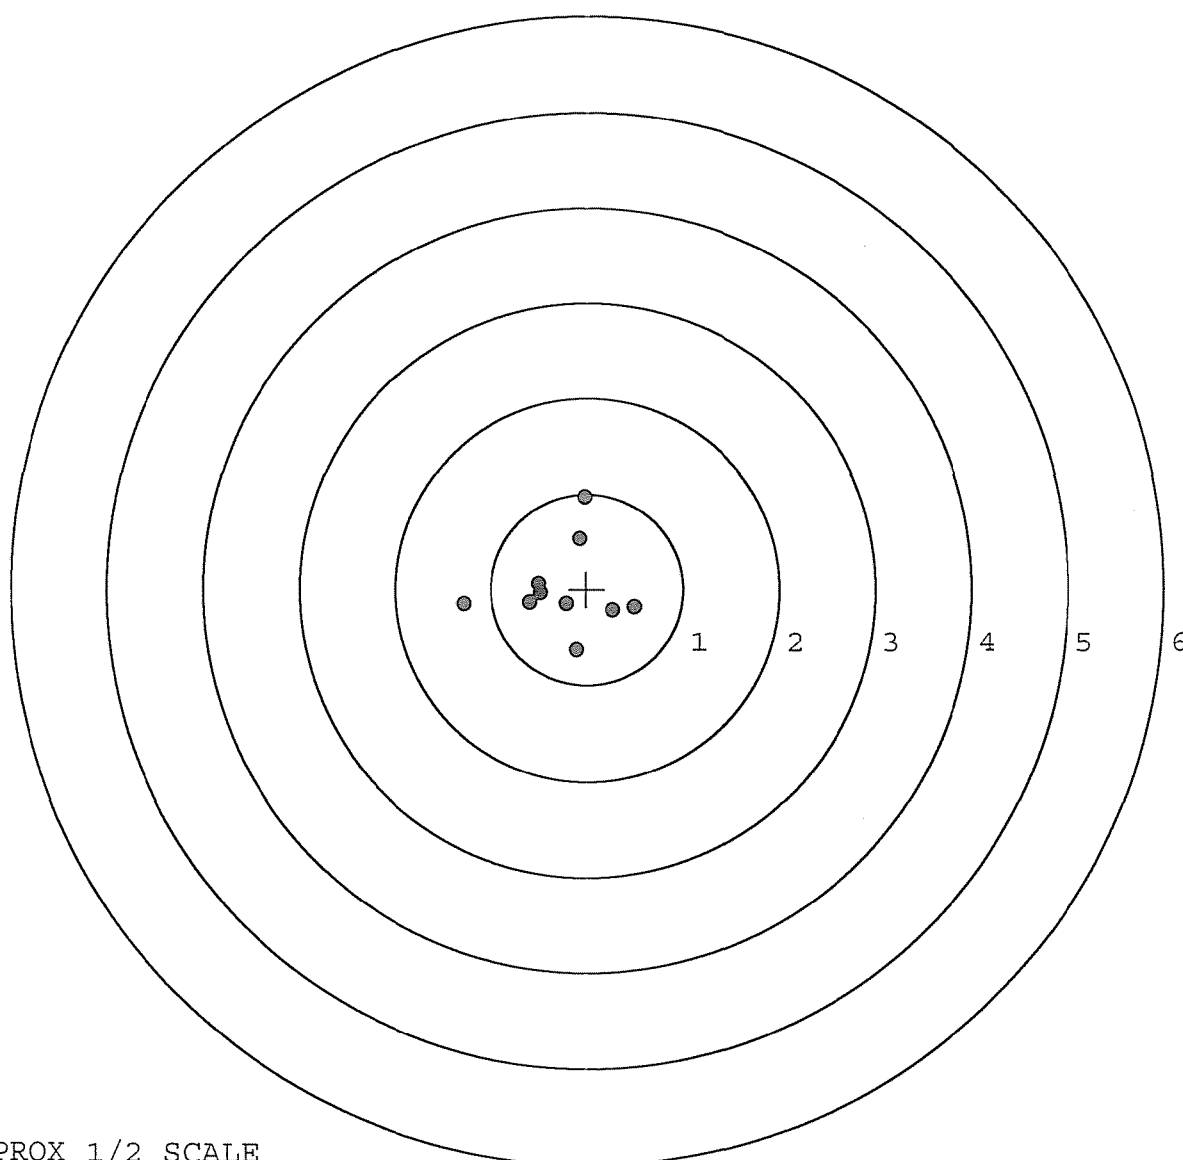


TARGET APPROX 1/2 SCALE

**BARBER - M24 0098315**

SERIAL NUMBER: G6521234. \_\_0  
TARGET NUMBER: 5  
FILE DATE: 11/07/2005  
FILE TIME: 19:04

X CENTROID: 0.116  
Y CENTROID: -0.114  
POA TO CENTROID: 0.162  
HORZ SPREAD: 1.252  
VERT SPREAD: 2.691  
GROUP SPREAD: 2.873  
MIN RADIUS: 0.153  
MAX RADIUS: 1.492  
MEAN RADIUS: 0.694  
# IN 1 IN DIAMETER: 5  
# IN 2 IN DIAMETER: 7  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.367  | 0.262  |
| 2:     | 0.350  | 0.053  |
| 3:     | 0.361  | -0.270 |
| 4:     | 0.277  | -0.423 |
| 5:     | -0.157 | -0.533 |
| 6:     | -0.147 | -0.795 |
| 7:     | 0.545  | -1.543 |
| 8:     | 0.004  | 1.148  |
| 9:     | -0.707 | 1.043  |
| 10:    | 0.265  | -0.079 |

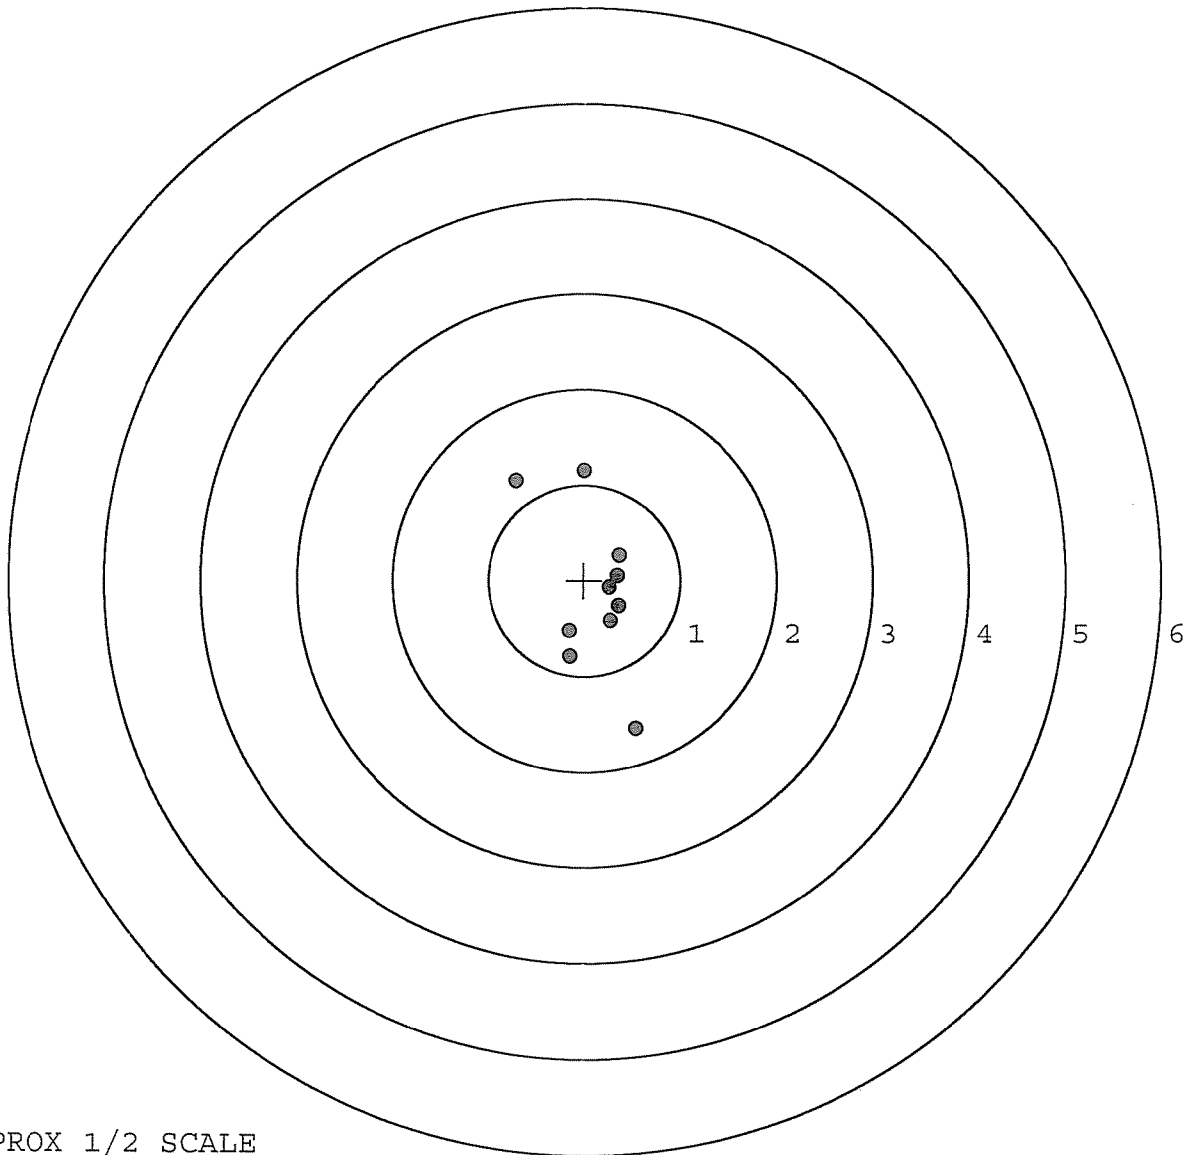

TARGET APPROX 1/2 SCALE