

G 652 1397
A2

ORDER 27246

M24A2 7.62 NATO COMPLETE SYSTEM

UPC



ORDER 27246

M24A2 7.62 NATO COMPLETE SYSTEM

UPC



SERIAL NO.



M24A2 7.62 NATO COMPLETE SYSTEM
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO


- INSTRUCTION BOOK 3518

BM FORM



ORDER NO.	27246
BARREL LENGTH	24"
CAPACITY	6

G6521397



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL #

G 6521397

~~G 6461790~~

OP #	OPERATION NAME	READINGS	DATE	INITIAL
420 & 430	ASSEMBLE ACTION ASSEMBLE TO STOCK		1-19-06	RTZ
440	PROOF		1-19-06	RTZ
460	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	1-19-06	RTZ
470	DIS-ASSEMBLE ACTION	JAN 20 2006	1-19-06	RTZ
480 & 490	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OP 480 OPERATOR CPD	1-20-06	APD
500	ROLLMARK CALIBER		1-19-06	CW
510	DRILL AND TAP SIGHT HOLES	N/A		
520	GOFF BLAST BBL / REC		1-20-06	LB
530 & 540	APPLY COATINGS (BARREL ACTION)		1/23	HP
	(BOLT)			
560	RE-ASSEMBLE ACTION			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		1-23-06	A
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		1-23-06	A
	C) INSPECT EJECTOR HOLE FOR CHAMFER		1-23-06	A
	D) OIL FIRING PIN ASSEMBLY		1-2-06	RTZ
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		


REV-8405

OP #	OPERATION NAME	READINGS	DATE	INITIAL
560	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>6.5</u> <u>6.2</u> <u>6.4</u>	8-22-07	DA
CONT.	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.5</u> <u>3.5</u> <u>4.0</u>	8-22-07	DA
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.021</u> <u>.022</u> <u>.022</u>	8-22-07	DA
	J) ASSEMBLE STOCK		3-6-06	RTZ
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		3-6-06	RTZ
	M) IRON SIGHT ALIGNMENT		3-6-06	RTZ
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		3-6-06	RTZ
640 & 650	FUNCTION TEST AND TARGET	<u>PASS</u> FAIL <u>PASS</u> FAIL	8-6-07 3-6-06	TRW TRW
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
660	INSPECT FOR LIVE AMMO	8-6-07 <u>FM</u>	3/6/06	RP.
670	FINAL INSPECTION A) HEADSPACE			
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.65</u> <u>2.70</u> <u>2.65</u> <u>2.69</u> <u>2.67</u>	8-22-07	DA
	C) FUNCTION			
690	PACK		8-22-07	DA

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 6/28/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. ini. +/- .50 lbs.

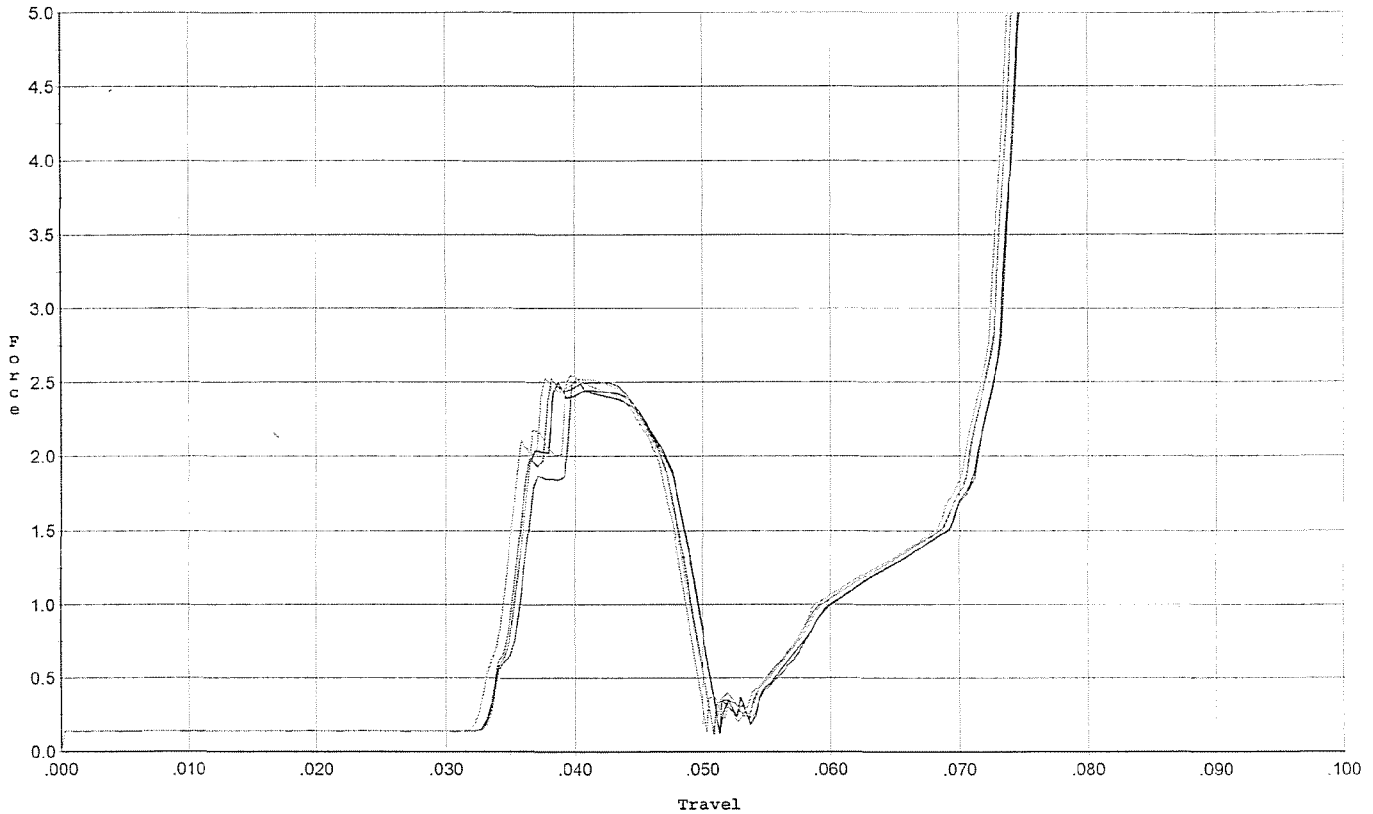


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.531	0.049	0.034	0.033	0.034		Set Trigger
2	2.498	0.049	0.033	0.033	0.035		Set Trigger
3	2.525	0.048	0.033	0.033	0.035		Set Trigger
4	2.553	0.049	0.034	0.033	0.034		Set Trigger
5	2.528	0.048	0.033	0.033	0.035		Set Trigger

Avg 2.52

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

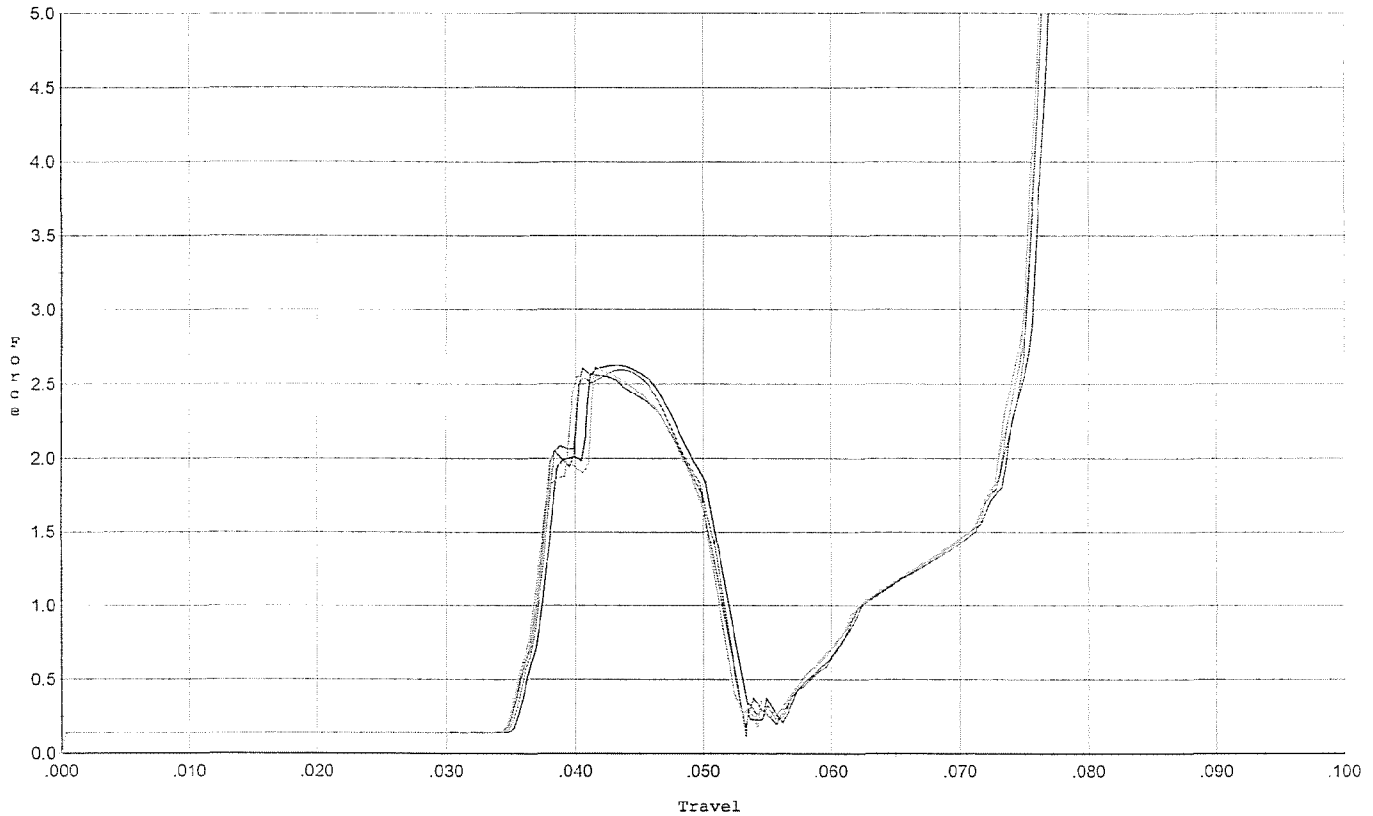


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.604	0.051	0.035	0.033	0.037		Set Trigger
2	2.623	0.050	0.036	0.033	0.036		Set Trigger
3	2.594	0.051	0.035	0.033	0.037		Set Trigger
4	2.620	0.050	0.035	0.033	0.035		Set Trigger
5	2.562	0.050	0.035	0.033	0.036		Set Trigger

Avg 2.60

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: R. Putch 6/28/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

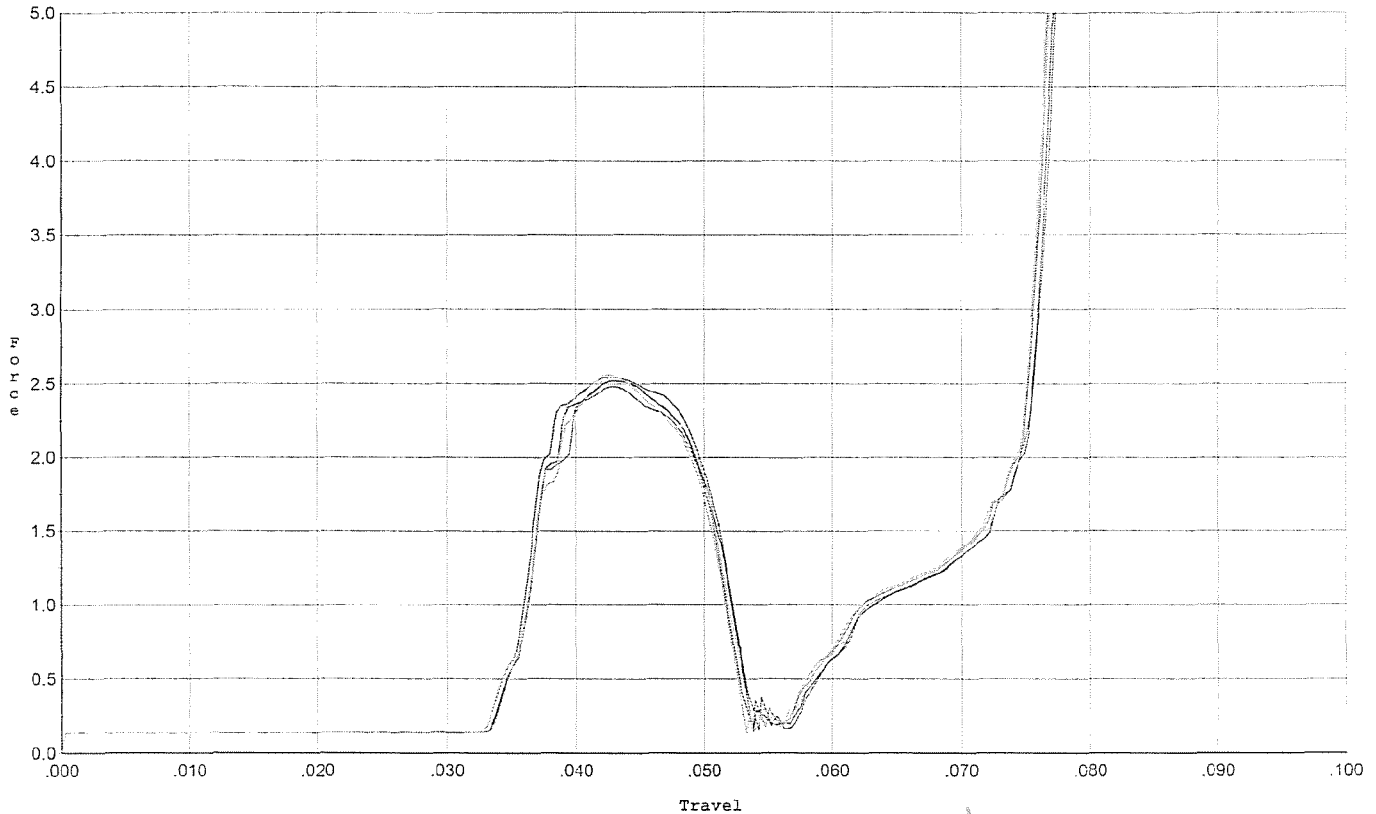


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.542	0.051	0.033	0.033	0.041		Set Trigger
2	2.519	0.051	0.034	0.033	0.039		Set Trigger
3	2.482	0.051	0.034	0.033	0.037		Set Trigger
4	2.560	0.051	0.033	0.033	0.039		Set Trigger
5	2.545	0.050	0.034	0.034	0.038		Set Trigger

Avg 2.53

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. ini. +/- .75 lbs.

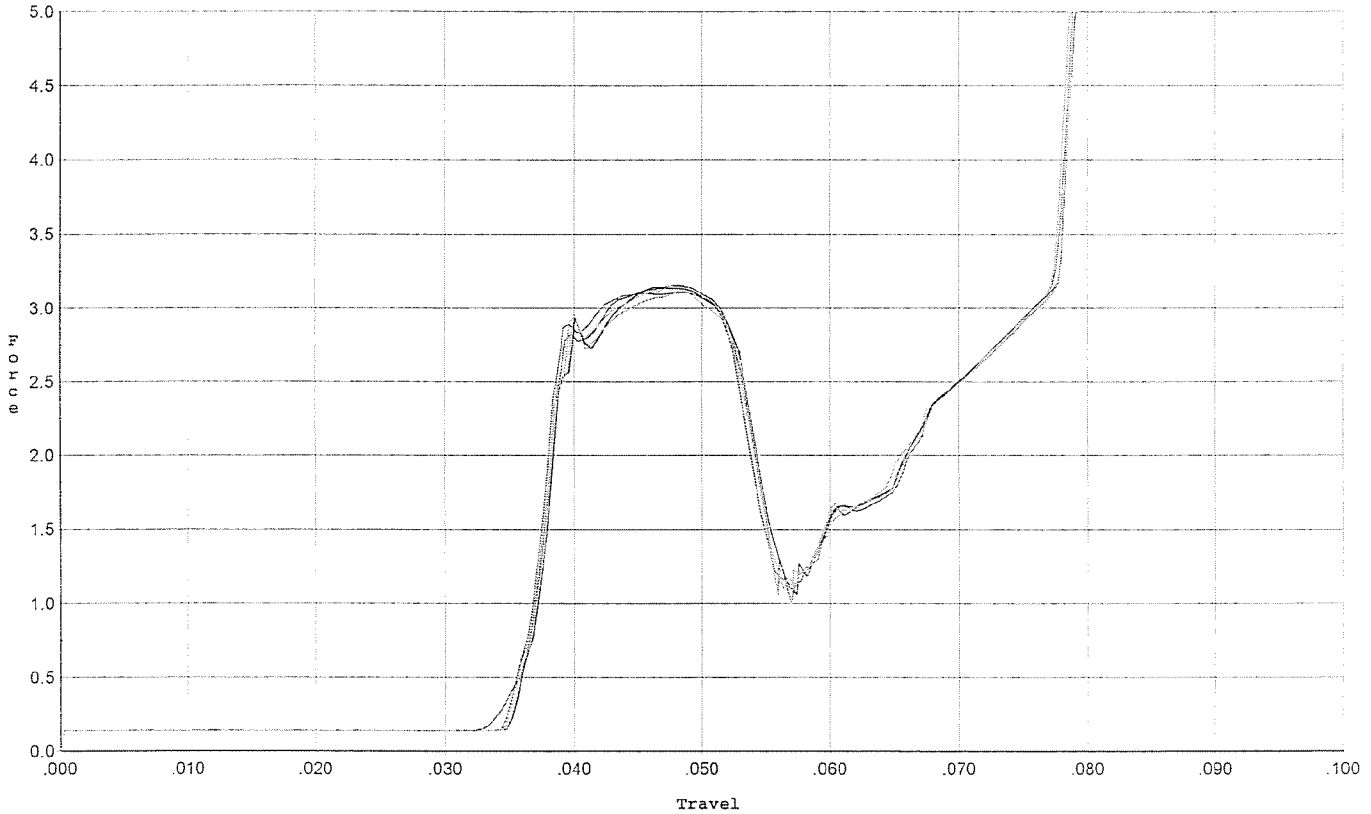


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.153	0.053	0.035	0.032	0.054		Set Trigger
2	3.142	0.053	0.035	0.032	0.053		Set Trigger
3	3.107	0.052	0.035	0.032	0.053		Set Trigger
4	3.118	0.053	0.035	0.032	0.053		Set Trigger
5	3.161	0.054	0.035	0.031	0.054		Set Trigger

Avg 3.13

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

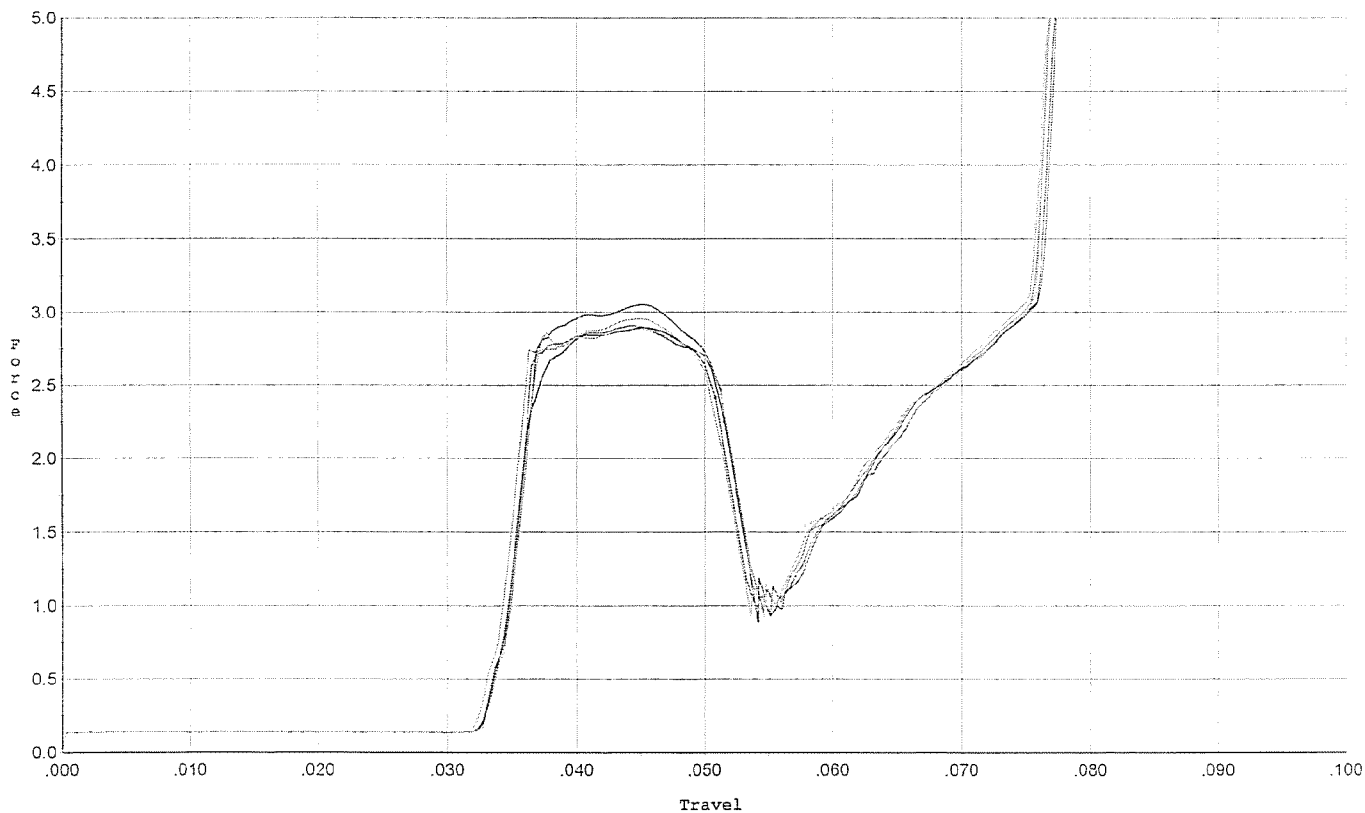


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.053	0.051	0.033	0.032	0.053		Set Trigger
2	2.896	0.052	0.033	0.032	0.051		Set Trigger
3	2.905	0.051	0.033	0.032	0.050		Set Trigger
4	2.955	0.051	0.033	0.032	0.051		Set Trigger
5	2.884	0.051	0.032	0.032	0.052		Set Trigger

AUG 2.93

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: -4.0 lbs. ini. +/- 1.0 lbs.

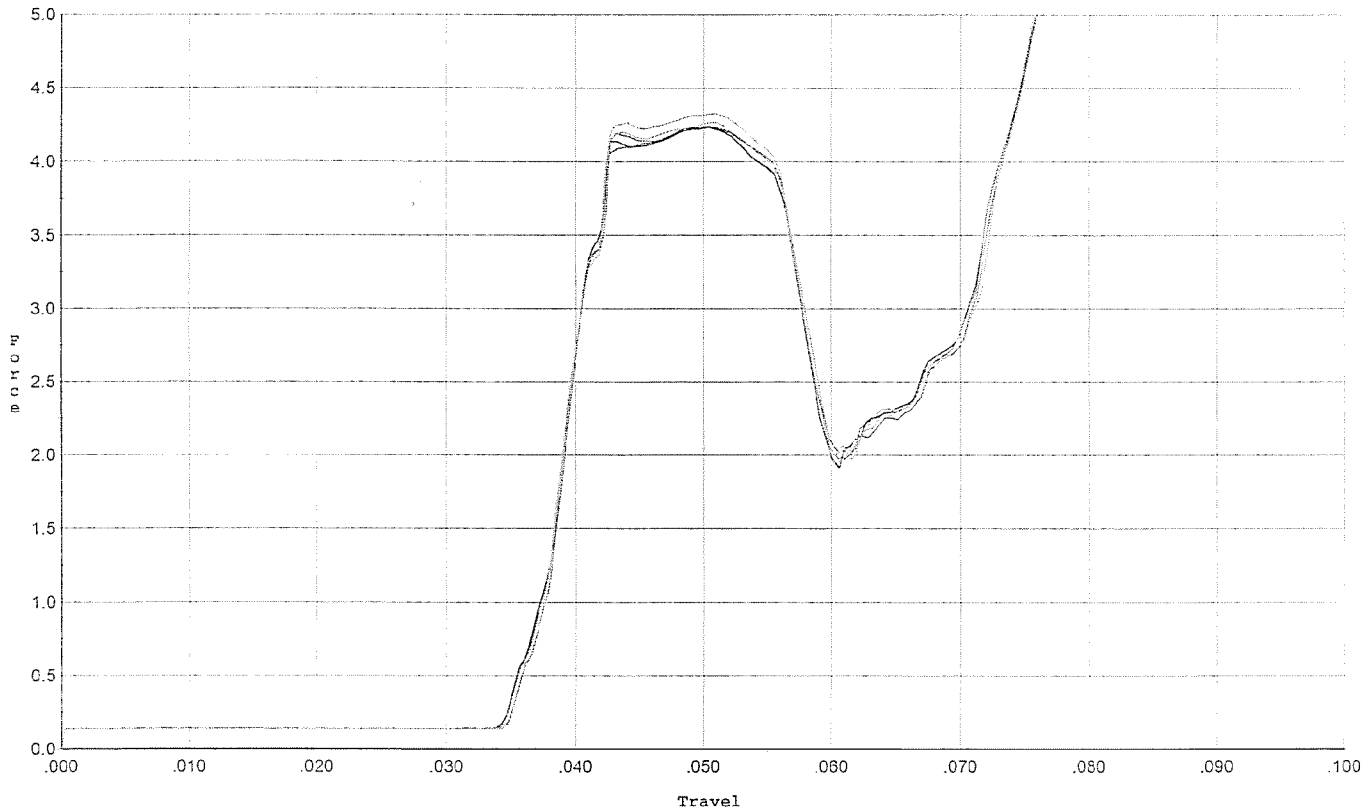


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.236	0.056	0.035	0.024	0.080		Set Trigger
2	4.233	0.056	0.035	0.024	0.080		Set Trigger
3	4.236	0.058	0.035	0.024	0.083		Set Trigger
4	4.266	0.056	0.035	0.024	0.080		Set Trigger
5	4.326	0.058	0.035	0.024	0.084		Set Trigger

Aug 4.25

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: -4.0 lbs. after 20 cycles +/- 1.0 lbs.

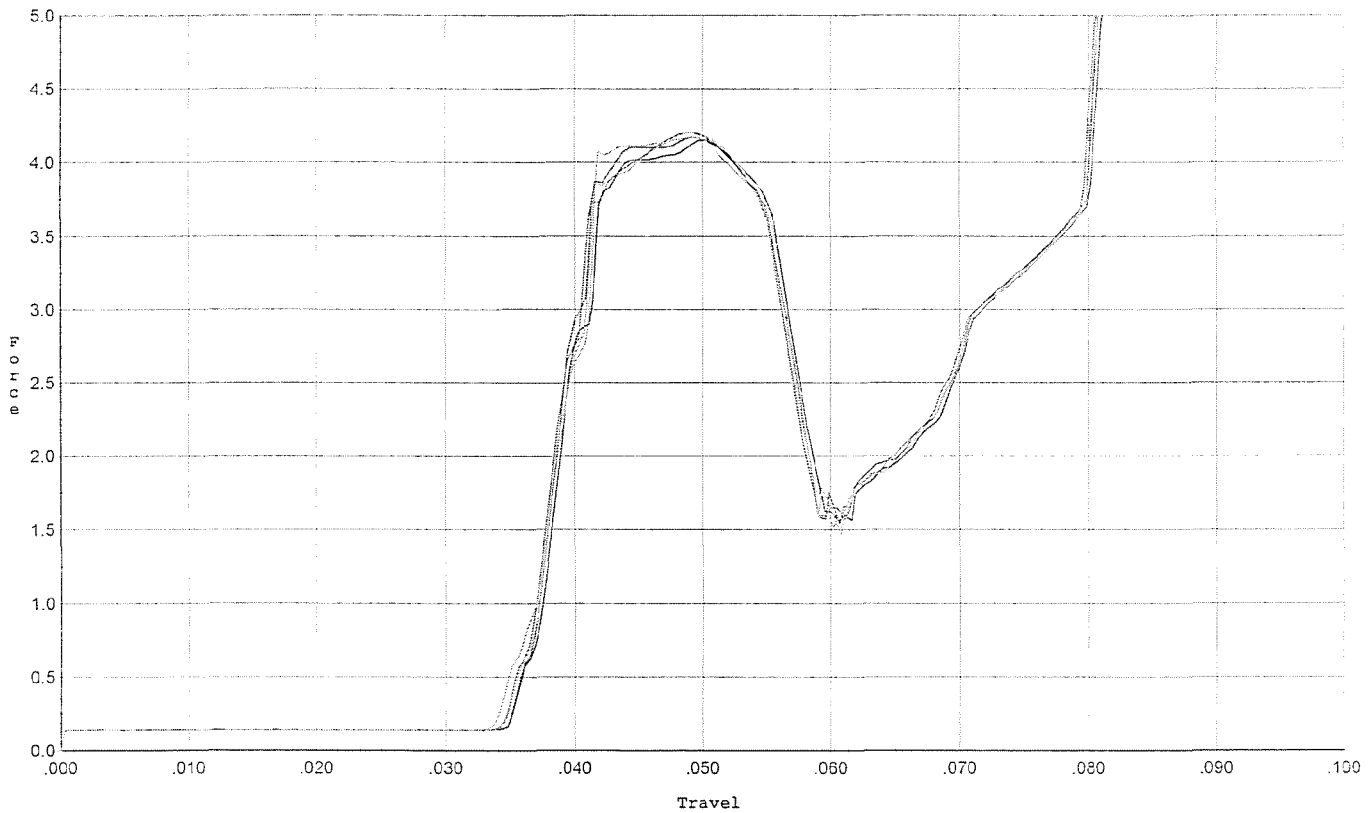


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.172	0.057	0.035	0.029	0.077		Set Trigger
2	4.149	0.055	0.035	0.030	0.075		Set Trigger
3	4.202	0.055	0.035	0.030	0.075		Set Trigger
4	4.204	0.056	0.035	0.029	0.076		Set Trigger
5	4.170	0.055	0.034	0.030	0.075		Set Trigger

Aug 4.17

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

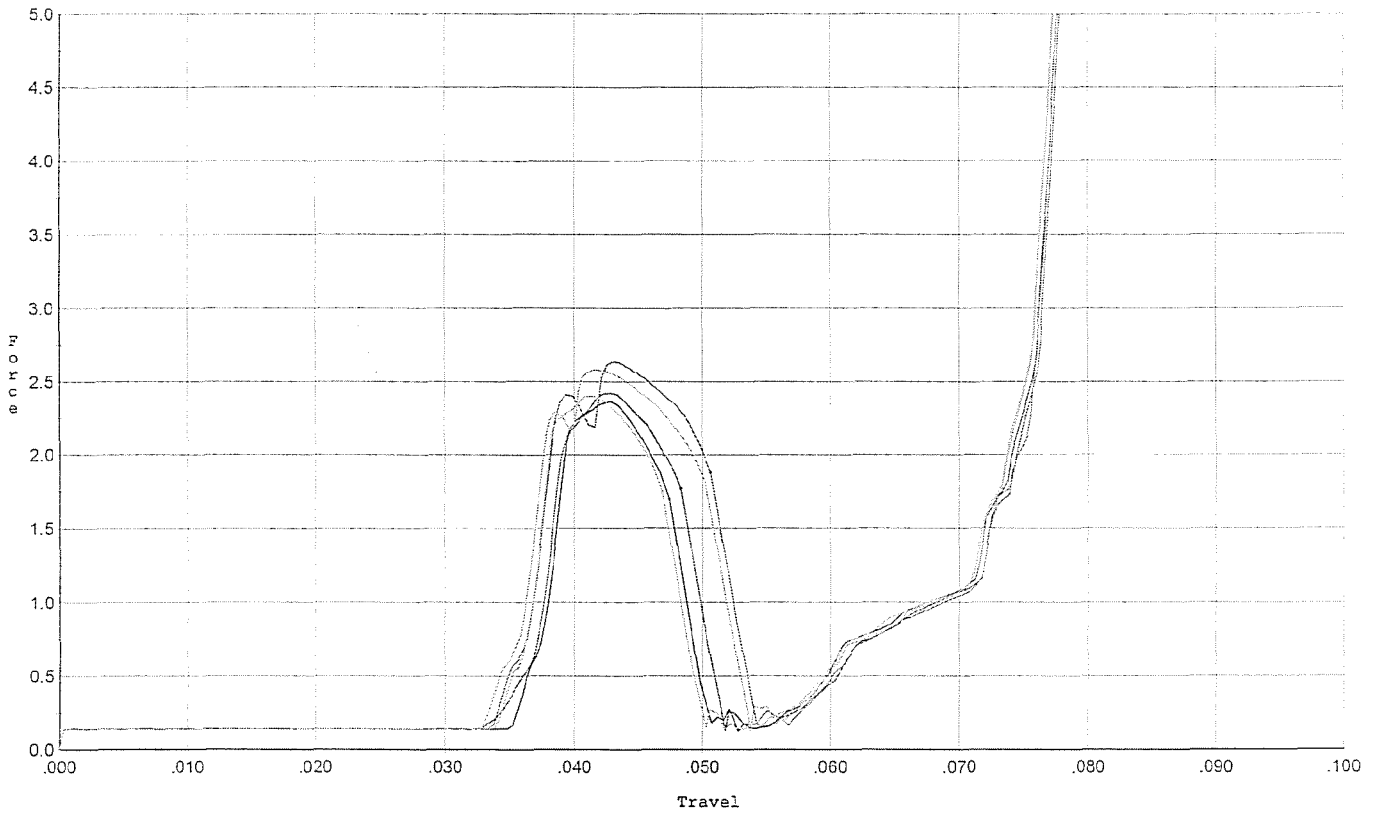


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.420	0.048	0.035	0.036	0.030		Set Trigger
2	2.364	0.047	0.036	0.037	0.027		Set Trigger
3	2.633	0.051	0.034	0.034	0.039		Set Trigger
4	2.403	0.047	0.034	0.036	0.029		Set Trigger
5	2.579	0.050	0.033	0.034	0.039		Set Trigger

Aug 2.48

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putsch 6/28/07

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

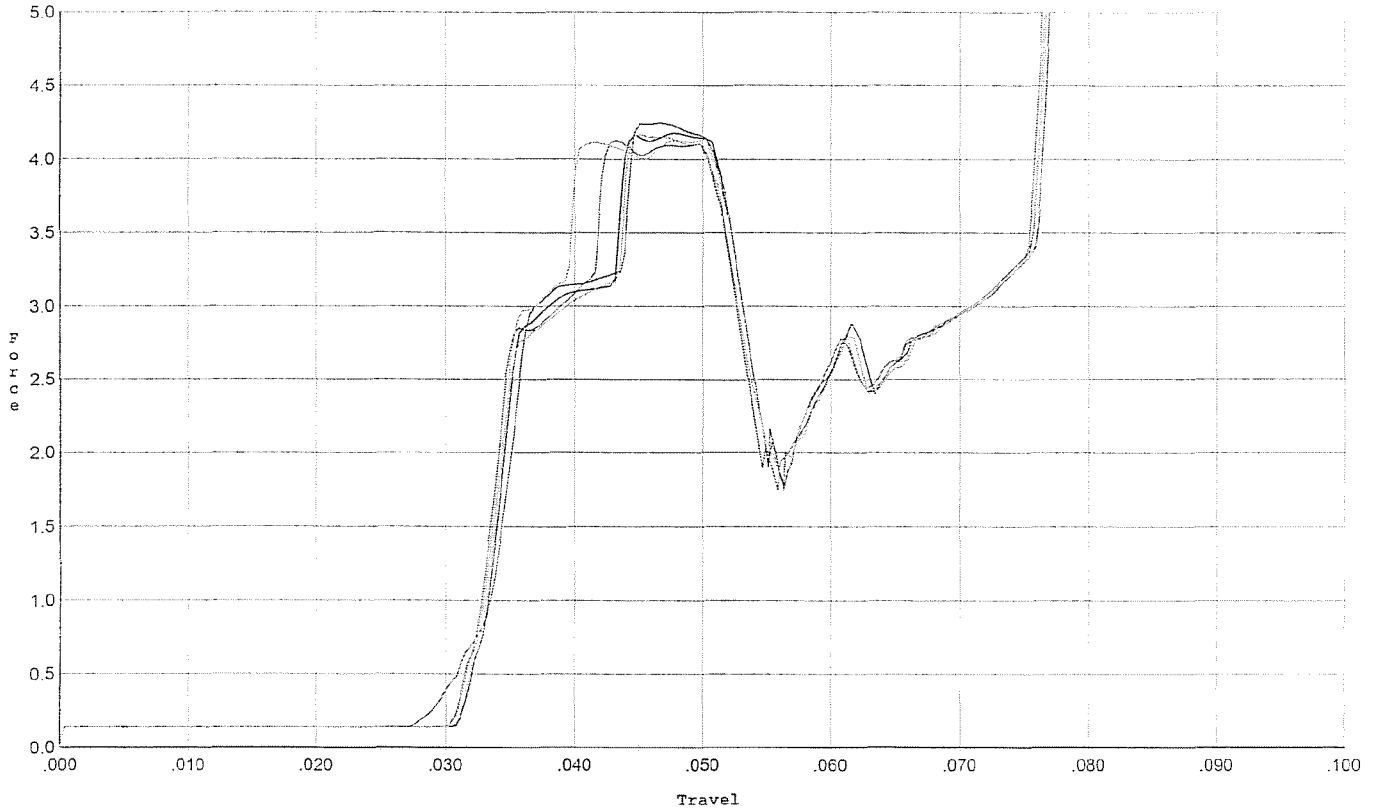

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.247	0.052	0.030	0.029	0.072		Set Trigger
2	4.176	0.052	0.031	0.029	0.072		Set Trigger
3	4.129	0.051	0.031	0.029	0.072		Set Trigger
4	4.139	0.052	0.031	0.029	0.075		Set Trigger
5	4.169	0.051	0.031	0.029	0.070		Set Trigger

AUG 4.17

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6521397.___0
FILE DATE AND TIME: 08/06/2007 11:25

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.072
The Average Y Centroid of the Five Target Set:	0.031
The Average Point of Impact of the Five Target Set:	0.079
The Average Mean Radius of the Five Target Set:	0.690
The Distance from POA to Centroid Target #1:	0.224
The Distance from Centroid Target #2 to Centroid Target #1:	0.285
The Distance from Centroid Target #3 to Centroid Target #1:	0.191
The Distance from Centroid Target #4 to Centroid Target #1:	0.165
The Distance from Centroid Target #5 to Centroid Target #1:	0.302

BARBER - M24 0100282

SERIAL NUMBER: G6521397. 0
 TARGET NUMBER: 1
 FILE DATE: 08/06/2007
 FILE TIME: 11:25

POINT#	X	Y
1:	0.127	0.542
2:	-0.296	0.930
3:	0.178	1.244
4:	0.289	-0.605
5:	0.145	-0.015
6:	-0.250	-0.327
7:	-0.283	-0.508
8:	-0.527	-0.819
9:	-0.768	-0.604
10:	-0.776	-0.410

X CENTROID: -0.216
 Y CENTROID: -0.057
 POA TO CENTROID: 0.224
 HORZ SPREAD: 1.065
 VERT SPREAD: 2.063
 GROUP SPREAD: 2.180
 MIN RADIUS: 0.272
 MAX RADIUS: 1.360
 MEAN RADIUS: 0.714
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

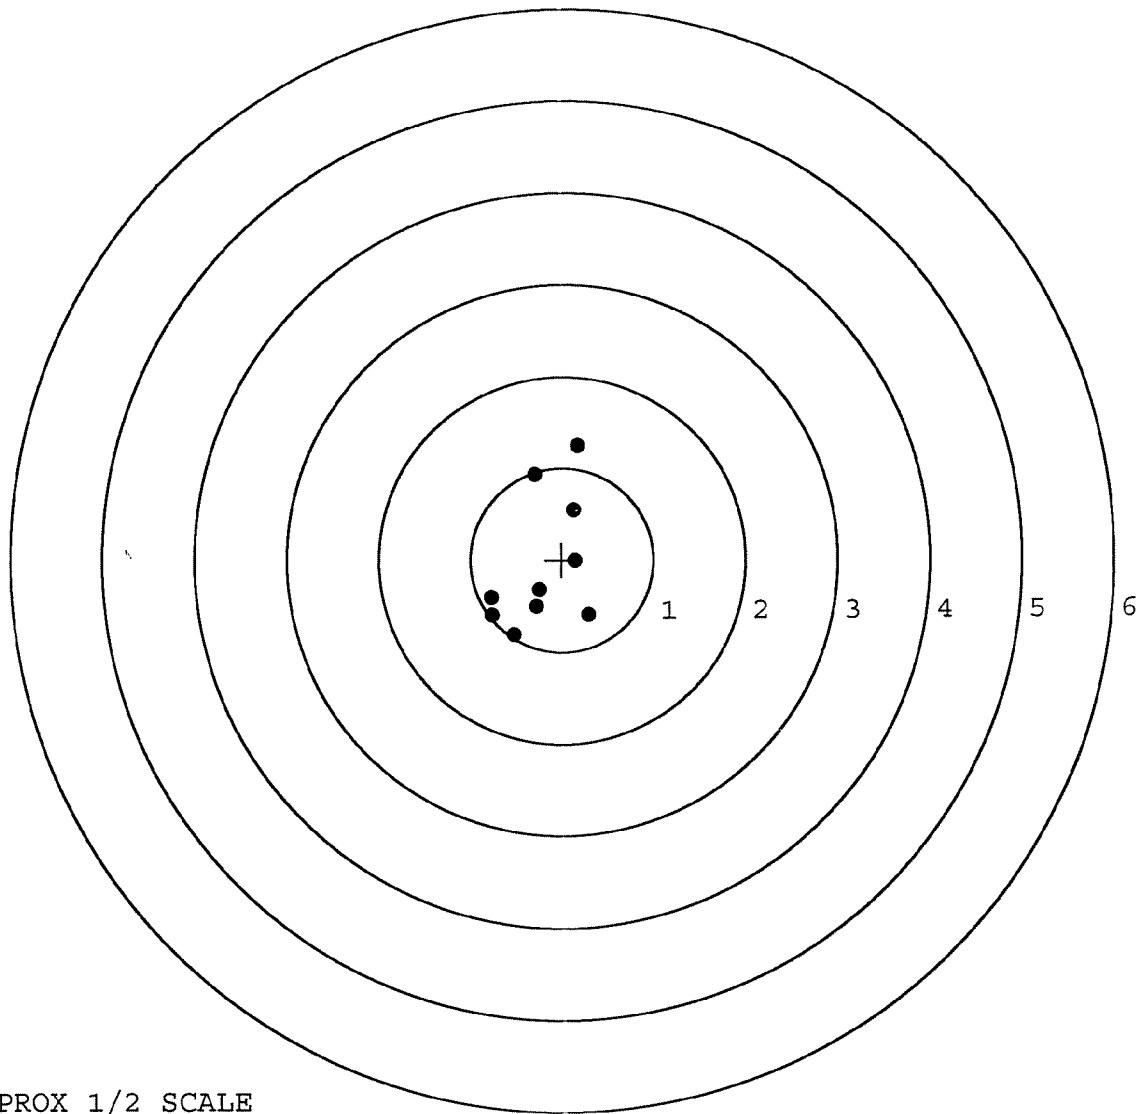


TARGET APPROX 1/2 SCALE

BARBER - M24 0100283

SERIAL NUMBER: G6521397. __0
 TARGET NUMBER: 2
 FILE DATE: 08/06/2007
 FILE TIME: 11:25

POINT#	X	Y
1:	0.892	0.084
2:	0.250	-0.388
3:	0.103	-0.519
4:	0.176	-0.100
5:	-0.838	-0.351
6:	-0.370	0.132
7:	-0.327	0.500
8:	-0.116	0.324
9:	0.093	0.384
10:	-0.885	1.976

X CENTROID: -0.102
 Y CENTROID: 0.204
 POA TO CENTROID: 0.228
 HORZ SPREAD: 1.777
 VERT SPREAD: 2.495
 GROUP SPREAD: 2.683
 MIN RADIUS: 0.121
 MAX RADIUS: 1.937
 MEAN RADIUS: 0.675
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 9

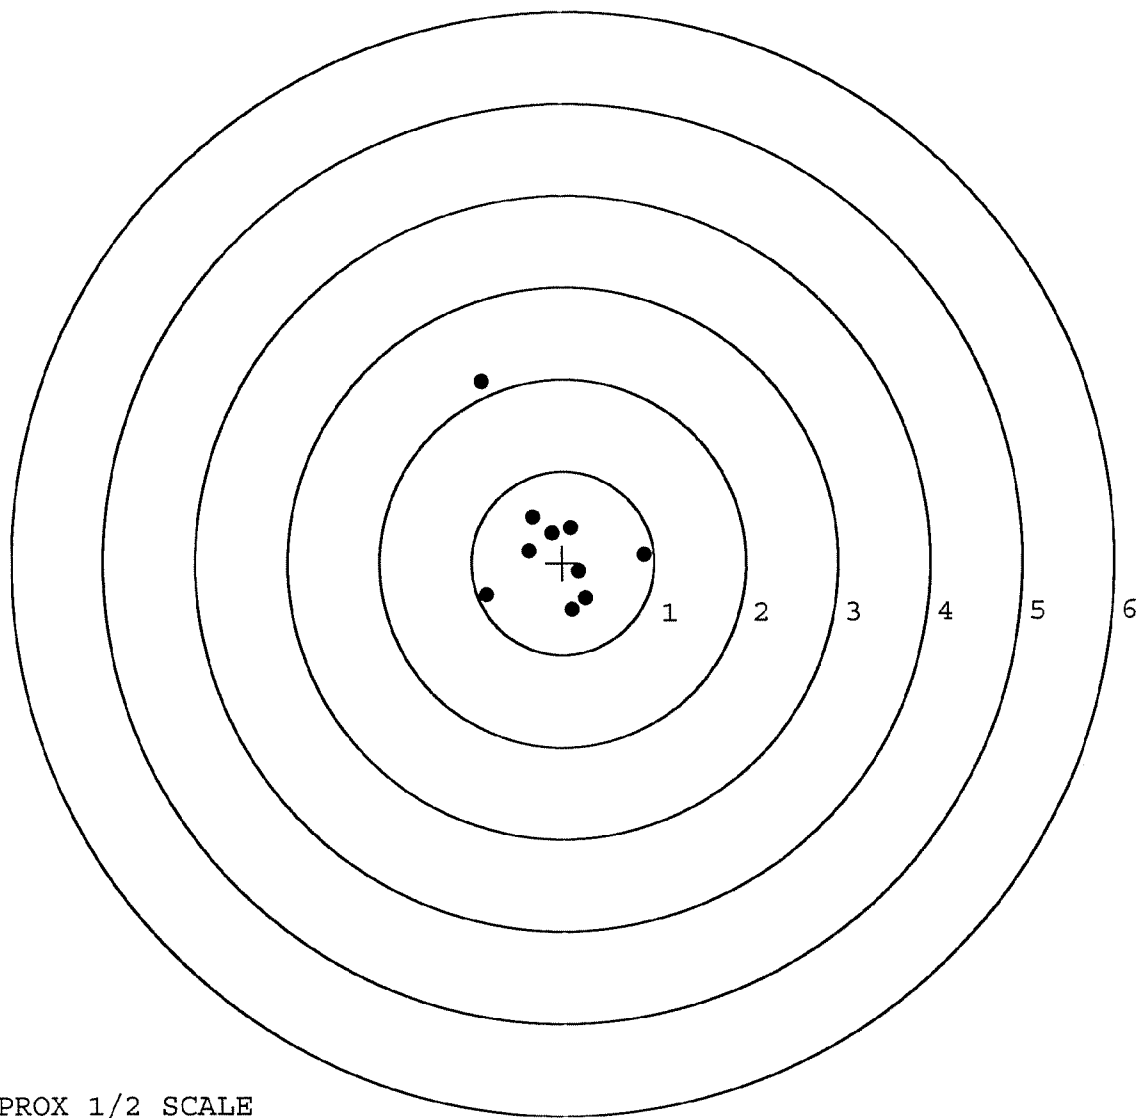


TARGET APPROX 1/2 SCALE

BARBER - M24 0100284

SERIAL NUMBER: G6521397. __0
 TARGET NUMBER: 3
 FILE DATE: 08/06/2007
 FILE TIME: 11:25

POINT#	X	Y
1:	1.082	-0.025
2:	1.071	-0.693
3:	0.551	-0.616
4:	0.154	-0.971
5:	-0.842	-1.271
6:	-0.559	-0.134
7:	-0.667	0.554
8:	-0.459	0.569
9:	-0.354	0.843
10:	-0.250	0.906

X CENTROID: -0.027
 Y CENTROID: -0.084
 POA TO CENTROID: 0.088
 HORZ SPREAD: 1.924
 VERT SPREAD: 2.177
 GROUP SPREAD: 2.292
 MIN RADIUS: 0.534
 MAX RADIUS: 1.440
 MEAN RADIUS: 0.972
 # IN 1 IN DIAMETER: 0
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 10

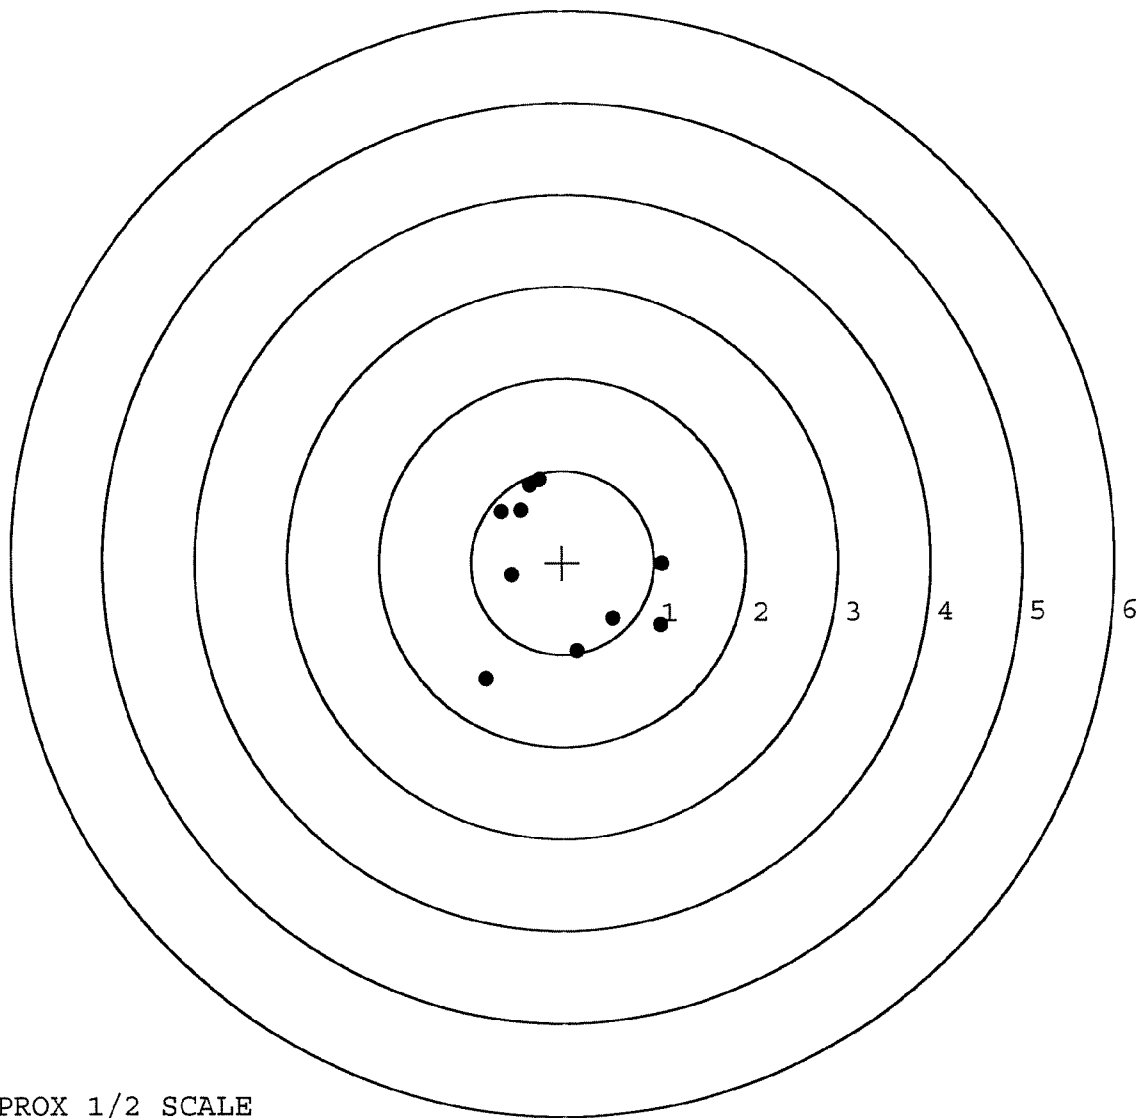

TARGET APPROX 1/2 SCALE

BARBER - M24 0100285

SERIAL NUMBER: G6521397. __0

TARGET NUMBER: 4

FILE DATE: 08/06/2007

FILE TIME: 11:25

POINT#	X	Y
1:	-0.021	-0.782
2:	0.148	-0.322
3:	0.431	0.025
4:	0.493	0.347
5:	0.128	0.106
6:	-0.039	-0.151
7:	-0.441	-0.303
8:	-0.754	-0.124
9:	-0.592	0.261
10:	-0.067	1.165

X CENTROID: -0.071

Y CENTROID: 0.022

POA TO CENTROID: 0.075

HORZ SPREAD: 1.247

VERT SPREAD: 1.947

GROUP SPREAD: 1.948

MIN RADIUS: 0.176


MAX RADIUS: 1.143

MEAN RADIUS: 0.567

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

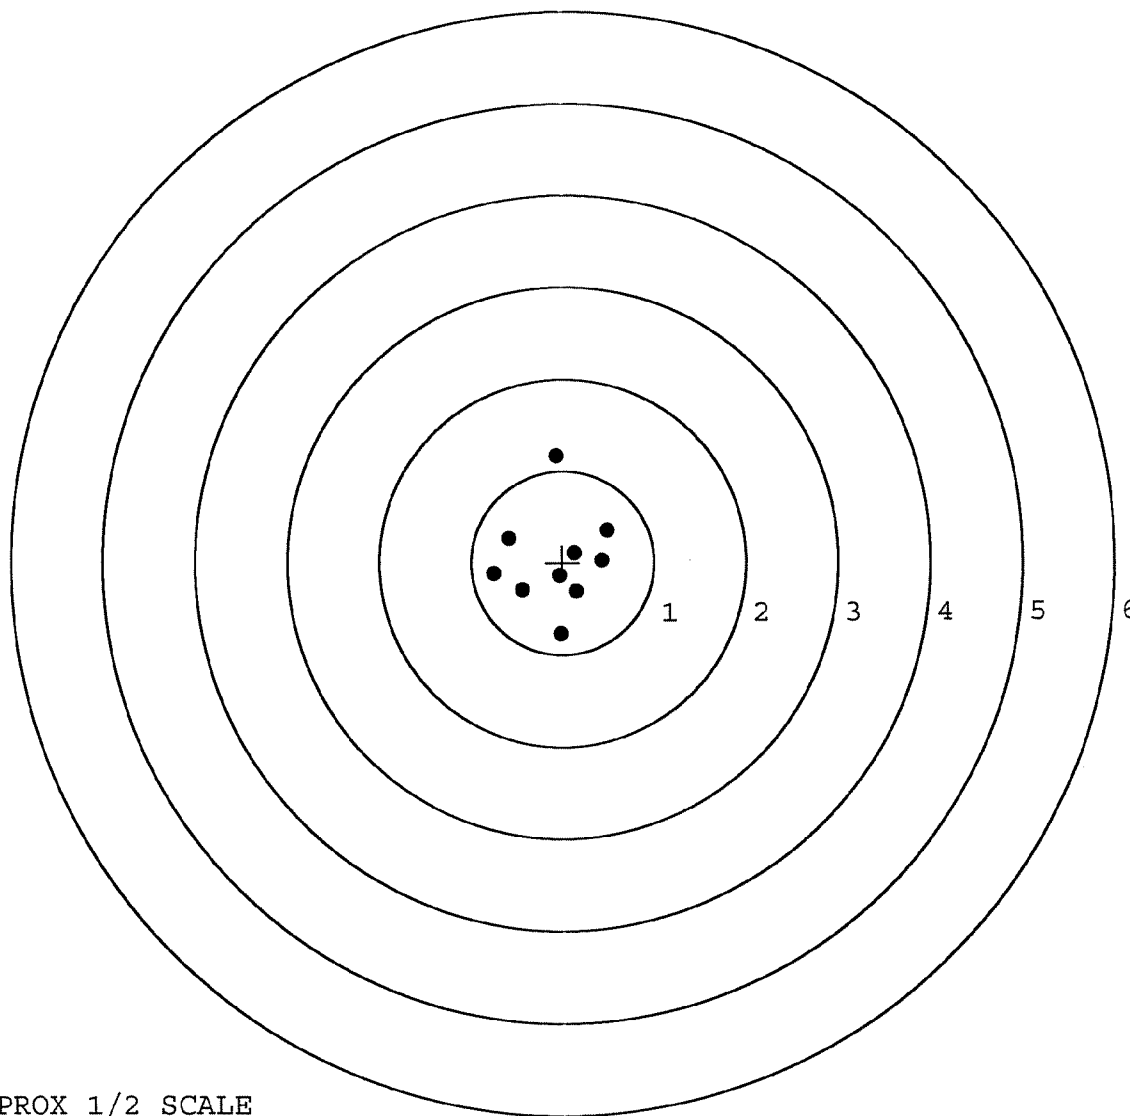


TARGET APPROX 1/2 SCALE

BARBER - M24 0100286

SERIAL NUMBER: G6521397. __0
 TARGET NUMBER: 5
 FILE DATE: 08/06/2007
 FILE TIME: 11:25

POINT#	X	Y
1:	1.459	0.745
2:	-0.056	0.352
3:	0.332	0.119
4:	0.548	-0.076
5:	0.021	-0.287
6:	-0.230	-0.241
7:	-0.434	-0.116
8:	-0.639	0.127
9:	-0.456	0.089
10:	0.021	0.004

X CENTROID: 0.057
 Y CENTROID: 0.072
 POA TO CENTROID: 0.091
 HORZ SPREAD: 2.098
 VERT SPREAD: 1.032
 GROUP SPREAD: 2.187
 MIN RADIUS: 0.076
 MAX RADIUS: 1.556
 MEAN RADIUS: 0.525
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 9

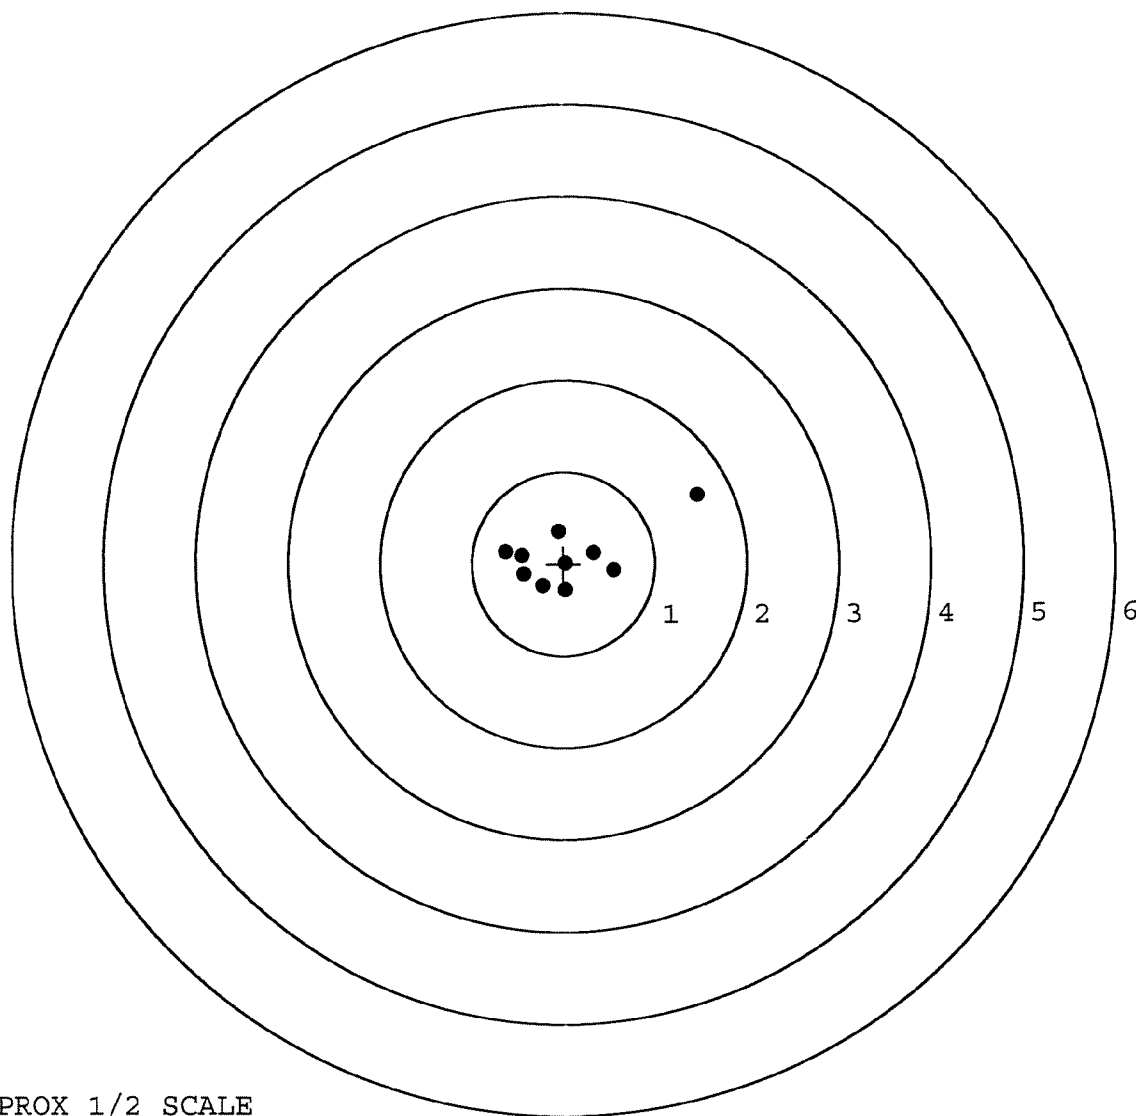

TARGET APPROX 1/2 SCALE