

C6349054

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5716**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: RE00133031

Serial: C6349054 Model M24 SWS Center Fire
Caliber: 7.62 NATO Produced: 03/19/1990

Repairman:

Status: Closed 8/22/2007 7:13:01 AM

Verify Repair

High Priority

Address Information

Customer:

Received From

Return To:

Received From

Name: TRANSPORTATION OFFICER

TRANSPORTATION OFFICER

Address 1: XR WOK8 USA ROCK ISL ARSENAL

XR WOK8 USA ROCK ISL ARSENAL

Address 2: BLDG 299 GILLESPIE AVE BECK PO Box:

BLDG 299 GILLESPIE AVE BECK PO Box:

City: ROCK ISLAND

ROCK ISLAND

State: IL

Zip Code: 61299

Country: US

State: IL

Zip Code: 61299

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information:

Phone: NN

Fax:

Email:

Comments:

Received Condition:

Fair

Condition
Notes:CSR
Notes:

Accessories Received:

Code	Desc	Qty
A007	With Stud	3
A045	Bi Pod	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

naglej

8/22/2007

7:54 AM

CAPS

NUM

INS

SCRL



Inbox - Micr...

Calendar - M...

FW: Restrict...

Arms Service...



7:54 AM

Serial Number: C6349054

Model: M24 SWS




RE00133031

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 11/02/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. ini. +/- .50 lbs.

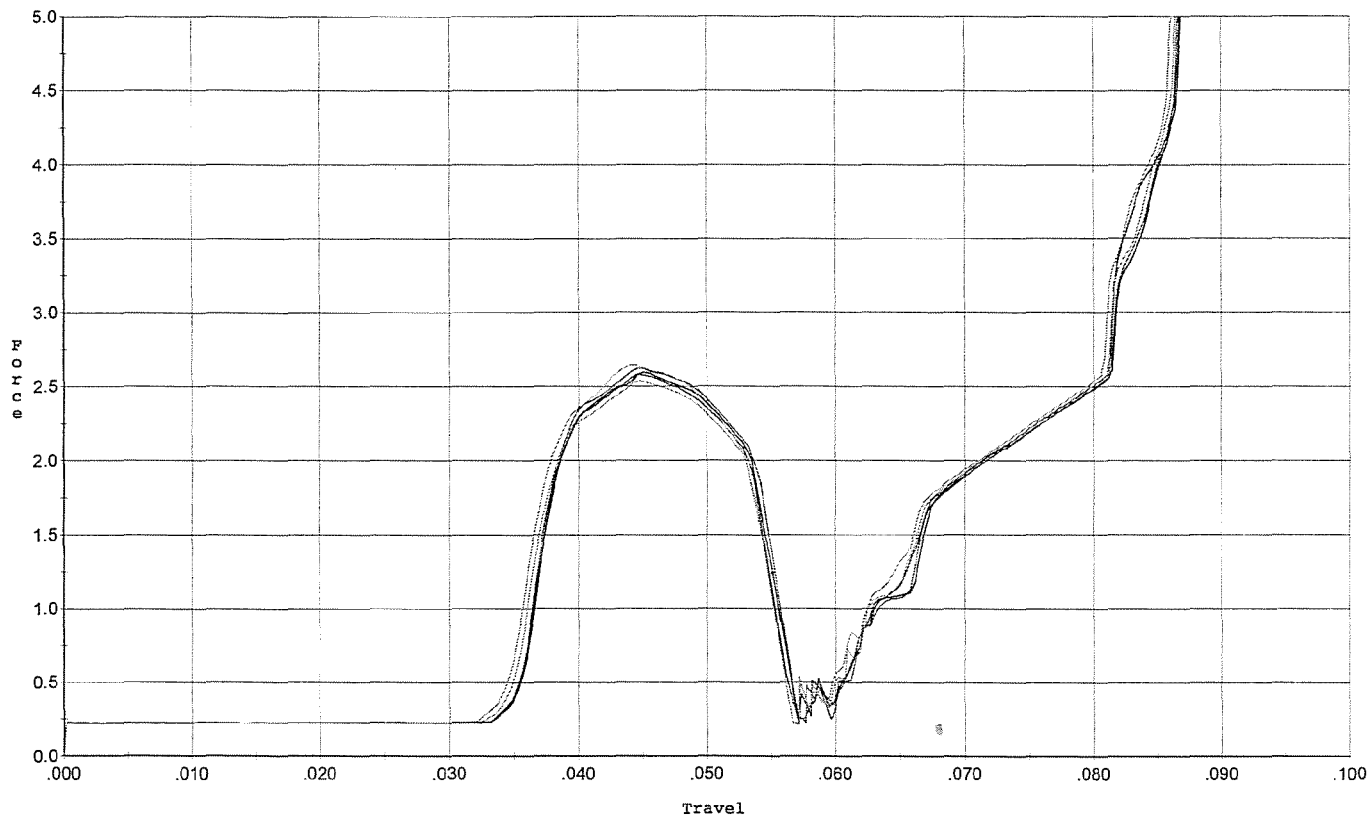


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.584	0.054	0.035	0.038	0.049		Set Trigger
2	2.596	0.055	0.035	0.037	0.050		Set Trigger
3	2.623	0.054	0.035	0.037	0.050		Set Trigger
4	2.539	0.054	0.034	0.037	0.049		Set Trigger
5	2.645	0.054	0.034	0.037	0.051		Set Trigger

AVG 2.59

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

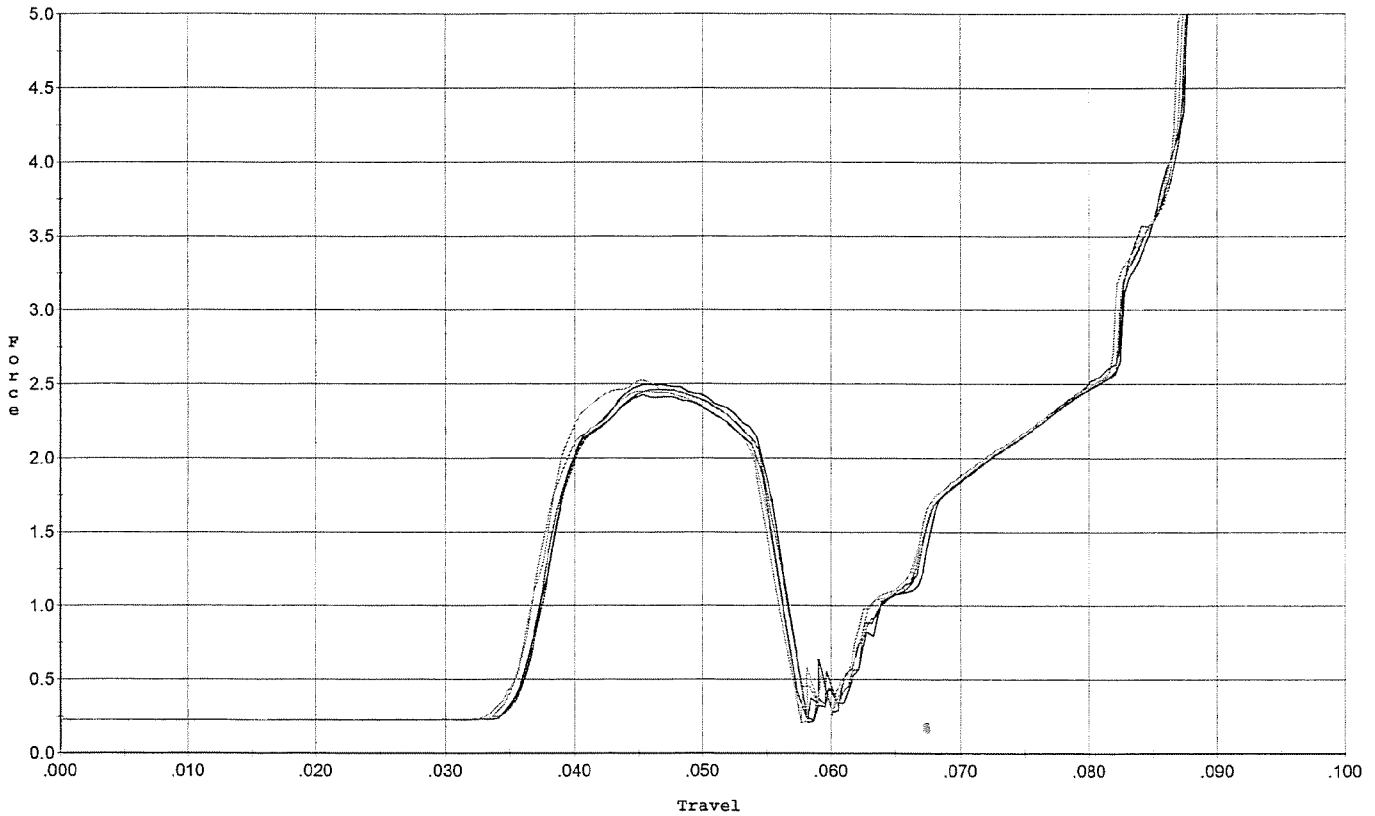


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.425	0.055	0.036	0.038	0.048		Set Trigger
2	2.497	0.055	0.035	0.038	0.050		Set Trigger
3	2.464	0.056	0.035	0.038	0.049		Set Trigger
4	2.526	0.055	0.035	0.038	0.050		Set Trigger
5	2.451	0.054	0.035	0.038	0.048		Set Trigger

Avg 2.47

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. ini. +/- .75 lbs.

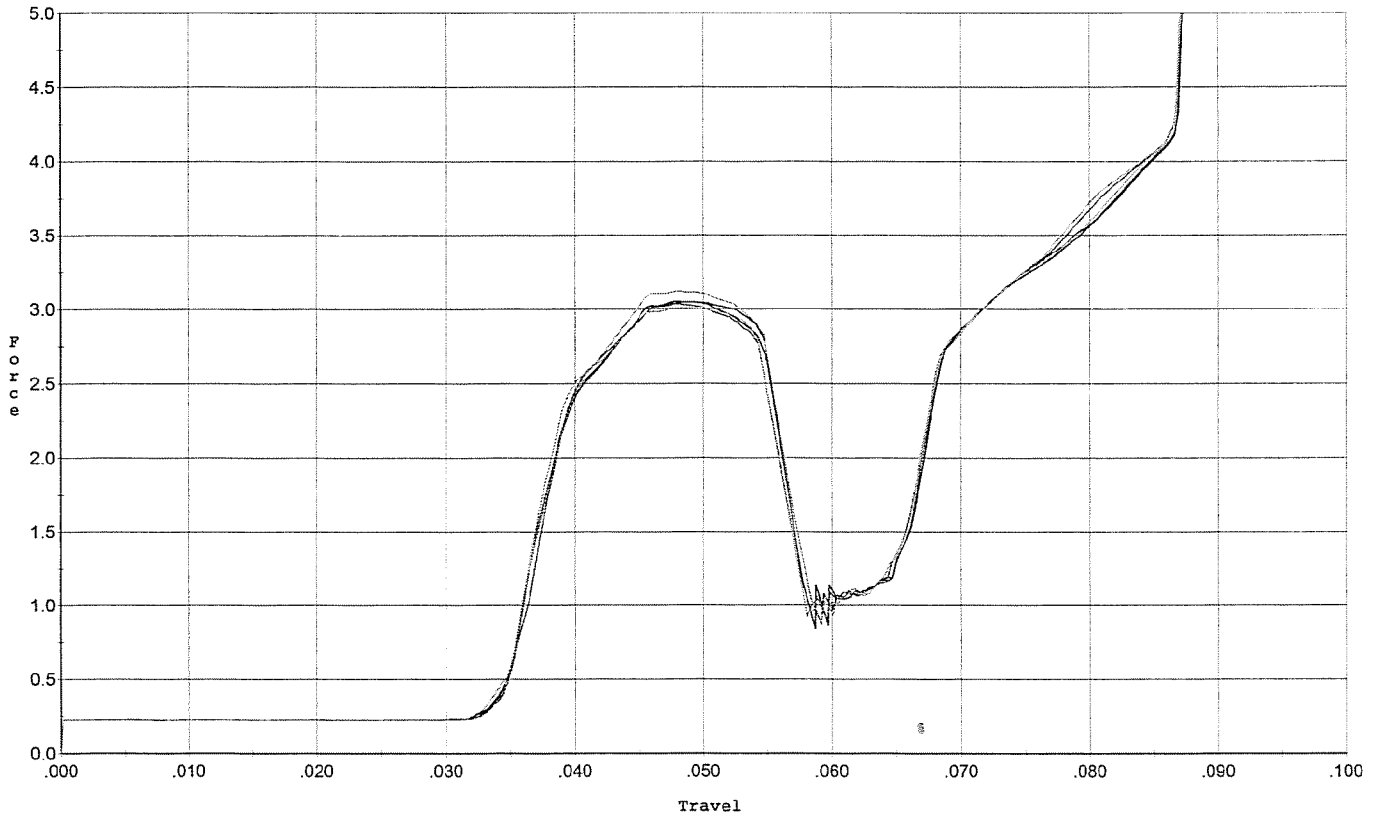


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.047	0.055	0.035	0.036	0.061		Set Trigger
2	3.051	0.055	0.034	0.036	0.061		Set Trigger
3	3.036	0.056	0.035	0.036	0.062		Set Trigger
4	3.013	0.054	0.034	0.037	0.060		Set Trigger
5	3.120	0.055	0.034	0.036	0.061		Set Trigger

Avg 3.05

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

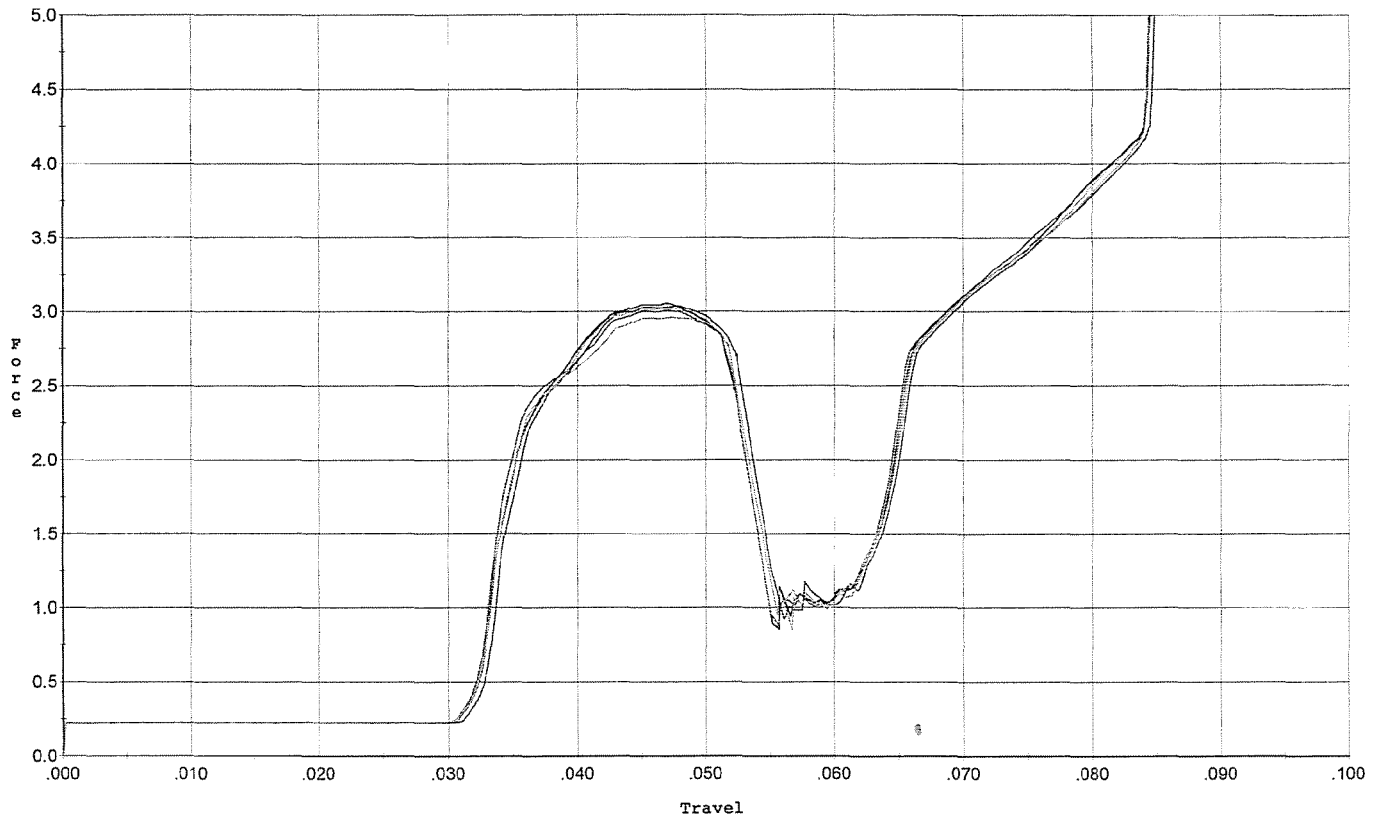


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.038	0.052	0.032	0.036	0.060		Set Trigger
2	3.056	0.052	0.032	0.035	0.060		Set Trigger
3	3.010	0.052	0.032	0.035	0.060		Set Trigger
4	2.958	0.052	0.031	0.035	0.058		Set Trigger
5	3.027	0.052	0.031	0.035	0.059		Set Trigger

Avg 3.01

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

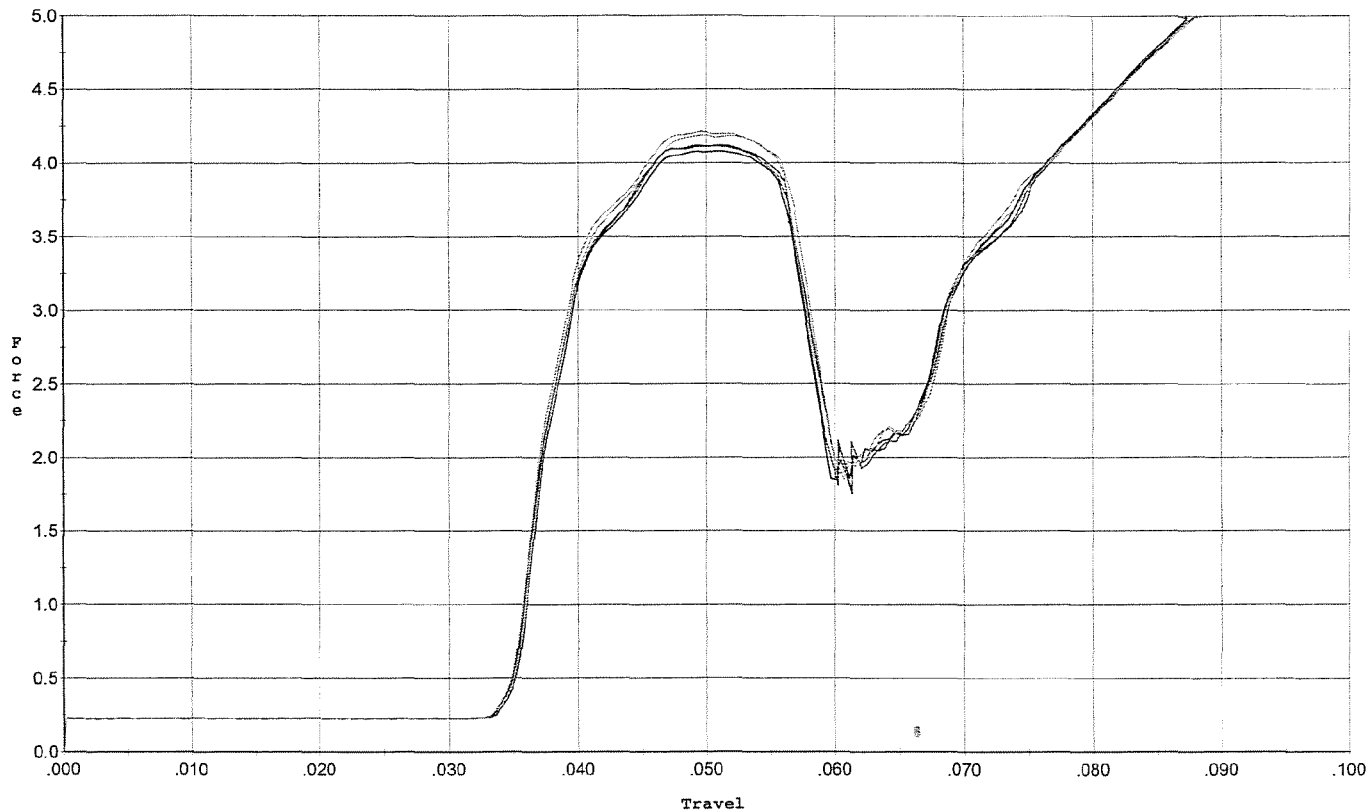


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.120	0.058	0.035	0.035	0.088		Set Trigger
2	4.080	0.057	0.034	0.035	0.085		Set Trigger
3	4.120	0.056	0.034	0.035	0.085		Set Trigger
4	4.188	0.057	0.034	0.035	0.087		Set Trigger
5	4.212	0.056	0.034	0.035	0.086		Set Trigger

Avg 4.14

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 11/02/07

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

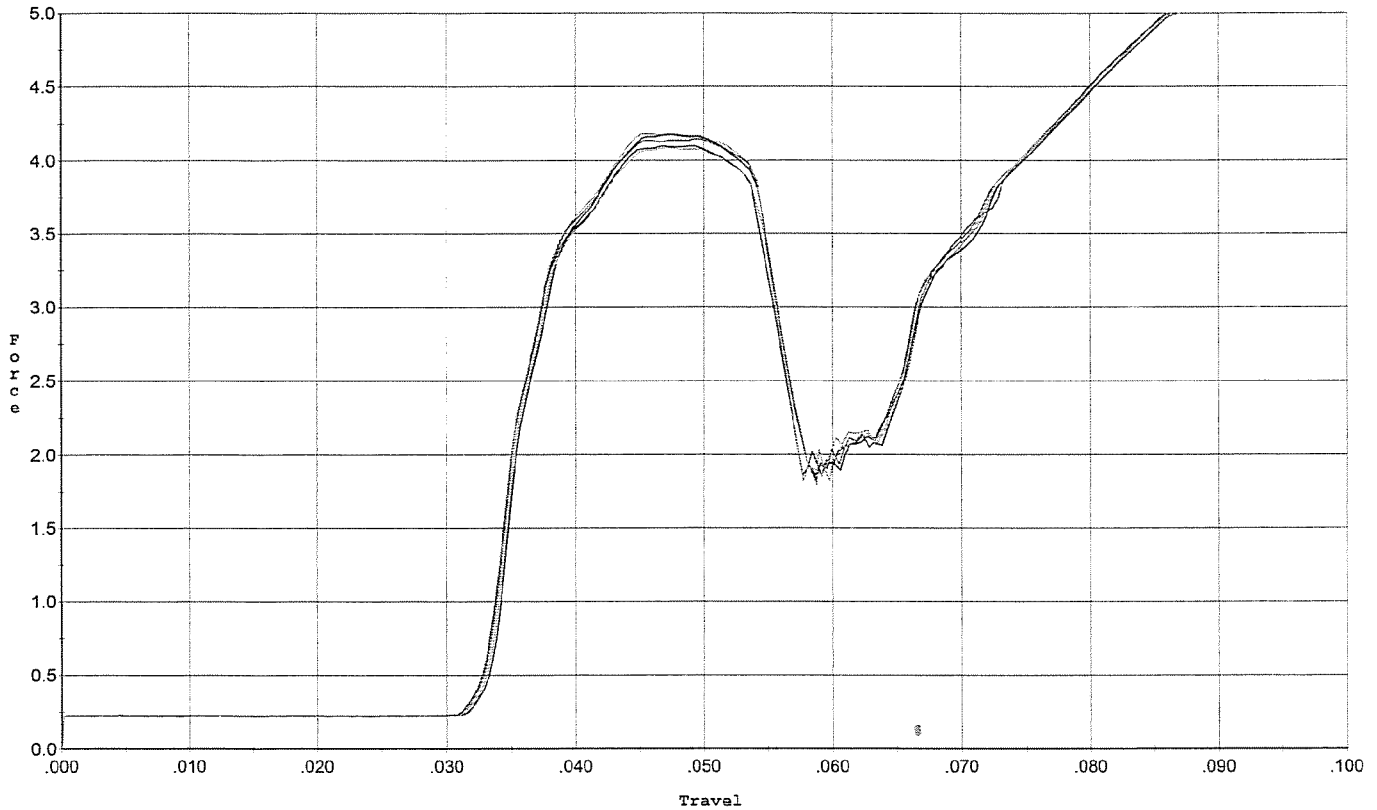


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.099	0.055	0.032	0.034	0.085		Set Trigger
2	4.175	0.054	0.032	0.035	0.084		Set Trigger
3	4.145	0.054	0.032	0.034	0.085		Set Trigger
4	4.085	0.055	0.032	0.034	0.084		Set Trigger
5	4.182	0.054	0.032	0.034	0.085		Set Trigger

AVG 4.13

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

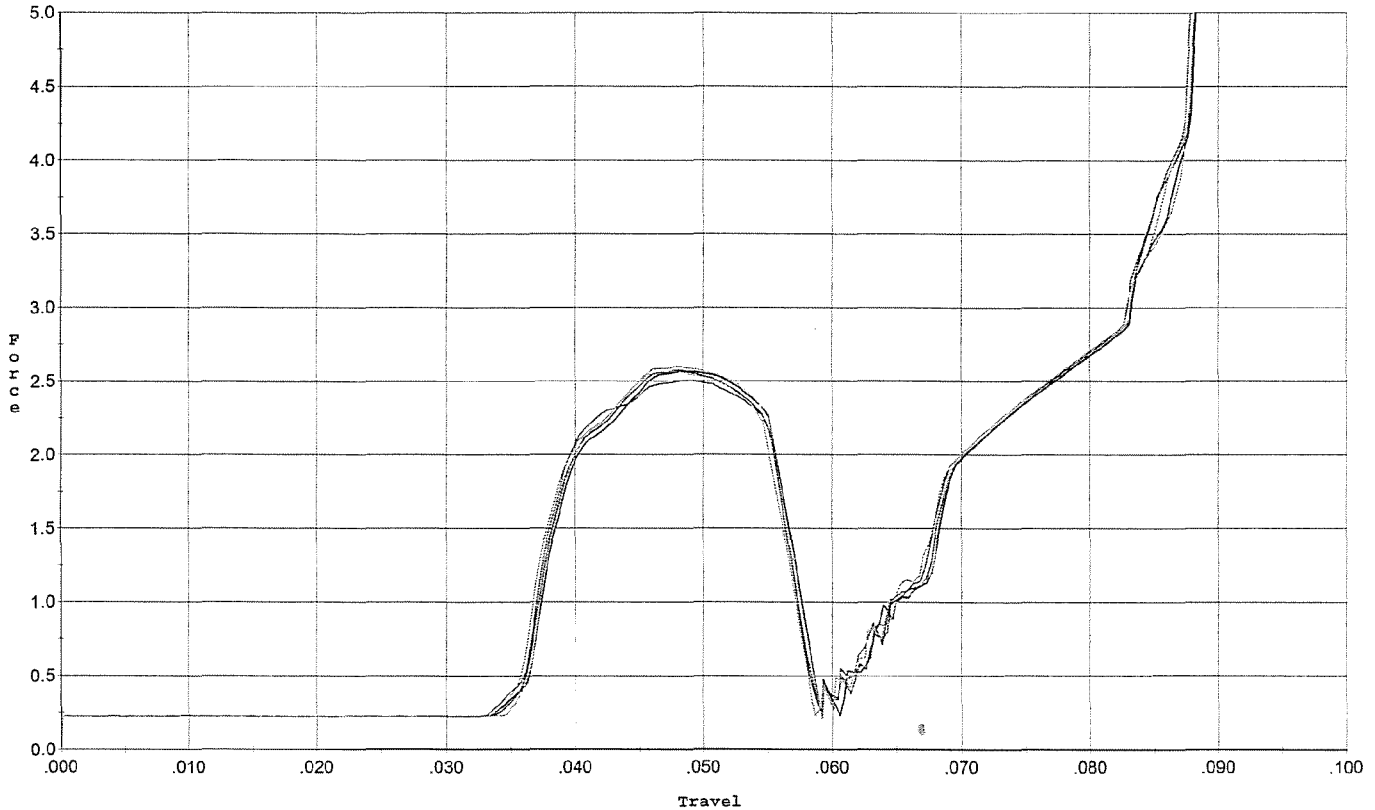


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.574	0.055	0.036	0.038	0.051		Set Trigger
2	2.569	0.057	0.037	0.037	0.053		Set Trigger
3	2.501	0.055	0.036	0.037	0.051		Set Trigger
4	2.601	0.057	0.036	0.037	0.053		Set Trigger
5	2.569	0.056	0.035	0.037	0.053		Set Trigger

Avg 2.56

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 11/02/07

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

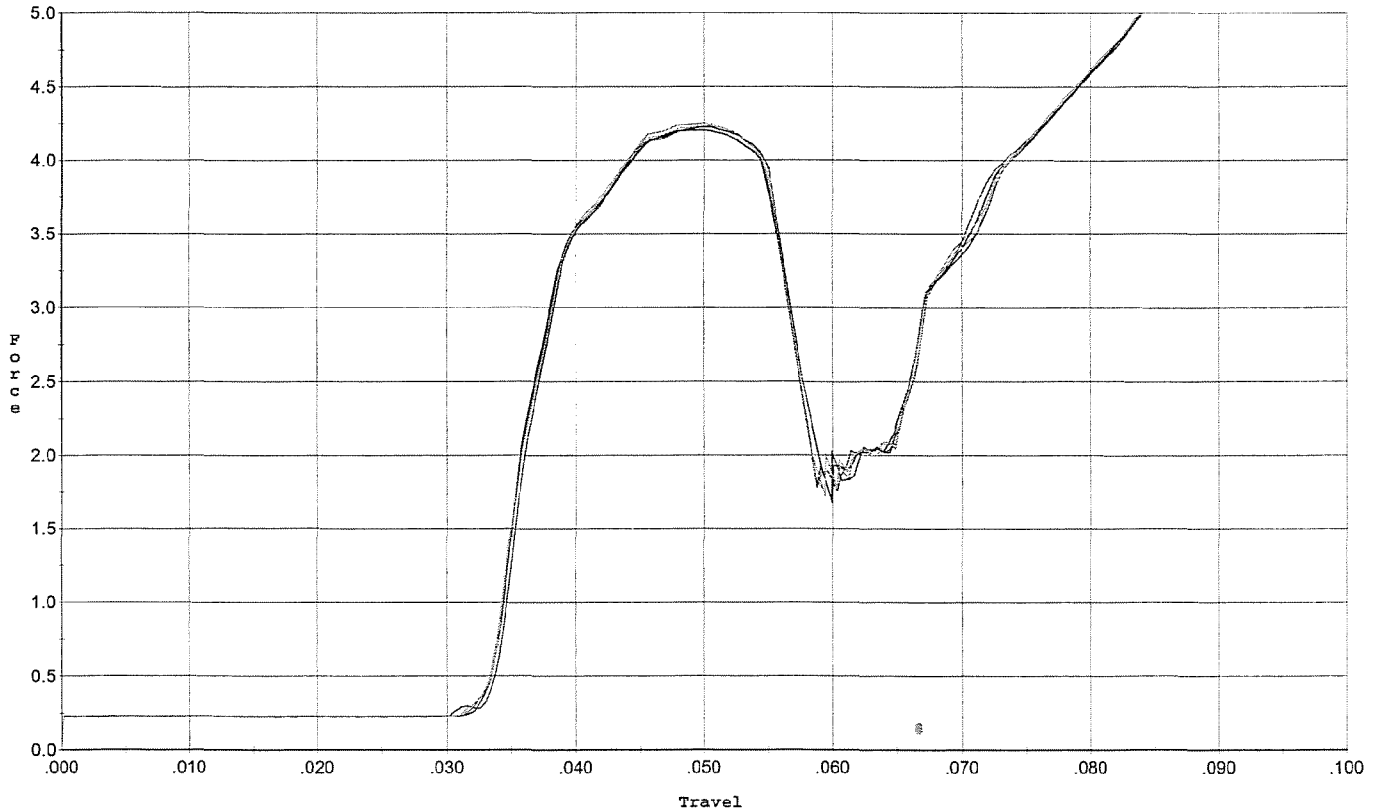

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.226	0.055	0.033	0.034	0.086		Set Trigger
2	4.207	0.056	0.033	0.034	0.088		Set Trigger
3	4.231	0.055	0.033	0.034	0.087		Set Trigger
4	4.238	0.055	0.033	0.034	0.087		Set Trigger
5	4.255	0.055	0.033	0.034	0.087		Set Trigger

Avg 4.23

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6349054.___0
FILE DATE AND TIME: 11/30/2007 11:26

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.089
The Average Y Centroid of the Five Target Set:	0.045
The Average Point of Impact of the Five Target Set:	0.099
The Average Mean Radius of the Five Target Set:	0.713
The Distance from POA to Centroid Target #1:	0.276
The Distance from Centroid Target #2 to Centroid Target #1:	0.260
The Distance from Centroid Target #3 to Centroid Target #1:	0.205
The Distance from Centroid Target #4 to Centroid Target #1:	0.179
The Distance from Centroid Target #5 to Centroid Target #1:	0.335

SERIAL NUMBER: C6349054. __0

TARGET NUMBER: 1

FILE DATE: 11/30/2007

FILE TIME: 11:26

POINT#	X	Y
1:	0.956	-0.684
2:	0.782	-0.681
3:	1.680	0.094
4:	0.495	1.034
5:	-0.366	0.967
6:	-0.240	0.228
7:	-0.021	-0.048
8:	0.182	-0.362
9:	-0.475	-0.343
10:	-0.238	-0.145

X CENTROID: 0.276

Y CENTROID: 0.006

POA TO CENTROID: 0.276

HORZ SPREAD: 2.155

VERT SPREAD: 1.718

GROUP SPREAD: 2.224

MIN RADIUS: 0.301


MAX RADIUS: 1.407

MEAN RADIUS: 0.804

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

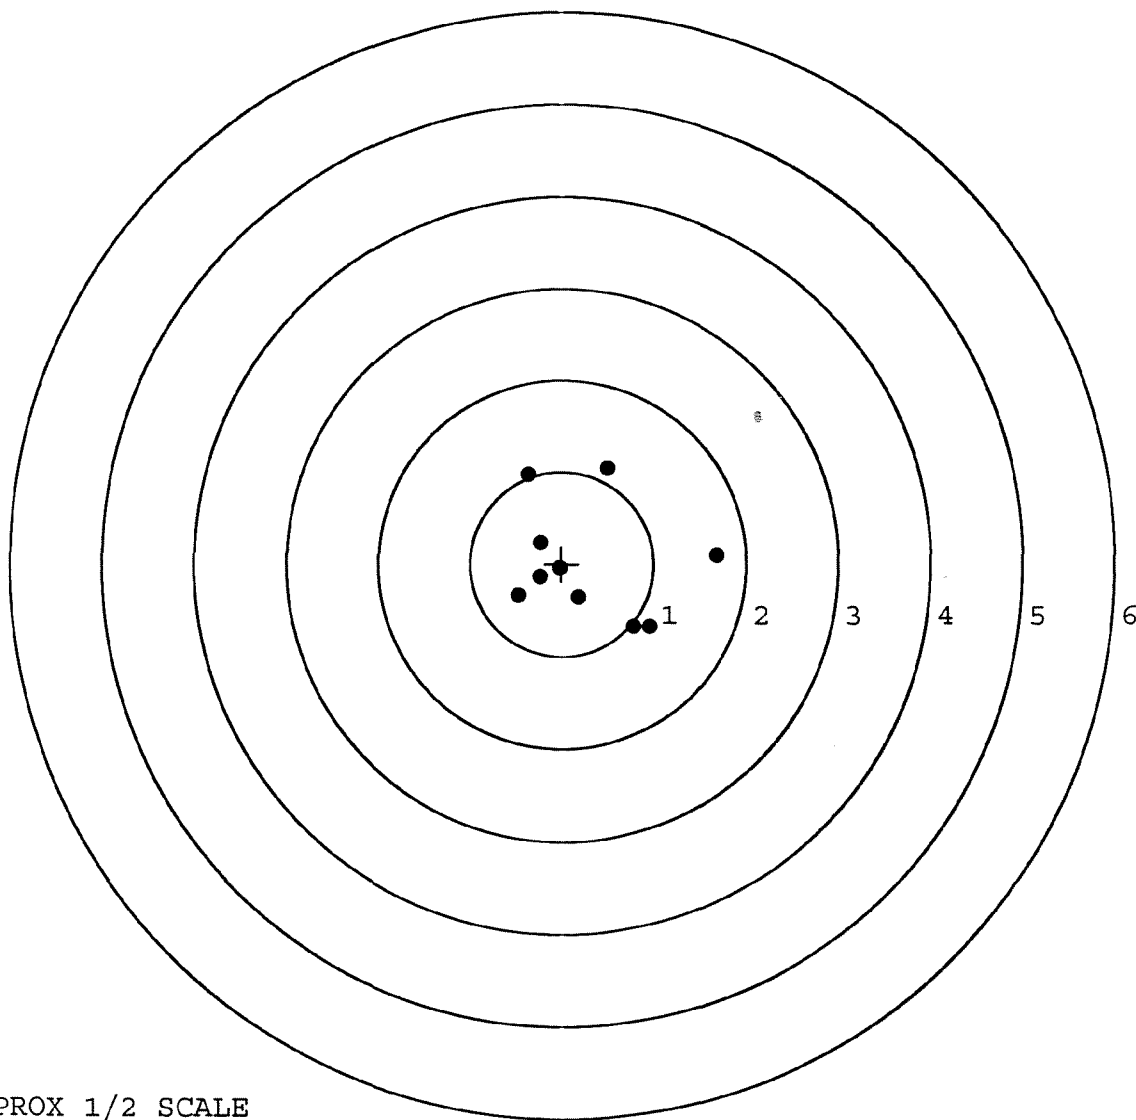


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349054. __0
 TARGET NUMBER: 2
 FILE DATE: 11/30/2007
 FILE TIME: 11:26

POINT#	X	Y
1:	0.415	-0.863
2:	0.258	-0.552
3:	0.464	0.189
4:	0.515	0.307
5:	-0.523	-0.545
6:	-0.408	-0.313
7:	0.040	0.352
8:	-0.333	0.400
9:	-0.038	0.749
10:	-0.140	1.021

X CENTROID: 0.025
 Y CENTROID: 0.074
 POA TO CENTROID: 0.079
 HORZ SPREAD: 1.038
 VERT SPREAD: 1.884
 GROUP SPREAD: 1.964
 MIN RADIUS: 0.278
 MAX RADIUS: 1.015
 MEAN RADIUS: 0.649
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

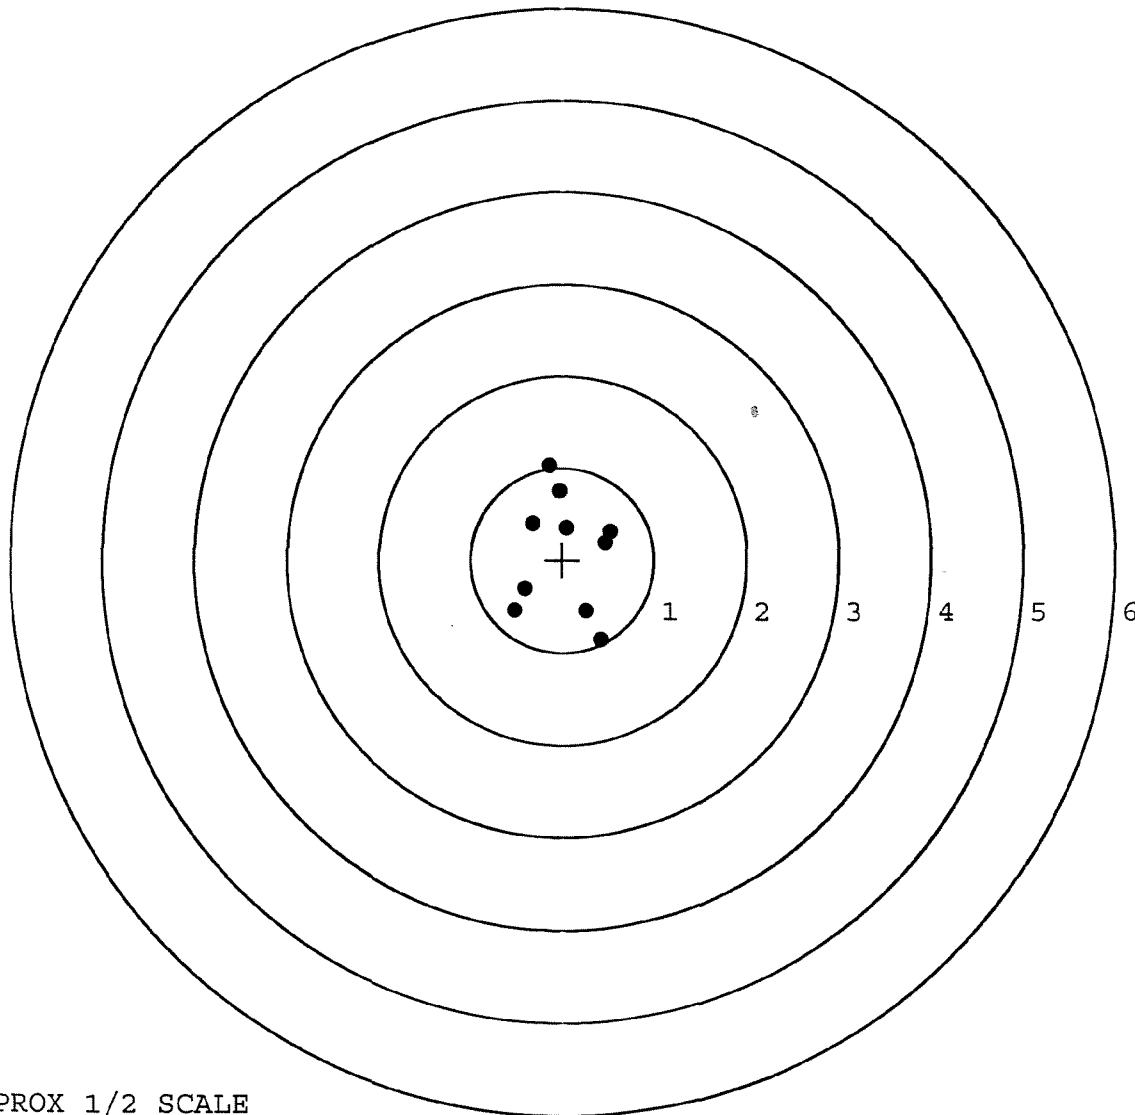

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349054. 0

TARGET NUMBER: 3

FILE DATE: 11/30/2007

FILE TIME: 11:26

POINT#	X	Y
1:	0.864	-0.802
2:	0.417	-0.836
3:	0.364	0.108
4:	-0.027	-0.430
5:	-0.041	-0.078
6:	-0.034	0.018
7:	-0.570	-0.055
8:	-0.047	0.550
9:	-1.008	0.824
10:	1.093	1.830

X CENTROID: 0.101

Y CENTROID: 0.113

POA TO CENTROID: 0.152

HORZ SPREAD: 2.101

VERT SPREAD: 2.666

GROUP SPREAD: 2.750

MIN RADIUS: 0.165


MAX RADIUS: 1.983

MEAN RADIUS: 0.787

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

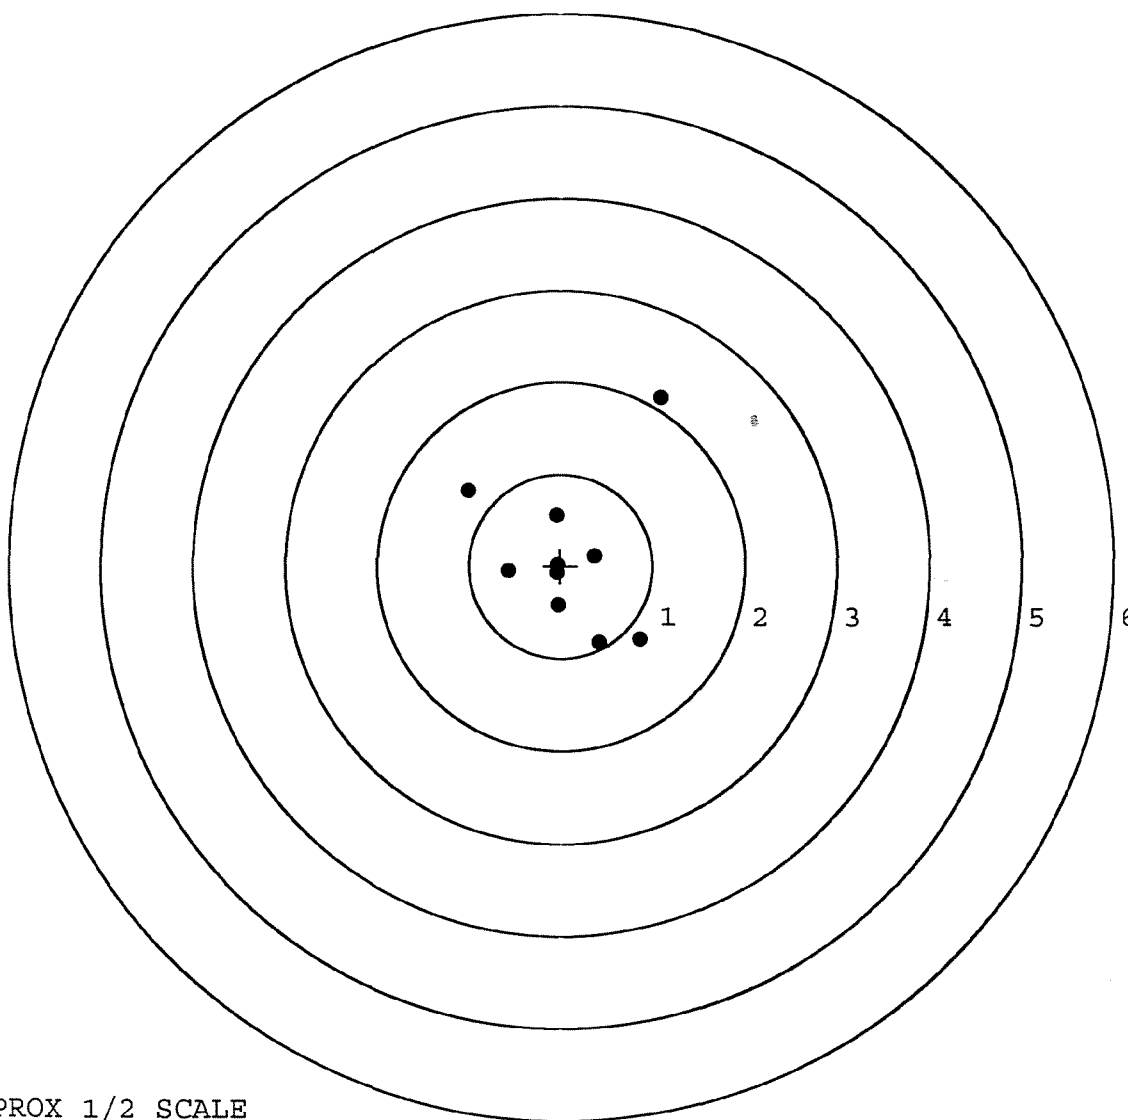

TARGET APPROX 1/2 SCALE

BARBER - M24 0106792

SERIAL NUMBER: C6349054. __ 0

TARGET NUMBER: 4

FILE DATE: 11/30/2007

FILE TIME: 11:26

POINT#	X	Y
1:	1.263	-0.578
2:	1.108	-0.152
3:	0.393	0.373
4:	0.091	0.545
5:	0.189	-0.567
6:	-0.173	-0.461
7:	-0.240	-0.029
8:	-0.265	0.270
9:	-1.161	-0.010
10:	-0.221	0.414

X CENTROID: 0.098

Y CENTROID: -0.019

POA TO CENTROID: 0.100

HORZ SPREAD: 2.424

VERT SPREAD: 1.123

GROUP SPREAD: 2.490

MIN RADIUS: 0.339


MAX RADIUS: 1.292

MEAN RADIUS: 0.704

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

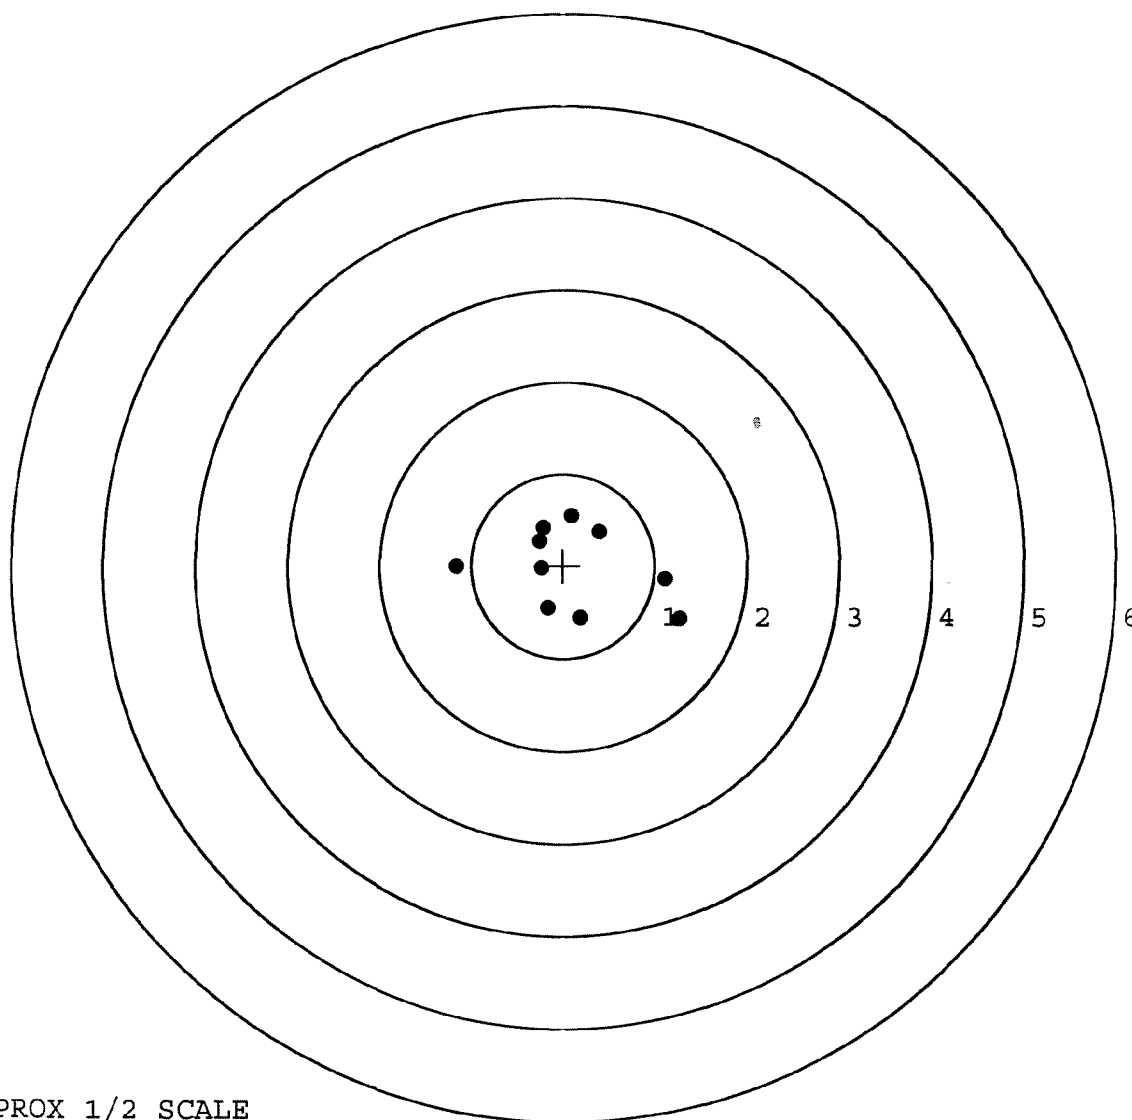

TARGET APPROX 1/2 SCALE

BARBER - M24 0106793

SERIAL NUMBER: C6349054. 0

TARGET NUMBER: 5

FILE DATE: 11/30/2007

FILE TIME: 11:26

POINT#	X	Y
1:	0.830	0.058
2:	0.582	-0.055
3:	0.468	-0.416
4:	0.376	0.553
5:	-0.391	0.583
6:	-0.896	0.523
7:	-0.307	0.103
8:	-0.146	-0.055
9:	-0.380	-0.184
10:	-0.701	-0.621

X CENTROID: -0.057

Y CENTROID: 0.049

POA TO CENTROID: 0.075

HORZ SPREAD: 1.726

VERT SPREAD: 1.204

GROUP SPREAD: 1.788

MIN RADIUS: 0.137


MAX RADIUS: 0.964

MEAN RADIUS: 0.621

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

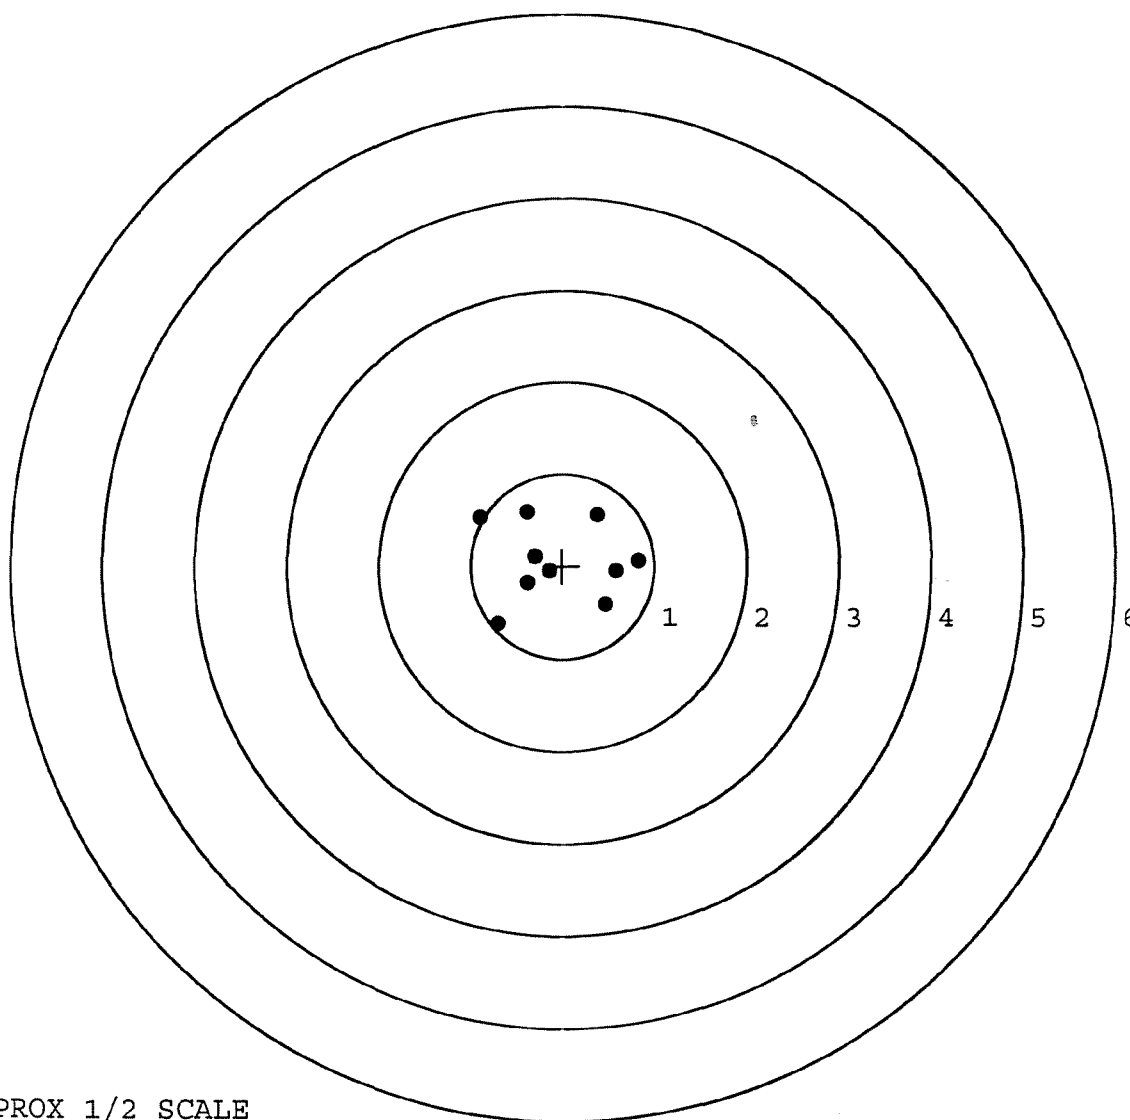

TARGET APPROX 1/2 SCALE

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER		13303	
SERIAL NUMBER		C6349054	
LOG-IN DATE		8-22-07	
OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	11-5-07	RTZ
505	RE-BARREL		
560	ASSEMBLE		
600	PROOF	11-7-07	TRW
605	CHECK HEADSPACE	11-7-07	TRW
610	DIS-ASSEMBLE GUN	11-08-07	RTZ
612	MAGNAFLUX	11-14-07	JB
510	DRILL AND TAP	11-8-07	SD
615	ROLLMARK CALIBER	11-13-07	CW
618	ROTO-BLAST	11-14-07	YJ
620	APPLY COATINGS	11-27-07	PS
625	FINAL ASSEMBLY	11-29-07	RTZ
640	FUNCTION TEST AND	PASS FAIL	11-29-07 TRW
650	TARGET	PASS FAIL	11-29-07 TRW
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	11-29-07	RTZ
	A) HEADSPACE	PASS FAIL	11-29-07 RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.22 2.25 2.33 2.27 2.28 11-29-07 DA
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	5.5 5.5 5.5 11-29-07 DA
	G) SAFETY OFF FORCE	2 LBS MIN	3.5 3.5 3.5 11-29-07 DA
	I) FIRING PIN INDENT	.020	1.023 1.022 1.022 11-29-07 DA
690	PACK		11-30-07 DA

Repair Number: RE00074607	Serial: C6349054 Model 700 Center Fire Caliber: 7 62 NATO M24 SWS Produced: 03/19/1990	Repairman:	Status: Closed 12/29/2003 9:49:33 AM																
Address Information Customer: ☒ Received From: ☐ Return To: ☐ Received From Name: DEPARTMENT OF THE ARMY DEPARTMENT OF THE ARMY Address 1: SSG M BOWENFANT 2ND BATT SSG M BOWENFANT 2ND BATT Address 2: 25TH ID PO Box: 25TH ID PO Box: City: SCHOFIELD BARRACKS SCHOFIELD BARRACKS State: HI Zip Code: 96857 Country: US State: HI Zip Code: 96857 Country: US FFL:																			
<table border="1"> <tr> <td>Contact / Condition</td> <td>Problems</td> <td>Estimate</td> <td>History / Status</td> <td>Shipping / Billing</td> </tr> </table>				Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing											
Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing															
Contact Information Phone: 308 655 0990 0955 Fax: Email: Comments:		Received Condition Fair Condition Notes: CSR Notes:		Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Studs</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Bases</td> <td>3</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> </tbody> </table>	Code	Desc	Qty	A007	With Studs	3	A010	Hard Case	1	A017	Scope Bases	3	A026	Scope	1
Code	Desc	Qty																	
A007	With Studs	3																	
A010	Hard Case	1																	
A017	Scope Bases	3																	
A026	Scope	1																	
Repair Search		Refresh Close																	

nagley 1/5/2004 9:14 AM CAPS NUM INS 3

start

 Serial Number: **C6349054**

 Model: **700**

RE00074607

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6349054.___0
FILE DATE AND TIME: 01/20/2004 07:43

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.046
The Average Y Centroid of the Five Target Set:	0.226
The Average Point of Impact of the Five Target Set:	0.231
The Average Mean Radius of the Five Target Set:	0.803
The Distance from POA to Centroid Target #1:	0.290
The Distance from Centroid Target #2 to Centroid Target #1:	0.081
The Distance from Centroid Target #3 to Centroid Target #1:	0.255
The Distance from Centroid Target #4 to Centroid Target #1:	0.146
The Distance from Centroid Target #5 to Centroid Target #1:	0.191


8

BARBER - M24 0106797

SERIAL NUMBER: C6349054. __0
 TARGET NUMBER: 1
 FILE DATE: 01/20/2004
 FILE TIME: 07:43

POINT#	X	Y
1:	0.211	0.607
2:	0.172	0.483
3:	-0.569	0.243
4:	-0.369	0.130
5:	-0.589	0.963
6:	-0.838	0.646
7:	0.756	1.899
8:	0.190	-0.325
9:	-0.150	-0.949
10:	0.757	-0.825

X CENTROID: -0.043
 Y CENTROID: 0.287
 POA TO CENTROID: 0.290
 HORZ SPREAD: 1.595
 VERT SPREAD: 2.848
 GROUP SPREAD: 2.989
 MIN RADIUS: 0.291
 MAX RADIUS: 1.799
 MEAN RADIUS: 0.839
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

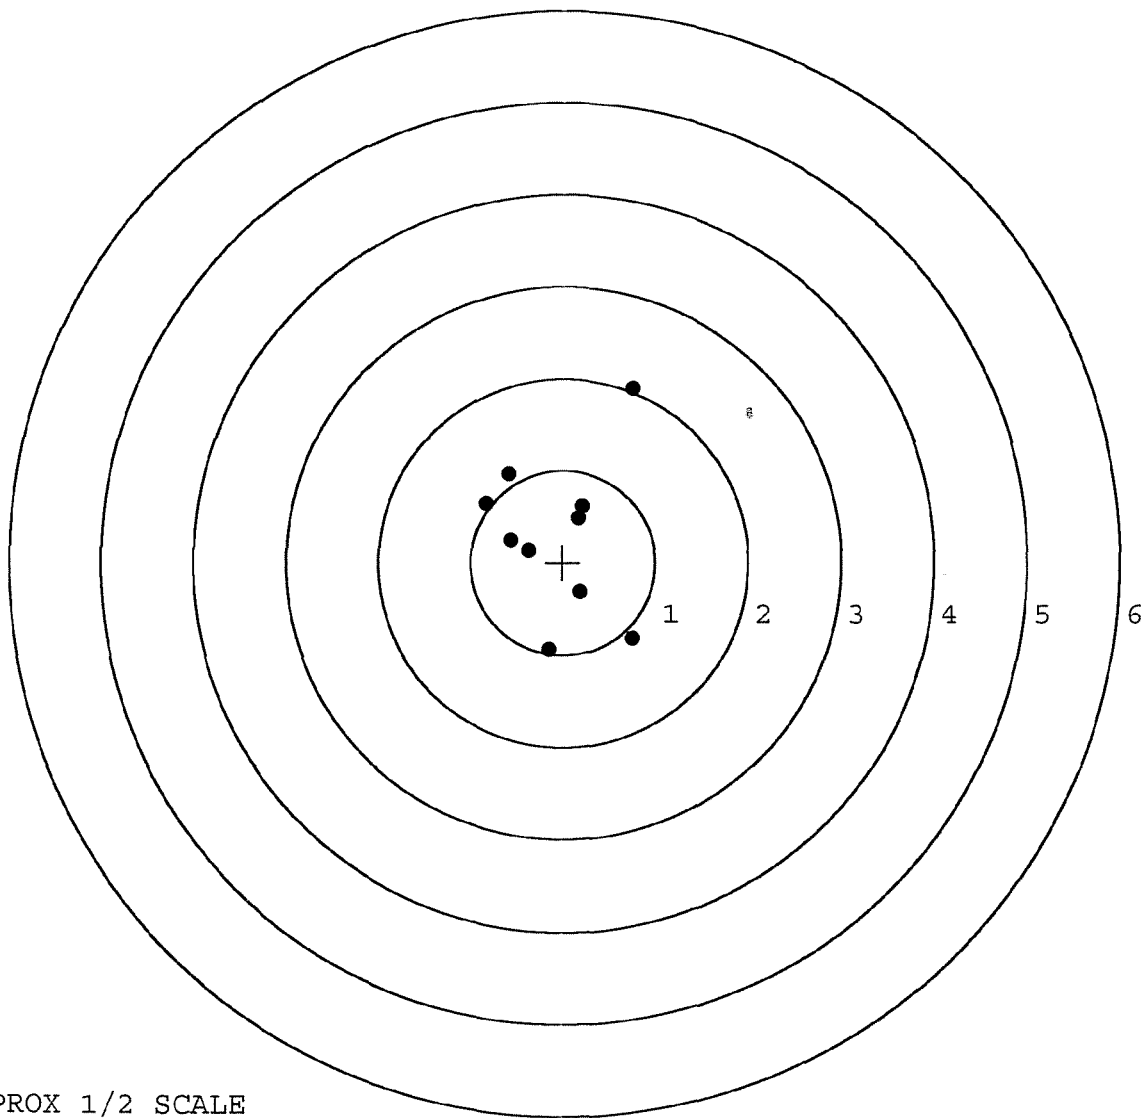

TARGET APPROX 1/2 SCALE

BARBER - M24 0106798

SERIAL NUMBER: C6349054. __0

TARGET NUMBER: 2

FILE DATE: 01/20/2004

FILE TIME: 07:43

POINT#	X	Y
1:	0.133	0.489
2:	0.182	0.252
3:	-0.199	0.066
4:	-0.295	-0.345
5:	-0.761	-0.841
6:	-0.196	-0.807
7:	0.526	-0.311
8:	0.104	1.181
9:	0.823	1.798
10:	-0.258	2.032

X CENTROID: 0.006

Y CENTROID: 0.351

POA TO CENTROID: 0.351

HORZ SPREAD: 1.584

VERT SPREAD: 2.873

GROUP SPREAD: 2.917

MIN RADIUS: 0.187


MAX RADIUS: 1.701

MEAN RADIUS: 0.913

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 8

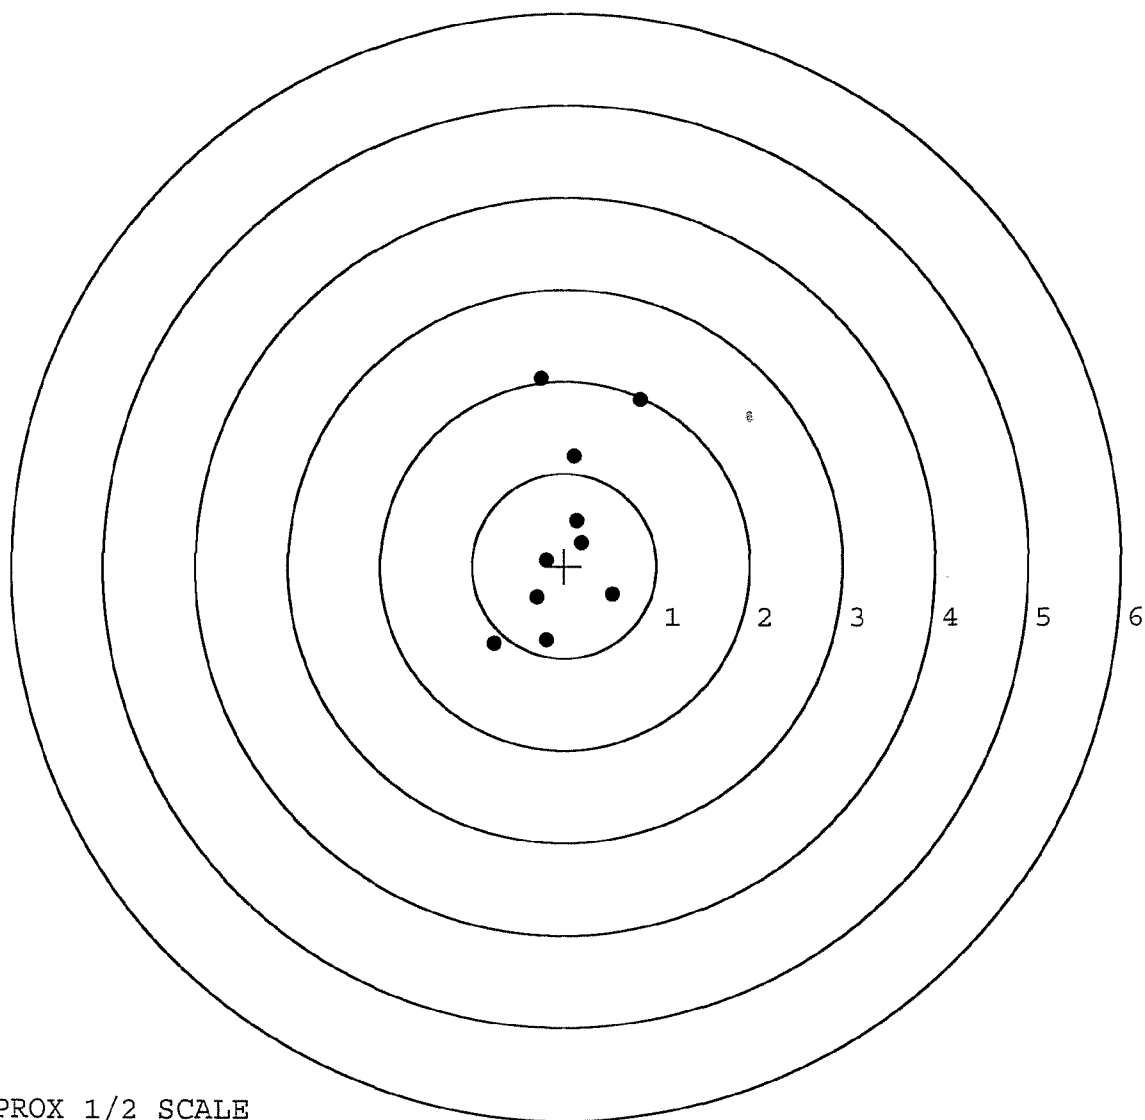


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349054. __0
 TARGET NUMBER: 3
 FILE DATE: 01/20/2004
 FILE TIME: 07:43

POINT#	X	Y
1:	0.505	1.452
2:	1.110	-0.026
3:	0.393	-0.642
4:	0.211	-1.449
5:	-0.006	-0.349
6:	0.253	0.231
7:	0.349	0.501
8:	-0.068	0.686
9:	-0.286	0.399
10:	-0.842	0.551

X CENTROID: 0.162
 Y CENTROID: 0.135
 POA TO CENTROID: 0.211
 HORZ SPREAD: 1.952
 VERT SPREAD: 2.901
 GROUP SPREAD: 2.916
 MIN RADIUS: 0.132
 MAX RADIUS: 1.585
 MEAN RADIUS: 0.798
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

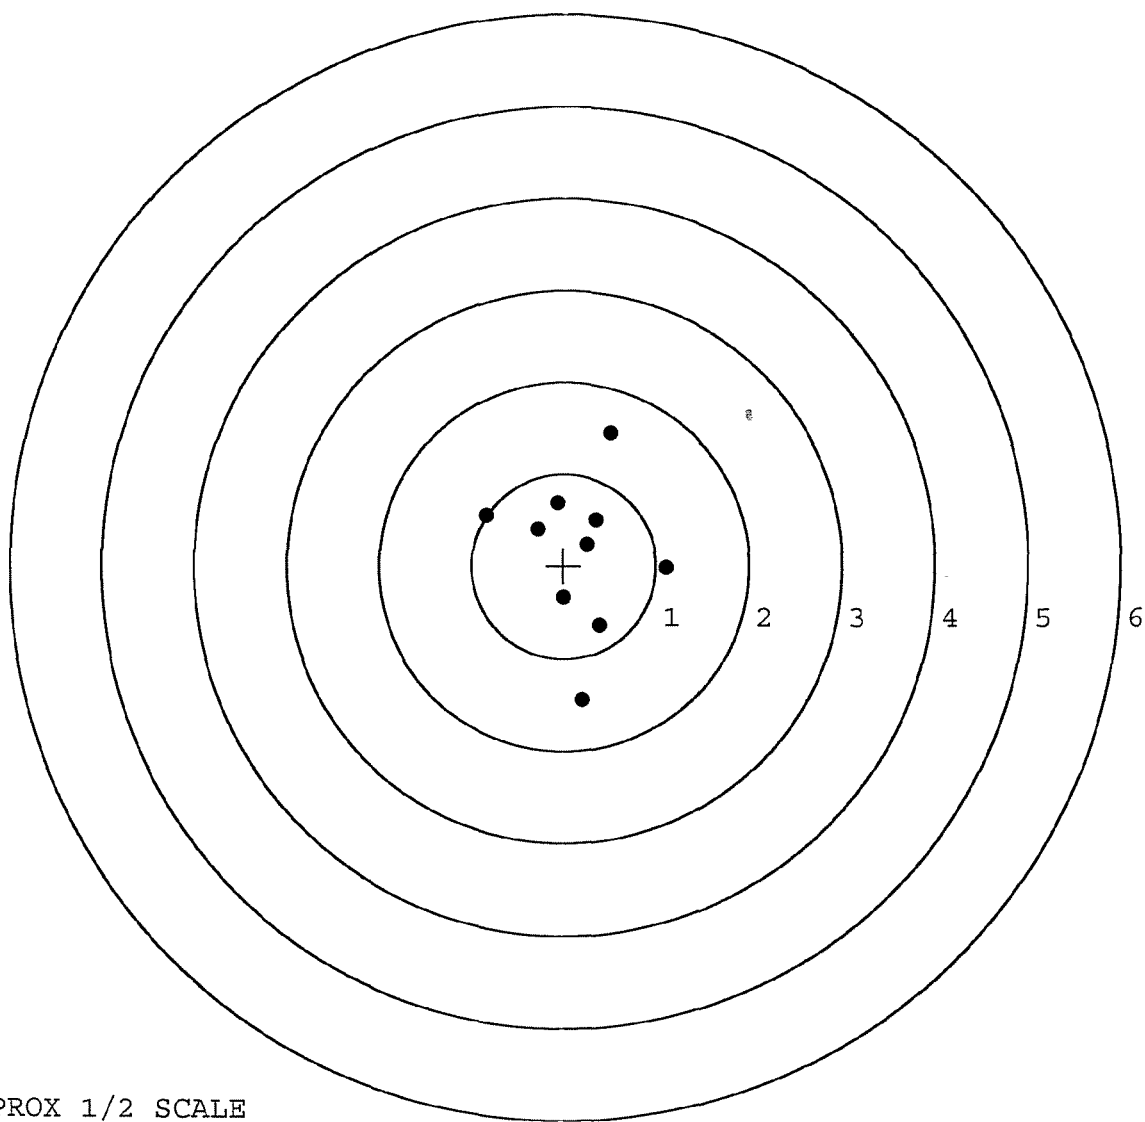


TARGET APPROX 1/2 SCALE

BARBER - M24 0106800

SERIAL NUMBER: C6349054. __0
 TARGET NUMBER: 4
 FILE DATE: 01/20/2004
 FILE TIME: 07:43

POINT#	X	Y
1:	0.341	1.117
2:	0.097	0.856
3:	0.925	0.791
4:	-0.638	0.658
5:	-0.153	0.434
6:	-0.337	0.040
7:	0.655	-0.013
8:	0.253	-0.478
9:	-0.130	-0.522
10:	-0.020	-0.353

X CENTROID: 0.099
 Y CENTROID: 0.253
 POA TO CENTROID: 0.272
 HORZ SPREAD: 1.563
 VERT SPREAD: 1.639
 GROUP SPREAD: 1.684
 MIN RADIUS: 0.311
 MAX RADIUS: 0.986
 MEAN RADIUS: 0.691
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

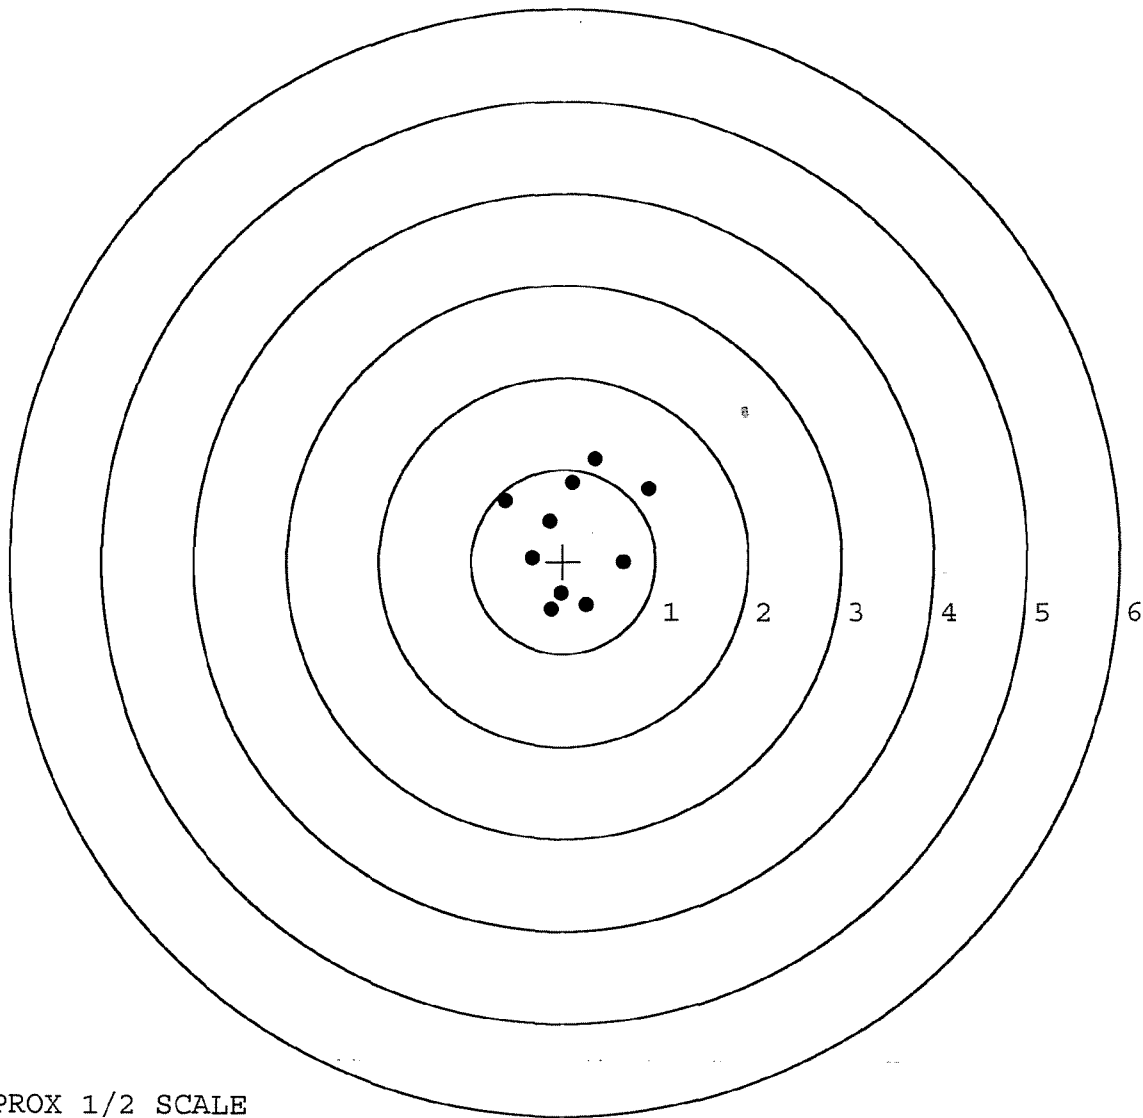


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: C6349054. __0
 TARGET NUMBER: 5
 FILE DATE: 01/20/2004
 FILE TIME: 07:43

POINT#	X	Y
1:	-0.561	1.384
2:	-0.478	0.719
3:	0.248	0.492
4:	0.560	-0.008
5:	1.002	-0.525
6:	-0.789	-0.215
7:	-0.077	-0.281
8:	-0.411	-0.055
9:	-0.459	0.010
10:	1.036	-0.491

X CENTROID: 0.007
 Y CENTROID: 0.103
 POA TO CENTROID: 0.103
 HORZ SPREAD: 1.825
 VERT SPREAD: 1.909
 GROUP SPREAD: 2.467
 MIN RADIUS: 0.393
 MAX RADIUS: 1.401
 MEAN RADIUS: 0.774
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 10

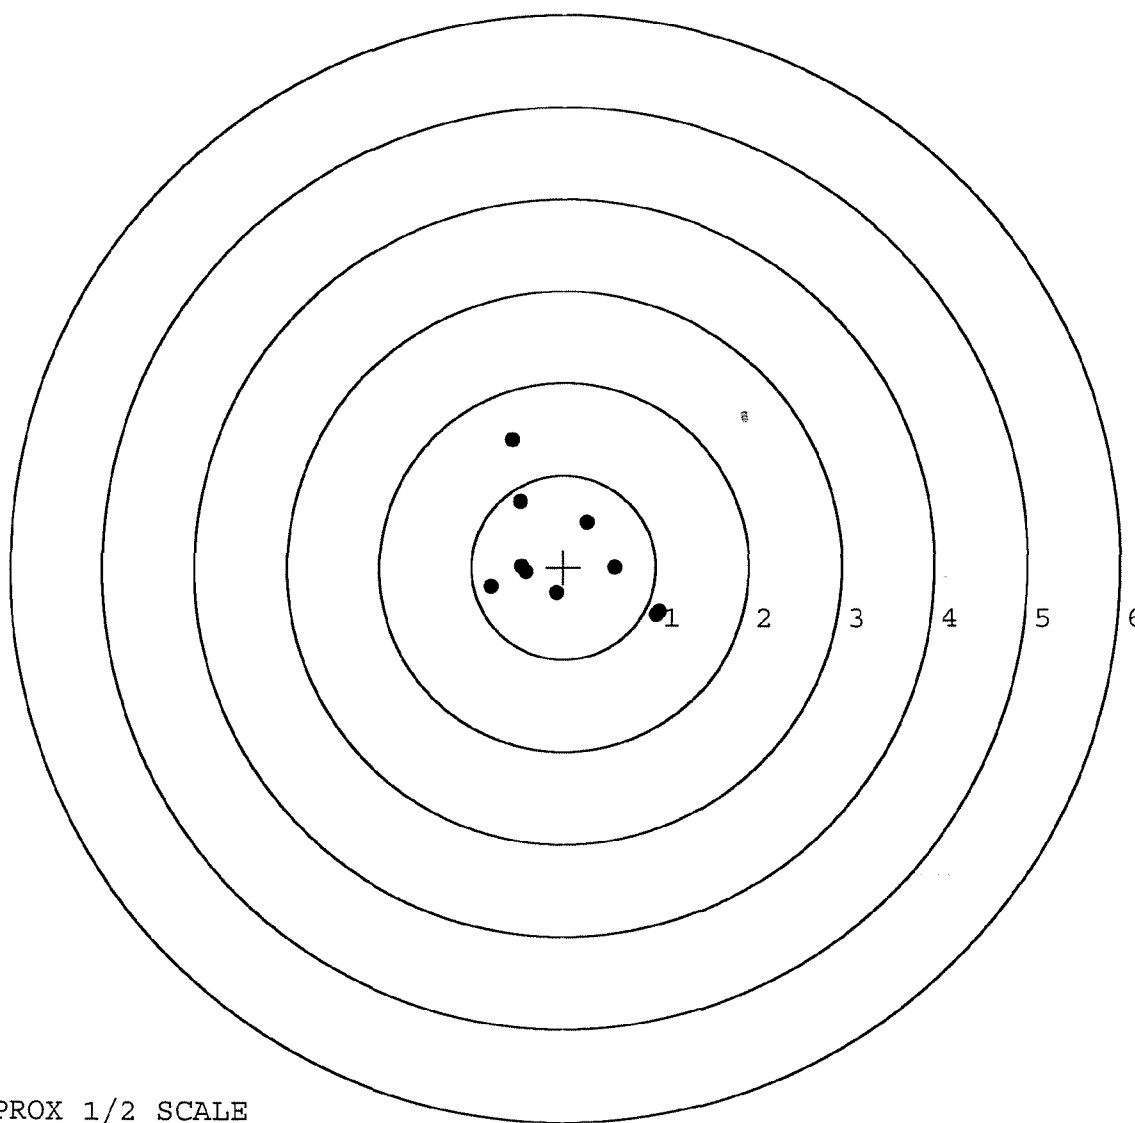

TARGET APPROX 1/2 SCALE

CONTRACT #: DAAE-20-02-D-0127

BARBER - M24 **M2400106841**

Remington[®]

MODEL 700TM H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off., Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

DUPONT
REG. U.S. PAT. & T.M. OFF.


SERIAL NO.
C6349054

ORDER NO.
5716

01


5716 C6349054

UPC

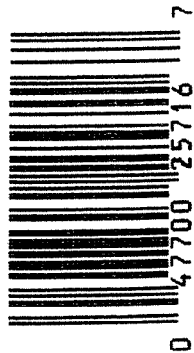

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C6349054

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	1 12 90		RW
600	Proof	1 12 90		K
607	Check Headspace	1 12 90		K
610	Dis-assemble Gun	1 12 90		RW
612	Magnaflux Barrel Action	1-16-90		KCR
	Magnaflux Bolt	1-17-90		KCR
615	Rollmark Caliber		1-17-90	GS
617	Drill and Tap Sight Holes		1-19-90	FB
618	Polish Barrel RB		1-27-90	WB
620	Apply Coatings (Barrel Action)		2/2/90	JA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		2/2/90	WB
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		3/1/90	GS

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	6	6	6			1-31-90	JL
	G) Safety Off Force	3	3	3			1-31-90	JL
	H) Trigger Pull Test & Retainability						3/14/90	JS
	I) Firing Pin Indent	.0225	.0225	.0225			1-31-90	JL
	J) Assemble Stock						1-31-90	JL
	K) Assemble Swivel Studs						2/28/90	WB
	L) Attach Front and Rear Sight Assemblies						1-31-90	JL
	M) Iron Sight Alignment						1-31-90	JL
	N) Detach Front & Rear Sights & place in numbered container						1-31-90	JL
	O) Attach Scope to Rifle						2-23-90	JL
	P) Detach & Attach Scope 20 Times						2-23-90	JL
640	Gallery Target & Test						2/26/90	DH
	A) Time						2/26/90	DH
	B) Malfunctions						2/26/90	DH
	C) Pierced Primers						2/26/90	DH
	D) Optical Clarity of Scope						2/26/90	DH
645	Inspect for Live Ammo						2/26/90	DH
655	Final Inspection						2/28/90	WB
	A) Headspace							
	B) Trigger Pull	2.24	2.34	2.53	2.45	2.25	2/27/90	WB
	C) Function						2/28/90	WB
660	Pack						20 Mar 90	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. C6349054

DATE 31 Jan 90

TESTER 1928

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.21	2.22	2.13	2.74	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.17	2.16	2.06	2.34	
PULL #3	2.21	2.08	2.05	2.53	
PULL #4	2.09	2.12	2.07	2.43	
PULL #5	2.21	2.18	2.09	2.25	
TOTAL	10.89	10.76	10.40		
AVG.	2.178	2.152	2.08		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.95	2.86		
PULL #2	2.86	2.61		
PULL #3	2.82	2.76		
PULL #4	2.79	2.58		
PULL #5	2.80	2.80		
TOTAL	14.22	13.61		
AVG.	2.844	2.712		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.00	3.82		3.87
PULL #2	3.98	3.82		3.94
PULL #3	3.93	3.73		3.86
PULL #4	3.90	3.73		3.86
PULL #5	3.84	3.73		3.89
TOTAL	19.35	18.80		19.42
AVG.	3.87	3.76		3.884

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06349054
26 Feb 1990

CENTROIDAL DISTANCES

0 TO	1	.105948
1 TO	2	.312623
1 TO	3	.379301
1 TO	4	.547161
1 TO	5	.161533


4
5 (----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0504
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0414
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0632236
THE AMP FOR THIS RIFLE IS: .8112

28 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06349034

CENTERFIRE PATTERNS # 1

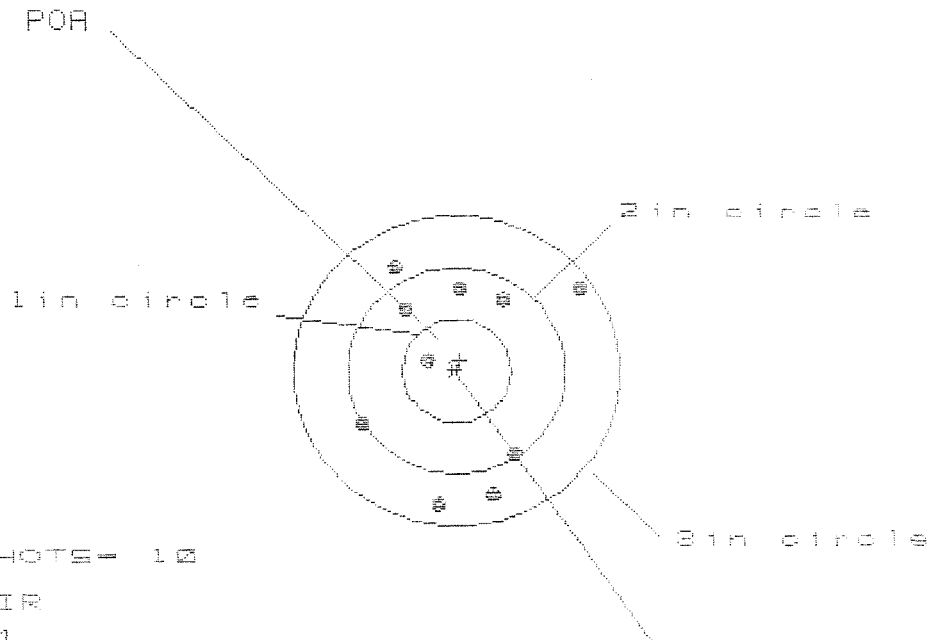

OF SHOTS= 10

IN CIR

1in = 1

2in = 5

3in = 10

HS= 1.964

VS= 2.260

GS= 2.465


CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.093	.623	.613
MINIMUM X	-.871	-.750	-.760
MAXIMUM Y	.964	1.053	.962
MINIMUM Y	-1.296	-1.207	-1.286
CENTROID X	-.032	-.153	-.143
CENTROID Y	-.101	-.190	-.039
POA TO CENTROID in.	.106	.244	.148
MIN RADIUS	.281	.238	.155
MEAN RADIUS	.968	.917	.847
MAX RADIUS	1.355	1.240	1.375
HORIZONTAL SPREAD	1.964	1.373	1.373
VERTICAL SPREAD	2.260	2.260	2.188
HYPERBOLIC SPREAD	2.465	2.393	2.393
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 5		
NUMBER IN THREE INCH CIRCLE	= 10		

26 Feb 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8349054

CENTERFIRE PATTERNS # 2

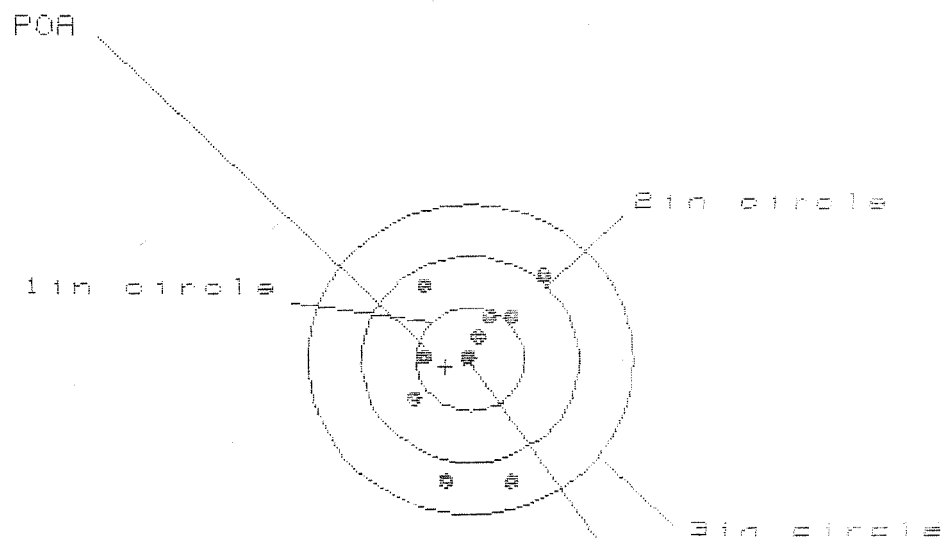

OF SHOTS = 10

IN CIR

1 in = 4

2 in = 7

3 in = 10

HS = 1.167

VS = 2.041


GS = 2.168

PATTERN #	2		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.627	.673	.655
MINIMUM X	-.539	-.494	-.512
MAXIMUM Y	.861	.730	.570
MINIMUM Y	-1.180	-1.278	-.639
CENTROID X	.225	.180	.198
CENTROID Y	.077	.208	.368
POA TO CENTROID in.	.238	.275	.417
MIN RADIUS	.059	.080	.140
MEAN RADIUS	.664	.569	.469
MAX RADIUS	1.250	1.286	.869
HORIZONTAL SPREAD	1.167	1.167	1.167
VERTICAL SPREAD	2.041	2.008	1.209
EXTREME SPREAD	2.168	2.168	1.680
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		

28 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349054

CENTERFIRE PATTERNS # 3

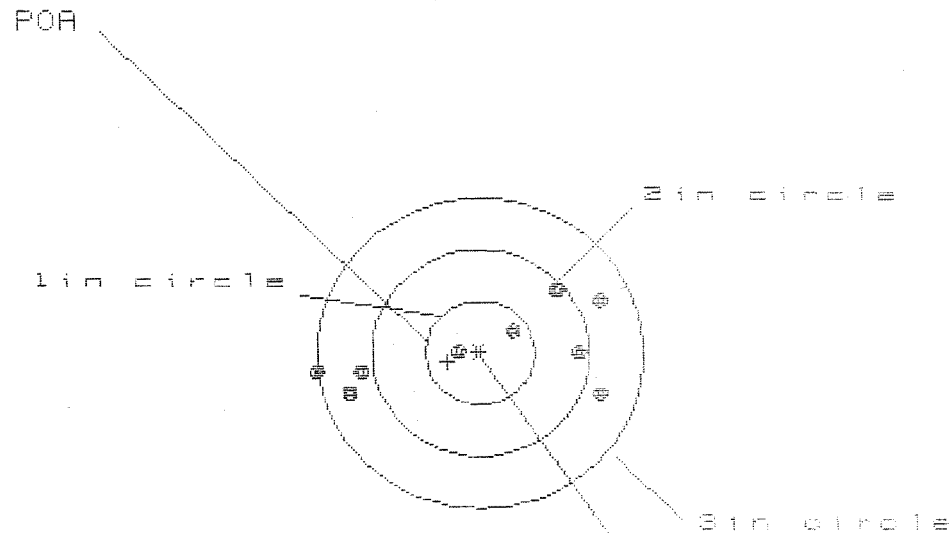

OF SHOTS- 10

IN CIR

1 in = 3

2 in = 5

3 in = 9

IS= 2.646

VS= 1.094

GS= 2.698


CENTROID #

PATTERN #	3
SHOTS (BEST OF)	10
MAXIMUM X	1.149
MINIMUM X	-1.497
MAXIMUM Y	.660
MINIMUM Y	-.434
CENTROID X	.298
CENTROID Y	.086
POA TO CENTROID in.	.310
MIN RADIUS	.154
MEAN RADIUS	.885
MAX RADIUS	1.509
HORIZONTAL SPREAD	2.646
VERTICAL SPREAD	1.094
EXTREME SPREAD	2.696
NUMBER IN ONE INCH CIRCLE =	3
NUMBER IN TWO INCH CIRCLE =	5
NUMBER IN THREE INCH CIRCLE =	9

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349054

CENTERFIRE PATTERNS # 4

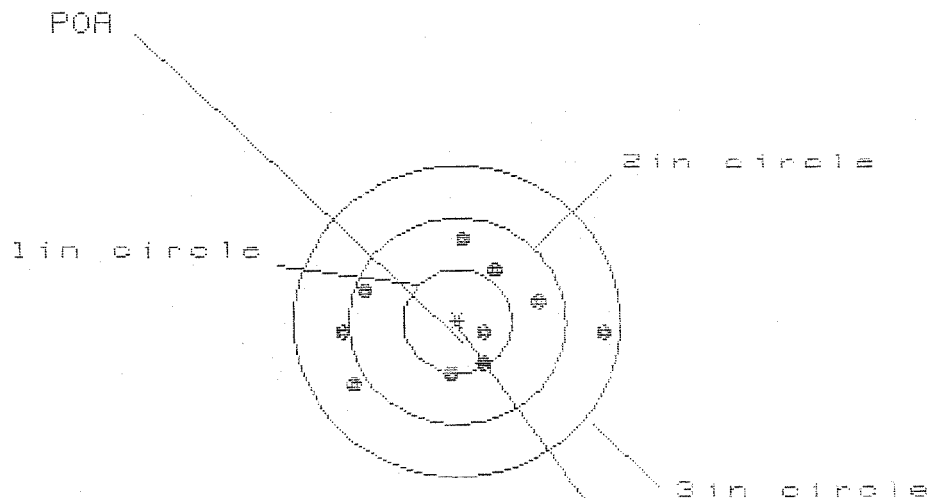

OF SHOTS = 10

IN CIR

1in = 3

2in = 7

3in = 10

HS = 2.284

VS = 1.451

GS = 2.391

CENTROID #


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.355	.863	.759
MINIMUM X	-1.029	-.878	-.982
MAXIMUM Y	.840	.827	.749
MINIMUM Y	-.511	-.624	-.585
CENTROID X	-.245	-.396	-.292
CENTROID Y	.403	.416	.495
POA TO CENTROID in.	.472	.575	.574
MIN RADIUS	.280	.421	.378
MEAN RADIUS	.786	.733	.678
MAX RADIUS	1.361	1.042	1.010
HORIZONTAL SPREAD	2.384	1.741	1.741
VERTICAL SPREAD	1.451	1.451	1.333
EXTREME SPREAD	2.391	1.888	1.778
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/08345054

CENTERFIRE PATTERNS # 5

POA

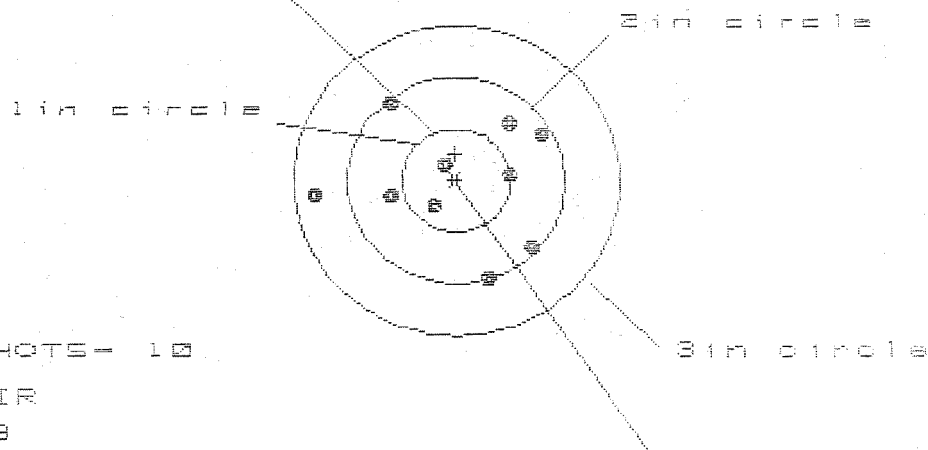

OF SHOTS- 10

IN CIR

1in = 3

2in = 3

3in = 10

HS= 2.083

VS= 1.710

GS= 2.166

CENTROID *

PATTERN #	5
SHOTS (BEST OF)	10
MAXIMUM X	.816
MINIMUM X	-1.267
MAXIMUM Y	.788
MINIMUM Y	-.922
CENTROID X	.006
CENTROID Y	-.258
POA TO CENTROID in.	.258
MIN RADIUS	.186
MEAN RADIUS	.753
MAX RADIUS	1.272
HORIZONTAL SPREAD	2.083
VERTICAL SPREAD	1.710
EXTREME SPREAD	2.166
NUMBER IN ONE INCH CIRCLE	3
NUMBER IN TWO INCH CIRCLE	9
NUMBER IN THREE INCH CIRCLE	10

GFM

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6349054

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		5/4/93	RW
600	Proof		5/4/93	RW
607	Check Headspace		5/4/93	RW
610	Dis-assemble Gun		5/4/93	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/14/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/14/93	RW
	C) Inspect Ejector Hole for Chamfer		5/14/93	RW
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER - M24 0106814 OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
630	Gallery Target & Test			
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		5/18/93	RW
655	Final Inspection			
	A) Headspace		5/18/93	RW
	B) Trigger Pull			
	C) Function		5/18/93	RW
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6349054
21 May 1993

CENTROIDAL DISTANCES

0 TO	1	.635172
1 TO	2	.284271
1 TO	3	.784272
1 TO	4	1.00031
1 TO	5	.717865


45
+21
3 <----POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1494
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1818
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .235312
THE AMR FOR THIS RIFLE IS: 1.14

21 May 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8348054

CENTERFIRE PATTERNS # 1

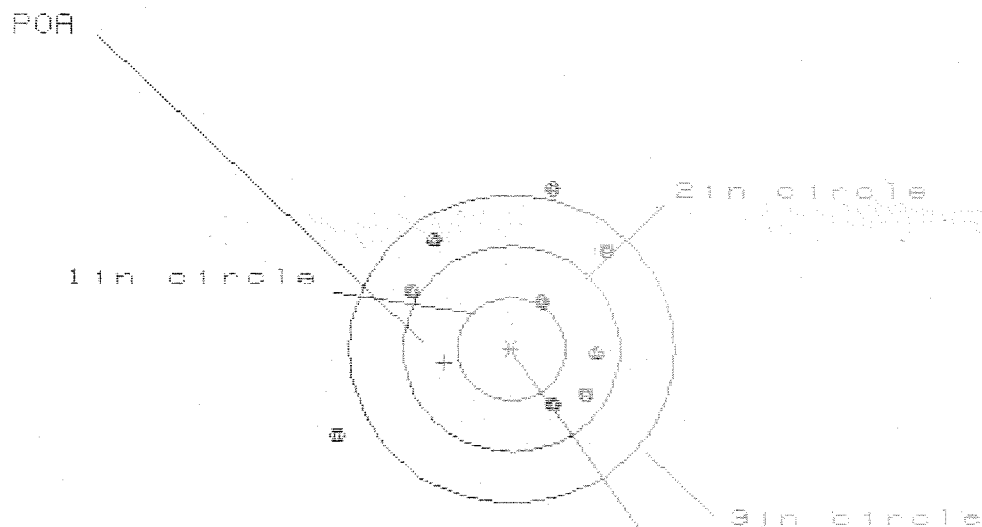

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 7

ME= 2.578

VS= 4.235

GS= 4.285

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.929	.900	.690
MINIMUM X	:	-1.649	-1.678	-1.127
MAXIMUM Y	:	1.560	1.263	1.117
MINIMUM Y	:	-2.675	-1.174	-1.006
CENTROID X	:	.620	.649	.859
CENTROID Y	:	.138	.436	.582
POA TO CENTROID in.	:	.635	.782	1.038
MIN RADIUS	:	.549	.315	.062
MEAN RADIUS	:	1.269	1.064	.882
MAX RADIUS	:	2.687	2.048	1.138
HORIZONTAL SPREAD	:	2.578	2.578	1.817
VERTICAL SPREAD	:	4.235	2.437	2.123
EXTREME SPREAD	:	4.285	3.176	2.123
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		7	

21 May 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C8349054

CENTERFIRE PATTERNS # 2

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 9

HS= 2.526

VS= 2.673

QS= 3.075

PATTERN #	:	2	3	4
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.156	1.065	.883
MINIMUM X	:	-1.370	-1.461	-.857
MAXIMUM Y	:	1.915	.774	.747
MINIMUM Y	:	-.757	-.545	-.448
CENTROID X	:	.339	.430	.613
CENTROID Y	:	.181	-.031	-.128
POA TO CENTROID in.	:	.385	.431	.626
MIN RADIUS	:	.414	.299	.190
MEAN RADIUS	:	.962	.787	.646
MAX RADIUS	:	2.082	1.653	.967
HORIZONTAL SPREAD	:	2.526	2.526	1.739
VERTICAL SPREAD	:	2.673	1.319	1.195
EXTREME SPREAD	:	3.075	2.610	1.887
NUMBER IN ONE INCH CIRCLE	:	= 2		
NUMBER IN TWO INCH CIRCLE	:	= 6		
NUMBER IN THREE INCH CIRCLE	:	= 9		

21 May 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6349054

CENTERFIRE PATTERNS # 3

POA

1 in circle =

2 in circle

3 in circle

CENTROID *

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 1

3 in = 7

HS= 2.038

VS= 3.342

GS= 3.691

PATTERN #

:

3

SHOTS (BEST OF)

:

10

9

8

MAXIMUM X

:

1.254

1.363

1.321

MINIMUM X

:

-.784

-.675

-.717

MAXIMUM Y

:

1.478

1.271

1.026

MINIMUM Y

:

-1.864

-1.964

-1.606

CENTROID X

:

.091

-.019

.023

CENTROID Y

:

-.441

-.234

.011

POA TO CENTROID in.

:

.450

.235

.025

MIN RADIUS

:

.869

.650

.412

MEAN RADIUS

:

1.363

1.234

1.069

MAX RADIUS

:

2.109

1.992

1.651

HORIZONTAL SPREAD

:

2.038

2.038

2.038

VERTICAL SPREAD

:

3.342

3.235

2.632

EXTREME SPREAD

:

3.691

3.238

2.663

NUMBER IN ONE INCH CIRCLE =

0

NUMBER IN TWO INCH CIRCLE =

1


NUMBER IN THREE INCH CIRCLE =

7

21 May 1993

FILE:/PATTERNING/CENTERFIRE_PATT/06349054

CENTERFIRE PATTERNS # 4

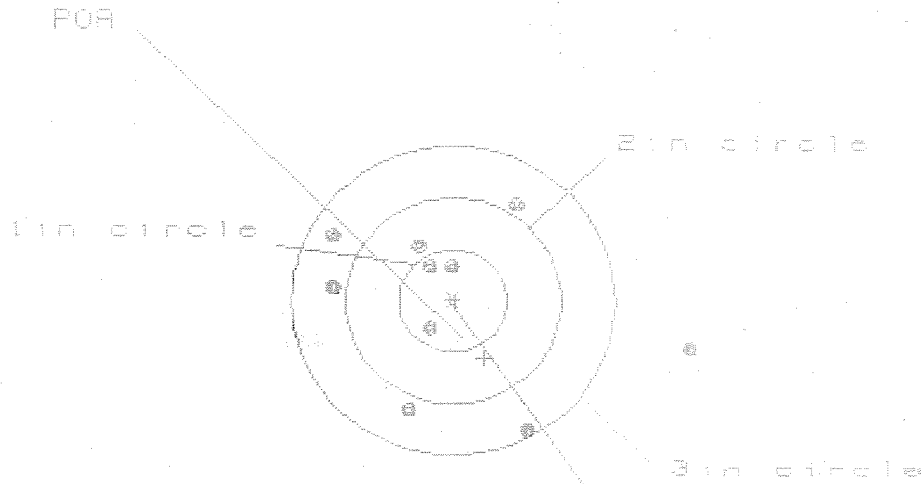

* OF SHOTS- 10

IN CIR

1 in = 3

2 in = 4

3 in = 9

HS= 3.262

VS= 2.189

ES= 3.420

CENTROID *

PATTERN #	4		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	2.146	.914	.896
MINIMUM X	-1.116	-.877	-.763
MAXIMUM Y	.944	.897	.735
MINIMUM Y	-1.245	-1.292	-1.252
CENTROID X	-.286	-.525	-.639
CENTROID Y	.562	.609	.771
POA TO CENTROID in.	.631	.804	1.001
MIN RADIUS	.332	.293	.238
MEAN RADIUS	.996	.815	.686
MAX RADIUS	2.188	1.583	1.255
HORIZONTAL SPREAD	3.262	1.791	1.659
VERTICAL SPREAD	2.189	2.189	1.987
EXTREME SPREAD	3.420	2.571	2.217
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		4	
NUMBER IN THREE INCH CIRCLE =		9	

21 May 1993


FILE:/PATTERNING/CENTERFIRE PATT/06349054

CENTERFIRE PATTERNS # 5

POA

1 in circle

3 in circle

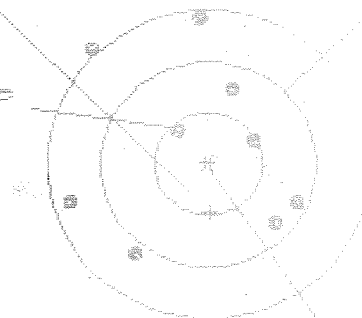

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 5

3 in = 3

HG = 2.900

VS = 3.112

GS = 3.881

CENTERFIRE

PATTERN #

5

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.577	.947	.622
MINIMUM X	-1.331	-1.155	-1.270
MAXIMUM Y	1.415	1.226	1.343
MINIMUM Y	-1.697	-1.028	-1.911
CENTROID X	-.017	-.193	-.073
CENTROID Y	.469	.658	.541
POA TO CENTROID in.	.470	.685	.547
MIN RADIUS	.455	.218	.381
MEAN RADIUS	1.112	.953	.981
MAX RADIUS	2.317	1.387	1.345
HORIZONTAL SPREAD	2.908	2.102	2.182
VERTICAL SPREAD	3.112	2.254	2.234
EXTREME SPREAD	3.881	2.467	2.334
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		8	

BARBER - M24 0106821
RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 93-10816

INITIAL FPS	CUSTOMER ORDER NO.		FRED MARTIN/M24 SNIPER W/10X-M3A SCOPE			
DATE RECEIVED 04/28/93	DATE OPENED 04/28/93	DATE CODE XJ 12-89	SERIAL NUMBER C6349054	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62	NATO
ACCESSORIES W/STUDS SCOPE MNTS SCOPE BASE						


FROM:	SHIP TO:
DEPARTMENT OF THE ARMY USASCH DOL STOR BR, BLDG 2131 SCHO BKS HI 96857	DEPARTMENT OF THE ARMY USASCH DOL STOR BR, BLDG 2131 SCHO BKS HI 96857
CUST NO: 078579 C.O.L.D L	

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
GUN CONDITION ☐ NEW ☐ LIGHTLY WORN ☐ WORN ☐ VERY WORN ☐ UNREPAIRABLE ☐ MARRED					REPAIR CHARGE EXCISE TAX INSURANCE UPS PARCEL POST TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT	Barrel Replacement

PARTS	COMMENTS
Barrel Assy - 96002	Re Zinc - Scope Rings, Scope Base & Studs Re powder Coat - Floor plate, 1 Aitch, Trigger Guard, Front & Rear Sight Bases
REPAIRMAN RW	PROOF ✓
GALLERY TESTER RW	DATE 5/4/93
	CLEAN ✓
	DATE 5/18/93
	TEST ✓
	DATE 5/18/93
	TARGET ✓
	DATE 5/18/93
	PATTERN
	DATE

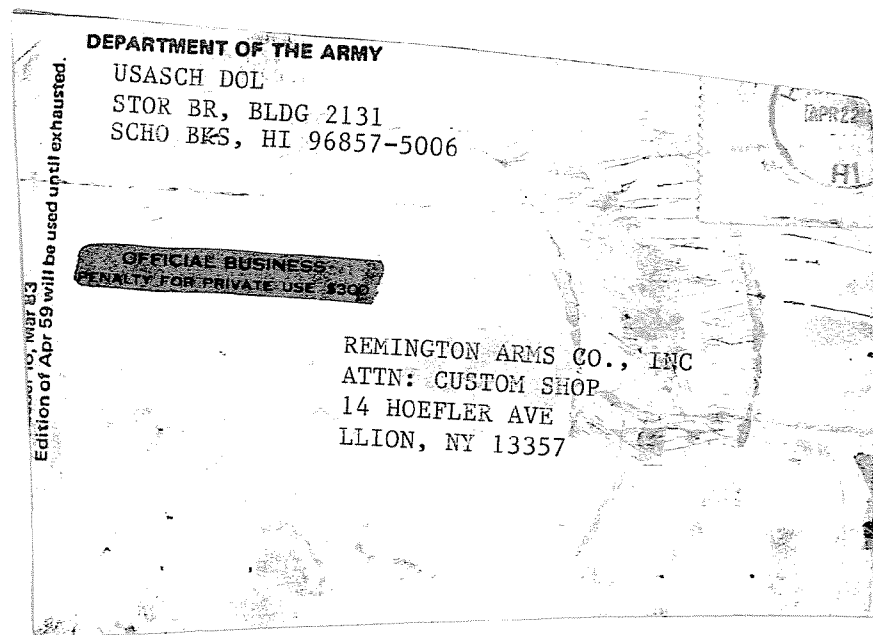

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON**

☆U.S. Government Printing Office: 1989-244-058

DD Form 1348-1, SEP 87 Jun 86 edition may be used. FORM APPROVED, OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

Shipped

MAINTENANCE REQUEST				PAGE OF	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047	CONTROL NUMBER
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG						
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA		
1a. WORK ORDER NO. WIFBVT10	b. CUSTOMER UNIT NAME HRC3BJ	c. PHONE NO. 4209	3a. WORK ORDER NO (WON)	b. SHOP 110917	c. PHONE NO.	
2. Intransit Customer, enter data in Blocks 2a and 2b	2a. SAMS-2 UIC	b. UTILIZATION CODE	4a. UIC SUPPORT	b. SUPPORT UNIT NAME		
SECTION III - EQUIPMENT DATA						
5. ID	6. NSN 11005012402136	15. FAILURE DETECTED DURING (Select one - use / or X)				
7. TYPE MNT. REQ. CODE	8. MODEL M24, 7.62mm	☐ A Sch. Main. ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other ☐ I Calibration				
9. NOUN SNIPER WEAPON SYSTEM	16a. MILES/KILOMETERS (Enter or x)	b. HOURS	c. ROUNDS			
10a. ORG WON	b. EIC	d. LANDINGS	e. AUTO ROTATIONS	17. PROJ. CODE (If Assigned)	18. ACCT. PROCESSING CODE	
11. SERIAL NUMBER C6349054	b. QTY.	13. PD	19. IN WARRANTY? (Y or N)	20. LEVEL OF WORK (Select one - use / or X)		
24. Describe Deficiencies or Symptoms on the basis of Complete Checkout and Diagnostic Procedure in Equipment TM (Do not prescribe repairs.)		☐ O Unit Level ☐ H Intermediate General Spt. ☐ I Special Repair Activity ☐ F Immediate Direct Spt. ☐ D Depot				
DOES NOT EXTRACT		21. BUMPER NO.-TAIL NO.		22. REIMBURSABLE CUSTOMER? (If Intransit Customer, enter Y or N)		
P.O.C. SC Mitchell (4209)		23. PD AUTHENTICATION SIGNATURE (Payroll Signature)				
SECTION IV - REPORTABLE DATA						
25a. STA	b. ORD DATE	c. MIL TIME	d. STA	e. ORD DATE	f. MIL TIME	26. TECHNICAL REFERENCES
SECTION V - TASK REQUIREMENTS DATA						
27a. FILE INPUT CD.	b. TASK NO.	c. ACT. RQD.	d. TASK DESCRIPTION Classified Condition Code F Verifiably DCD 25 FSB <i>[Signature]</i> Signature Date	e. QTY. TO BE RPR	f. WORK CENTER	g. FAILURE CODE
SECTION VI - PART REQUIREMENTS						
28a. FILE INPUT CD.	b. TASK NO.	c. ID	d. RQD NSN OR PART NO.	e. SFX	f. QTY. REQUIRED	g. QTY. ISSUED
SECTION VII - COMPLETION DATA						
29. QTY. RPR	30. QTY. CONDEMN.	31. QTY. NRTS	32. EVAC WON	33. EVAC UNIT NAME		
SECTION VIII - ACTION SIGNATURES						
34a. SUBMITTED BY	35a. ACCEPTED BY	36a. WORK STARTED BY	37a. INSPECTED BY	38a. PICKED UP BY		
b. ORD DATE 930716	b. ST. c. ORD DATE 930716	d. MIL TIME 93085	b. ST. c. ORD DATE 93085	d. MIL TIME 93085	b. ST. c. ORD DATE 93085	d. MIL TIME 93085

WARNING: Unauthorized persons removing, defacing, or destroying this tag may be subject to a fine of not more than \$1,000 or imprisonment for not more than one year or both. (18 USC 1361)	FSN, PART NO. AND ITEM DESCRIPTION		UNSERVICEABLE (REPARABLE) TAG - MATERIEL	
	1005-01-240-2136 SNIPER WEAPON SYS. M24 7.62 MM		INSPECTION ACTIVITY	CONDITION CODE
	Serial 89 1315		USASCH DOL	F
	REASON FOR REPARABLE CONDITION		NRTS	
	REMARKS		REMOVED FROM	
SERIAL NO./LOT NO.	UNIT OF ISSUE	INSPECTOR'S NAME OR STAMP AND DATE		
C6349054	EA	30 MAR 1993		
CONTRACT OR PURCHASE ORDER NO.	QUANTITY			
	1			
REPAIRABLE/RECOVERABLE		T A Q DoI Maint Div 3008 Inspected By <i>R. Schuler</i>		

DD FORM 1577-2, 1 OCT 86