

C6349193

MODEL 700TM M24

Model **SMS** TM

Action

Barrel Length

Capacity

Order No. **5715**

*Includes 1 in chamber.

Remington

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSB Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00028493** Serial: C6349193 Model 700 Center Fire Caliber 7.62 NATO M 24 (SWS) Repairman: Status: New 6/13/01 7:42:50 AM

Verify Repair

Address Information

Customer Received From Return To Received From

Name: **COMMANDER** **COMMANDER**

Address 1: **2ND BN 35TH INF BATTALION** **2ND BN 35TH INF BATTALION**

Address 2: **25TH ID(L) USARHAW** **25TH ID(L) USARHAW** PG Box PG Box

City: **SCHOFIELD BARRACKS** **SCHOFIELD BARRACKS**

State: **HI** Zip Code: **96857** Country: **US** State: **HI** Zip Code: **96857** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: Fax: Email: Comments:

Received Condition

Poor

Condition Notes:

CSB Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	1
A010	Hard Case	1
X	BI POD	1


Repair Search **Refresh** **Close**

maglet 6/18/01 8:34 AM CAPS NUM INS SCPL

Start Inbox - Microsoft Exchange Arms Services Repair 8:34 AM

Serial Number: **C6349193**

Model: **700**



RE00028493

BARBER - M24 0109831

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6349193
17 Jul 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1866

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.007

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .186731

THE AMR FOR THIS RIFLE IS: .956

CENTROIDAL DISTANCES

Ø TO	1	.347794
1 TO	2	.400525
1 TO	3	.703295
1 TO	4	.362084
1 TO	5	.264462


3
4 5 2 <----POA
1

PATTERN #: 1
 POA TO CENTROID: .348
 MIN RADIUS : .225
 MEAN RADIUS : .950
 MAX RADIUS : 1.841
 CENTROID X : -.231
 CENTROID Y : -.260

17 Jul 2001

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/c6349193.1

CENTERFIRE PATTERN # 1

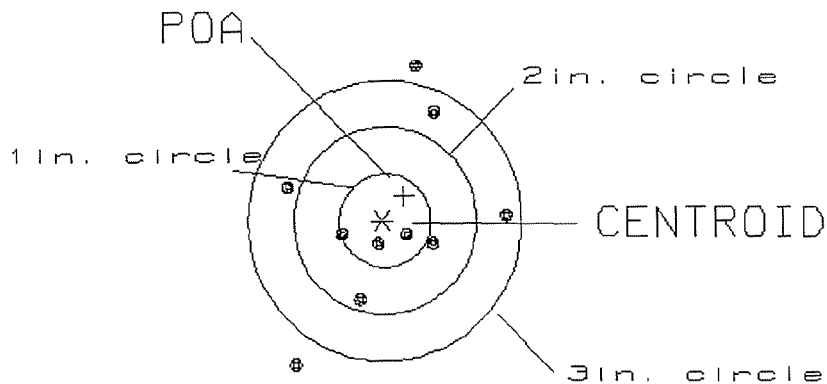

OF SHOTS= 10

IN CIRCLE

HS= 2.34

3

VS= 3.18

5

GS= 3.43


8

PATTERN #: 2
 POA TO CENTROID: .189
 MIN RADIUS : .245
 MEAN RADIUS : .904
 MAX RADIUS : 1.533
 CENTROID X : .145
 CENTROID Y : -.122

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193.1

CENTERFIRE PATTERN # 2

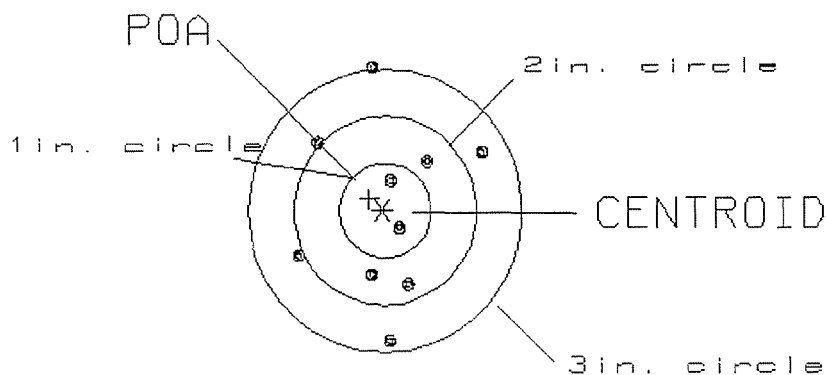

OF SHOTS= 10

IN CIRCLE

HS= 1.96

2

US= 2.94

5

GS= 2.94

9

BARBER - M24 0109834

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: .532

MIN RADIUS : .129

MEAN RADIUS : .771


MAX RADIUS : 1.686

CENTROID X : -.299

CENTROID Y : .440

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193.1

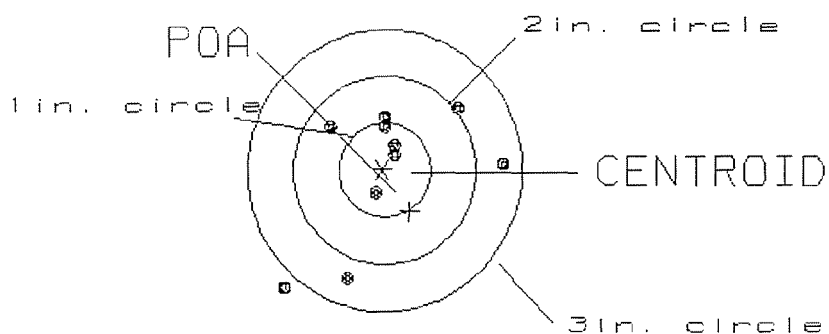CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.46

4

VS= 1.92

6

GS= 2.77

9

BARBER - M24 0109835


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐
POA TO CENTROID: .504
MIN RADIUS : .416
MEAN RADIUS : 1.056
MAX RADIUS : 1.945
CENTROID X : -.503
CENTROID Y : -.021

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193.1

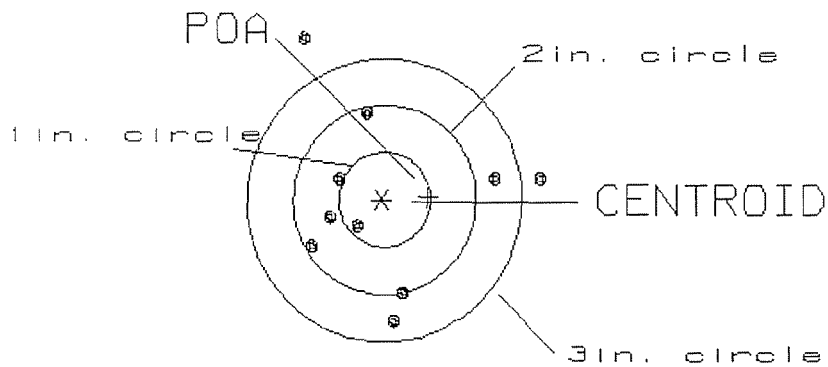CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 2.58

1

VS= 3.06

6

GS= 3.22

8

BARBER - M24 0109836

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .084
 MIN RADIUS : .577
 MEAN RADIUS : 1.099
 MAX RADIUS : 2.085
 CENTROID X : -.045
 CENTROID Y : -.072

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193.1

CENTERFIRE PATTERN # 5

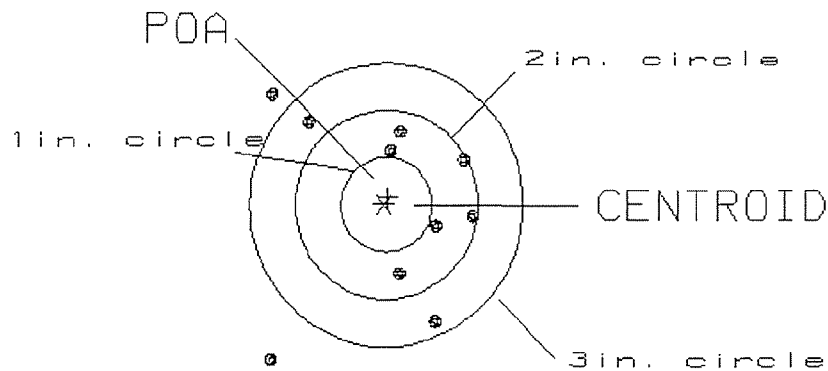

OF SHOTS= 10

IN CIRCLE

HS= 2.16

0

VS= 2.88

6

GS= 3.02

8

BARBER - M24 0109837

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6349193
17 Jul 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.378
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1896
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .422886

THE AMR FOR THIS RIFLE IS: 1.325

CENTROIDAL DISTANCES

Ø TO	1	.380423
1 TO	2	.411461
1 TO	3	.295163
1 TO	4	.279732
1 TO	5	.44588

3 2+ <----POA
5 4 1

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 1

POA TO CENTROID: .289
 MIN RADIUS : .876
 MEAN RADIUS : 1.554
 MAX RADIUS : 2.093
 CENTROID X : -.107
 CENTROID Y : -.269

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193

CENTERFIRE PATTERN # 1

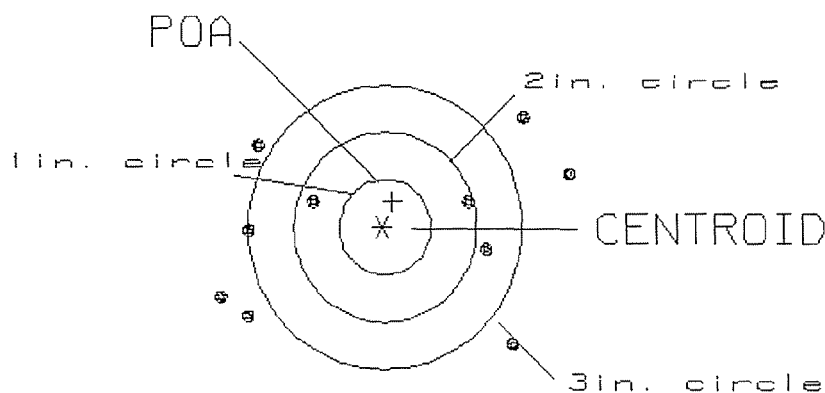

OF SHOTS= 10

IN CIRCLE

HS= 3.80

0

VS= 2.41

2

GS= 4.00


4

PATTERN #: 2
 POA TO CENTROID: .127
 MIN RADIUS : .306
 MEAN RADIUS : 1.203
 MAX RADIUS : 2.072
 CENTROID X : -.081
 CENTROID Y : .097

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193

CENTERFIRE PATTERN # 2

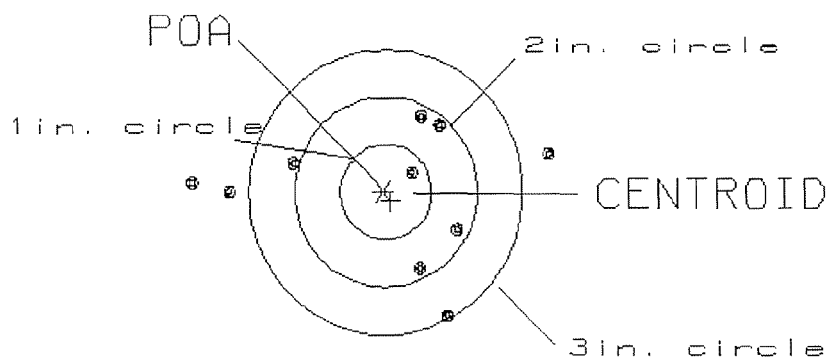

OF SHOTS= 10

IN CIRCLE

HS= 3.83

1

VS= 2.05

5

GS= 3.84

7


PATTERN #: 3

POA TO CENTROID: .329
 MIN RADIUS : .114
 MEAN RADIUS : 1.098
 MAX RADIUS : 2.099
 CENTROID X : -.329
 CENTROID Y : .020

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193

CENTERFIRE PATTERN # 3

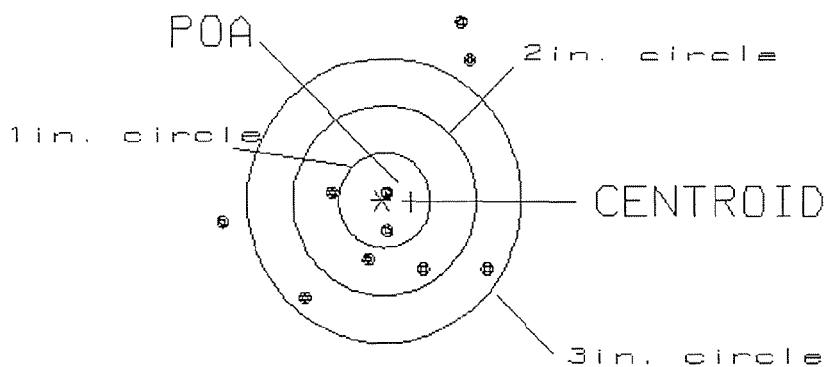

OF SHOTS= 10

IN CIRCLE

HS= 2.95

2

VS= 2.95

5

GS= 3.45


7

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .634
 MIN RADIUS : .306
 MEAN RADIUS : 1.251
 MAX RADIUS : 2.700
 CENTROID X : -.542
 CENTROID Y : -.330

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193

CENTERFIRE PATTERN # 4

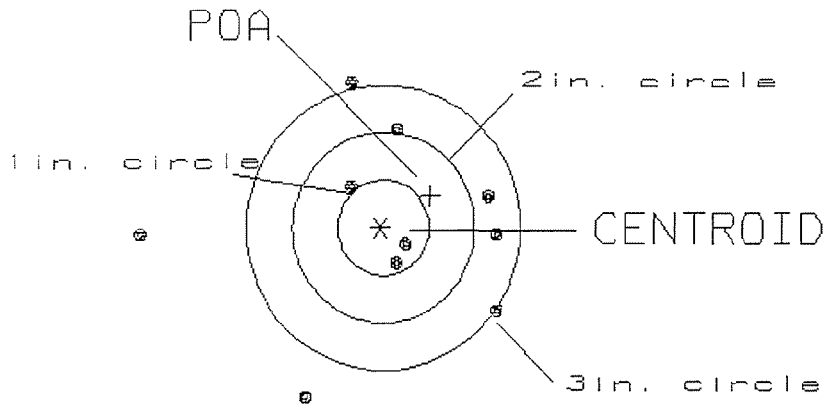

OF SHOTS= 10

IN CIRCLE

HS= 3.98

2

VS= 3.31

3

GS= 4.06

6

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 5

POA TO CENTROID: .815
 MIN RADIUS : .427
 MEAN RADIUS : 1.521
 MAX RADIUS : 3.613
 CENTROID X : -.669
 CENTROID Y : -.466

17 Jul 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6349193

CENTERFIRE PATTERN # 5

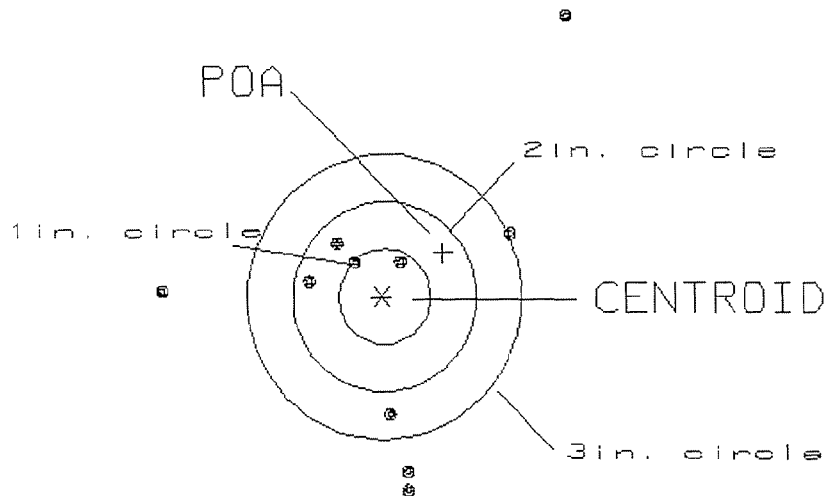

OF SHOTS= 10

IN CIRCLE

HS= 4.44

2

VS= 5.07

4

GS= 5.37

6

M-24 INSPECTION CHECKLIST
 CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 000 28493			
SERIAL NUMBER C 6349193			
LOG-IN DATE 6/13/01			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	6/13/01	RLH
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL AND TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	6/14/01	RLH
605	CHECK HEADSPACE	6/14/01	RLH
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	7/16/01	RLH
655	FINAL INSPECT	7/17/01	RLH
660	PACK		
		SHIP DATE	
QAR INSPECTION DATE			

Final Inspection

S.N. C6349193

DATE REC'D: 6/13/01

DATE RET'D:

AUDITOR: *vt*

Item:

BARREL ASSY.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

SCOPE ASSY.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

MISC.

☒ DD-250☒ BAR CODE☒ PACKAGING

Item:

STOCK ASSY.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

SYSTEMS CASE

☒ SCOPE CASE☒ IRON SIGHTS☒ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION☒ SET

Comments:

Remington®

MODEL 700™ H24

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

REMINGTON-UMC
REG. U.S. PAT. & TM. OFF.

SERIAL NO.
C6349193

ORDER NO.
5716


MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

01



5716 C6349193

UPC



0 47700 25716 7

GUN SERIAL # C6349193

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		12-20 89	Rw
600	Proof		12-20 89	A
607	Check Headspace		12-20 89	A
610	Dis-assemble Gun		12-20 89	Rw
612	Magnaflux Barrel Action		1-5-90	KCR
	Magnaflux Bolt		1-5-90	
615	Rollmark Caliber		1/5/90	gs
617	Drill and Tap Sight Holes		1/8/90	WB
618	Polish Barrel RB		1/9/90	WB
620	Apply Coatings (Barrel Action)		1-15-90	TJA
	Apply Coating (Bolt)			
625	Final Assembly			
	A) Clean inside of Bolt Assembly		1/17/90	Rw
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		1/17/90	Rw
	C) Inspect Ejector Hole for Chamfer		1/17/90	Rw
	D) Oil Firing Pin Ass'y		1/17/90	Rw
	E) Adjust Trigger Pull to Min Setting and Stake		25 Jan 90	gs

BARBER - M24 0109847

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			1-25-90	JS
	G) Safety Off Force	2	2	2			1-25-90	JS
	H) Trigger Pull Test & Retainability						25 Jan 90	JS
	I) Firing Pin Indent	1.0225	0.22	0.22			1-25-90	JS
	J) Assemble Stock						1/29/90	RW
	K) Assemble Swivel Studs						1/29/90	WB
	L) Attach Front and Rear Sight Assemblies						1/29/90	RW
	M) Iron Sight Alignment						1/29/90	RW
	N) Detach Front & Rear Sights & place in numbered container						1/29/90	RW
	O) Attach Scope to Rifle						2/16/90	WB
	P) Detach & Attach Scope 20 Times						2/16/90	WB
640	Gallery Target & Test						2-26-90	JS
	A) Time						"	JS
	B) Malfunctions						"	JS
	C) Pierced Primers						"	JS
	D) Optical Clarity of Scope						"	JS
645	Inspect for Live Ammo						2-26-90	JS
655	Final Inspection						2/18/90	WB
	A) Headspace							
	B) Trigger Pull	2.15	2.10	2.18	2.15	2.28	2/27/90	WB
	C) Function						2/28/90	WB
660	Pack						20 Mar 90	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6349193

DATE 24 Jan 90

TESTER JS

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.46	2.55	2.47	2.68	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.17	2.53	2.51	2.65	
PULL #3	2.24	2.40	2.35	2.52	
PULL #4	2.14	2.38	2.45	2.42	
PULL #5	2.03	2.34	2.55	2.30	
TOTAL	11.04	12.20	12.33	12.57	
AVG.	2.208	2.44	2.466	2.512	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.54	3.53		
PULL #2	3.49	3.43		
PULL #3	3.39	3.40		
PULL #4	3.43	3.50		
PULL #5	3.41	3.48		
TOTAL	17.26	17.34		
AVG.	3.452	3.468		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.37	4.18		4.12
PULL #2	4.20	4.20		4.11
PULL #3	4.17	4.16		4.11
PULL #4	4.23	4.19		4.14
PULL #5	4.18	4.22		4.12
TOTAL	21.15	20.95		20.60
AVG.	4.23	4.19		4.12

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6349193
27 Feb 1990

CENTROIDAL DISTANCES

0 TO	1	.544362
1 TO	2	.346954
1 TO	3	.41173
1 TO	4	.811816
1 TO	5	.925562


5
2, 3rd < ---- POA

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.2864
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1366
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .317308
THE AMR FOR THIS RIFLE IS: .888

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 1

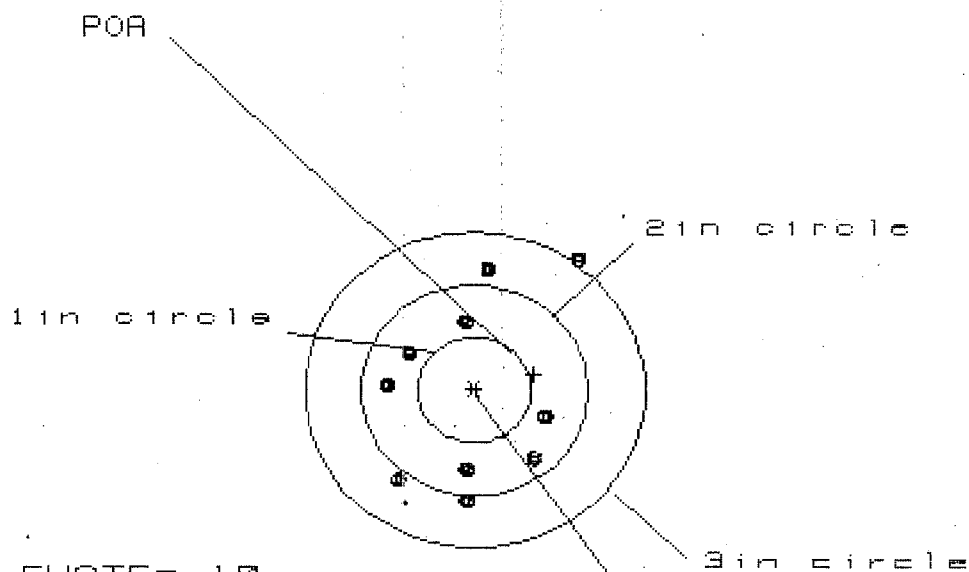

OF SHOTS- 10

IN CIR

1in - 0

2in - 6

3in - 9

HS- 1.608

VS- 2.386

GS- 2.592


CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.874	.684	.716
MINIMUM X	-.734	-.637	-.605
MAXIMUM Y	1.293	1.337	.935
MINIMUM Y	-1.093	-.949	-.782
CENTROID X	-.523	-.620	-.652
CENTROID Y	-.151	-.295	-.462
POA TO CENTROID in.	.544	.687	.799
MIN RADIUS	.627	.599	.437
MEAN RADIUS	.919	.826	.736
MAX RADIUS	1.561	1.362	.936
HORIZONTAL SPREAD	1.608	1.321	1.321
VERTICAL SPREAD	2.386	2.286	1.717
EXTREME SPREAD	2.592	2.296	1.718
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	9		

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 2

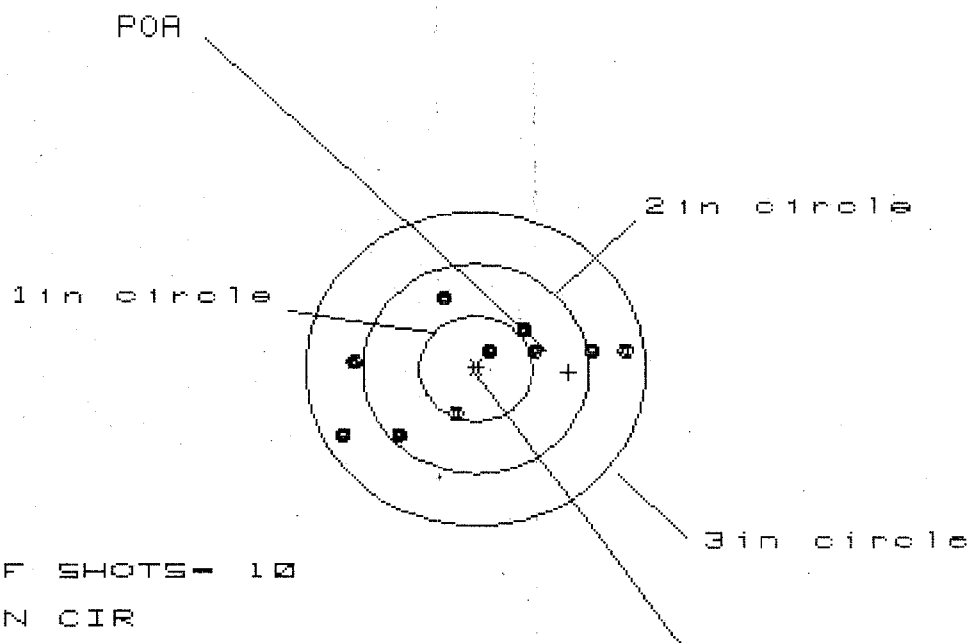

OF SHOTS- 10

IN CIR

1in - 2

2in - 7

3in = 10

HS= 2.485

VS= 1.272


GS= 2.615

PATTERN #	:	2	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.310	1.179	.999
MINIMUM X	:	-1.175	-1.212	-1.065
MAXIMUM Y	:	.654	.585	.601
MINIMUM Y	:	-.618	-.676	-.660
CENTROID X	:	-.822	-.691	-.839
CENTROID Y	:	.025	.094	.078
POA TO CENTROID in.	:	.822	.697	.842
MIN RADIUS	:	.178	.067	.157
MEAN RADIUS	:	.808	.719	.675
MAX RADIUS	:	1.328	1.212	1.065
HORIZONTAL SPREAD	:	2.485	2.391	2.063
VERTICAL SPREAD	:	1.272	1.261	1.261
EXTREME SPREAD	:	2.615	2.395	2.065
NUMBER IN ONE INCH CIRCLE =	:	2		
NUMBER IN TWO INCH CIRCLE =	:	7		
NUMBER IN THREE INCH CIRCLE =	:	10		

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 3

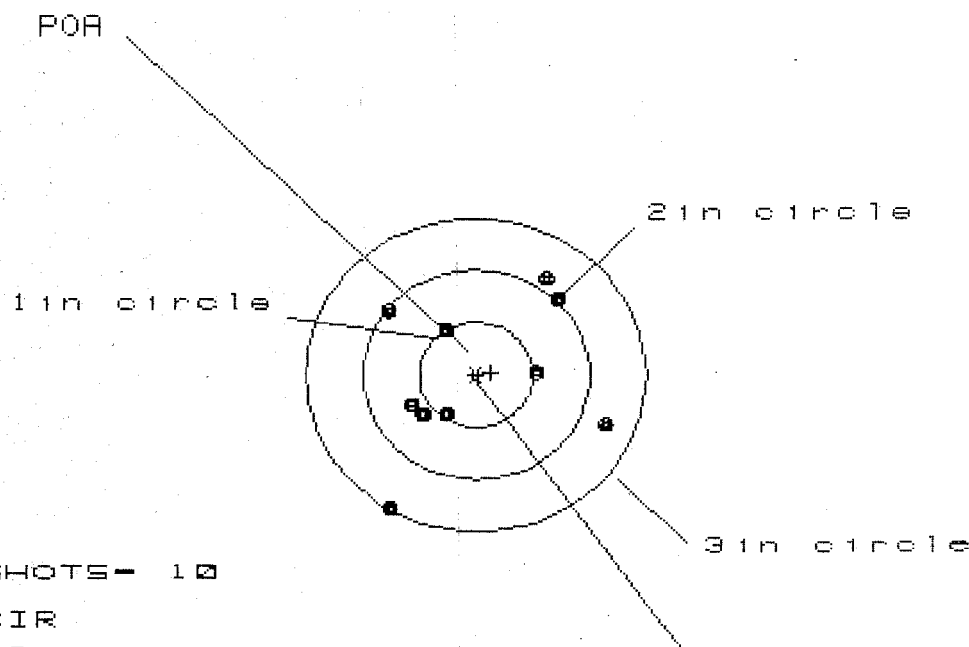

OF SHOTS- 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HS= 1.928

VS= 2.196

GS= 2.612

PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.140	1.053	.789
MINIMUM X	:	-.788	-.875	-.744
MAXIMUM Y	:	.967	.831	.753
MINIMUM Y	:	-1.228	-.622	-.601
CENTROID X	:	-.132	-.045	-.176
CENTROID Y	:	-.022	.114	.192
POA TO CENTROID in.	:	.134	.123	.261
MIN RADIUS	:	.474	.423	.274
MEAN RADIUS	:	.860	.794	.721
MAX RADIUS	:	1.457	1.223	1.012
HORIZONTAL SPREAD	:	1.928	1.928	1.533
VERTICAL SPREAD	:	2.196	1.453	1.354
EXTREME SPREAD	:	2.612	2.213	1.711
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		10	

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06349193

CENTERFIRE PATTERNS

4

POA

1 in circle

2 in circle

3 in circle

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS= 1.811

VS= 2.348

GS= 2.669


CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.872	.768	.676
MINIMUM X	:	-.939	-.736	-.818
MAXIMUM Y	:	1.007	.858	.949
MINIMUM Y	:	-1.341	-1.019	-.928
CENTROID X	:	.244	.348	.440
CENTROID Y	:	.115	.264	.173
POA TO CENTROID in.	:	.270	.437	.473
MIN RADIUS	:	.362	.320	.192
MEAN RADIUS	:	.907	.796	.751
MAX RADIUS	:	1.637	1.252	1.237
HORIZONTAL SPREAD	:	1.811	1.504	1.494
VERTICAL SPREAD	:	2.348	1.877	1.877
EXTREME SPREAD	:	2.669	2.105	2.105
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		9	

26 Feb 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 5

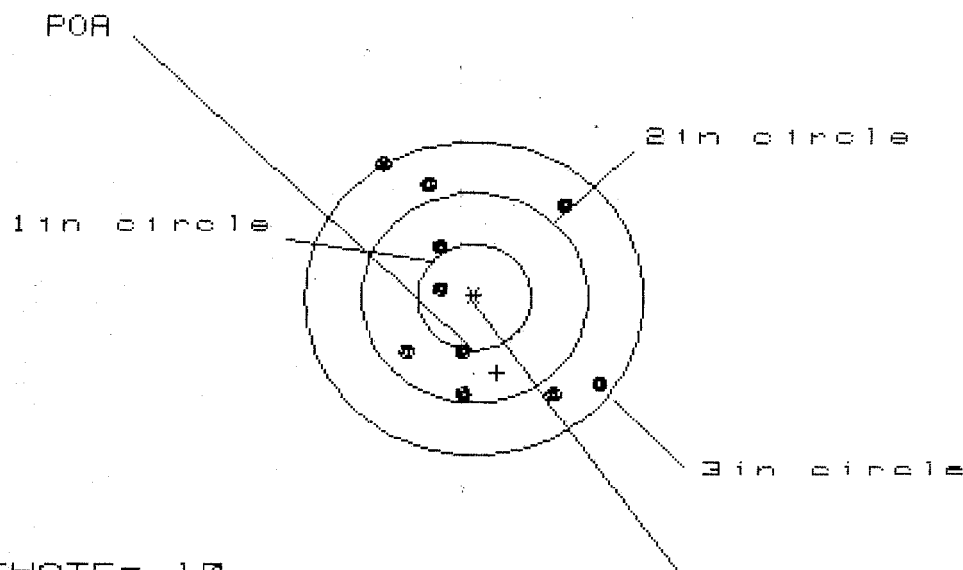

OF SHOTS- 10

IN CIR

1in - 2

2in - 5

3in = 10

HS- 1.874

VS= 2.165

GS= 2.780

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.122	1.039	.883
MINIMUM X	:	-.752	-.691	-.562
MAXIMUM Y	:	1.237	1.193	1.108
MINIMUM Y	:	-.928	-.790	-.875
CENTROID X	:	-.199	-.116	-.245
CENTROID Y	:	.716	.578	.663
POA TO CENTROID in.	:	.743	.590	.707
MIN RADIUS	:	.318	.384	.288
MEAN RADIUS	:	.946	.883	.815
MAX RADIUS	:	1.448	1.297	1.255
HORIZONTAL SPREAD	:	1.874	1.730	1.445
VERTICAL SPREAD	:	2.165	1.983	1.983
EXTREME SPREAD	:	2.780	2.428	2.256
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

GFM

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6349193

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		6/22/93	
600	Proof		6/22/93	
607	Check Headspace		6/22/93	
610	Dis-assemble Gun		6/22/93	
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		6/30/93	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/30/93	RW
	C) Inspect Ejector Hole for Chamfer		6/30/93	RW
	D) Oil Firing Pin Ass'y		6/30/93	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock			
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
0	Gallery Target & Test		6/30/93	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		6/30/93	RW
655	Final Inspection			
	A) Headspace		6/30/93	RW
	B) Trigger Pull		6/30/93	RW
	C) Function		6/30/93	RW
660	Pack			

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # 06349193
1 Jul 1993

CENTROIDAL DISTANCES

0 TO	1	.268213
1 TO	2	.933806
1 TO	3	.699235
1 TO	4	.839915
1 TO	5	.544031


4
3
2
1
0
-1
-2
-3
-4
-5
-6
-7
-8
-9
-10
-11
-12
-13
-14
-15
-16
-17
-18
-19
-20
-21
-22
-23
-24
-25
-26
-27
-28
-29
-30
-31
-32
-33
-34
-35
-36
-37
-38
-39
-40
-41
-42
-43
-44
-45
-46
-47
-48
-49
-50
-51
-52
-53
-54
-55
-56
-57
-58
-59
-60
-61
-62
-63
-64
-65
-66
-67
-68
-69
-70
-71
-72
-73
-74
-75
-76
-77
-78
-79
-80
-81
-82
-83
-84
-85
-86
-87
-88
-89
-90
-91
-92
-93
-94
-95
-96
-97
-98
-99
-100
-101
-102
-103
-104
-105
-106
-107
-108
-109
-110
-111
-112
-113
-114
-115
-116
-117
-118
-119
-120
-121
-122
-123
-124
-125
-126
-127
-128
-129
-130
-131
-132
-133
-134
-135
-136
-137
-138
-139
-140
-141
-142
-143
-144
-145
-146
-147
-148
-149
-150
-151
-152
-153
-154
-155
-156
-157
-158
-159
-160
-161
-162
-163
-164
-165
-166
-167
-168
-169
-170
-171
-172
-173
-174
-175
-176
-177
-178
-179
-180
-181
-182
-183
-184
-185
-186
-187
-188
-189
-190
-191
-192
-193
-194
-195
-196
-197
-198
-199
-200
-201
-202
-203
-204
-205
-206
-207
-208
-209
-210
-211
-212
-213
-214
-215
-216
-217
-218
-219
-220
-221
-222
-223
-224
-225
-226
-227
-228
-229
-230
-231
-232
-233
-234
-235
-236
-237
-238
-239
-240
-241
-242
-243
-244
-245
-246
-247
-248
-249
-250
-251
-252
-253
-254
-255
-256
-257
-258
-259
-260
-261
-262
-263
-264
-265
-266
-267
-268
-269
-270
-271
-272
-273
-274
-275
-276
-277
-278
-279
-280
-281
-282
-283
-284
-285
-286
-287
-288
-289
-290
-291
-292
-293
-294
-295
-296
-297
-298
-299
-300
-301
-302
-303
-304
-305
-306
-307
-308
-309
-310
-311
-312
-313
-314
-315
-316
-317
-318
-319
-320
-321
-322
-323
-324
-325
-326
-327
-328
-329
-330
-331
-332
-333
-334
-335
-336
-337
-338
-339
-340
-341
-342
-343
-344
-345
-346
-347
-348
-349
-350
-351
-352
-353
-354
-355
-356
-357
-358
-359
-360
-361
-362
-363
-364
-365
-366
-367
-368
-369
-370
-371
-372
-373
-374
-375
-376
-377
-378
-379
-380
-381
-382
-383
-384
-385
-386
-387
-388
-389
-390
-391
-392
-393
-394
-395
-396
-397
-398
-399
-400
-401
-402
-403
-404
-405
-406
-407
-408
-409
-410
-411
-412
-413
-414
-415
-416
-417
-418
-419
-420
-421
-422
-423
-424
-425
-426
-427
-428
-429
-430
-431
-432
-433
-434
-435
-436
-437
-438
-439
-440
-441
-442
-443
-444
-445
-446
-447
-448
-449
-450
-451
-452
-453
-454
-455
-456
-457
-458
-459
-460
-461
-462
-463
-464
-465
-466
-467
-468
-469
-470
-471
-472
-473
-474
-475
-476
-477
-478
-479
-480
-481
-482
-483
-484
-485
-486
-487
-488
-489
-490
-491
-492
-493
-494
-495
-496
-497
-498
-499
-500
-501
-502
-503
-504
-505
-506
-507
-508
-509
-510
-511
-512
-513
-514
-515
-516
-517
-518
-519
-520
-521
-522
-523
-524
-525
-526
-527
-528
-529
-530
-531
-532
-533
-534
-535
-536
-537
-538
-539
-540
-541
-542
-543
-544
-545
-546
-547
-548
-549
-550
-551
-552
-553
-554
-555
-556
-557
-558
-559
-560
-561
-562
-563
-564
-565
-566
-567
-568
-569
-570
-571
-572
-573
-574
-575
-576
-577
-578
-579
-580
-581
-582
-583
-584
-585
-586
-587
-588
-589
-590
-591
-592
-593
-594
-595
-596
-597
-598
-599
-600
-601
-602
-603
-604
-605
-606
-607
-608
-609
-610
-611
-612
-613
-614
-615
-616
-617
-618
-619
-620
-621
-622
-623
-624
-625
-626
-627
-628
-629
-630
-631
-632
-633
-634
-635
-636
-637
-638
-639
-640
-641
-642
-643
-644
-645
-646
-647
-648
-649
-650
-651
-652
-653
-654
-655
-656
-657
-658
-659
-660
-661
-662
-663
-664
-665
-666
-667
-668
-669
-670
-671
-672
-673
-674
-675
-676
-677
-678
-679
-680
-681
-682
-683
-684
-685
-686
-687
-688
-689
-690
-691
-692
-693
-694
-695
-696
-697
-698
-699
-700
-701
-702
-703
-704
-705
-706
-707
-708
-709
-710
-711
-712
-713
-714
-715
-716
-717
-718
-719
-720
-721
-722
-723
-724
-725
-726
-727
-728
-729
-730
-731
-732
-733
-734
-735
-736
-737
-738
-739
-740
-741
-742
-743
-744
-745
-746
-747
-748
-749
-750
-751
-752
-753
-754
-755
-756
-757
-758
-759
-760
-761
-762
-763
-764
-765
-766
-767
-768
-769
-770
-771
-772
-773
-774
-775
-776
-777
-778
-779
-780
-781
-782
-783
-784
-785
-786
-787
-788
-789
-790
-791
-792
-793
-794
-795
-796
-797
-798
-799
-800
-801
-802
-803
-804
-805
-806
-807
-808
-809
-810
-811
-812
-813
-814
-815
-816
-817
-818
-819
-820
-821
-822
-823
-824
-825
-826
-827
-828
-829
-830
-831
-832
-833
-834
-835
-836
-837
-838
-839
-840
-841
-842
-843
-844
-845
-846
-847
-848
-849
-850
-851
-852
-853
-854
-855
-856
-857
-858
-859
-860
-861
-862
-863
-864
-865
-866
-867
-868
-869
-870
-871
-872
-873
-874
-875
-876
-877
-878
-879
-880
-881
-882
-883
-884
-885
-886
-887
-888
-889
-890
-891
-892
-893
-894
-895
-896
-897
-898
-899
-900
-901
-902
-903
-904
-905
-906
-907
-908
-909
-910
-911
-912
-913
-914
-915
-916
-917
-918
-919
-920
-921
-922
-923
-924
-925
-926
-927
-928
-929
-930
-931
-932
-933
-934
-935
-936
-937
-938
-939
-940
-941
-942
-943
-944
-945
-946
-947
-948
-949
-950
-951
-952
-953
-954
-955
-956
-957
-958
-959
-960
-961
-962
-963
-964
-965
-966
-967
-968
-969
-970
-971
-972
-973
-974
-975
-976
-977
-978
-979
-980
-981
-982
-983
-984
-985
-986
-987
-988
-989
-990
-991
-992
-993
-994
-995
-996
-997
-998
-999
-1000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.3874
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0606
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .392111
THE AMR FOR THIS RIFLE IS: .923

1 Jul 1993

FILE:/PATTERNING/CENTERFIRE PATT/C6349193

CENTERFIRE PATTERNS # 1

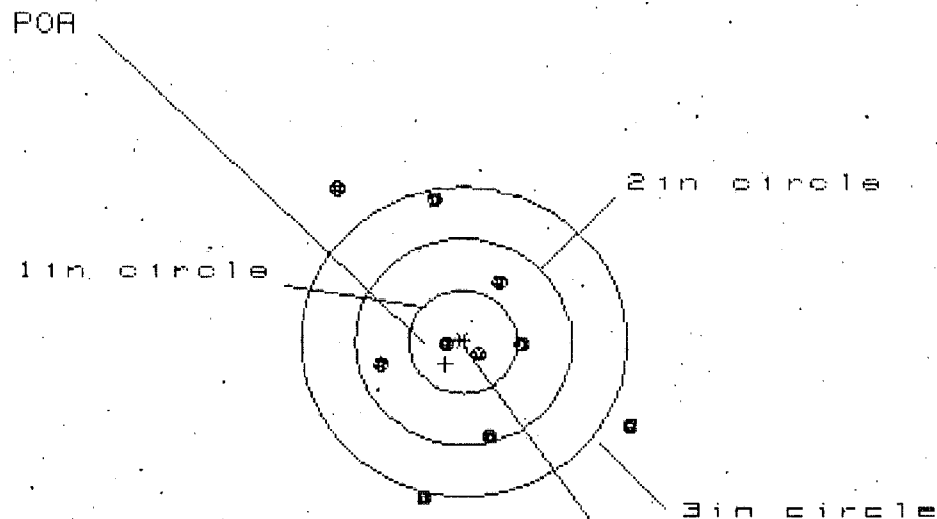

OF SHOTS- 10

IN CIR.

1in = 2

2in = 6

3in = 7

HS= 2.758

VS= 2.985

GS= 3.633


CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.546	1.411	.542
MINIMUM X	-1.212	-.947	-.770
MAXIMUM Y	1.519	1.599	1.514
MINIMUM Y	-1.466	-1.297	-1.382
CENTROID X	.163	.298	.121
CENTROID Y	.213	.044	.129
POA TO CENTROID in.	.268	.301	.177
MIN RADIUS	.151	.034	.142
MEAN RADIUS	1.001	.870	.784
MAX RADIUS	1.943	1.654	1.534
HORIZONTAL SPREAD	2.758	2.358	1.312
VERTICAL SPREAD	2.985	2.896	2.896
EXTREME SPREAD	3.633	2.923	2.897
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		7	

1 Jul 1933

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 2

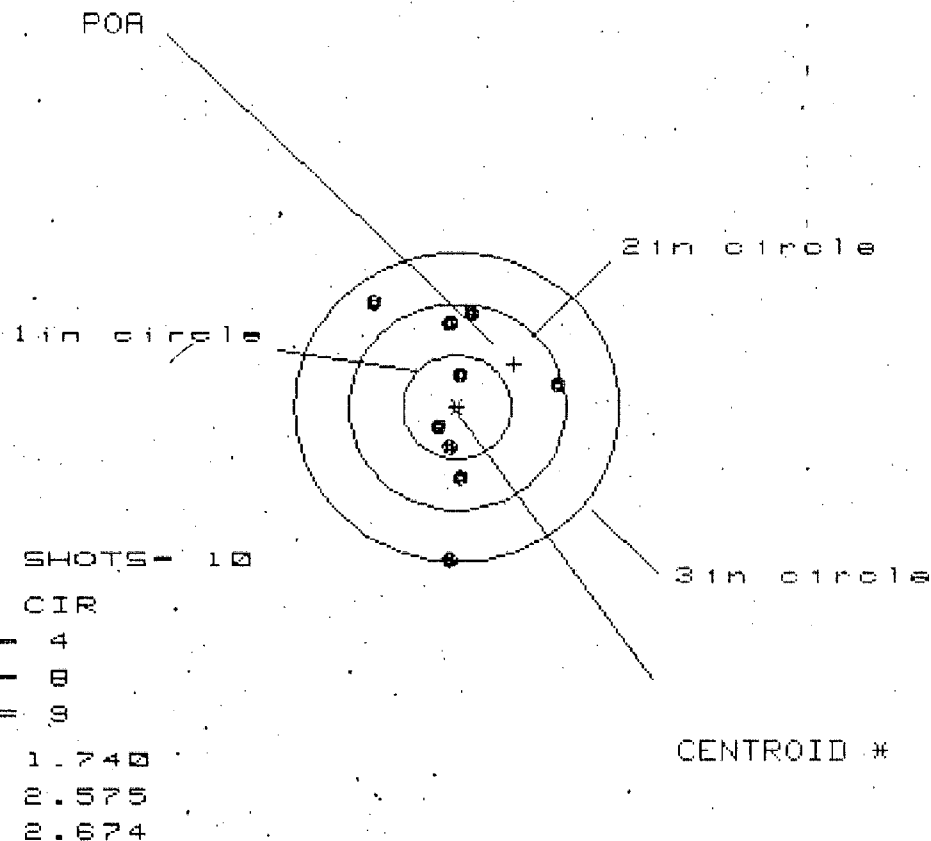


PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.969	.963	.866
MINIMUM X	-.771	-.777	-.256
MAXIMUM Y	1.052	.883	.820
MINIMUM Y	-1.523	-.891	-.781
CENTROID X	-.529	-.523	-.426
CENTROID Y	-.414	-.245	-.355
POA TO CENTROID in.	.672	.578	.555
MIN RADIUS	.269	.100	.227
MEAN RADIUS	.754	.669	.599
MAX RADIUS	1.524	1.176	.876
HORIZONTAL SPREAD	1.740	1.740	1.122
VERTICAL SPREAD	2.575	1.774	1.601
EXTREME SPREAD	2.674	1.944	1.611
NUMBER IN ONE INCH CIRCLE =	4		
NUMBER IN TWO INCH CIRCLE =	8		
NUMBER IN THREE INCH CIRCLE =	8		

1 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 3

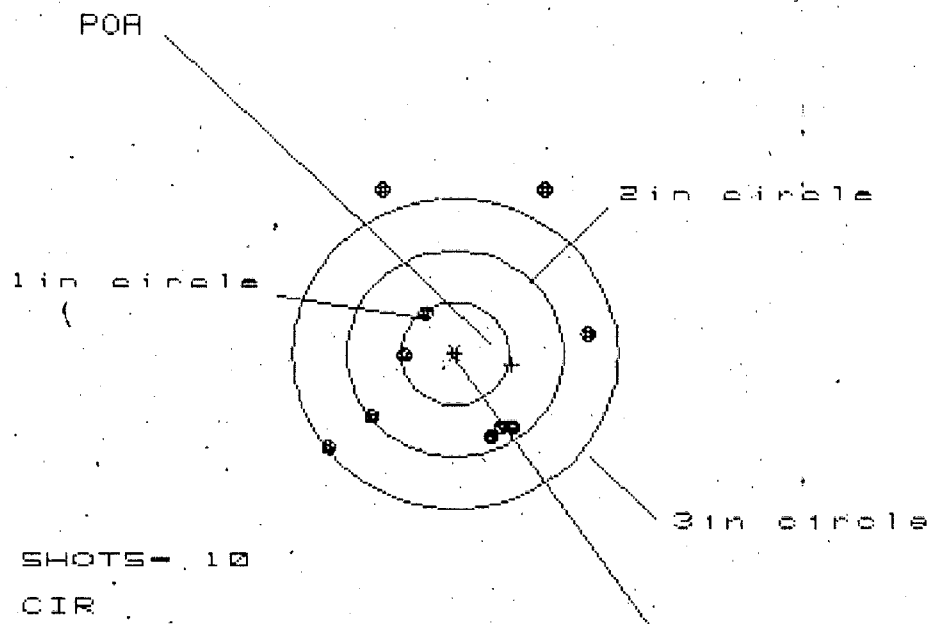

OF SHOTS - 10

IN CIR

1 in = 2

2 in = 6

3 in = 7

HS = 2.378

VS = 2.538


GS = 3.236

PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.179	1.273	1.197
MINIMUM X	-1.199	-1.105	-1.181
MAXIMUM Y	1.628	1.805	.769
MINIMUM Y	-.910	-.733	-.507
CENTROID X	-.528	-.622	-.546
CENTROID Y	.106	-.071	-.297
POA TO CENTROID in.	.538	.626	.621
MIN RADIUS	.447	.372	.553
MEAN RADIUS	1.077	.961	.813
MAX RADIUS	1.807	1.905	1.324
HORIZONTAL SPREAD	2.378	2.378	2.378
VERTICAL SPREAD	2.538	2.538	1.276
EXTREME SPREAD	3.236	2.666	2.609
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	7		

1 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6348193

CENTERFIRE PATTERNS # 4

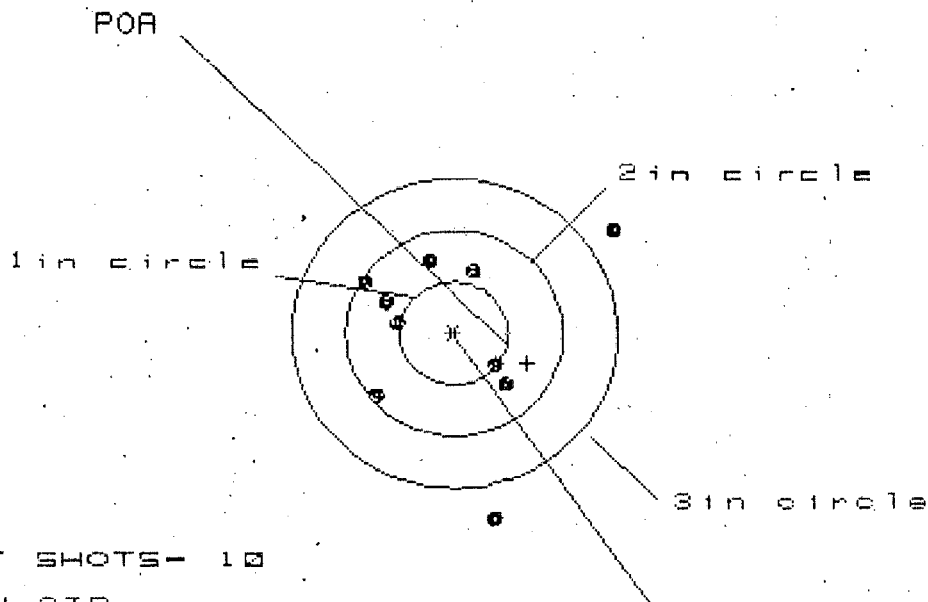

OF SHOTS - 10

IN CIR

1 in - 0

2 in - 8

3 in - 2

HS - 2.358

VS - 2.756

GS - 2.974

PATTERN #


749

SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.492	1.534	.714
MINIMUM X	-.866	-.824	-.632
MAXIMUM Y	.986	.789	.645
MINIMUM Y	-1.770	-.754	-.655
CENTROID X	-.673	-.715	-.907
CENTROID Y	.294	.491	.392
POA TO CENTROID in.	.735	.867	.988
MIN RADIUS	.520	.464	.301
MEAN RADIUS	.933	.811	.661
MAX RADIUS	1.809	1.725	.927
HORIZONTAL SPREAD	2.358	2.358	1.346
VERTICAL SPREAD	2.756	1.543	1.300
EXTREME SPREAD	2.974	2.682	1.648
NUMBER IN ONE INCH CIRCLE =		0	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		8	

1 Jul 1993

FILE:/PATTERNING/CENTERFIRE_PATT/C6349193

CENTERFIRE PATTERNS # 5

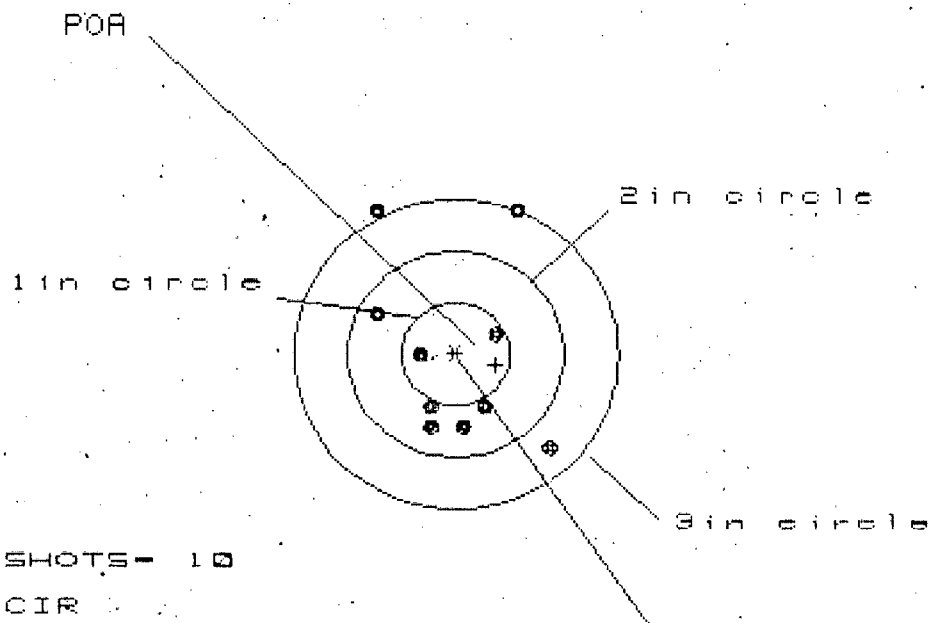

OF SHOTS- 10

IN CIR

1in = 2

2in = 7

3in = 9

HS = 1.653

VS = 2.324

GS = 2.822

CENTROID *

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.875	.788	.843
MINIMUM X	-.778	-.831	-.776
MAXIMUM Y	1.387	1.537	.746
MINIMUM Y	-.937	-.787	-.595
CENTROID X	-.370	-.283	-.338
CENTROID Y	.104	-.046	-.238
POA TO CENTROID in.	.384	.287	.413
MIN RADIUS	.291	.393	.279
MEAN RADIUS	.850	.739	.583
MAX RADIUS	1.558	1.598	1.077
HORIZONTAL SPREAD	1.653	1.619	1.619
VERTICAL SPREAD	2.324	2.324	1.341
EXTREME SPREAD	2.822	2.351	2.102
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

RECEIVING AND ESTIMATING REPORT

COMMENTS

ORDER
R 93-12833

INITIAL CUSTOMER ORDER NO.

ATTN FRED MARTIN M-24
W/10X-M3A SCOPE S/N89-1270

DATE RECEIVED	DATE OPENED	DATE CODE	SERIAL NUMBER	NEW SERIAL NUMBER	MODEL AND GRADE
05/28/93	06/02/93	XJ 12-89	C6349193		700 7.62 NATO

ACCESSORIES W/STUDS SCOPE BASE SOFT CASE

FROM: SHIP TO:

DEPARTMENT OF THE ARMY
USASCH DOL
STOR BR, BLDG 2131
SCHD BKS

HI 96857

DEPARTMENT OF THE ARMY
USASCH DOL
STOR BR, BLDG 2131
SCHD BKSHI
96857

CUST NO: 078579 C.D.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

New Barrel

PARTS

COMMENTS

Barrel Assy - 96002

Re zinc - Scope Rings, Scope Base
Swivel, Swivel Studs
Re powder Coat - Floor plate, Inch,
Trigger Guard, Front & Rear Sight
Bases.

REPAIRMAN	PROOF	CLEAN	TEST	TARGET	PATTERN
-----------	-------	-------	------	--------	---------


GALLERY TESTER	DATE	DATE	DATE	DATE	DATE
----------------	------	------	------	------	------

OFFICE COPY

RD6925 REV. 1/92

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 M2400109902

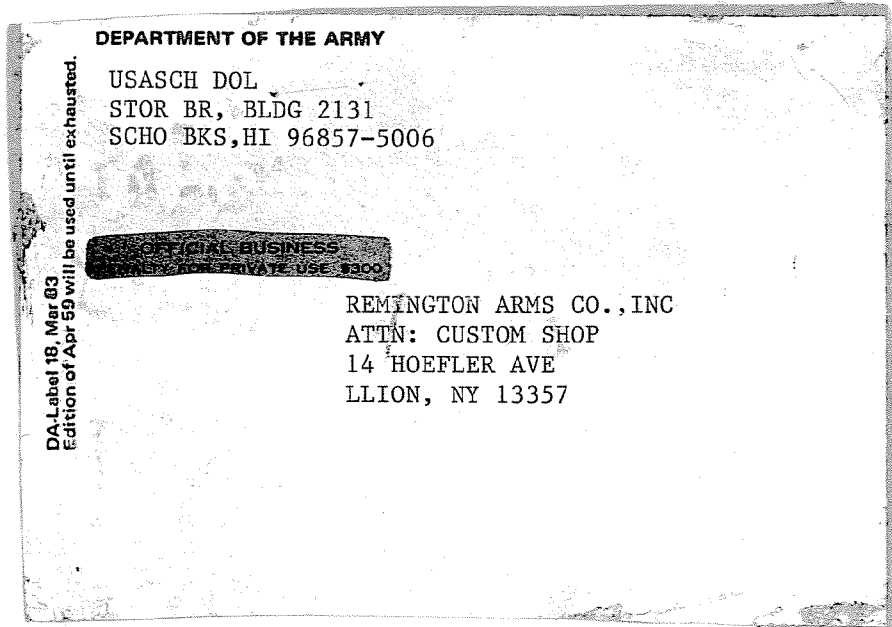

~~BARBER M24 0109865~~

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG.

PAGE NO.

NO. OF PAGES

REQUIREMENT CONTROL SYMBOL
CSGLD-1047(R1)

SECTION I - EQUIPMENT DATA

CONTROL NUMBER		WORK ORDER NUMBER		WESDC		ORG PD		PD AUTHENTICATION	
☒ WORK REQUEST ☐ MWO ☐ WARRANTY CLAIM		1a. ORGANIZATION			b. LOCATION			c. UNIT IDENT CODE	
2. SERIAL NO.		3. NOUN NOMENCLATURE		4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER	
7. MAINTENANCE ACTIVITY		a. LEVEL	8. UTILIZATION CODE	9. MCSR ITEM	a. ERC	b. PACING ITEM	10. HOURS	11. MILES	12. ROUNDS
					ER				
14. FAILURE DETECTED DURING (Select one - use ✓ or X)					15. FIRST INDICATION OF TROUBLE (Select one - use ✓ or X)				
☒ A Scheduled Maintenance ☐ B Handling		☐ C Test ☐ D Normal Op		☐ E Storage ☐ F Inspection		☐ G Flight ☐ H Other		☐ 068 Inoperative ☐ 008 Noisy	
						☐ 258 Overheating ☐ 387 Low Performance		☐ 790 Out of Adjustment ☐ Other	
16. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)									

SECTION II - WORK ACCOMPLISHED

[illegible]

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON**

BARBER - M24 ~~0149883~~ **M2400109904**

PD AUTHENTICATION

16. REMARKS

19. AMS ACCOUNT CODE

BARBER - M24 **M2400109905**

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG.

PAGE NO.

NO. OF PAGES

REQUIREMENT CONTROL SYMBOL
CSGLD-1047(R1)

SECTION I - EQUIPMENT DATA

CONTROL NUMBER		WORK ORDER NUMBER		SECTION 1 - EQUIPMENT DATA		PD AUTHENTICATION	
		57430		WESDC 4WV		ORG PD 31	
☒ WORK REQUEST ☐ MWO ☐ WARRANTY CLAIM		1a. ORGANIZATION 4th AF			b. LOCATION Hammel AFB		c. UNIT IDENT CODE 18816
1. SERIAL NO. 01112		3. NOUN NOMENCLATURE C-130		4. LINE NO.		5. MODEL M-4	
6. NATIONAL STOCK NUMBER 16800140-1126							
7. MAINTENANCE ACTIVITY		a. LEVEL	8. UTILIZATION CODE	9. MCSR ITEM	a. ERC ER	b. PACING ITEM	10. HOURS
14. FAILURE DETECTED DURING (Select one - use ✓ or X)				15. FIRST INDICATION OF TROUBLE (Select one - use ✓ or X)			
☒ A Scheduled Maintenance ☐ C Test ☐ E Storage ☐ G Flight ☐ B Handling ☐ D Normal Op ☐ F Inspection ☐ H Other				☐ 068 Inoperative ☐ 258 Overheating ☐ 790 Out of Adjustment ☐ 008 Noisy ☐ 397 Low Performance ☐ Other			
6. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs) Engine 15 sec before takeoff							

6. REMARKS

SECTION II - WORK ACCOMPLISHED

17a. REPAIR ORGANIZATION/ACTIVITY		c. UNIT IDENT CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ✓ or X)		19. AMS ACCOUNT CODE				
Shop 5 LOCATION		W3RBA5		☐ 1 TOE	☒ 2 TD	WWED 0522I				
		☐ 3 CONTRACTOR								
20a. ACT CODE	FAILURE CODE <i>b</i>	c. COMPONENT/PART NOUN, SVC, OR MKGT NO.	d. CB CODE	e. REF DESIGNATOR	f. MFR CODE	MANHOURS (hrs & tenths) <i>g</i>	NATIONAL STOCK NUMBER <i>h</i>	PART SOURCE CODE <i>i</i>	QTY <i>j</i>	PARTS COS <i>k</i>
		EST. 02				.				
Y	020	RIFLE M24				.2			1	
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						.				
						l TOTAL MANHOURS	m TOTAL MANHOURS COST	n TOTAL PARTS COST		
						07	\$ 626	\$		

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG.

SECTION I - EQUIPMENT DATA

16. REMARKS

SECTION II - WORK ACCOMPLISHED

17a. REPAIR ORGANIZATION/ACTIVITY		c. UNIT IDENT CODE		18. TYPE ORGANIZATION/ACTIVITY AC- COMPLISHING WORK (Select one - use $\checkmark$ or X)		19. AMS ACCOUNT CODE			
b. LOCATION		W3RB15		☐ 1 TOE ☒ 2 TD ☐ 3 CONTRACTOR		LOWED 05201			
20a. ACT CODE	FAILURE CODE b	c. COMPONENT/PART NOUN, SVC, OR MWO NO.		MANHOURS (hrs & tenths) f	NATIONAL STOCK NUMBER h	PART SOURCE CODE i	QTY j	PARTS COST k	
		d. CB CODE	e. REF DESIGNATOR						f. MFR CODE
			EST. 02						
4	020		RIFLE M24	.2			1		
TOTAL MANHOURS				0.2	TOTAL MANHOURS COST		\$ 626	TOTAL PARTS COST	
							\$		

MAINTENANCE REQUEST

For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG.

PAGE NO.

NO. OF PAGES

REQUIREMENT CONTROL SYMBOL
CSGLD-1047(R1)

SECTION I - EQUIPMENT DATA

CONTROL NUMBER		WORK ORDER NUMBER		WESDC		ORG PD		PD AUTHENTICATION											
☒ WORK REQUEST ☐ MWO ☐ WARRANTY CLAIM		1a. ORGANIZATION		b. LOCATION		c. UNIT IDENT COD													
2. SERIAL NO.		3. NOUN NOMENCLATURE		4. LINE NO.		5. MODEL		6. NATIONAL STOCK NUMBER											
7. MAINTENANCE ACTIVITY		a. LEVEL		8. UTILIZATION CODE		9. MCSR ITEM		a. ERC		b. PACING ITEM		10. HOURS		11. MILES		12. ROUNDS		13. STAR	
14. FAILURE DETECTED DURING (Select one - use ✓ or X)		15. FIRST INDICATION OF TROUBLE (Select one - use ✓ or X)																	
☒ A Scheduled Maintenance ☐ B Handling		☐ C Test ☐ D Normal Op		☐ E Storage ☐ F Inspection		☐ G Flight ☐ H Other		☐ 068 Inoperative ☐ 008 Noisy		☐ 258 Overheating ☐ 327 Low Performance		☐ 790 Out of Adjustment ☐ Other							
16. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs)																			

16. REMARKS

SECTION II - WORK ACCOMPLISHED

[illegible]

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

DA FORM 2404
1 APR 79

BARBER - M24 0169870 09909

BARBER - M24 0169871

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6349193
3 Mar 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1594
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.077
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .177024

THE AMR FOR THIS RIFLE IS: 1.155

CENTROIDAL DISTANCES

0 TO	1	.127941
1 TO	2	.161047
1 TO	3	.646118
1 TO	4	.705312
1 TO	5	.584863

2⁺ 5⁺ <----POA

4

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
 POA TO CENTROID: .128
 MIN RADIUS : .375
 MEAN RADIUS : 1.214
 MAX RADIUS : 2.358
 CENTROID X : -.113
 CENTROID Y : -.060

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6349193

CENTERFIRE PATTERN # 1

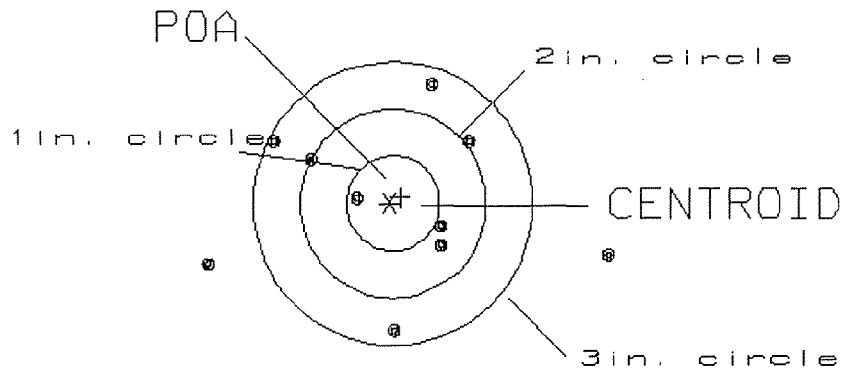

OF SHOTS= 10

IN CIRCLE

HS= 4.30

1

VS= 2.54

3

GS= 4.30

6

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .121
 MIN RADIUS : .427
 MEAN RADIUS : .899
 MAX RADIUS : 1.441
 CENTROID X : -.073
 CENTROID Y : .096

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6349193

CENTERFIRE PATTERN # 2

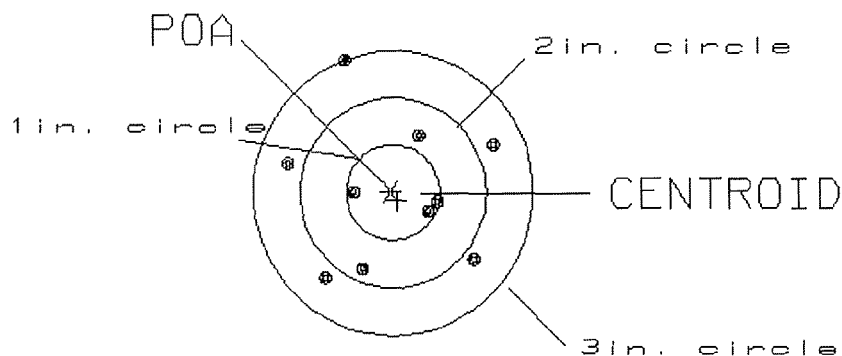

OF SHOTS= 10

IN CIRCLE

HS= 2.23

3

VS= 2.29

5

GS= 2.48

10

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .519
 MIN RADIUS : .262
 MEAN RADIUS : 1.191
 MAX RADIUS : 2.608
 CENTROID X : .474
 CENTROID Y : .210

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6349193

CENTERFIRE PATTERN # 3

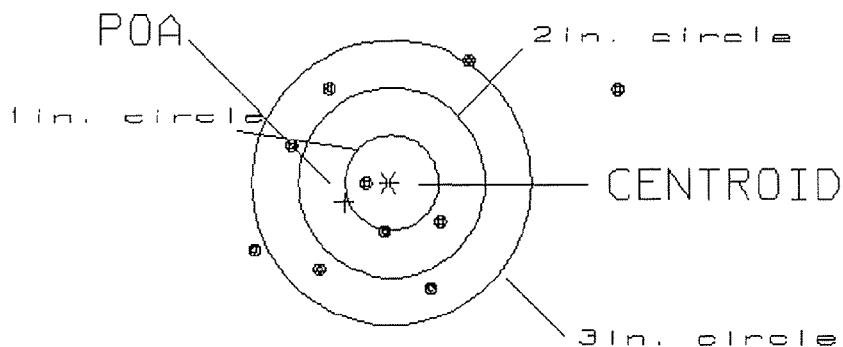

OF SHOTS= 10

IN CIRCLE

HS= 3.89

1

VS= 2.39

3

GS= 4.24

7

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 4
 POA TO CENTROID: .745
 MIN RADIUS : .333
 MEAN RADIUS : 1.039
 MAX RADIUS : 1.887
 CENTROID X : .063
 CENTROID Y : -.743

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6349193

CENTERFIRE PATTERN # 4

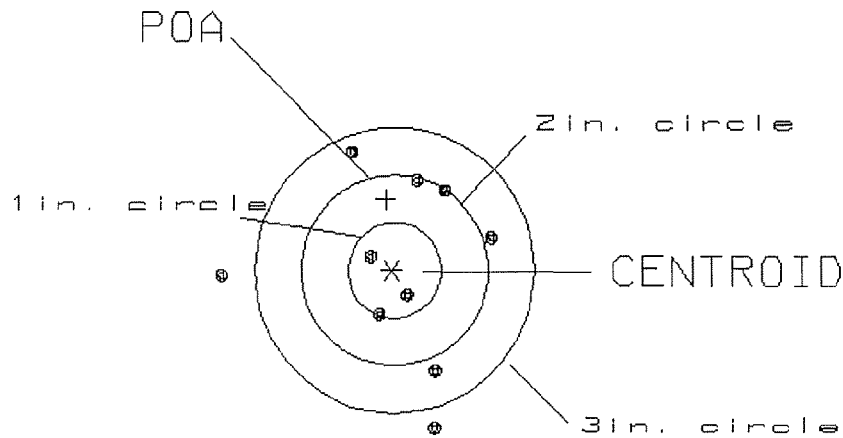

OF SHOTS= 10

IN CIRCLE

HS= 2.91
 US= 2.93
 GS= 3.05

3
 4
 8

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 5
 POA TO CENTROID: .460
 MIN RADIUS : .508
 MEAN RADIUS : 1.433
 MAX RADIUS : 3.908
 CENTROID X : .446
 CENTROID Y : .112

3 Mar 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6349193

CENTERFIRE PATTERN # 5

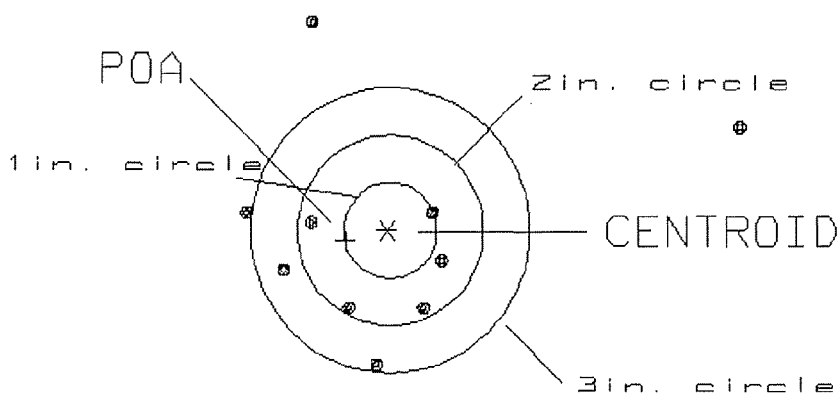

OF SHOTS= 10

IN CIRCLE

HS= 5.33

0

VS= 3.57

5

GS= 5.40

7

BARBER - M24 0109878

RECEIVED ESTIMATING REPORT

COMMENTS

ORDER

R 97-02914

INITIAL CUSTOMER ORDER NO.

JJM

WOG 3 OF 3 W/DEPOLYMENT KIT
W/LEUPOLD 10X SCOPE

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

01/31/97

01/31/97

C6349193

700

7.62

NATO

ACCESSORIES

SOFT CASE

SCOPE MNTS

SCOPE BASE

W/STUDS

FROM:

SHIP TO:

DEPT. OF THE ARMY
USASCH DOL. SUP/SVC.
BLDG. 6037 EAST RANGE
SCHOFIELD BKS

HI 96857

DEPT. OF THE ARMY
USASCH DOL. SUP/SVC.
BLDG. 6037 EAST RANGE
SCHOFIELD BKSHI
96857

CUST NO: 107708 C.O.D.L

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

F1

B1

TRIGGER GROUP

B2

E1

F1

BOLT ASSY.

B3

E2

F2

BARREL ASSY.

B4

D1

E3

F3

REC. ASSY.

B5

D2

E4

F4

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

W55 H097063 #244

PARTS

COMMENTS

✓ Barrel

✓ Stock

✓ Firing pin Assy

✓ Scope Rings

✓ Soft Case

96003

96018

96007

96082 (2)

96076

Repowder Coat Trigger Guard

Assy, Front & Rear Sight

base

ReZinc Scope Base, Rings &

Swivel Studs

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6925 REV. 11/95

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

KINZER V. REMINGTON

BARBER - M24 0109878 0109917

21 DAY TURN - AROUND

New Barrel,
Stock

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6349193

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	2/3/97	RW
605	CHECK HEADSPACE	3/3/97	RW
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	2/28/97	RW
655	FINAL INSPECT	3/3/97	RW
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6349193

DATE REC'D: 1/31/97

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ IRON SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments: