

UPC



E6374569

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

* INCLUDES 1 IN CHAMBER

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374569
14 Nov 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.303
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0253333
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .304057

THE AMR FOR THIS RIFLE IS: 1.079

CENTROIDAL DISTANCES

Ø TO	1	.404665
1 TO	2	.349046
1 TO	3	.284918

1
2³ + <----POA

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 1

POA TO CENTROID: .405
MIN RADIUS : .087
MEAN RADIUS : 1.042
MAX RADIUS : 1.820
CENTROID X : -.335
CENTROID Y : .227

14 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374569

CENTERFIRE PATTERN # 1

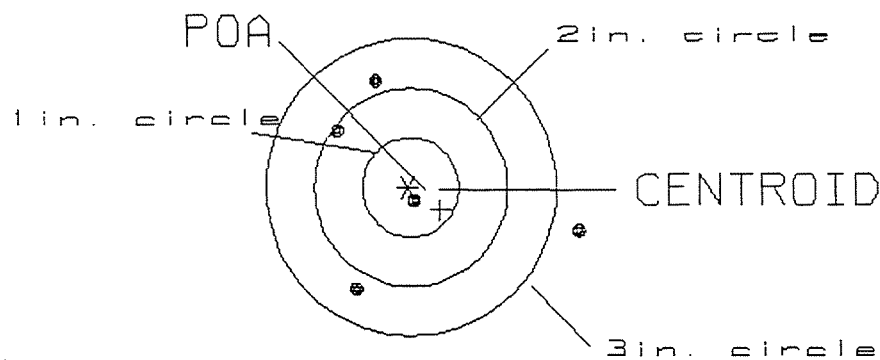

OF SHOTS= 5

IN CIRCLE

HS= 2.56

1

VS= 2.11

2

GS= 2.75

4

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .382
 MIN RADIUS : .479
 MEAN RADIUS : .896
 MAX RADIUS : 1.353
 CENTROID X : -.362
 CENTROID Y : -.121

14 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374569

CENTERFIRE PATTERN # 2

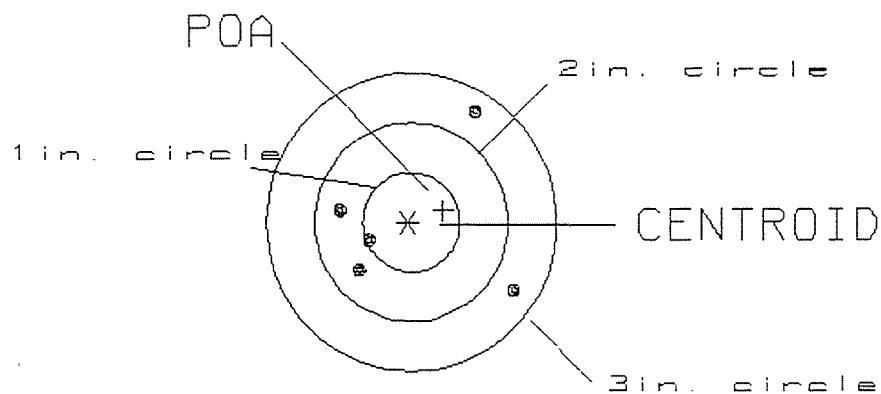

OF SHOTS= 5

IN CIRCLE

HS= 1.75

1

VS= 1.80

3

GS= 2.03

5

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .214
 MIN RADIUS : .746
 MEAN RADIUS : 1.299
 MAX RADIUS : 1.789
 CENTROID X : -.212
 CENTROID Y : -.030

14 Nov 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374569

CENTERFIRE PATTERN # 3

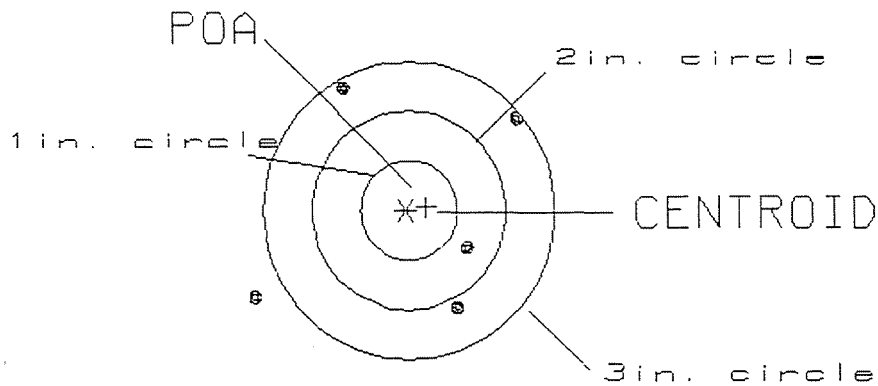

OF SHOTS= 5

IN CIRCLE

HS= 2.72

0

VS= 2.17

1

GS= 3.26

4

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E6374569

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

625	F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	11-19-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	11-19-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.023</u> <u>.022</u> <u>.022</u>	11-19-97	CR
	J) ASSEMBLE STOCK		10-29-97	RW
	K) ASSEMBLE SWIVEL STUDS		11-11-97	CL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		10-29-97	RW
	M) IRON SIGHT ALIGNMENT		10-29-97	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		10-29-97	RW
640	GALLERY TEST AND TARGET	L R	11/14/97	PB
	A) MALFUNCTIONS		11/14/97	PB
	B) PIERCED PRIMERS		11/14/97	PB
645	INSPECT FOR LIVE AMMO		11/14/97	DM
655	FINAL INSPECTION A) HEADSPACE		11-19-97	C/L
	B) TRIGGER PULL	<u>2.48</u> <u>2.50</u> <u>2.51</u> <u>2.56</u> <u>2.60</u>	11/19/97	TM
	C) FUNCTION		11-19-97	C/L
660	PACK			

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. E6374569DATE 10-29-97TESTER TPM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.63	2.54	2.63		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.66	2.52	2.66		
PULL #3	2.59	2.40	2.69		
PULL #4	2.70	2.53	2.65		
PULL #5	2.67	2.58	2.72		
TOTAL	13.25	12.57	13.35		
AVG.	2.65	2.51	2.67		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.08	2.91		
PULL #2	3.07	2.99		
PULL #3	2.95	2.95		
PULL #4	2.97	2.99		
PULL #5	3.06	2.90		
TOTAL	15.13	14.74		
AVG.	3.02	2.94		


	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.21		3.95
PULL #2	4.11	4.17		4.13
PULL #3	4.21	4.21		4.17
PULL #4	4.24	3.99		4.19
PULL #5	3.99	4.25		4.21
TOTAL	20.66	20.83		20.65
AVG.	4.13	4.16		4.13

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

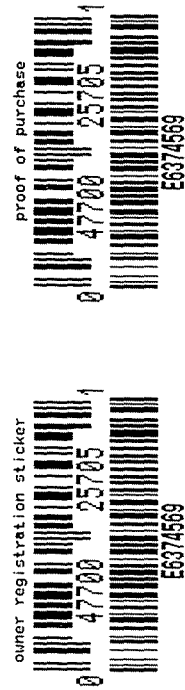

Do Not Use

SERIAL NO



E6374569

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



Do Not Use

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.



5705 E6374569