

E 6374597 New
C 6225572 040

RECEIVING AND ESTIMATING REPORT

BARBER M24 0118654

COMMENTS

ORDER

R 98-05082

INITIAL

CUSTOMER ORDER NO.

WOG 23 OF 23

JLM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/24/98

02/24/98

~~04225572~~

E6374597

700 7.62

NATO

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

SHIP TO:

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

CUST NO: 113830 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

FROM DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

W/52 H098079H242

W/36N32

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

TRIGGER GROUP

BOLT ASSY.

BARREL ASSY.

REC. ASSY.

WOOD

METAL

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

FORMS REV 7-97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0118654

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374597
13 May 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1894
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1484
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .240614

THE AMR FOR THIS RIFLE IS: 1.242

CENTROIDAL DISTANCES

0 TO	1	.428229
1 TO	2	.0671193
1 TO	3	.204658
1 TO	4	.727541
1 TO	5	.0485489


+
4
3
-----POA

PATTERN #: 010
 POA TO CENTROID: .428
 MIN RADIUS : .219
 MEAN RADIUS : 1.245
 MAX RADIUS : 1.892
 CENTROID X : .268
 CENTROID Y : .334

13 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374597

CENTERFIRE PATTERN # 1

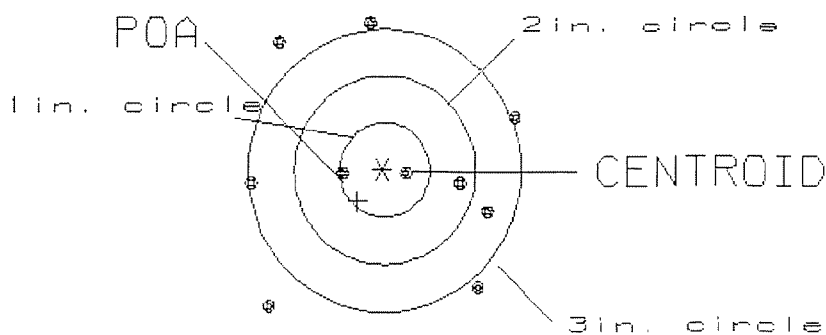

OF SHOTS= 10

IN CIRCLE

HS= 2.84

2

VS= 2.91

3

GS= 3.43

6

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .362

MIN RADIUS : .451

MEAN RADIUS : 1.292

MAX RADIUS : 2.248


CENTROID X : .236

CENTROID Y : .275

13 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374597

CENTERFIRE PATTERN # 2

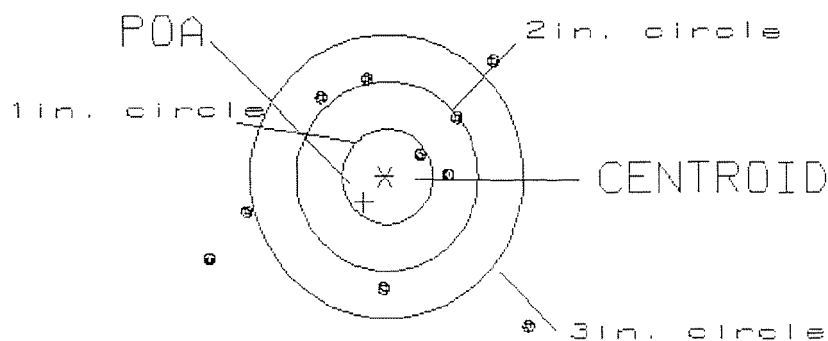

OF SHOTS= 10

IN CIRCLE

HS= 3.46

1

VS= 2.80

3

GS= 3.69

6

PATTERN #: E 3 C

POA TO CENTROID: .322

MIN RADIUS : .678

MEAN RADIUS : 1.548

MAX RADIUS : 2.595


CENTROID X : .294

CENTROID Y : .131

13 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374597

CENTERFIRE PATTERN # 3

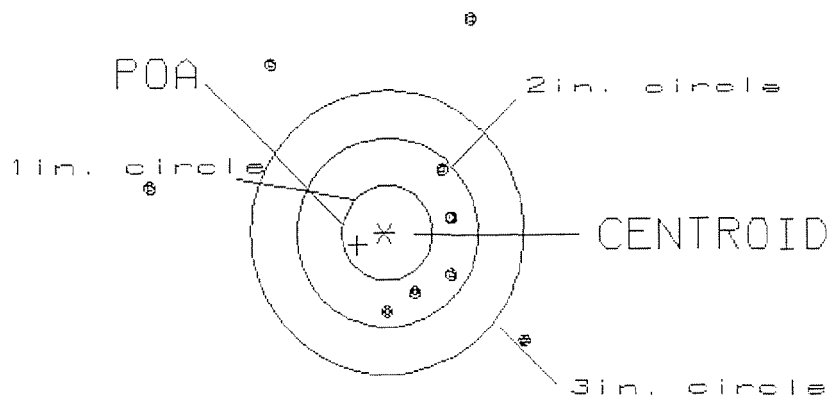

OF SHOTS= 10

IN CIRCLE

HS= 4.01

0

VS= 4.58

5

GS= 4.89

5

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .315
 MIN RADIUS : .581
 MEAN RADIUS : 1.018
 MAX RADIUS : 1.950
 CENTROID X : -.078
 CENTROID Y : -.306

13 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374597

CENTERFIRE PATTERN # 4

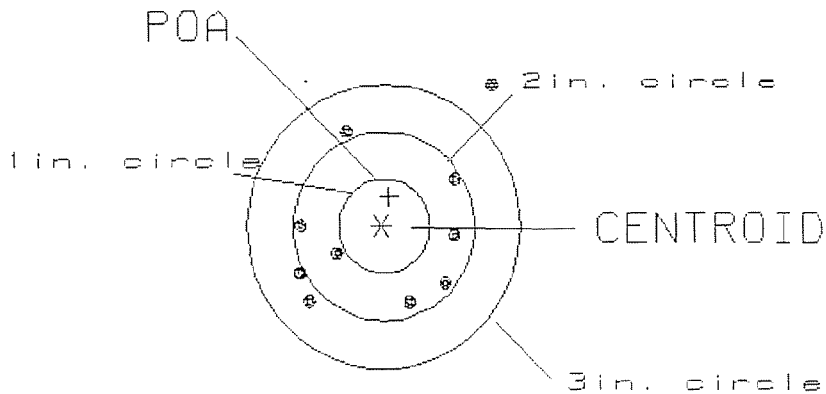

OF SHOTS= 10

IN CIRCLE

HS= 2.14

0

US= 2.37

6

GS= 3.06


9

PATTERN #: 5
 POA TO CENTROID: .383
 MIN RADIUS : .200
 MEAN RADIUS : 1.107
 MAX RADIUS : 2.343
 CENTROID X : .227
 CENTROID Y : .308

13 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374597

CENTERFIRE PATTERN # 5

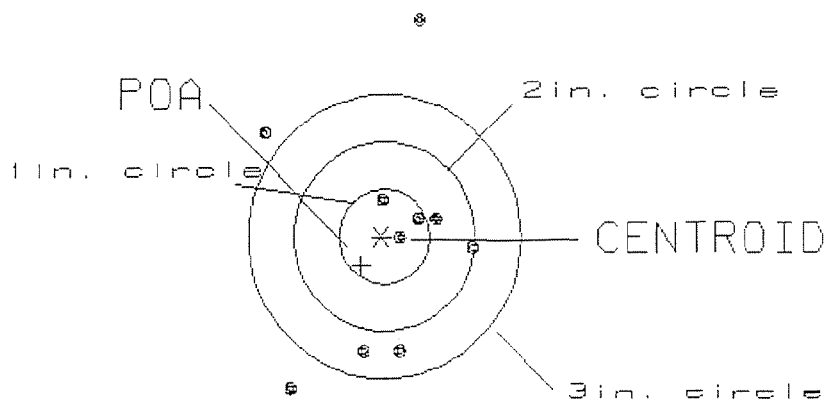

OF SHOTS= 10

IN CIRCLE

HS= 2.28
 VS= 3.89
 GS= 4.14

3
 5
 7