

E6413614

E6413614

RECEIVED BARBER - M24 0120722

COMMENTS

ORDER

R 99-00000

INITIAL CUSTOMER ORDER NO.

SWS 357

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

04/05/99

04/05/99

~~C4225072~~

E6413614

700 7.62

M/24

ACCESSORIES

FROM:

SHIP TO:

US ARMY
C CO 3RD BN 7TH SFG (A)

FT CLAYTON PAN AM

34004

US ARMY
C CO 3RD BN 7TH SFG (A)

ATTN: ROBERT HOBART

FT CLAYTON PAN AM

34004

CUST NO: 132573 C-D.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA

DOOR

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A

B1

TRIGGER GROUP

B2

BOLT ASSY.

B3

BARREL ASSY.

B4

REC. ASSY.

B5

WOOD

C1

D3

E5

F5

METAL

C2

MAIN FAULT

PARTS

COMMENTS

Barrel Assy

96001

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6625 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0120722 20761

Receipt Of Firearm(s) Delivered to the Plant for Repair
Firearm Checked For Live Ammunition ☒

File # 00357

Delivery Date 4/5/99

Customer Name (Print)

US ARMY (ROBERT HOBART)
Address 3rd BN 7th ASF SFG State FORT LAYTON Zip PANAMA
Phone Number (011) - 507-288-4287Firearm Description Model M124 Cal./ Ga. 7.62Serial Number C6225072

Stock/ Fore-end Condition circle the description

(Excellent; Good; Fair; Poor; Fancy; Plain; Synthetic; Wood)

Comments on Stock/ Fore-end condition _____

Metal Condition circle the description

(Excellent; Good; Fair; Poor; Fancy; Plain Stainless Steel)

Comments on Metal condition _____

Barrel Type (VT. Rib; Plain; Deer; Stainless Steel) Barrel length _____

List additional accessories IE Scope, Sling, Gun case and description;
_____Customer request: recondition per SWSReturn Process Return to Clark St. Ent. ☐ Return via UPS ☐

By signing this receipt the person delivering the firearm understands to be the only person to receive the firearm upon completion of repairs.

Signature _____ Date 04/05/99

person delivering firearm.

Signature 293 State Date 4/5/99

security officer

Signature W. Brelm Date 4/5/99

arms service / CSR

Customer Pick Up Verification

I certify, I am the same person whom delivered the above described firearm to the Remington Ilion plant for repair and may lawfully possess a firearm in New York State

Signature _____ Date ____/____/____

person receiving firearm must be the same whom delivered

Signature _____ Date ____/____/____

security officer or other witness returning the firearm

Receipt Of Firearm. Doc
Rev. 12/16/98

ARM SERVICE COPY

BARBER - M24 0120724

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # e6413614
27 May 1999

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0192
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1124
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .114028

THE AMR FOR THIS RIFLE IS: 1.233

CENTROIDAL DISTANCES

0 TO	1	.604573
1 TO	2	.458314
1 TO	3	.705508
1 TO	4	.632013
1 TO	5	1.05988

5
4 3 <----FOA
1
2


PATTERN #: 1

POA TO CENTROID: .455
 MIN RADIUS : .244
 MEAN RADIUS : 1.537
 MAX RADIUS : 2.213
 CENTROID X : .390
 CENTROID Y : .235

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413614.1.1

CENTERFIRE PATTERN # 1

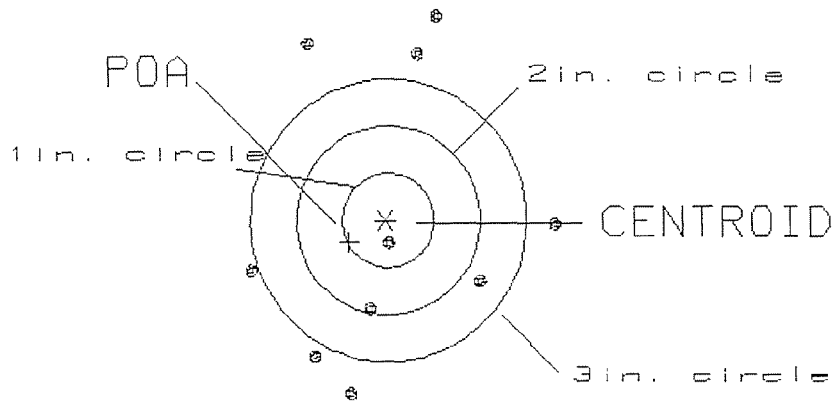

OF SHOTS= 10

IN CIRCLE

HS= 3.29
 US= 4.02
 GS= 4.13

1
 2
 3

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.


PATTERN #: 2

POA TO CENTROID: .072
 MIN RADIUS : .342
 MEAN RADIUS : 1.054
 MAX RADIUS : 1.863
 CENTROID X : -.014
 CENTROID Y : .071

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/a6413614.1.1

CENTERFIRE PATTERN # 2

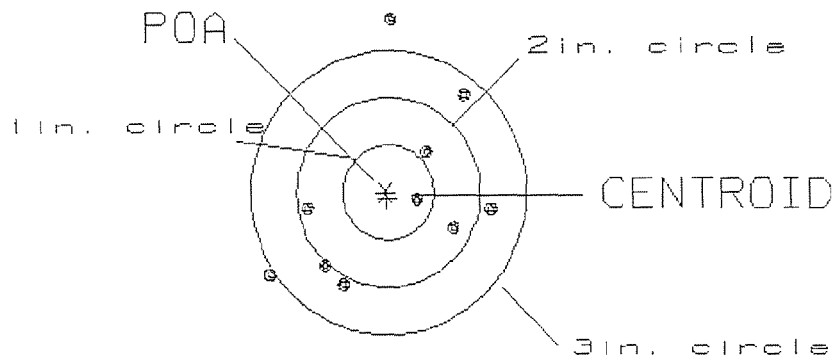

OF SHOTS= 10

IN CIRCLE

HS= 2.40

1

VS= 2.79

4

GS= 3.02


8

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .170
 MIN RADIUS : .132
 MEAN RADIUS : 1.117
 MAX RADIUS : 1.856
 CENTROID X : .148
 CENTROID Y : -.084

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e5413614.1.1

CENTERFIRE PATTERN # 3

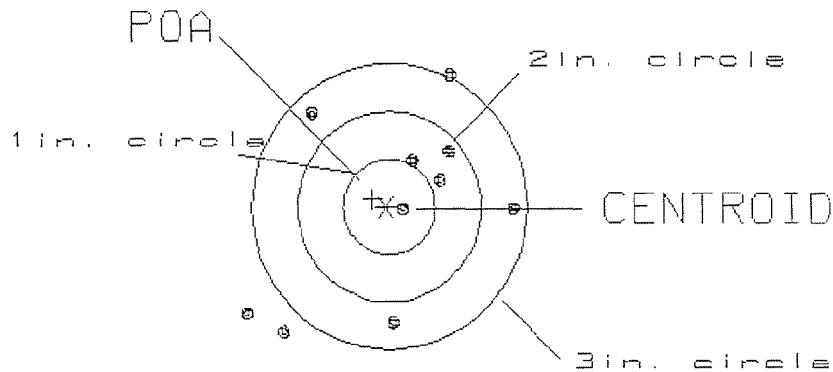

OF SHOTS= 10

IN CIRCLE

HS= 2.82

1

VS= 2.63

4

GS= 3.23


5

PATTERN #: 4
 POA TO CENTROID: .488
 MIN RADIUS : .094
 MEAN RADIUS : .985
 MAX RADIUS : 1.990
 CENTROID X : -.098
 CENTROID Y : -.479

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413614.1.1

CENTERFIRE PATTERN # 4

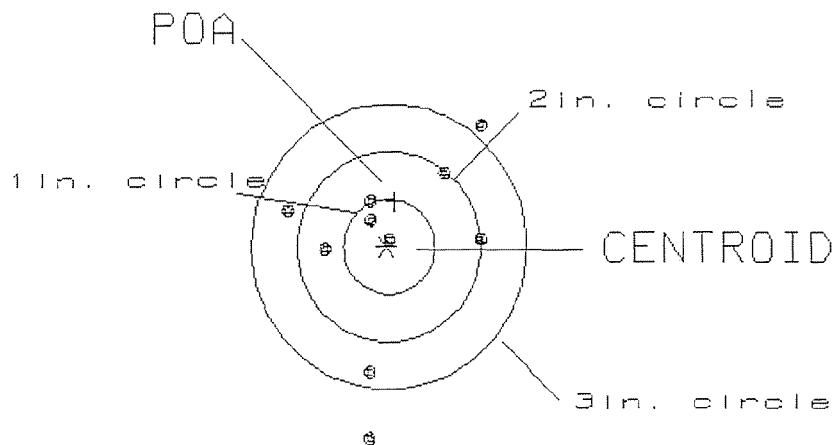

OF SHOTS= 10

IN CIRCLE

HS= 2.11

2

VS= 3.29

5

GS= 3.50


8

PATTERN #: 5
 POA TO CENTROID: .604
 MIN RADIUS : .509
 MEAN RADIUS : 1.470
 MAX RADIUS : 3.032
 CENTROID X : -.522
 CENTROID Y : -.305

27 May 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/e6413614.1.1

CENTERFIRE PATTERN # 5

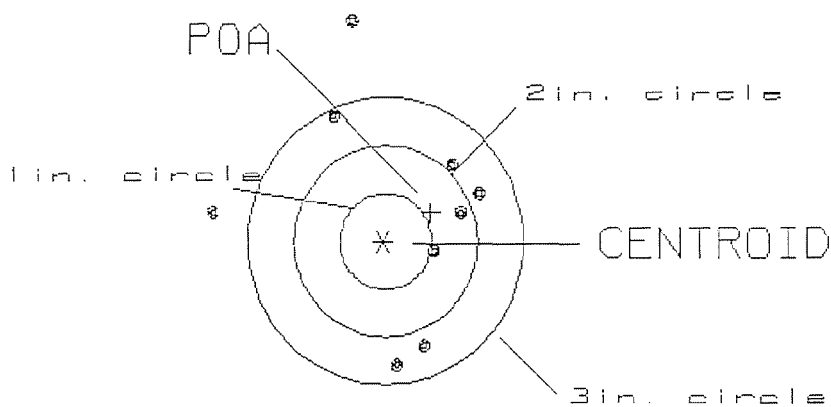

# OF SHOTS= 10	#	# IN CIRCLE
HS= 2.89		0
VS= 5.23		2
GS= 5.24		7