

UPC



E6349854

ENCLOSURE 1 IN UNIFORM

ORDER NO.		25705
BARREL LENGTH		24"
CAPACITY *		6

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:
- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM



Do Not Use

VERY IMPORTANT:
INSTRUCTION BOOK
ENCLOSED. NO ASSURE
SAFE USE OF THIS
FIREARM.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

SERIAL NO.
E6349854

46

ORDER NO.
25705

26PR

5705 E6349854

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



Do Not Use

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E6349854

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE		3/11/97	WJT
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES		3/11/97	WJT
618	POLISH BARREL		3/11/97	WJT
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>3</u> <u>3</u> <u>25</u>	6-23-97	CK
CONT.	G) SAFETY OFF FORCE	<u>2</u> <u>2</u> <u>2</u>	6-23-97	CK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.022</u> <u>.022</u> <u>.022</u>	6-23-97	CK
	J) ASSEMBLE STOCK		6-17-97	CK
	K) ASSEMBLE SWIVEL STUDS		6/26/97	RP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		6-17-97	CK
	M) IRON SIGHT ALIGNMENT		6-17-97	CK
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		6-17-97	CK
640	GALLERY TEST AND TARGET	L 78 R 72	6/25/97	KJ
	A) MALFUNCTIONS		1,	KJ
	B) PIERCED PRIMERS		1,	KJ
645	INSPECT FOR LIVE AMMO		6/25/97	CK
655	FINAL INSPECTION A) HEADSPACE		6/26/97	RP
	B) TRIGGER PULL	<u>2.32</u> <u>2.31</u> <u>2.36</u> <u>2.56</u> <u>2.48</u>	6-26-97	CR
	C) FUNCTION		6/26/97	RP
660	PACK			

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6849854DATE 6-8-97TESTER A.P.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.32	2.38	2.32	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.56	2.36	2.42	
PULL #3	2.49	2.64	2.38	
PULL #4	2.51	2.59	2.64	
PULL #5	2.45	2.64	2.65	
TOTAL	12.33	12.61	12.41	
AVG.	2.466	2.522	2.482	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.97	2.95		
PULL #2	2.97	2.93		
PULL #3	2.87	2.86		
PULL #4	2.90	2.87		
PULL #5	2.83	2.88		
TOTAL	14.54	14.49		
AVG.	2.908	2.898		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.08	3.96		4.05
PULL #2	4.24	3.94		4.05
PULL #3	4.11	3.90		4.00
PULL #4	3.79	3.97		4.09
PULL #5	4.02	3.98		4.07
TOTAL	20.24	19.75		20.26
AVG.	4.048	3.95		4.05

BARBER - M24 0122937


Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349854
25 Jun 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.271667$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.149333$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.310005$
THE AMR FOR THIS RIFLE IS: $.7347$

CENTROIDAL DISTANCES

Ø TO	1	.950428
1 TO	2	1.03232
1 TO	3	1.58154

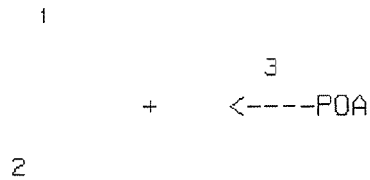


PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .950
 MIN RADIUS : .511
 MEAN RADIUS : .695
 MAX RADIUS : .882
 CENTROID X : -.733
 CENTROID Y : .605

25 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349854

CENTERFIRE PATTERN # 1

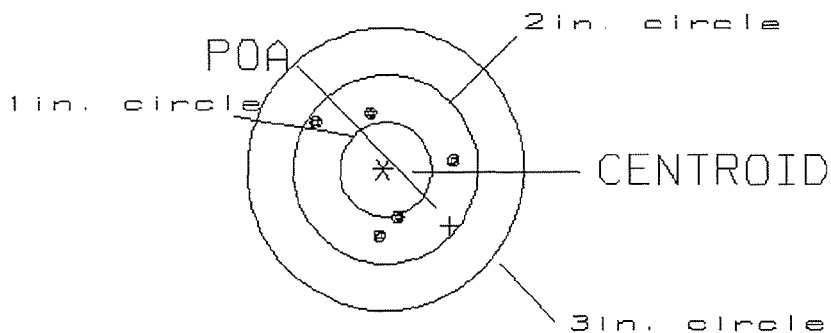

OF SHOTS= 5

IN CIRCLE

HS= 1.51
 VS= 1.27
 GS= 1.55

0
 5
 5

BARBER - M24 0122939


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
POA TO CENTROID: .983
MIN RADIUS : .525
MEAN RADIUS : .676
MAX RADIUS : .838
CENTROID X : -.892
CENTROID Y : -.415

25 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG349854

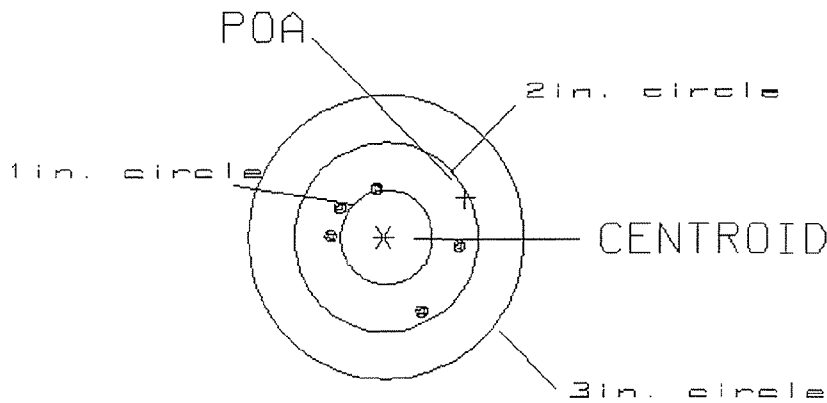CENTERFIRE PATTERN # 2

OF SHOTS= 5

IN CIRCLE

HS= 1.43
VS= 1.26
GS= 1.43

0
5
5

BARBER - M24 0122940

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 030

POA TO CENTROID: .850

MIN RADIUS : .496

MEAN RADIUS : .833


MAX RADIUS : 1.591

CENTROID X : .810

CENTROID Y : .258

25 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349854

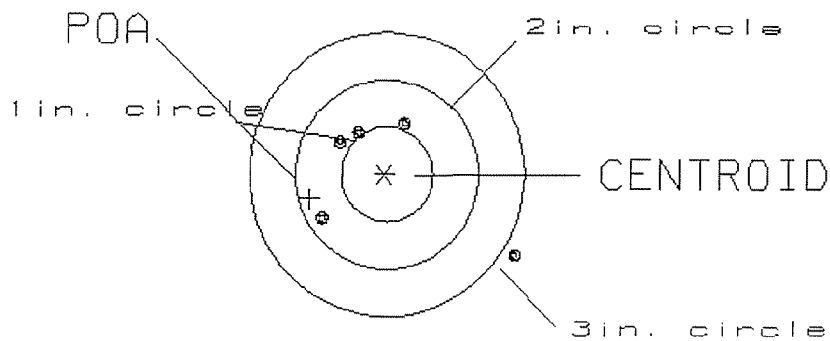CENTERFIRE PATTERN # 3

OF SHOTS= 5

IN CIRCLE

HS= 2.07

1

VS= 1.42

4

GS= 2.21

4