

UPC



E6349882

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6
*INCLUDES 1 IN CHAMBER	

Do Not Use

VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Serial No. E6349882

46 ORDER NO. 25705

26PR

5705 E6349882

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



E6349882

Do Not Use

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINS:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM



ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # E 6349882

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE		3/11/92	WJT
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES		3/11/92	WJT
618	POLISH BARREL		3/11/92	WJT
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>3.5</u> <u>3</u> <u>3</u>	6-23-97	CK
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3.5</u> <u>3.5</u>	6-23-97	CK
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.022</u> <u>.021</u>	6-23-97	CK
	J) ASSEMBLE STOCK		6-17-97	CK
	K) ASSEMBLE SWIVEL STUDS		6-26-97	RP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		6-17-97	CK
	M) IRON SIGHT ALIGNMENT		6-17-97	CK
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		6-17-97	CK
640	GALLERY TEST AND TARGET	<u>L 74</u> <u>R 76</u>	6-25-97	TMM
	A) MALFUNCTIONS		6-25-97	TMM
	B) PIERCED PRIMERS		6-25-97	TMM
645	INSPECT FOR LIVE AMMO		6-25-97	TAD
655	FINAL INSPECTION A) HEADSPACE		6-26-97	RP
	B) TRIGGER PULL	<u>2.83</u> <u>2.77</u> <u>2.74</u> <u>2.76</u> <u>2.87</u>	6-26-97	CR
	C) FUNCTION		6-26-97	RP
660	PACK			

BARBER - M24 0123265

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349882
25 Jun 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.079
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .295333
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .305717

THE AMR FOR THIS RIFLE IS: 1.089

CENTROIDAL DISTANCES

0 TO 1 .347324
1 TO 2 .488016
1 TO 3 .260225

2 1 3
+ <----POA

BARBER - M24 0123266

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1

POA TO CENTROID: .347
MIN RADIUS : .267
MEAN RADIUS : .644
MAX RADIUS : 1.332
CENTROID X : .015
CENTROID Y : .347

25 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349882

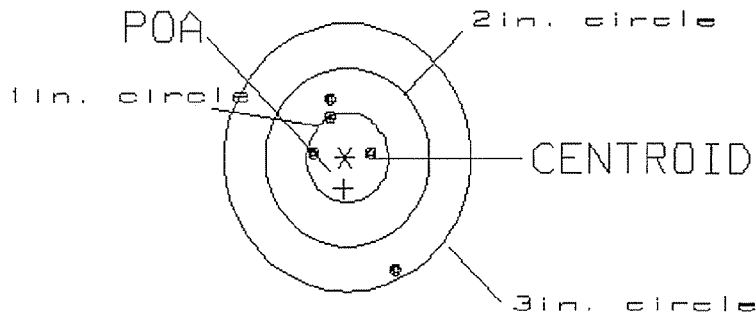CENTERFIRE PATTERN # 1

OF SHOTS= 5

IN CIRCLE

HS= .94
VS= 1.91
GS= 2.06

2
4
5

BARBER - M24 0123267

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .589
 MIN RADIUS : .550
 MEAN RADIUS : 1.280
 MAX RADIUS : 2.255
 CENTROID X : -.473
 CENTROID Y : .351

25 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349882

CENTERFIRE PATTERN # 2

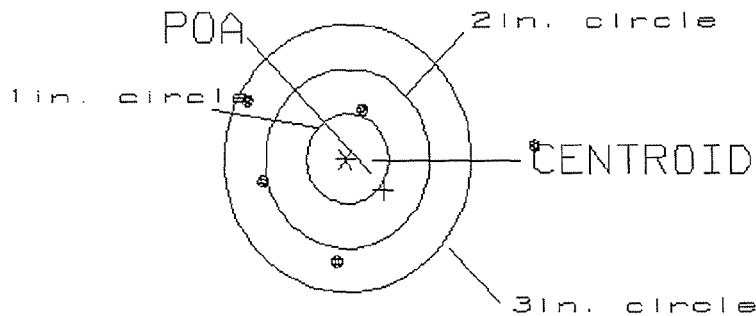

OF SHOTS= 5

IN CIRCLE

HS= 3.47
 US= 1.81
 GS= 3.52

0
 1
 4

BARBER - M24 0123268

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
 POA TO CENTROID: .290
 MIN RADIUS : .608
 MEAN RADIUS : 1.344
 MAX RADIUS : 2.164
 CENTROID X : .221
 CENTROID Y : .188

25 Jun 1997

FILE://Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349882

CENTERFIRE PATTERN # 3

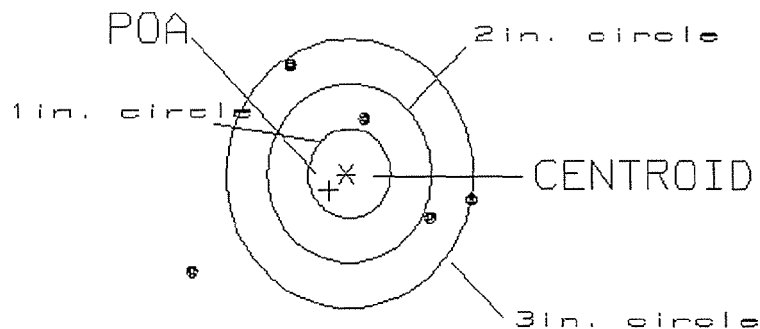

OF SHOTS= 5

IN CIRCLE

HS= 3.33
 VS= 2.28
 GS= 3.43

0
 1
 4

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. E6349882DATE 6-3-97TESTER C.K. & A.P.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.59	2.45	2.20	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.66	2.55	2.16	
PULL #3	2.71	2.28	2.34	
PULL #4	2.55	2.43	2.16	
PULL #5	2.48	2.61	2.29	
TOTAL	12.99	12.32	11.15	
AVG.	2.598	2.464	2.23	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	2.94	2.91	
PULL #2	2.89	2.99	
PULL #3	2.92	2.90	
PULL #4	2.83	2.93	
PULL #5	2.92	2.91	
TOTAL	14.50	14.64	
AVG.	2.90	2.93	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.96	4.09		4.03
PULL #2	4.12	4.00		3.91
PULL #3	3.91	3.88		3.89
PULL #4	4.18	4.07		4.06
PULL #5	4.02	4.19		3.83
TOTAL	20.19	20.23		19.72
AVG.	4.04	4.05		3.94