

BARBER - M24 0124172

UPC

E6349957



CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0124172 0124211

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

Do Not Use

Do Not Use

SERIAL NO.



E6349957

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

VERY IMPORTANT: Read instruction book enclosed to assure safe use of this firearm.

SERIAL NO.
E6349957

ORDER NO.
25705


26PR

5705 E6349957

MODEL 700[™] M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS



46 FORM

ISRAELI GUNS

IS-B-YLS

GUN SERIAL # E 6349957

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes		3/18/87	WJT
618	Polish Barrel		3/19/92	WJT
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

OP. #	OP. NAME	READINGS	DATE
	BARBER - M24 0124177		
625 CONT.	F) SAFETY ON FORCE	<u>3</u> <u>3</u> <u>4</u>	<u>6-9-97</u>
	G) SAFETY OFF FORCE	<u>4</u> <u>4</u> <u>4⁵</u>	<u>6-9-97</u>
	H) TRIGGER PULL TEST & RETAINABILITY		
	I) FIRING PIN INDENT	<u>1021</u> <u>10225</u> <u>0215</u>	<u>6-9-97</u>
	J) ASSEMBLE STOCK		
	K) ASSEMBLE SWIVEL STUDS		RP <u>6-24-97</u>
	L) ATTACH FRONT AND REAR SIGHT ASSEMBLIES		RP <u>6-9-97</u>
	M) IRON SIGHT ALIGNMENT		RP <u>6-9-97</u>
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERER CONTAINER		RP <u>6-9-97</u>
640	GALLERY TEST AND TARGET	<u>WIN L 81</u> <u>R 72</u>	<u>6-18-97</u>
	A) MALFUNCTIONS		<u>6-18-97</u>
	B) PIERCED PRIMERS		<u>Tm</u> <u>6-18-97</u>
645	INSPECT FOR LIVE AMMO		<u>6-18-97</u> <u>TRD</u>
655	FINAL INSPECTION		
	A) HEADSPACE		RP <u>6-24-97</u>
	B) TRIGGER PULL	<u>2.72</u> <u>2.80</u> <u>2.68</u> <u>2.86</u> <u>2.80</u>	<u>6-19-97</u> <u>OK</u>
	FUNCTION		RP <u>6-24-97</u>
660	PACK		

BARBER - M24 0124178

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349957
18 Jun 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.0256667$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $-.073$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.0773807$
THE AMR FOR THIS RIFLE IS: $.9007$

CENTROIDAL DISTANCES

0 TO 1	.143684
1 TO 2	.358511
1 TO 3	.365941

2 + 3
 1 <----POA

BARBER - M24 0124179

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
POA TO CENTROID: .144
MIN RADIUS : .256
MEAN RADIUS : .899
MAX RADIUS : 1.516
CENTROID X : .014
CENTROID Y : -.143

18 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349957

CENTERFIRE PATTERN # 1

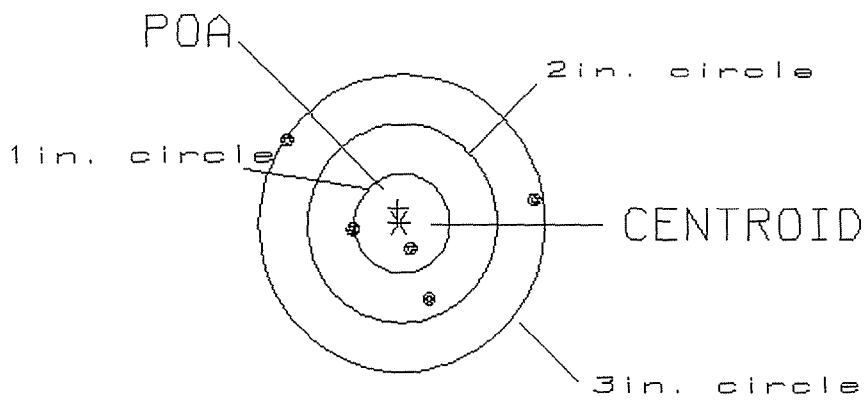

OF SHOTS= 5

IN CIRCLE

HS= 2.65
VS= 1.56
GS= 2.72

1
3
4

BARBER - M24 0124180

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
POA TO CENTROID: .401
MIN RADIUS : .123
MEAN RADIUS : .658
MAX RADIUS : 1.473
CENTROID X : -.337
CENTROID Y : -.216

18 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349957

CENTERFIRE PATTERN # 2

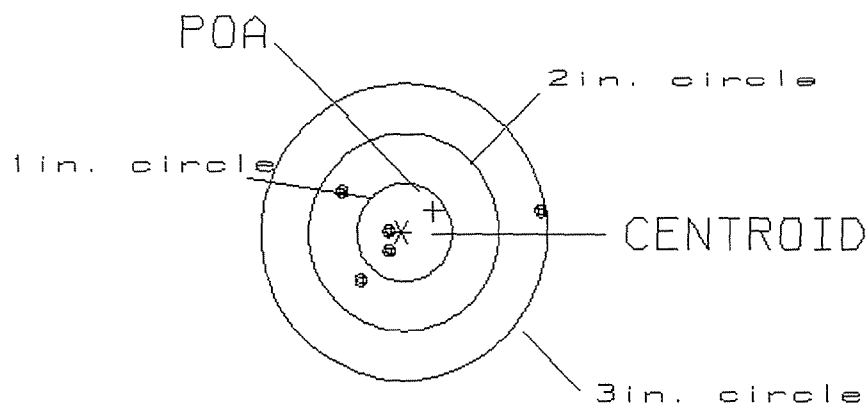

OF SHOTS= 5

IN CIRCLE

HS= 2.12

2

VS= .86

4

GS= 2.13

5

BARBER - M24 0124181

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .283

MIN RADIUS : .649

MEAN RADIUS : 1.145


MAX RADIUS : 1.699

CENTROID X : .246

CENTROID Y : .140

18 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349957

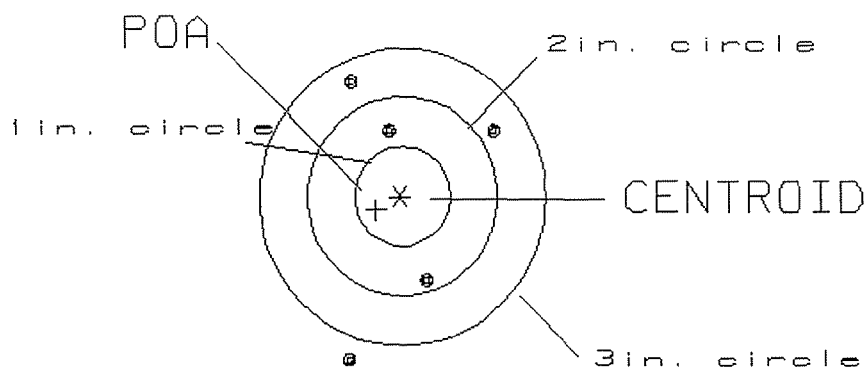CENTERFIRE PATTERN # 3

OF SHOTS= 5

IN CIRCLE

HS= 1.55

0

VS= 2.76

2

GS= 2.77

4

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# + .50#
3.00# + .75#
4.00# + 1.00#

SERIAL NO. E6349957DATE 5-16-97TESTER EK

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.62	2.55	2.67	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.57	2.65	2.26	
PULL #3	2.57	2.63	2.64	
PULL #4	2.58	2.58	2.59	
PULL #5	2.56	2.57	2.64	
TOTAL	12.90	12.98	12.80	
AVG.	2.58	2.60	2.56	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.02	2.92	
PULL #2	3.01	2.91	
PULL #3	2.99	2.94	
PULL #4	2.90	2.97	
PULL #5	2.89	2.95	
TOTAL	14.81	14.69	
AVG.	2.96	2.94	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.07		4.10
PULL #2	4.06	3.96		4.05
PULL #3	4.11	3.99		3.85
PULL #4	4.08	4.05		3.96
PULL #5	4.12	4.06		4.02
TOTAL	20.48	20.13		19.98
AVG.	4.10	4.03		4.00