

UPC



E6349962

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6

ISRAELI GUNS

IS-B-YLS

GUN SERIAL # E 6349962

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake		5-13	AMP

OP. #	OP. NAME	READINGS	DATE	INITIAL
625 CONT.	F) SAFETY ON FORCE	<u>4</u> <u>4</u> <u>4</u>	<u>6-3-97</u>	
	G) SAFETY OFF FORCE	<u>2</u> <u>2</u> <u>2</u>	<u>6-3-97</u>	
	H) TRIGGER PULL TEST & RETAINABILITY			
	I) FIRING PIN INDENT	<u>.021</u> <u>.020</u> <u>.021</u>	<u>6-3-97</u>	
	J) ASSEMBLE STOCK		<u>5-30-97</u>	<u>RP</u>
	K) ASSEMBLE SWIVEL STUDS		<u>6-23-97</u>	<u>RP</u>
	L) ATTACH FRONT AND REAR SIGHT ASSEMBLIES		<u>5-30-97</u>	<u>RP</u>
	M) IRON SIGHT ALIGNMENT		<u>5-30-97</u>	<u>RP</u>
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERER CONTAINER		<u>5-30-97</u>	<u>RP</u>
640	GALLERY TEST AND TARGET	Right 69 Left 81	<u>6-17-97</u>	<u>JW</u>
	A) MALFUNCTIONS	Closes barrel on live Round OK TAD	<u>6-17-97</u>	<u>JW</u>
	B) PIERCED PRIMERS		<u>6-17-97</u>	<u>JW</u>
645	INSPECT FOR LIVE AMMO		<u>6-17-97</u>	<u>NE</u>
655	FINAL INSPECTION			
	A) HEADSPACE		<u>6-23-97</u>	<u>RP</u>
	B) TRIGGER PULL	<u>2.84</u> <u>2.86</u> <u>2.87</u> <u>2.86</u> <u>2.88</u>	<u>6-18-97</u>	<u>CK</u>
	FUNCTION		<u>6-23-97</u>	<u>RP</u>
660	PACK			

BARBER - M24 0124235

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349962
17 Jun 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0336667
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .327
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .328729

THE AMR FOR THIS RIFLE IS: 1.164

CENTROIDAL DISTANCES

0 TO 1 .737902
1 TO 2 .575024
1 TO 3 .665391


1
2
3
+ <----POA

PATTERN #: 1
 POA TO CENTROID: .738
 MIN RADIUS : 1.462
 MEAN RADIUS : 1.780
 MAX RADIUS : 2.321
 CENTROID X : .132
 CENTROID Y : .726

17 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349962

CENTERFIRE PATTERN # 1

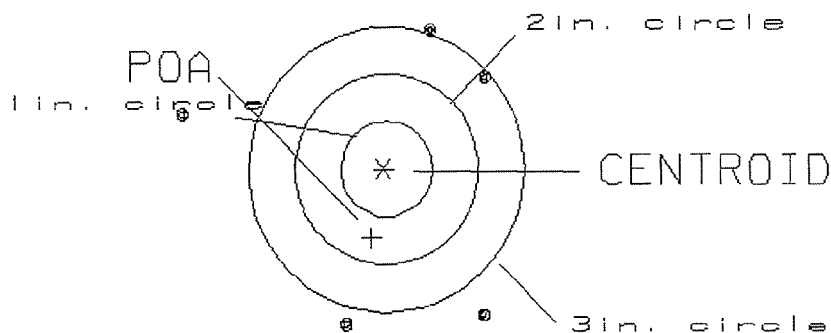

OF SHOTS= 5

IN CIRCLE

HS= 3.35

0

VS= 3.11

0

GS= 3.97

1

BARBER - M24 0124237

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .201
 MIN RADIUS : .252
 MEAN RADIUS : 1.046
 MAX RADIUS : 1.659
 CENTROID X : -.071
 CENTROID Y : .188

17 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349962

CENTERFIRE PATTERN # 2

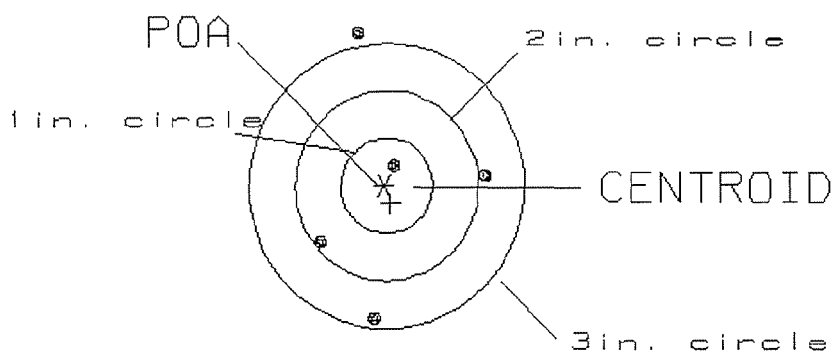

OF SHOTS= 5

IN CIRCLE

HS= 1.71
 VS= 3.04
 GS= 3.05

1
 2
 4

BARBER - M24 0124238

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .078

MIN RADIUS : .351

MEAN RADIUS : .984


MAX RADIUS : 1.801

CENTROID X : .040

CENTROID Y : .067

17 Jun 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349962

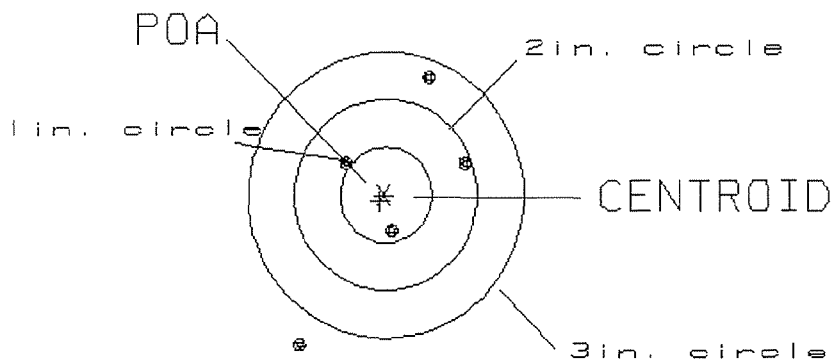CENTERFIRE PATTERN # 3

OF SHOTS= 5

IN CIRCLE

HS= 1.81

1

VS= 2.75

3

GS= 3.08

4

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
2.50# ± .50#
3.00# ± .75#
4.00# ± 1.00#

SERIAL NO. E6349962DATE 5-13-97TESTER A.P.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.41	2.57	2.69		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.61	2.73	2.63		
PULL #3	2.77	2.70	2.61		
PULL #4	2.36	2.56	2.69		
PULL #5	2.37	2.65	2.58		
TOTAL	12.52	13.21	13.2		
AVG.	2.50	2.64	2.64		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.08	3.15		
PULL #2	2.97	3.17		
PULL #3	3.15	3.23		
PULL #4	2.80	3.14		
PULL #5	3.27	3.11		
TOTAL	15.27	15.80		
AVG.	3.05	3.16		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.96	4.14		4.13
PULL #2	4.06	4.02		4.11
PULL #3	4.11	4.12		4.01
PULL #4	4.05	4.06		3.96
PULL #5	4.07	4.05		4.14
TOTAL	20.25	20.39		20.35
AVG.	4.05	4.08		4.07

Do Not Use

Do Not Use

BARBER - M24 0124240

VERY IMPORTANT - Book enclosed to assure safe use of this firearm.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Deposee.

46

E6349962

ORDER NO. 25705

26PR

5705 E6349962

ORDER 25705

MODEL 700™ M24

UPC



ORDER 25705

MODEL 700™ M24

UPC



SERIAL NO.




E6349962

MODEL 700TM M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS



46 FORM