

UPC



E6349984

ORDER NO. 25705

BARREL LENGTH 24"

CAPACITY * 6

*INCLUDES 1 IN CHAMBER

BARBER - M24 0124488

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6349984
19 Aug 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.134667
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.135667
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .191156

THE AMR FOR THIS RIFLE IS: .9267

CENTROIDAL DISTANCES

0 TO	1	.546795
1 TO	2	.559893
1 TO	3	.535584


3₊2 <----POA
1

PATTERN #: 1
 POA TO CENTROID: .547
 MIN RADIUS : .408
 MEAN RADIUS : 1.051
 MAX RADIUS : 2.003
 CENTROID X : -.397
 CENTROID Y : -.376

19 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG349984

CENTERFIRE PATTERN # 1

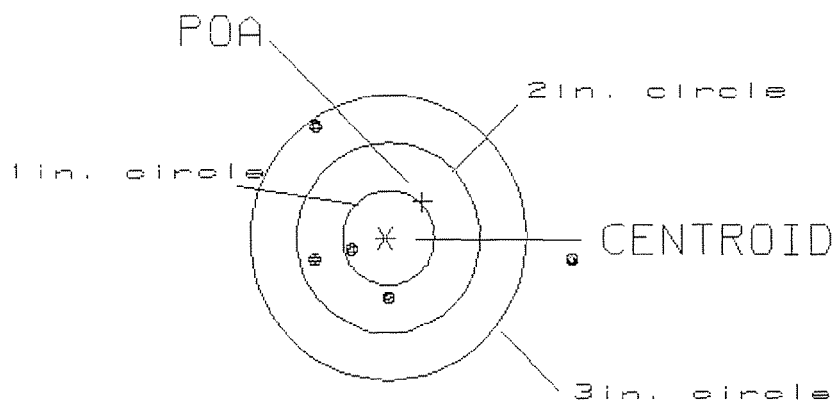

OF SHOTS= 5

IN CIRCLE

HS= 2.84
 VS= 1.77
 GS= 3.15

1
 3
 4

BARBER - M24 0124490

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
 POA TO CENTROID: .132
 MIN RADIUS : .428
 MEAN RADIUS : 1.231
 MAX RADIUS : 1.918
 CENTROID X : .089
 CENTROID Y : -.098

19 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6349984

CENTERFIRE PATTERN # 2

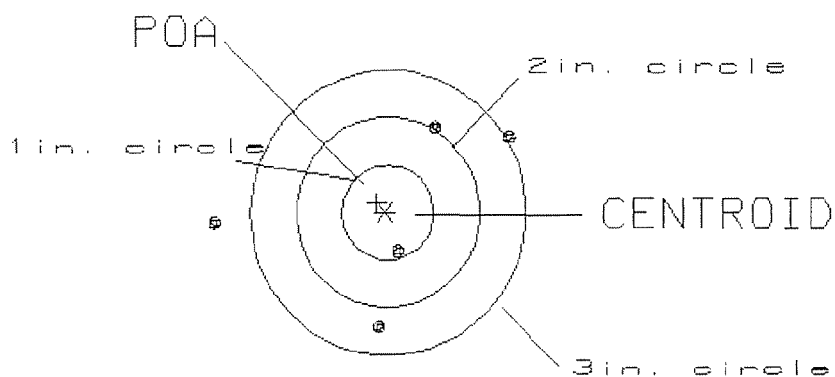

OF SHOTS= 5

IN CIRCLE

HS= 3.26

1

VS= 2.08

1

GS= 3.39

3

BARBER - M24 0124491


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 3
POA TO CENTROID: .117
MIN RADIUS : .153
MEAN RADIUS : .498
MAX RADIUS : .759
CENTROID X : -.096
CENTROID Y : .067

19 Aug 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG349984

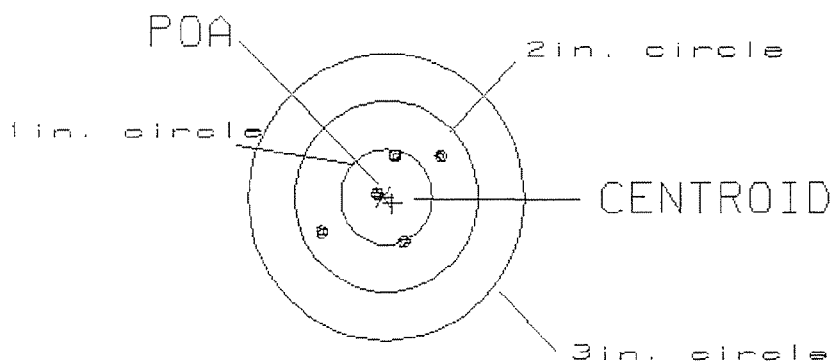CENTERFIRE PATTERN # 3

OF SHOTS= 5

IN CIRCLE

HS= 1.25

3

VS= .86

5

GS= 1.46

5

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6349984DATE 7-30-97TESTER TM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.53	2.32	2.36		MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.44	2.25	2.48		
PULL #3	2.42	2.30	2.60		
PULL #4	2.43	2.27	2.65		
PULL #5	2.45	2.28	2.64		
TOTAL	12.27	11.42	12.73		
AVG.	2.454	2.284	2.546		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	2.97	3.10		
PULL #2	3.13	3.20		
PULL #3	3.06	3.17		
PULL #4	3.12	3.10		
PULL #5	3.12	3.16		
TOTAL	15.40	15.73		
AVG.	3.080	3.146		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.19	4.36		4.16
PULL #2	4.26	4.38		3.94
PULL #3	4.20	4.28		4.18
PULL #4	4.19	4.05		3.93
PULL #5	4.18	4.17		4.04
TOTAL	21.02	21.24		20.25
AVG.	4.204	4.248		4.050

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>5</u> <u>5</u> <u>5</u>	8-6-97	A
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	8-6-97	A
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.022</u> <u>.025</u> <u>.022</u>	8-6-97	A
	J) ASSEMBLE STOCK		7-31-97	CK
	K) ASSEMBLE SWIVEL STUDS		8/27/97	TCP
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		7-31-97	CK
	M) IRON SIGHT ALIGNMENT		7-31-97	CK
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		7-31-97	CK
640	GALLERY TEST AND TARGET	WIN: <u>L 80</u> <u>R 70</u>	8/19/97	TM
	A) MALFUNCTIONS		8/19/97	TM
	B) PIERCED PRIMERS		8/19/97	TM
645	INSPECT FOR LIVE AMMO		8/19/97	TM
655	FINAL INSPECTION A) HEADSPACE		8/27/97	RP
	B) TRIGGER PULL	<u>2.50</u> <u>2.48</u> <u>2.49</u> <u>2.39</u> <u>2.41</u>	8/24/97	TM
	C) FUNCTION		8/27/97	RP
660	PACK			

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL #

F6349984

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

Do Not Use

Remington® MODEL 700™ M24 BOLT ACTION CENTERFIRE RIFLE 24" BARREL 7.62 NATO 6* Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.		VERY IMPORTANT! INSTRUCTION BOOK ENCLOSED TO ASSURE SAFE USE OF THIS RIFLE.
SERIAL NO E6349984	46	ORDER NO 25705
 5705 E6349984		08DR

ORDER 25705
MODEL 700™ M24
UPC



ORDER 25705
MODEL 700™ M24
UPC



SERIAL NO




MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINS:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



owner registration sticker

