

UPC



E6350113

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6
* INCLUDES 1 IN CHAMBER	

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6350113
17 Sep 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .147667
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.139667
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .203254

THE AMR FOR THIS RIFLE IS: 1.193

CENTROIDAL DISTANCES

0 TO	1	.253513
1 TO	2	.597443
1 TO	3	.330189

+¹₃ <----POA
2

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
 POA TO CENTROID: .253
 MIN RADIUS : .462
 MEAN RADIUS : .974
 MAX RADIUS : 1.520
 CENTROID X : .195
 CENTROID Y : .162

17 Sep 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6350113.1.1

CENTERFIRE PATTERN # 1

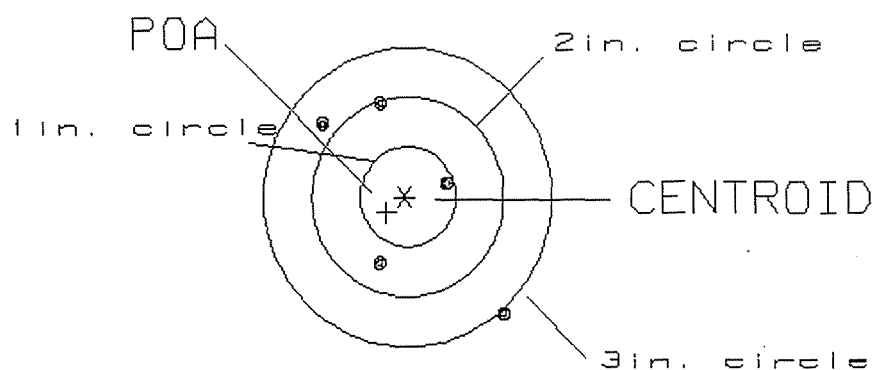

OF SHOTS= 5

IN CIRCLE

HS= 1.93
 VS= 2.09
 GS= 2.65


1
 2
 4

PATTERN #: 2
 POA TO CENTROID: .467
 MIN RADIUS : .359
 MEAN RADIUS : 1.311
 MAX RADIUS : 2.747
 CENTROID X : .172
 CENTROID Y : -.435

17 Sep 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6350113.1.1

CENTERFIRE PATTERN # 2

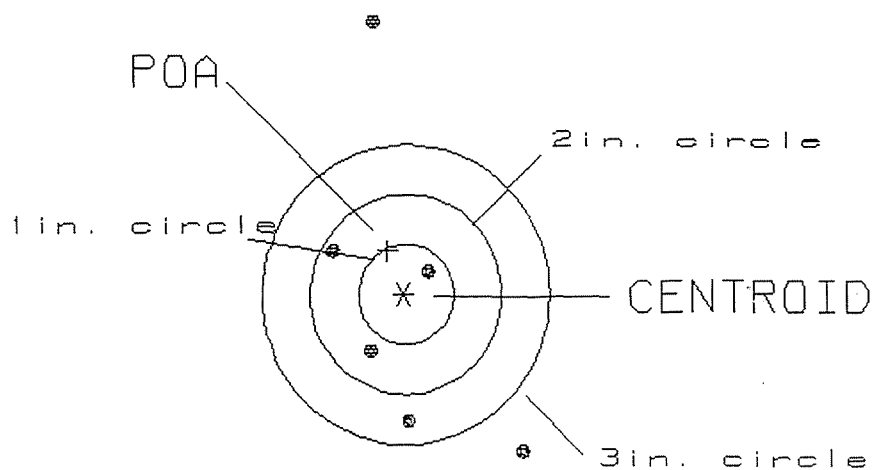

OF SHOTS= 6

IN CIRCLE

HS= 2.02

1

VS= 4.24

3

GS= 4.55

4

PATTERN #: 3

POA TO CENTROID: .165

MIN RADIUS : .380

MEAN RADIUS : 1.295

MAX RADIUS : 1.943


CENTROID X : .076

CENTROID Y : -.146

17 Sep 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6350113.1.1

CENTERFIRE PATTERN # 3

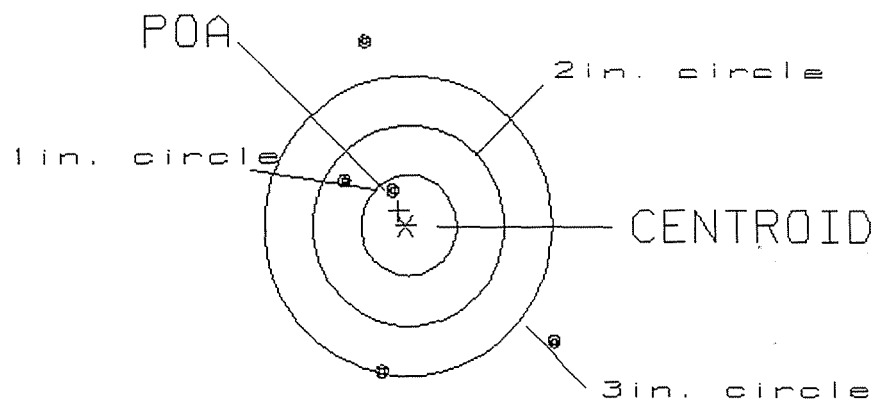

OF SHOTS= 5

IN CIRCLE

HS= 2.19

1

VS= 3.27

2

GS= 3.60

3

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6350113DATE 9-10-97TESTER Tm

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.55	2.52		2.82	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.52	2.51		2.53	
PULL #3	2.63	2.58		2.76	
PULL #4	2.59	2.57		2.76	
PULL #5	2.55	2.68		2.62	
TOTAL	12.84	12.86		13.49	
AVG.	2.568	2.572		2.70	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.02	3.00		
PULL #2	3.01	2.96		
PULL #3	2.97	2.84		
PULL #4	3.08	2.99		
PULL #5	3.06	3.06		
TOTAL	15.14	14.85		
AVG.	3.03	2.97		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	3.97		4.18
PULL #2	4.14	4.06		4.22
PULL #3	4.09	3.96		4.28
PULL #4	4.13	3.94		3.91
PULL #5	4.14	4.04		4.29
TOTAL	20.61	19.97		20.88
AVG.	4.12	3.99		4.18

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL # 86350113

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	<u>6</u> <u>6</u> <u>6</u>	9-12-97	RW
CONT.	G) SAFETY OFF FORCE	<u>2.5</u> <u>2.5</u> <u>2.5</u>	9-12-97	RW
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>.024</u> <u>.023</u> <u>.023</u>	9-12-97	RW
	J) ASSEMBLE STOCK		9-11-97	CR
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		9-11-97	CR
	M) IRON SIGHT ALIGNMENT		9-11-97	CR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		9-11-97	CR
640	GALLERY TEST AND TARGET	L 64 R 84	9/17/97	LT
	A) MALFUNCTIONS		9/17/97	LT
	B) PIERCED PRIMERS		9/17/97	LT
645	INSPECT FOR LIVE AMMO		9/17/97	BWT
655	FINAL INSPECTION A) HEADSPACE		9-19-97	RW
	B) TRIGGER PULL	<u>2.59</u> <u>2.65</u> <u>2.69</u> <u>2.69</u> <u>2.65</u>	9/18/97	JM
	C) FUNCTION			
660	BACK			

Do Not Use

AL NO.



ORDER
MODEL 700™ M24
UPC



ORDER
MODEL 700™ M24
UPC



Do Not Use

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT
Instruction
enclosed to assure
safe use of
firearm.

SERIAL NO.
E6350113

ORDER NO.
25705

23DR



5705 E6350113

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINS:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS



46 FORM