

UPC



E6350134

ORDER NO.	25705
BARREL LENGTH	24"
CAPACITY *	6
* INCLUDES 1 IN CHAMBER	

BARBER - M24 0126377

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6350134
23 Oct 1997

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.086$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.0876667$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.122807$

THE AMR FOR THIS RIFLE IS: 1.336

CENTROIDAL DISTANCES

Ø TO 1 .217442
1 TO 2 .651345
1 TO 3 .388623

2

3 + 1 <----POA


PATTERN #: 1

POA TO CENTROID: .217
 MIN RADIUS : .601
 MEAN RADIUS : 1.146
 MAX RADIUS : 1.521
 CENTROID X : .209
 CENTROID Y : -.060

22 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6358134

CENTERFIRE PATTERN # 1

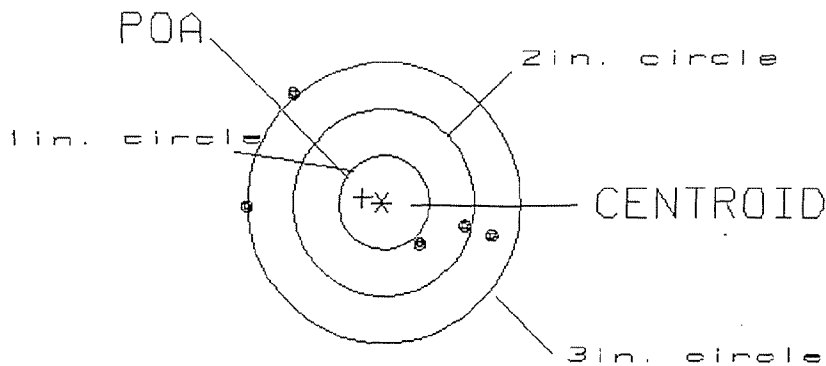

OF SHOTS= 5

IN CIRCLE

HS= 2.62
 VS= 1.57
 GS= 2.65


0
 2
 4

PATTERN #: 0 2 0
 POA TO CENTROID: .462
 MIN RADIUS : .127
 MEAN RADIUS : 1.885
 MAX RADIUS : 3.223
 CENTROID X : -.288
 CENTROID Y : .361

22 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6350134

CENTERFIRE PATTERN # 2

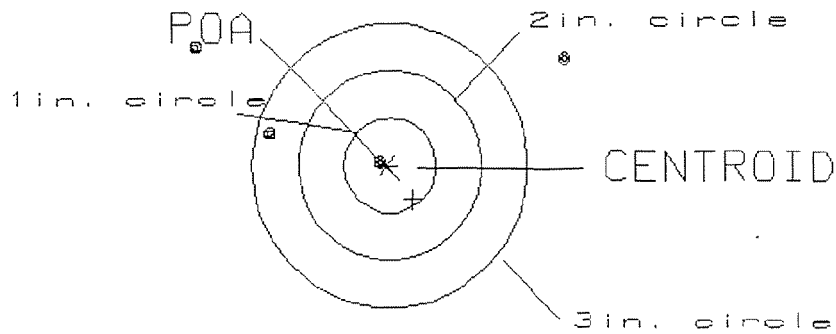

OF SHOTS= 5

IN CIRCLE

HS= 4.04
 VS= 3.92
 GS= 5.51


1
 1
 2

PATTERN #: 3
 POA TO CENTROID: .183
 MIN RADIUS : .478
 MEAN RADIUS : .976
 MAX RADIUS : 1.196
 CENTROID X : -.179
 CENTROID Y : -.038

22 Oct 1997

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6350134

CENTERFIRE PATTERN # 3

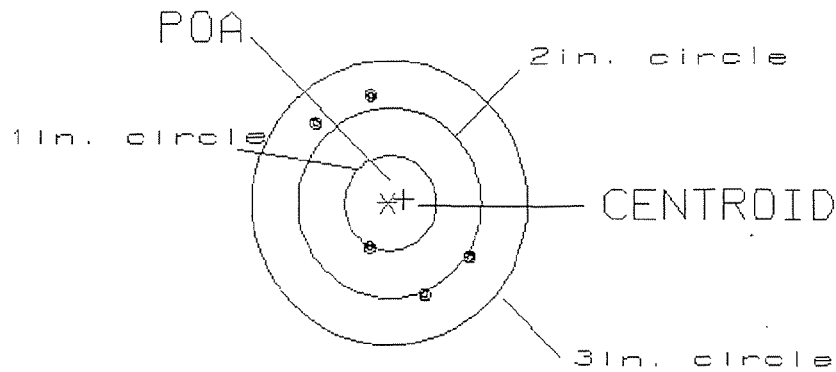

OF SHOTS= 5

IN CIRCLE

HS= 1.69
 VS= 2.12
 GS= 2.21

1
 1
 5

ISRAELI GUNS

CONTRACT # DAAE20-97-C-0182

GUN SERIAL #

E6850184

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK			
600	PROOF			
607	CHECK HEADSPACE			
610	DIS-ASSEMBLE GUN			
612	MAGNAFLUX BARREL ACTION			
	MAGNAFLUX BOLT			
615	ROLLMARK CALIBER			
617	DRILL AND TAP SIGHT HOLES			
618	POLISH BARREL			
620	APPLY COATINGS (BARREL ACTION)			
	(BOLT)			
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD			
	C) INSPECT EJECTOR HOLE FOR CHAMFER			
	D) OIL FIRING PIN ASSEMBLY			
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE			

OP. #	OPERATION NAME	READINGS	DATE	INITIAL
625	BARBER - M24 0126382 F) SAFETY ON FORCE	<u>5</u> <u>6</u> <u>5</u>	10-10-97	CR
CONT.	G) SAFETY OFF FORCE	<u>3</u> <u>3</u> <u>3</u>	10-10-97	CR
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT	<u>1023</u> <u>1023</u> <u>1022</u>	10-10-97	CR
	J) ASSEMBLE STOCK		10-7-97	RW
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		10-7-97	RW
	M) IRON SIGHT ALIGNMENT		10-7-97	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		10-7-97	RW
640	GALLERY TEST AND TARGET	L 49 R 101	10/22/97	PB
	A) MALFUNCTIONS		10/22/97	PB
	B) PIERCED PRIMERS		10/22/97	PB
645	INSPECT FOR LIVE AMMO		10/22/97	LT
655	FINAL INSPECTION A) HEADSPACE			
	B) TRIGGER PULL	<u>250</u> <u>254</u> <u>249</u> <u>246</u> <u>248</u>	10-27-97	DA
	C) FUNCTION			
660	PACK			

BARBER - M24 0126383

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

SERIAL NO. E6350134DATE 10-7-97TESTER TM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.46	2.38	2.59	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.39	2.30	2.53	
PULL #3	2.44	2.34	2.48	
PULL #4	2.45	2.47	2.50	
PULL #5	2.48	2.34	2.48	
TOTAL	12.22	11.83	12.58	
AVG.	2.44	2.36	2.51	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	2.98	3.18	
PULL #2	2.94	3.09	
PULL #3	3.06	3.13	
PULL #4	2.97	2.99	
PULL #5	3.01	3.19	
TOTAL	14.96	15.58	
AVG.	2.99	3.11	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	3.91	4.11		4.12
PULL #2	4.10	4.14		4.08
PULL #3	4.04	3.93		3.94
PULL #4	4.10	4.02		4.05
PULL #5	3.95	4.06		4.01
TOTAL	20.10	20.26		20.20
AVG.	4.02	4.05		4.04

Do Not Use

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
weapon.

Remington®

MODEL 700™ M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

Reg. U.S. Pat. & Tr. Off. Patent Registered. Patented. Remington-Union

SERIAL NO.
E6350134

48 ORDER NO.
25705

10RR

5705 E6350134

ORDER 25705

MODEL 700™ M24

UPC



ORDER 25705

MODEL 700™ M24

UPC



SERIAL NO.



MODEL 700[™] M24
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO 6*

GREEN ENVELOPE CONTAINING:

- INSTRUCTION BOOK
- PRODUCT OWNER'S CARD
- MUSEUM/COUNTRY STORE FLIER
- REMINGTON AUTHORIZED GUNSMITHS

46 FORM

proof of purchase



owner registration sticker

