

E6374502 New
C6225374 040

RECEIVING AND EXAMINING REPORT

BARBER - M24 0127852

COMMENTS

ORDER

R 98-05077

INITIAL CUSTOMER ORDER NO.

WOG 19 OF 23

JLM

DATE RECEIVED

DATE OPENED

DATE CODE

SERIAL NUMBER

NEW SERIAL NUMBER

MODEL AND GRADE

02/24/98

02/24/98

C6225374

E6374502

700

7.62

NATO

ACCESSORIES

W/STUDS

SCOPE BASE

FROM:

SHIP TO:

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

SUPPLY & SERVICES DIV
D O L WAREHOUSE J 2535 A1
KNOX ST
FT BRAGG NC 28307

CUST NO: 113830 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROV. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN

AMMO

FUNCTION

FINISH

ACCURACY

FIT

INSPECT

CYCLE

A

D

TRIGGER GROUP

SC

E

E

BOLT ASSY.

SC

E2

E

BARREL ASSY.

SC

D

E

E

REC. ASSY.

SC

U2

E

E

WOOD

C1

T100

U2

METAL

C2

MAIN*FAULT

PARTS

COMMENTS

REPAIRMAN

PROOF

CLEAN

TEST

TARGET

PATTERN

GALLERY TESTER

DATE

DATE

DATE

DATE

DATE

OFFICE COPY

RD6025 Rev 7-97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0127891

BARBER - M24 0127853

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374502
14 May 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1602
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .3326
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .36917

THE AMR FOR THIS RIFLE IS: 1.08

CENTROIDAL DISTANCES

0 TO 1	.178645
1 TO 2	.795573
1 TO 3	.779996
1 TO 4	.268822
1 TO 5	.436232

2 3
5
4
+ 1 <----POA

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .179

MIN RADIUS : .504

MEAN RADIUS : 1.424

MAX RADIUS : 2.903


CENTROID X : .135

CENTROID Y : -.117

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374582

CENTERFIRE PATTERN # 1

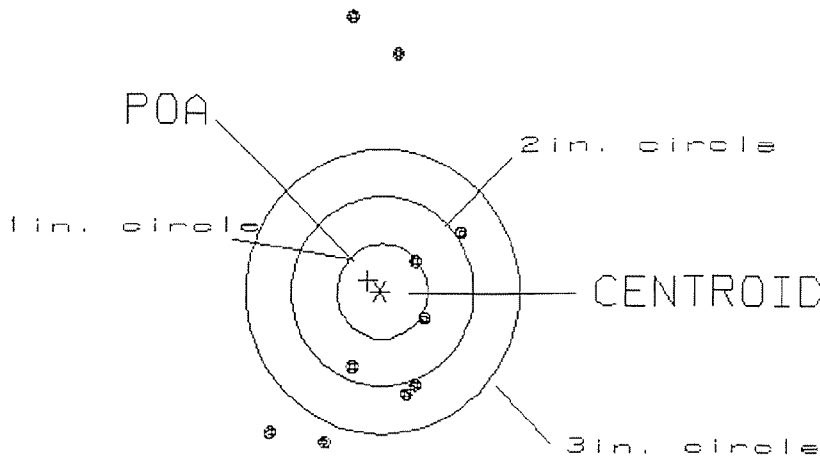

OF SHOTS= 10

IN CIRCLE

HS= 2.13

0

US= 4.49

3

GS= 4.50


6

PATTERN #: 2
 POA TO CENTROID: .674
 MIN RADIUS : .218
 MEAN RADIUS : .565
 MAX RADIUS : 1.058
 CENTROID X : .041
 CENTROID Y : .673

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374582

CENTERFIRE PATTERN # 2

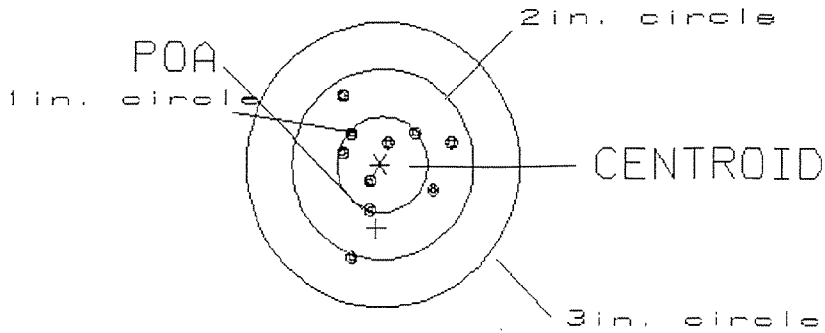

OF SHOTS= 10

IN CIRCLE

HS= 1.22

6

VS= 1.72

9

GS= 1.72


10

PATTERN #: 3
 POA TO CENTROID: .717
 MIN RADIUS : .402
 MEAN RADIUS : 1.220
 MAX RADIUS : 2.648
 CENTROID X : .323
 CENTROID Y : .640

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374582

CENTERFIRE PATTERN # 3

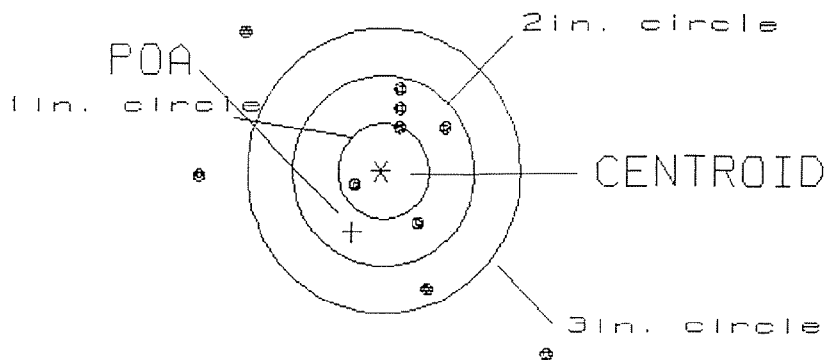

OF SHOTS= 10

IN CIRCLE

HS= 3.80

1

US= 3.46

6

GS= 4.76


7

PATTERN #: 4
 POA TO CENTROID: .189
 MIN RADIUS : .605
 MEAN RADIUS : 1.151
 MAX RADIUS : 1.821
 CENTROID X : .114
 CENTROID Y : .151

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374582

CENTERFIRE PATTERN # 4

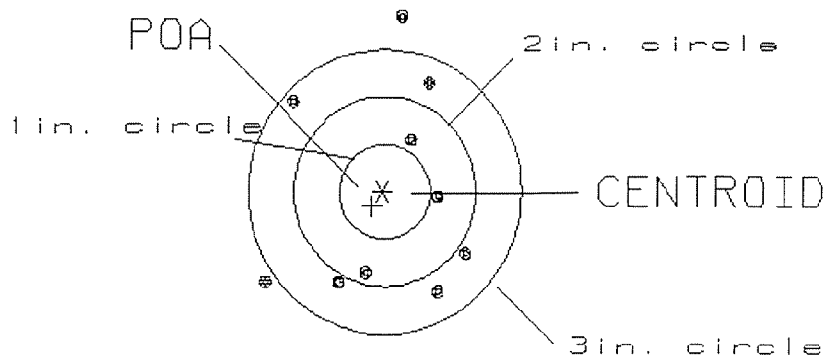

OF SHOTS= 10

IN CIRCLE

HS= 2.19

0

VS= 2.83

3

GS= 3.11

8

BARBER - M24 0127858

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .368
MIN RADIUS : .165
MEAN RADIUS : 1.041
MAX RADIUS : 2.406
CENTROID X : .188
CENTROID Y : .316

14 May 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374582

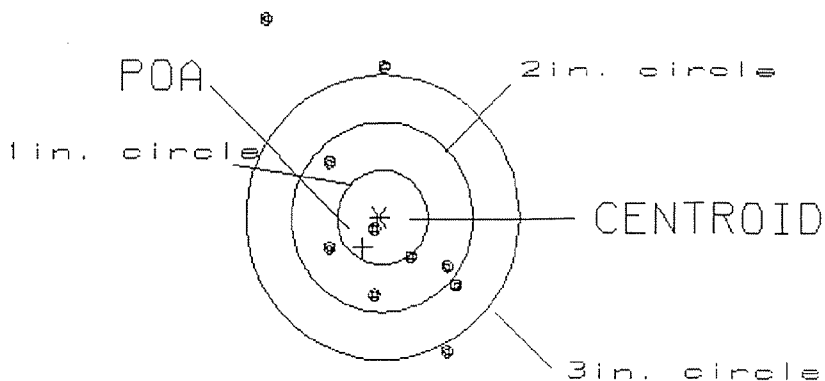CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 2.07

2

VS= 3.46

6

GS= 3.99

7