

E6374546
Ref. C6349014

MAINTENANCE REQUEST				PAGE NO.	NO. OF PAGES	REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)													
For use of this form, see DA PAM 738-750, the proponent agency is DCSLOG																			
SECTION I - EQUIPMENT DATA																			
CONTROL NUMBER		WORK ORDER NO.		WESDC		ORG. PD		PD AUTHENTICATION											
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION C 00 427 MPREG		B. LOCATION FT. Benning Ga 31905			C. UNIT IDENT CODE W2LSK4												
2. SERIAL NO. C634907		3. NOUN NOMENCLATURE M24SWS		4. LINE NO. 295387		5. MODEL		6. NATIONAL STOCK NUMBER 1605-01-240-213C											
7A. MAINTENANCE ACTIVITY		B. LEVEL		8. UTILIZATION CODE		9A. MCSR ITEM		9B. ERC		9C. PACING ITEM		10. HOURS		11. MILES		12. ROUNDS		13. STARTS	
14. FAILURE DETECTED DURING (Select one - use ☒ or X)								15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)											
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative		☐ 258 Overheating		☐ 790 Out of Adjustment							
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☐ 387 Low Performance		☐		☐		☐		☐	
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs) Barrel chn guages & is stripped																			
B. REMARKS																			
PREPARATION INSTRUCTIONS (Prior to using this form, read DA PAM 738-750 for detailed preparation instructions)																			
1. Place a "✓" or an "X" in the box for the type of action required. 2. Enter the WESDC if the item is Materiel Condition Status Reportable. 3. Enter the priority designator as determined from the urgency of need and force activity designator. 4. The Unit Commander, Chief of TDA activity or their designated representative will authenticate, by signature, a priority of 01 through 08. 5. Block 1A. Enter the name of the organization submitting the request. 6. Block 1B. Enter the unit submitting the request; units overseas enter APO only. 7. Block 1C. Enter the unit identification code of the unit in block 1A. 8. Block 2. Enter the equipment serial number. For ammunition, enter the lot number. For administrative-use vehicles, enter the USA registration number. 9. Block 3. Enter the noun abbreviation of the item. 10. Block 4. Enter the item line number, if applicable. 11. Block 5. Enter the model number. 12. Block 6. Enter the National Stock Number of the item listed in Block 3.								13. Block 7. Enter the name of the support activity. 14. Block 7A. Enter the symbol of the maintenance category (O, F, H, D, or L). 15. Block 8. Enter the utilization code. 16. Block 9A. Enter the word "yes" if the item is Materiel Condition Status Reportable. 17. Block 9B. Enter the equipment readiness code, if applicable. 18. Block 9C. Enter the word "yes" if the item is a pacing item. 19. Block 10. Enter the hour reading, if applicable. 20. Block 11. Enter the mileage from the odometer, if applicable. 21. Block 12. Enter the total rounds fired, if applicable. 22. Block 13. For turbine engines, enter the number of hot starts. 23. Block 14. Enter a "✓" or "X" in the proper block. 24. Block 15. Enter a "✓" or "X" in the proper block. 25. Block 16. Describe briefly the fault or symptoms needing correction.											
23. SUBMITTED BY		24. RECEIVED BY																	
JULIAN DATE		JULIAN DATE																	

MAINTENANCE REQUEST				PAGE NO.		NO. OF PAGES		REQUIREMENTS CONTROL SYMBOL CSGLD - 1047(R1)			
For use of this form, see DA PAM 738-750; the proponent agency is DCSLOG											
SECTION I - EQUIPMENT DATA											
CONTROL NUMBER		WORK ORDER NO.			WESDC		ORG PD		PD AUTHENTICATION		
☐ Work Request ☐ MWO ☐ Warranty Claim		1A. ORGANIZATION C 60429 J N F R F G			B. LOCATION FT. Benning GA 31905			C. UNIT IDENT CODE W2L5K4			
2. SERIAL NO. C 634901		3. NOUN NOMENCLATURE M24SWS			4. LINE NO. 295387		5. MODEL		6. NATIONAL STOCK NUMBER 1005-01-240-213C		
7A. MAINTENANCE ACTIVITY		B. LEVEL	8. UTILIZATION CODE	9A. MCSR ITEM	9B. ERC	9C. PACING ITEM	10. HOURS		11. MILES	12. ROUNDS 8700	13. STARTS
14. FAILURE DETECTED DURING (Select one - use ☒ or X)						15. FIRST INDICATION OF TROUBLE (Select one - use ☒ or X)					
☐ A Sch. Main.		☐ C Test		☐ E Storage		☐ G Flight		☐ 068 Inoperative		☐ 258 Overheating	
☐ B Handling		☐ D Normal Op		☐ F Inspection		☐ H Other		☐ 008 Noisy		☐ 387 Low Performance	
☐ 790 Out of Adjustment		☐ Other									
16A. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURE IN EQUIPMENT TM (Do not prescribe repairs). Round gun 9 is stopped											
B. REMARKS											
SECTION II - WORK ACCOMPLISHED											
17A. REPAIR ORGANIZATION/ACTIVITY				C. UNIT IDENT. CODE		18. TYPE ORGANIZATION/ACTIVITY ACCOMPLISHING WORK (Select one - use ☒ or X)				19. AMS ACCT. CODE	
B. LOCATION						☐ 1 TOE ☐ 2 TD ☐ 3 Contractor					
20A. ACT. CODE	B. FAILURE CODE	C. COMPONENT/PART NOUN, SVC, OR MWO NO.			D. MANHOURS (Hrs. & tenths)	E. NATIONAL STOCK NUMBER		F. PART SOURCE CODE	G. QTY.	H. PARTS COST	
		(1) CB CODE (2) REF DESIGN. (3) MFR. CODE									
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
											\$
I. TOTAL MANHOURS					J. TOTAL MANHOURS COST \$		K. TOTAL PARTS COST \$				
21. DELAY (Select One) ☐ 1 Parts ☐ 2 Manpower ☐ 3 Facilities ☐ 4 Funds ☐ 5 Tools											
22. Data Transcribed											
23. SUBMITTED BY		24. RECEIVED BY		25. WORK STARTED BY		26. INSPECTED BY		27. ACCEPTED BY		28. DISPOSITION (Select One)	
										☐ A To User ☐ D Evacuated ☐ B To Stock ☐ E Cannibalization ☐ C Salvaged	
JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE		JULIAN DATE			

LEUPOLD & STEVENS, INC.

MAILING: PO BOX 688
BEAVERTON OR 97075-0688
(503) 646-9171

SHIPPING: 14400 NW GREENBRIER PARKWAY
BEAVERTON OR 97006-5934
FAX (503) 526-1455

TELEX 15-1227

MAIL REMITTANCE IN U.S.
FUNDS TO:

LEUPOLD & STEVENS, INC.
PO BOX 4985
BEAVERTON OR 97076-4985 USA

B REMINGTON ARMS CO., INC.
I Attn:
L 14 HOEFLER AVE.
L ILION NY 13357

T
O

S REMINGTON ARMS CO., INC.
H Attn:
I 14 HOEFLER AVE.
P ILION NY 13357

T
O

Invoice No.	Date	Type of Service	Via
0152502	06/09/98	WARRANTY	
1 ea ULTRA M3A-10X S/N# 871143B Complaints/Requests WARRANTY- INSPECTION Service Activity: REPLACED OBJ LOCKRING REBUILT/REWORKED ADJUSTMENTS ALIGNED FOCUS ADJ SCREW REFILLED/WATER TESTED MECHANICAL INSPECTION VISUAL INSPECTION 100% CONTROL # M20295 CLEANED, SEALED, RECOLLIMATED, VISUAL & MECHANICAL INSPECTION 100%			Charge SHIPPING & HANDLING AMOUNT DUE NO CHG

For Customer Use Only:

Charge/Debit-Card Payment: ☐ Visa ☐ Master Card Card # _____

Expiration Date: _____ Signature: _____

VALUE FOR CUSTOMS PURPOSES ONLY \$ _____ THESE COMMODITIES ARE EXITING THE U.S.A. UNDER GENERAL LICENSE _____
 "THESE COMMODITIES LICENSED BY THE UNITED STATES FOR ULTIMATE DESTINATION USA DIVERSION CONTRARY TO
 UNITED STATES LAW PROHIBITED."

EXPORTER/MANUFACTURER: LEUPOLD & STEVENS INC.
PLACE: BEAVERTON, OREGON USA

ECCN: 0A985

SIGNATURE: _____
NAME: _____ EXPORT/INVOICING SPECIALIST

I.D. 93-0372974

BARBER - M24 0128434

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6374546
16 Jul 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .106
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1004
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .146001

THE AMR FOR THIS RIFLE IS: .9604

CENTROIDAL DISTANCES

Ø TO	1	.280223
1 TO	2	.286191
1 TO	3	.552327
1 TO	4	.806067
1 TO	5	.615851

3
5 4
1 2 <----POA


PATTERN #: 1

POA TO CENTROID: .281
 MIN RADIUS : .537
 MEAN RADIUS : 1.066
 MAX RADIUS : 1.859
 CENTROID X : -.222
 CENTROID Y : -.171

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 1

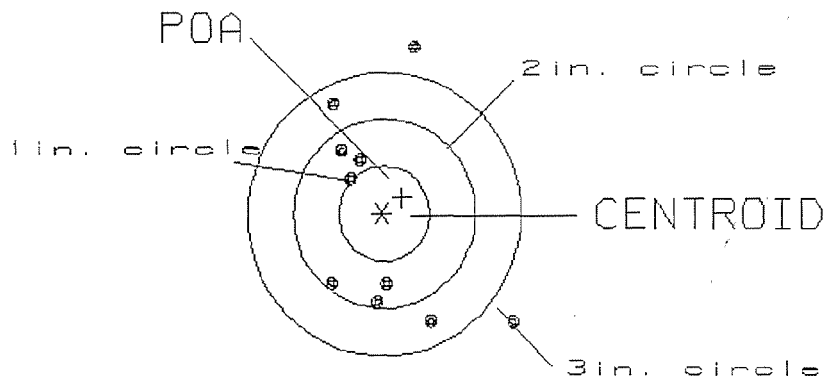

OF SHOTS= 10

IN CIRCLE

HS= 2.06

0

VS= 2.93

6

GS= 3.15


8

PATTERN #: 2
 POA TO CENTROID: .096
 MIN RADIUS : .295
 MEAN RADIUS : 1.152
 MAX RADIUS : 2.110
 CENTROID X : .050
 CENTROID Y : -.082

16 Jul 1998

FILE:/Hqbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 2

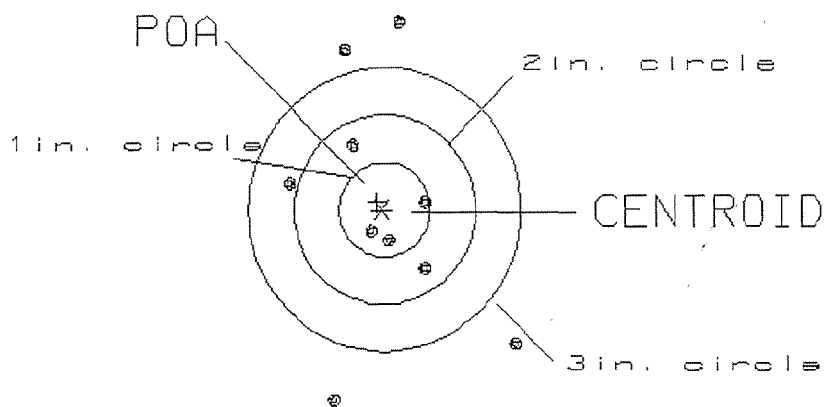

OF SHOTS= 10

IN CIRCLE

HS= 2.43

3

VS= 4.02

5

GS= 4.08

6

BARBER - M24 0128437


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐
POA TO CENTROID: .367
MIN RADIUS : .023
MEAN RADIUS : .755
MAX RADIUS : 1.858
CENTROID X : -.070
CENTROID Y : .360

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

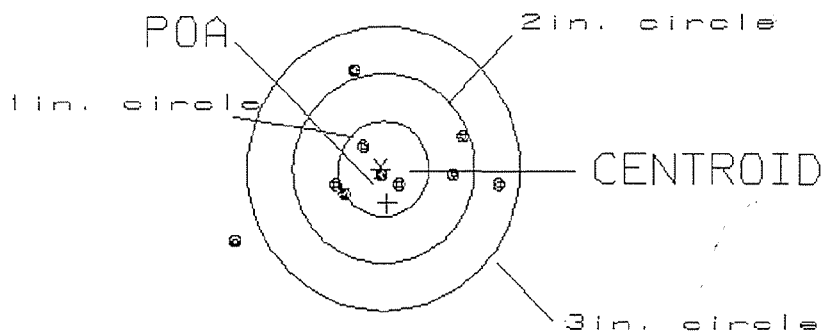CENTERFIRE PATTERN # 3

OF SHOTS= 10

IN CIRCLE

HS= 2.99

4

VS= 1.85

7

GS= 3.07

9

BARBER - M24 0128438

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .528

MIN RADIUS : .425

MEAN RADIUS : .887


MAX RADIUS : 1.807

CENTROID X : .466

CENTROID Y : .249

16 Jul 1999

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

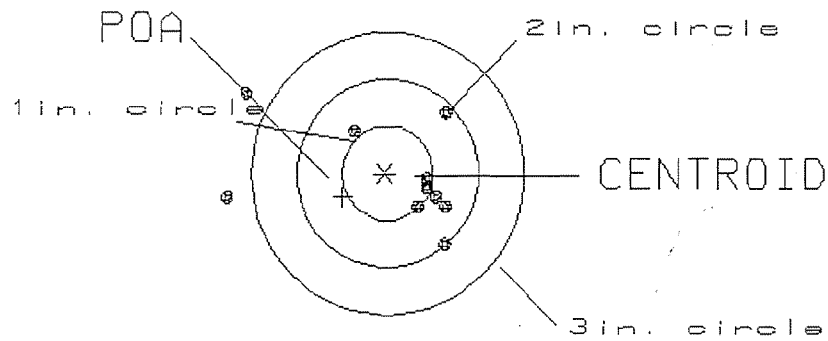CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 2.47

3

VS= 1.63

6

GS= 2.71

8

BARBER - M24 0128439

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐
 POA TO CENTROID: .339
 MIN RADIUS : .261
 MEAN RADIUS : .942
 MAX RADIUS : 1.749
 CENTROID X : .306
 CENTROID Y : .146

16 Jul 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6374546

CENTERFIRE PATTERN # 5

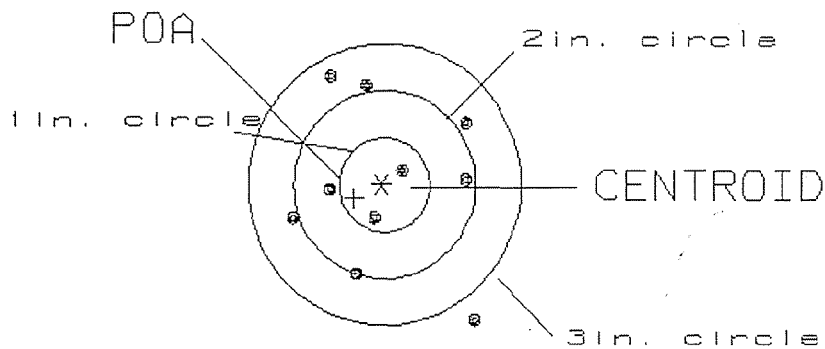

OF SHOTS= 10

IN CIRCLE

HS= 1.98

2

VS= 2.64

5

GS= 3.07

9