

G 6616351

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

proof of purchase




owner registration sticker



ORDER NO.	25716
BARREL LENGTH	24"
CAPACITY	6

G6616351



DD FORM

ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
UPC



ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
UPC



SERIAL NO.



GUN SERIAL # G6616351

OP #	OPERATION NAME	READINGS	DATE	INITIAL
410	SERIALIZE BOLT HANDLE		1-2-07	RTZ
420	ASSEMBLE ACTION		1-5-07	RTZ
430	ASSEMBLE TO STOCK		1-8-07	DK
440	PROOF		1-8-07	TRW
460	CHECK HEADSPACE	INSPECTED	1-8-07	TRW
470	DIS-ASSEMBLE ACTION	JAN 09 2007	1-8-07	RTZ
480	MAGNAFLUX BBL ACTION	OPERATOR <u>APD</u>	1-9-07	APD
490	MAGNAFLUX BOLT			
500	ROLLMARK CALIBER		1-9-07	CW
510	DRILL AND TAP SIGHT HOLES		1-8-07	TRW
520	GOFF BLAST BBL / REC		1-10-07	DG
530 & 540	APPLY COATINGS (BARREL ACTION)		1-2-07	WJ
	(BOLT)			
560	RE-ASSEMBLE ACTION		2-21-07	SD
	A) CLEAN INSIDE OF BOLT ASSEMBLY			
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2-21-07	SD
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2-21-07	SD
	D) OIL FIRING PIN ASSEMBLY		2-27-07	APD
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		3/1/07	mon

F004 REV 5/2006


560	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6° 5° 5°	3/1/07	non
CONT.					
	G) SAFETY OFF FORCE	2 LBS MIN	3° 3° 3°	3/1/07	non
	H) TRIGGER PULL TEST AND RETAINABILITY			3/1/07	non
	I) FIRING PIN INDENT	.020 MIN	.023 .024 .025	3/1/07	non
	J) ASSEMBLE STOCK			2-27-07	J.P.W.
	K) ASSEMBLE SWIVEL STUDS			3/1/07	non
	L) ATTACH FRONT AND REAR SIGHT ASSY'S			3/1/07	non
	M) IRON SIGHT ALIGNMENT			3/1/07	non
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER			3/1/07	non
640 & 650	FUNCTION TEST AND TARGET		PASS FAIL PASS FAIL	2-28-07	TRLW
	MALFUNCTION		CORRECTION		
	MALFUNCTION		CORRECTION		
	MALFUNCTION		CORRECTION		
	MALFUNCTION		CORRECTION		
660	INSPECT FOR LIVE AMMO			2-28-07	Fry
670	FINAL INSPECTION A) HEADSPACE			3/1/07	non
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.63 2.72 2.55 2.65 2.66	3-1-07	TRLW
	C) FUNCTION			3/1/07	non
690	PACK			3/28/07	DA

F004 REV 5/2006

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. ini. +/- .50 lbs.

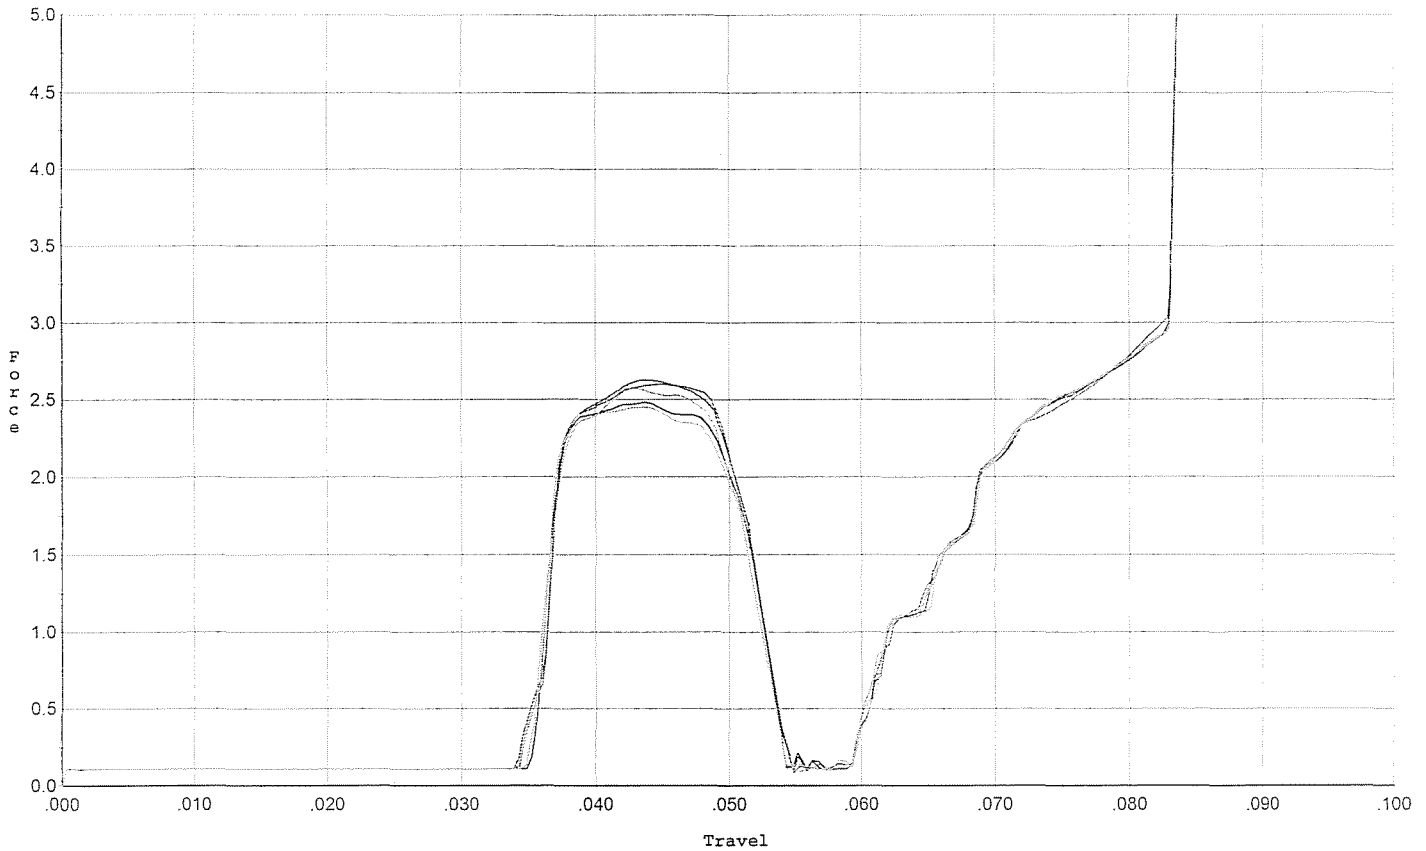


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.630	0.051	0.034	0.037	0.041		Set Trigger
2	2.483	0.052	0.035	0.037	0.040		Set Trigger
3	2.601	0.051	0.035	0.037	0.041		Set Trigger
4	2.453	0.051	0.035	0.037	0.038		Set Trigger
5	2.572	0.053	0.035	0.037	0.041		Set Trigger

Avg 2.54

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

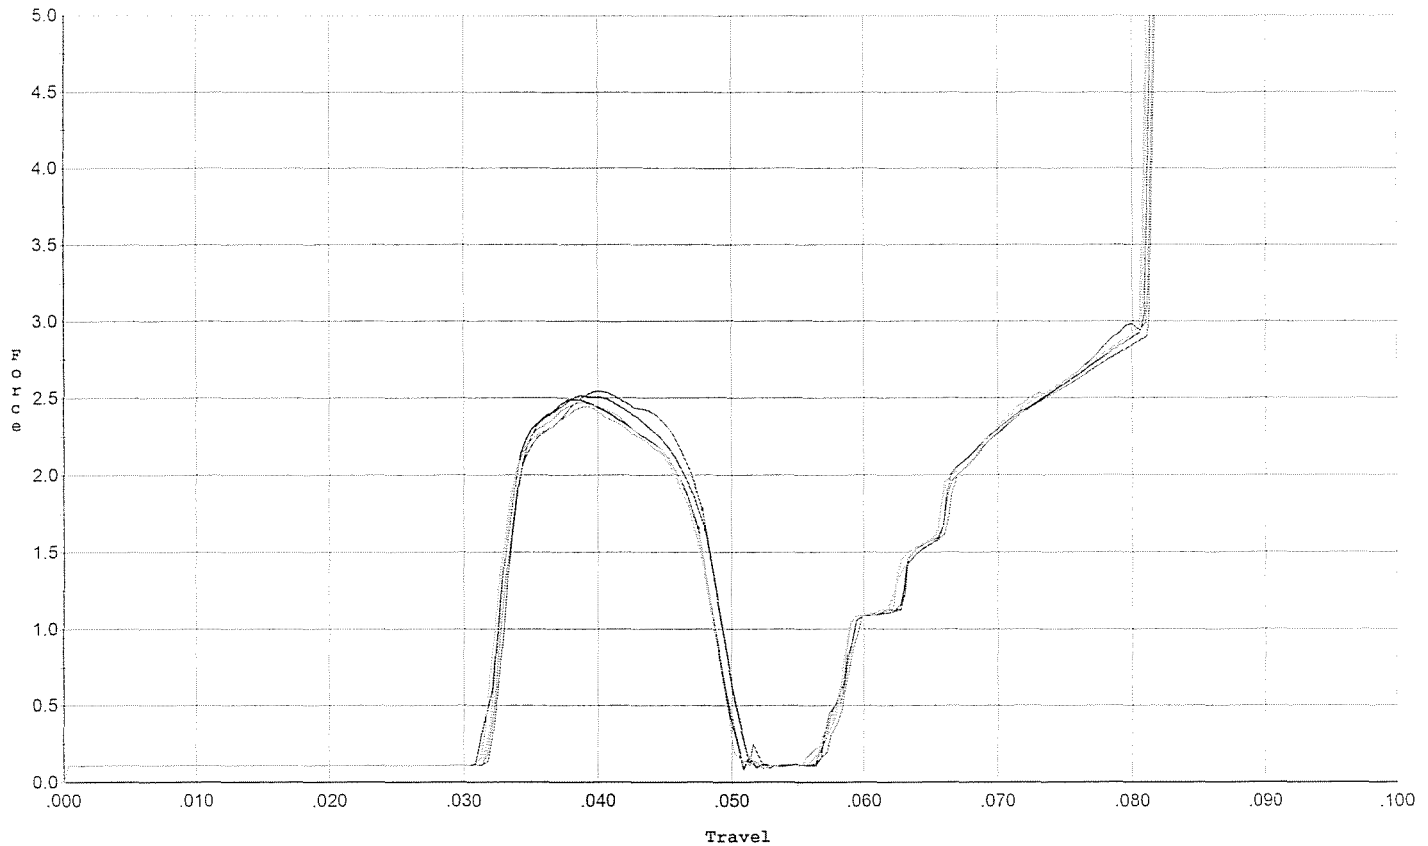


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.514	0.048	0.032	0.037	0.038		Set Trigger
2	2.490	0.047	0.031	0.037	0.038		Set Trigger
3	2.543	0.048	0.032	0.037	0.039		Set Trigger
4	2.445	0.048	0.032	0.037	0.037		Set Trigger
5	2.470	0.048	0.032	0.037	0.037		Set Trigger

AVG 2.49

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. ini. +/- .75 lbs.

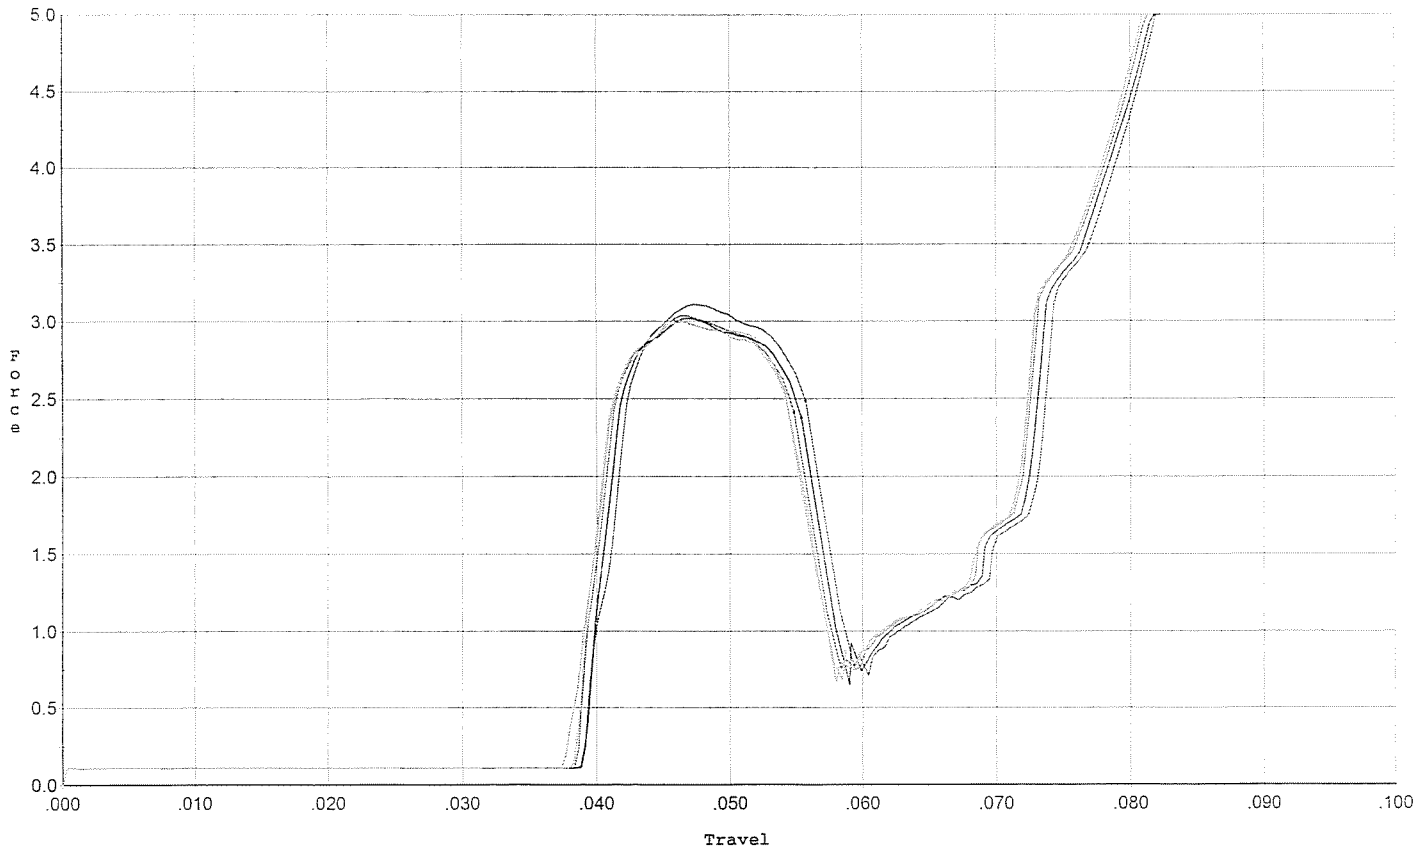


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.109	0.056	0.039	0.034	0.050		Set Trigger
2	3.018	0.055	0.039	0.034	0.049		Set Trigger
3	3.037	0.055	0.039	0.034	0.048		Set Trigger
4	3.007	0.054	0.039	0.035	0.047		Set Trigger
5	2.996	0.056	0.038	0.034	0.049		Set Trigger

Avg 3.03

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 2/20/07

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

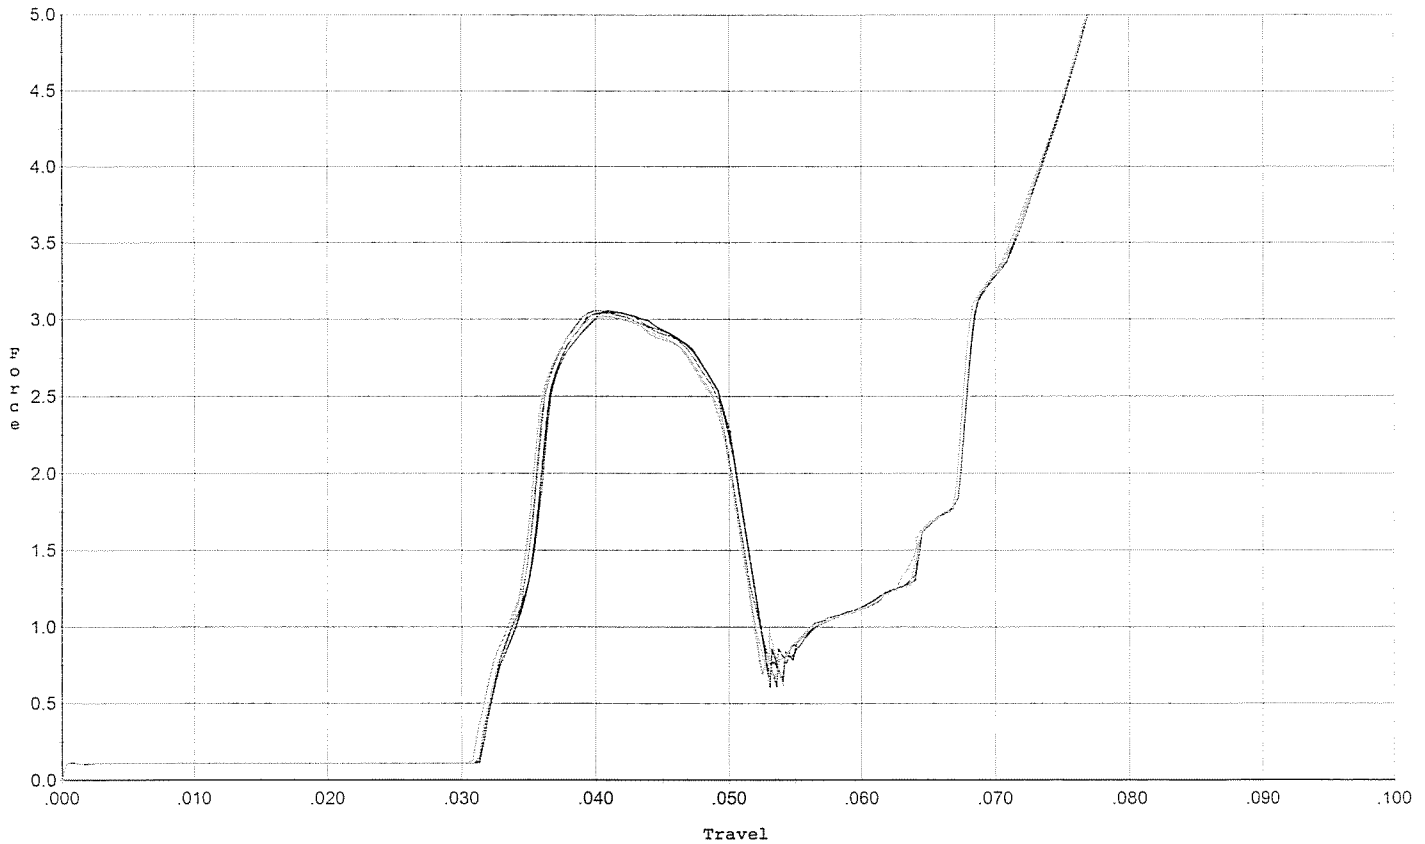


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.056	0.050	0.032	0.034	0.049		Set Trigger
2	3.044	0.050	0.032	0.034	0.049		Set Trigger
3	3.056	0.049	0.032	0.034	0.048		Set Trigger
4	3.012	0.049	0.031	0.034	0.048		Set Trigger
5	3.029	0.050	0.032	0.034	0.048		Set Trigger

Alg 3.03

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

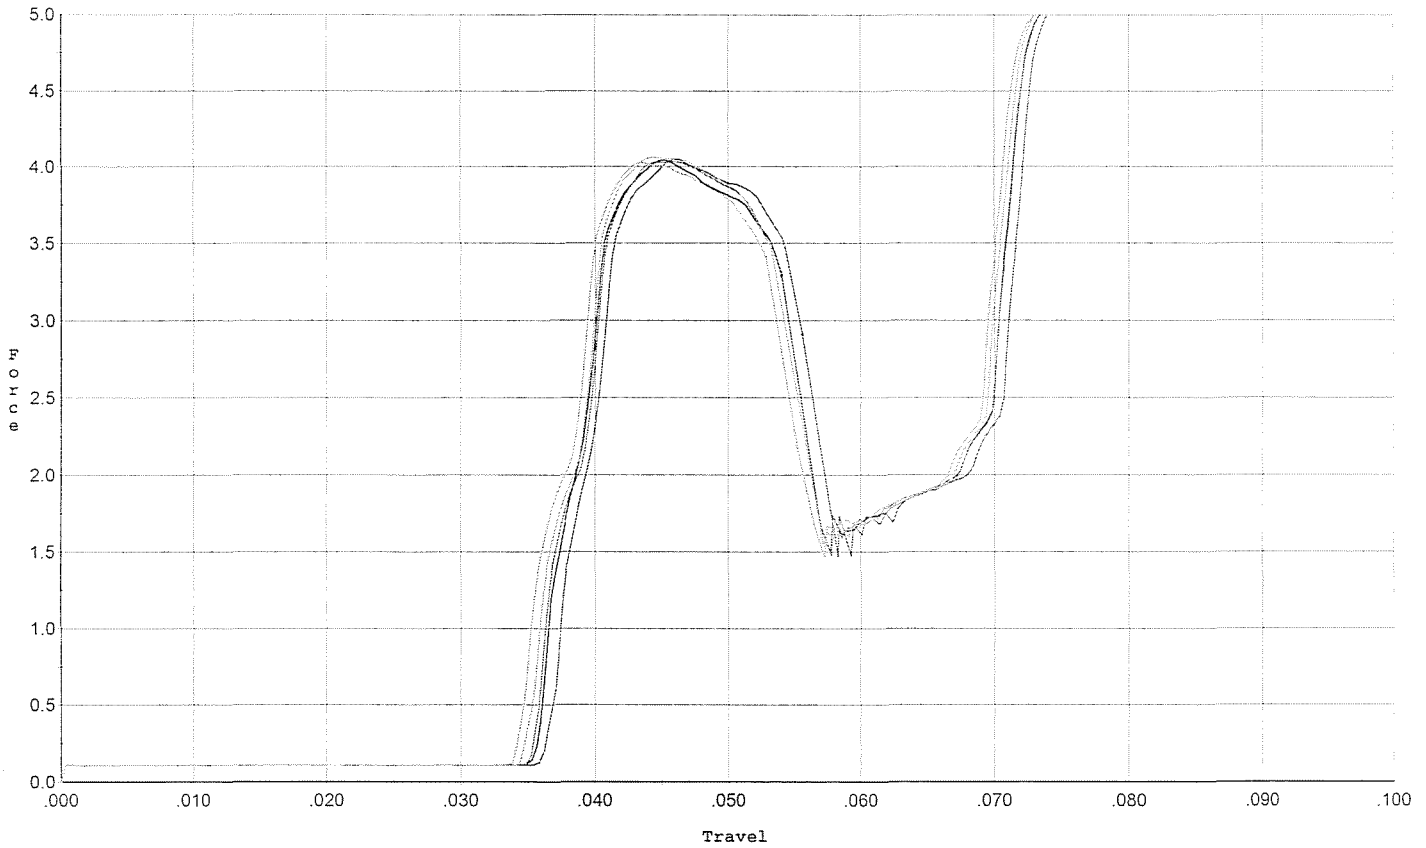


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.048	0.056	0.036	0.025	0.069		Set Trigger
2	4.039	0.054	0.036	0.028	0.067		Set Trigger
3	4.034	0.054	0.035	0.036	0.067		Set Trigger
4	4.061	0.055	0.035	0.036	0.070		Set Trigger
5	4.028	0.053	0.034	0.036	0.067		Set Trigger

AVG 4.04

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 2/20/07

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

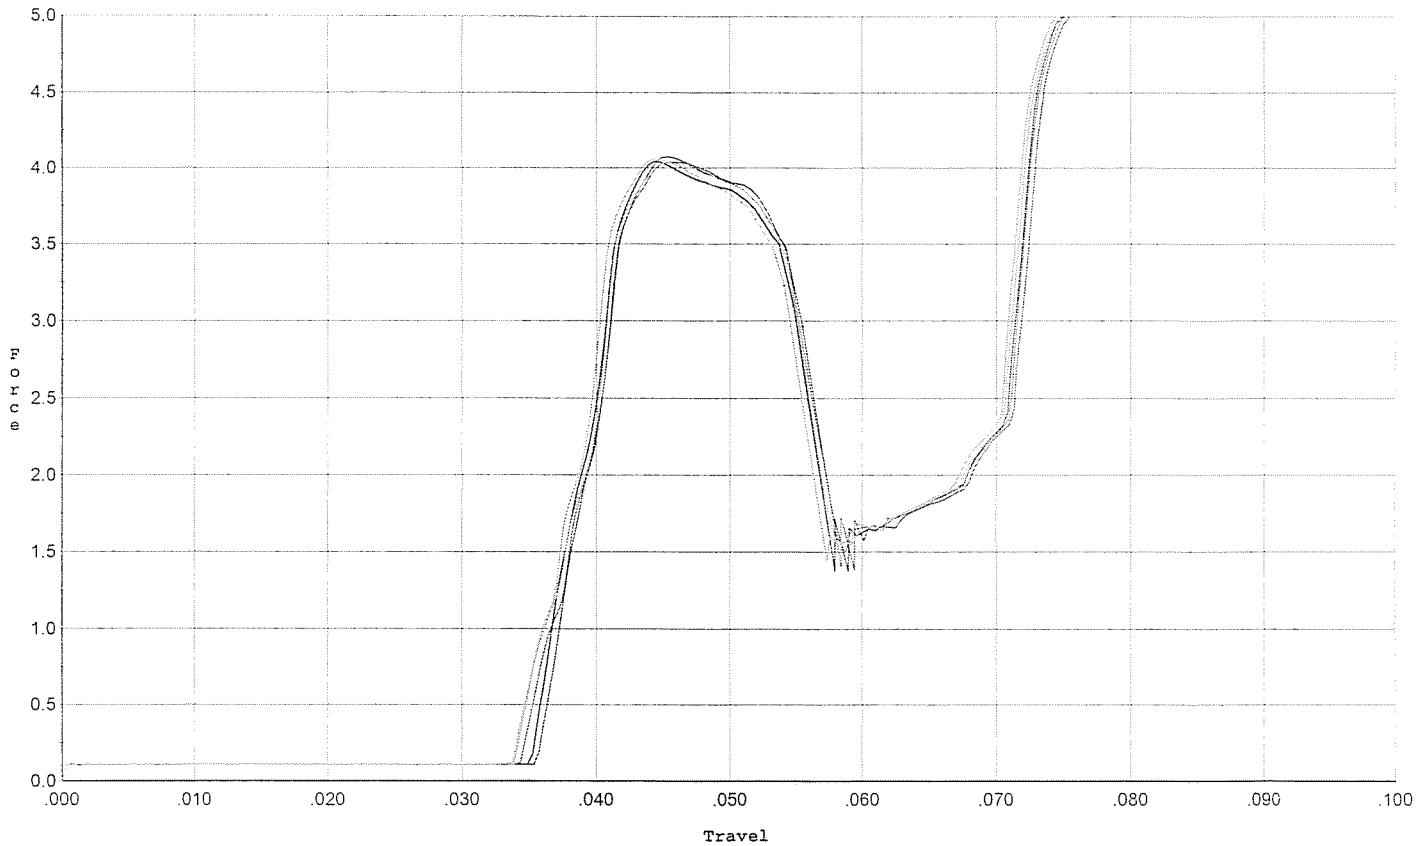


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.074	0.055	0.036	0.037	0.069		Set Trigger
2	4.043	0.055	0.035	0.037	0.068		Set Trigger
3	4.039	0.054	0.035	0.037	0.067		Set Trigger
4	4.032	0.054	0.034	0.036	0.068		Set Trigger
5	4.058	0.054	0.034	0.036	0.068		Set Trigger

AVG 4.04

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

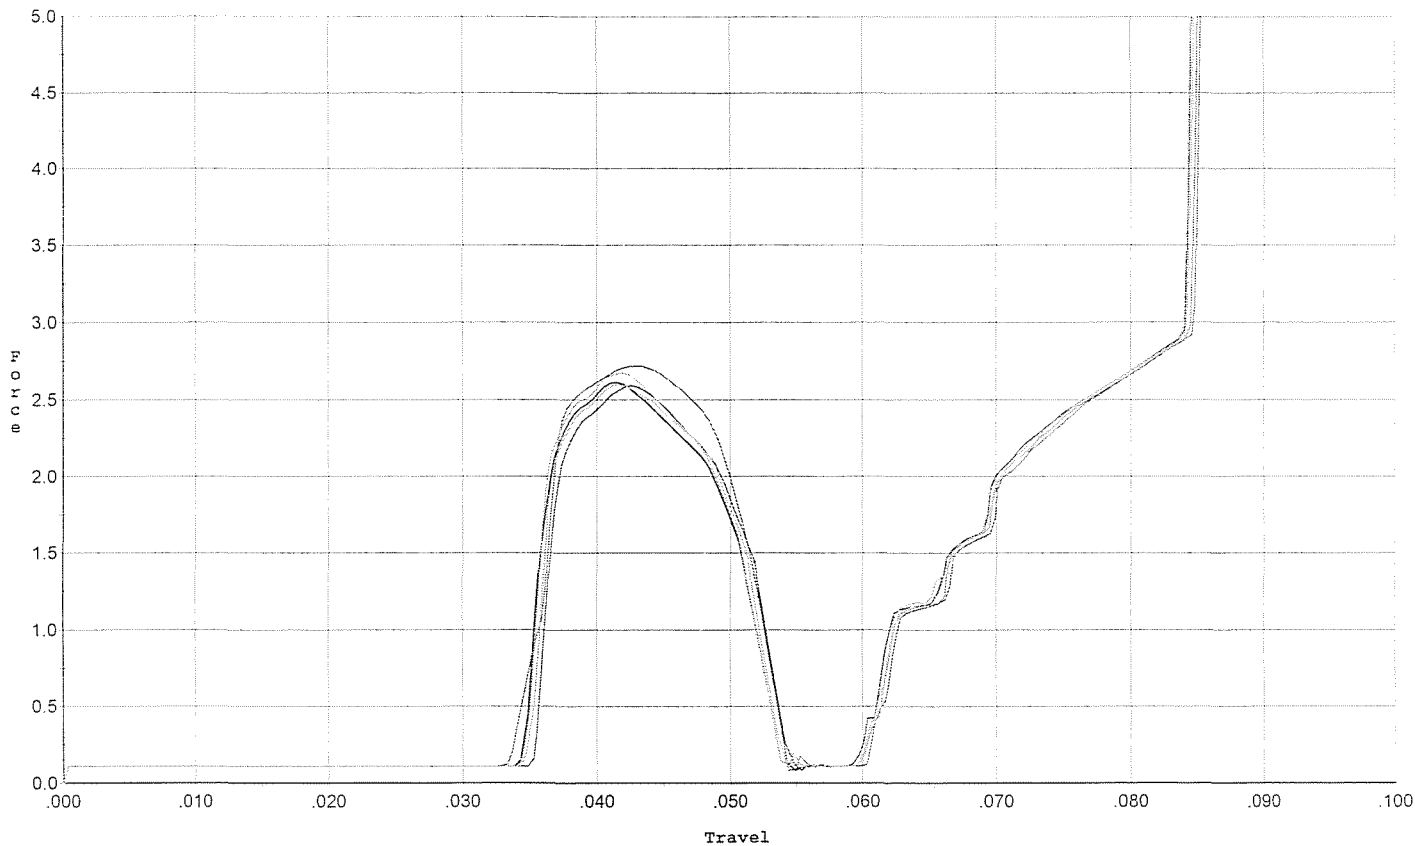


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.591	0.052	0.035	0.038	0.039		Set Trigger
2	2.613	0.052	0.035	0.037	0.040		Set Trigger
3	2.717	0.052	0.034	0.037	0.043		Set Trigger
4	2.601	0.051	0.035	0.038	0.040		Set Trigger
5	2.673	0.052	0.035	0.037	0.041		Set Trigger

AVG 2.63

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 2/20/07

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

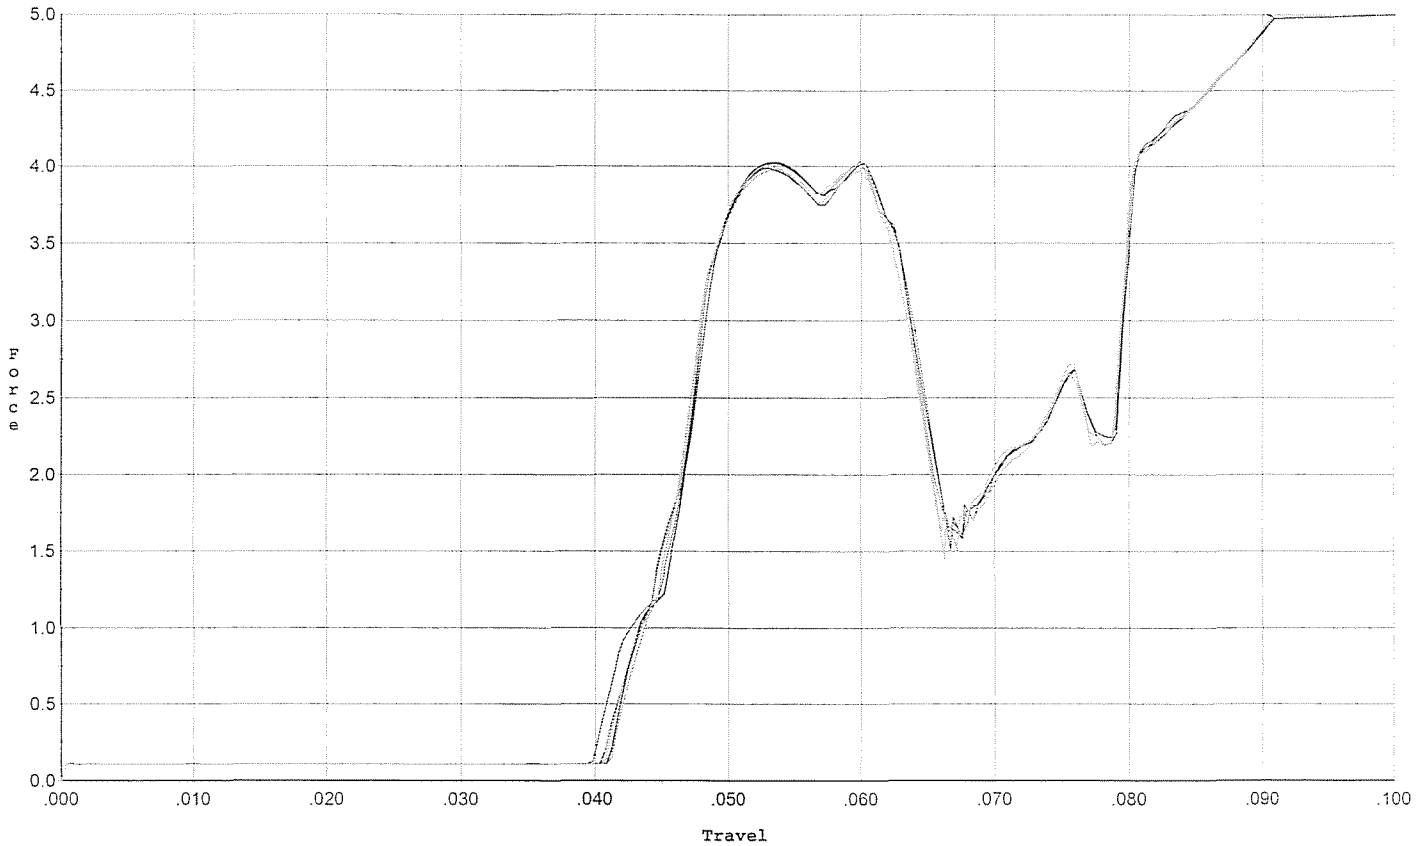

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.012	0.064	0.041	0.036	0.076		Set Trigger
2	4.023	0.063	0.041	0.036	0.074		Set Trigger
3	4.031	0.063	0.040	0.036	0.075		Set Trigger
4	4.004	0.063	0.041	0.036	0.074		Set Trigger
5	4.015	0.063	0.042	0.036	0.074		Set Trigger

Avg 4.01

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6616351.___0
FILE DATE AND TIME: 02/28/2007 23:04

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.029
The Average Y Centroid of the Five Target Set:	-0.024
The Average Point of Impact of the Five Target Set:	0.038
The Average Mean Radius of the Five Target Set:	0.650
The Distance from POA to Centroid Target #1:	0.327
The Distance from Centroid Target #2 to Centroid Target #1:	0.688
The Distance from Centroid Target #3 to Centroid Target #1:	0.432
The Distance from Centroid Target #4 to Centroid Target #1:	0.389
The Distance from Centroid Target #5 to Centroid Target #1:	0.350

SERIAL NUMBER: G6616351. __0

TARGET NUMBER: 1

FILE DATE: 02/28/2007

FILE TIME: 23:04

POINT#	X	Y
1:	-1.254	0.410
2:	-0.123	0.803
3:	-0.103	0.578
4:	0.316	0.700
5:	0.090	0.114
6:	0.462	-0.146
7:	0.147	-0.496
8:	-0.014	-0.361
9:	-0.403	-0.779
10:	0.501	2.426

X CENTROID: -0.038

Y CENTROID: 0.325

POA TO CENTROID: 0.327

HORZ SPREAD: 1.755

VERT SPREAD: 3.205

GROUP SPREAD: 3.330

MIN RADIUS: 0.247


MAX RADIUS: 2.169

MEAN RADIUS: 0.827

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

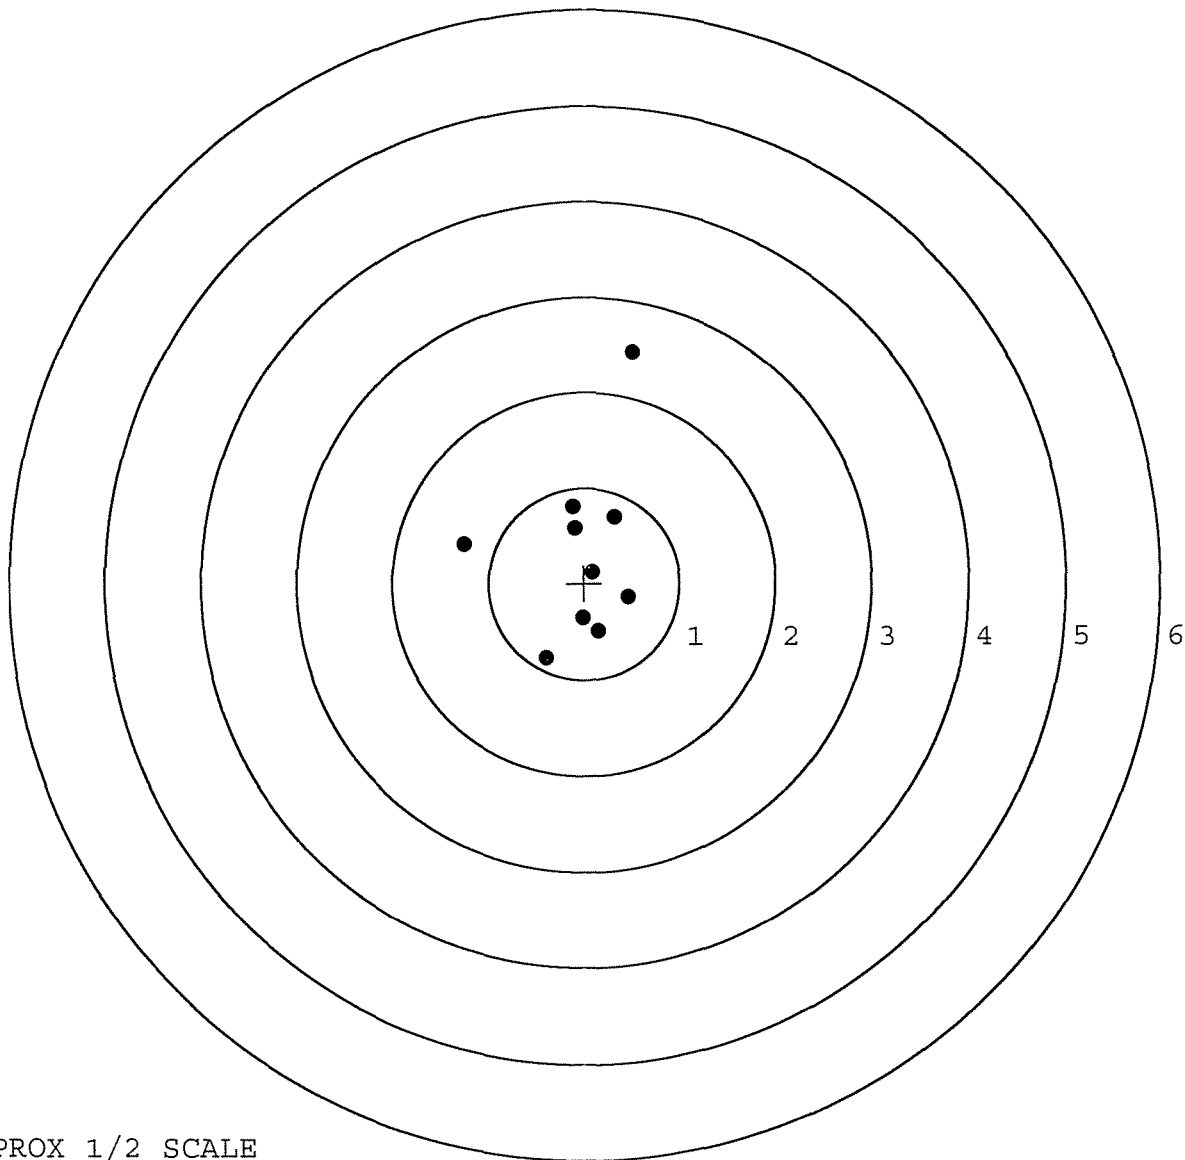


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6616351. __0
 TARGET NUMBER: 2
 FILE DATE: 02/28/2007
 FILE TIME: 23:04

POINT#	X	Y
1:	0.794	-0.677
2:	1.026	-1.741
3:	-0.501	-1.736
4:	0.354	0.077
5:	0.222	-0.172
6:	0.140	-0.050
7:	-0.004	-0.068
8:	-0.344	0.000
9:	0.035	0.400
10:	-0.498	0.523

X CENTROID: 0.122
 Y CENTROID: -0.344
 POA TO CENTROID: 0.366
 HORZ SPREAD: 1.527
 VERT SPREAD: 2.264
 GROUP SPREAD: 2.729
 MIN RADIUS: 0.199
 MAX RADIUS: 1.663
 MEAN RADIUS: 0.761
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 8

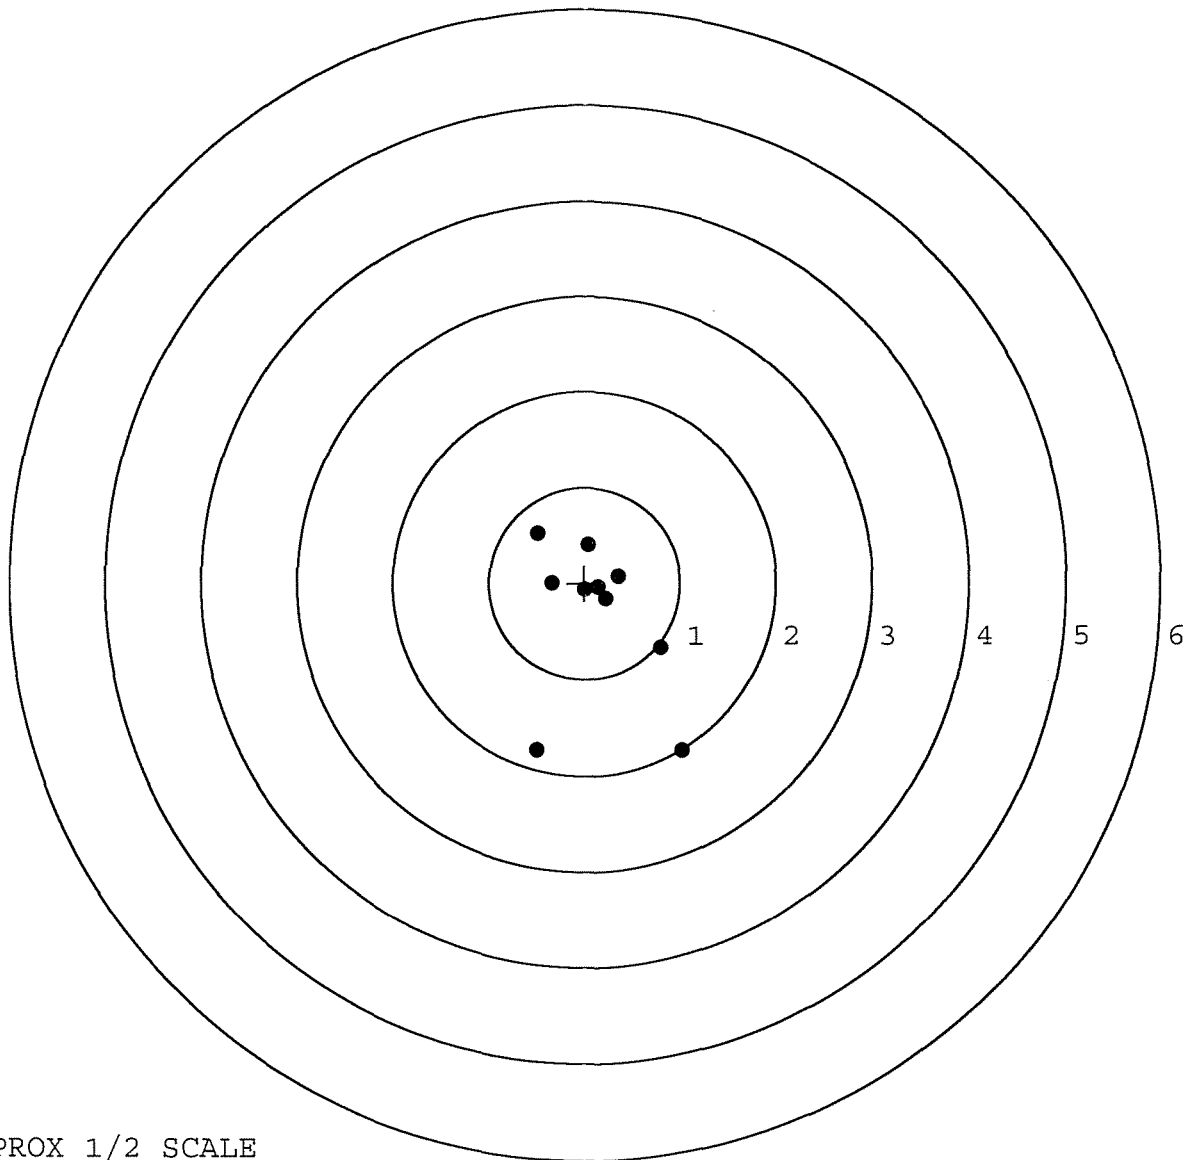

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6616351. __ 0

TARGET NUMBER: 3

FILE DATE: 02/28/2007

FILE TIME: 23:04

POINT#	X	Y
1:	0.130	0.714
2:	0.598	0.494
3:	0.921	-0.264
4:	1.105	-0.266
5:	0.226	-0.053
6:	0.072	-0.399
7:	-0.073	-0.335
8:	-0.151	0.265
9:	-0.253	-0.250
10:	-0.395	-0.135

X CENTROID: 0.218

Y CENTROID: -0.023

POA TO CENTROID: 0.219

HORZ SPREAD: 1.500

VERT SPREAD: 1.113

GROUP SPREAD: 1.506

MIN RADIUS: 0.031


MAX RADIUS: 0.920

MEAN RADIUS: 0.552

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

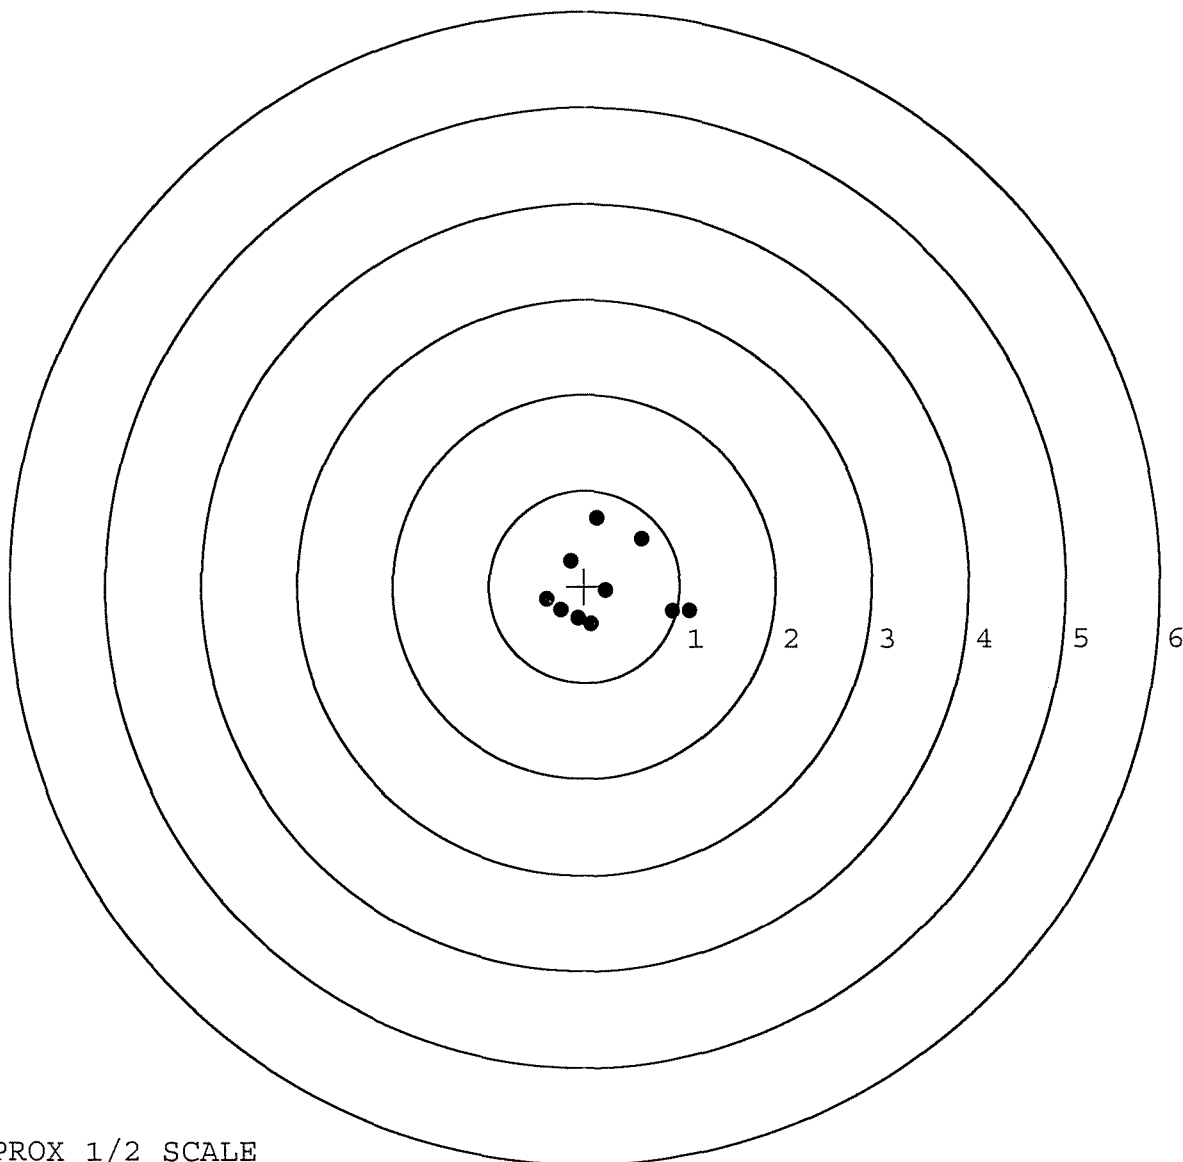

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6616351. __0

TARGET NUMBER: 4

FILE DATE: 02/28/2007

FILE TIME: 23:04

POINT#	X	Y
1:	-1.142	-0.194
2:	-0.215	0.465
3:	0.083	0.262
4:	0.446	0.186
5:	0.437	-0.190
6:	0.161	-0.152
7:	-0.171	-0.428
8:	-0.295	-0.657
9:	-0.297	-0.061
10:	-0.321	0.239

X CENTROID: -0.131

Y CENTROID: -0.053

POA TO CENTROID: 0.142

HORZ SPREAD: 1.588

VERT SPREAD: 1.122

GROUP SPREAD: 1.633

MIN RADIUS: 0.166


MAX RADIUS: 1.020

MEAN RADIUS: 0.496

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

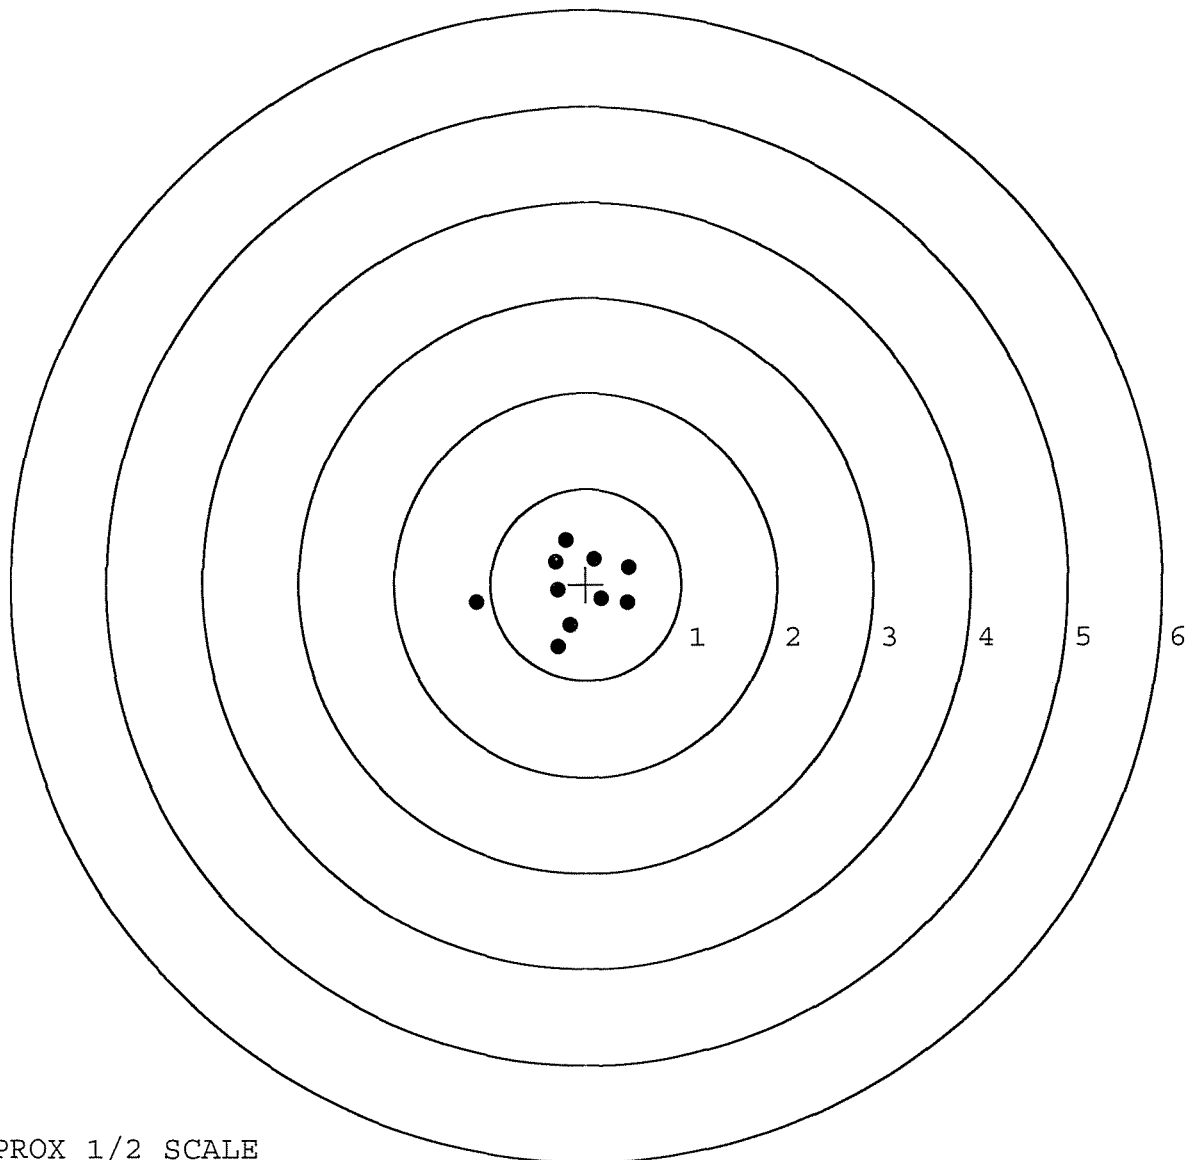

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6616351. __0

TARGET NUMBER: 5

FILE DATE: 02/28/2007

FILE TIME: 23:04

POINT#	X	Y
1:	0.261	-1.255
2:	-0.278	-0.456
3:	0.070	-0.222
4:	0.352	-0.114
5:	0.494	-0.325
6:	0.429	0.149
7:	-0.202	0.465
8:	-0.377	0.075
9:	-0.327	0.676
10:	-0.682	0.755

X CENTROID: -0.026

Y CENTROID: -0.025

POA TO CENTROID: 0.036

HORZ SPREAD: 1.176

VERT SPREAD: 2.010

GROUP SPREAD: 2.220

MIN RADIUS: 0.219


MAX RADIUS: 1.263

MEAN RADIUS: 0.612

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

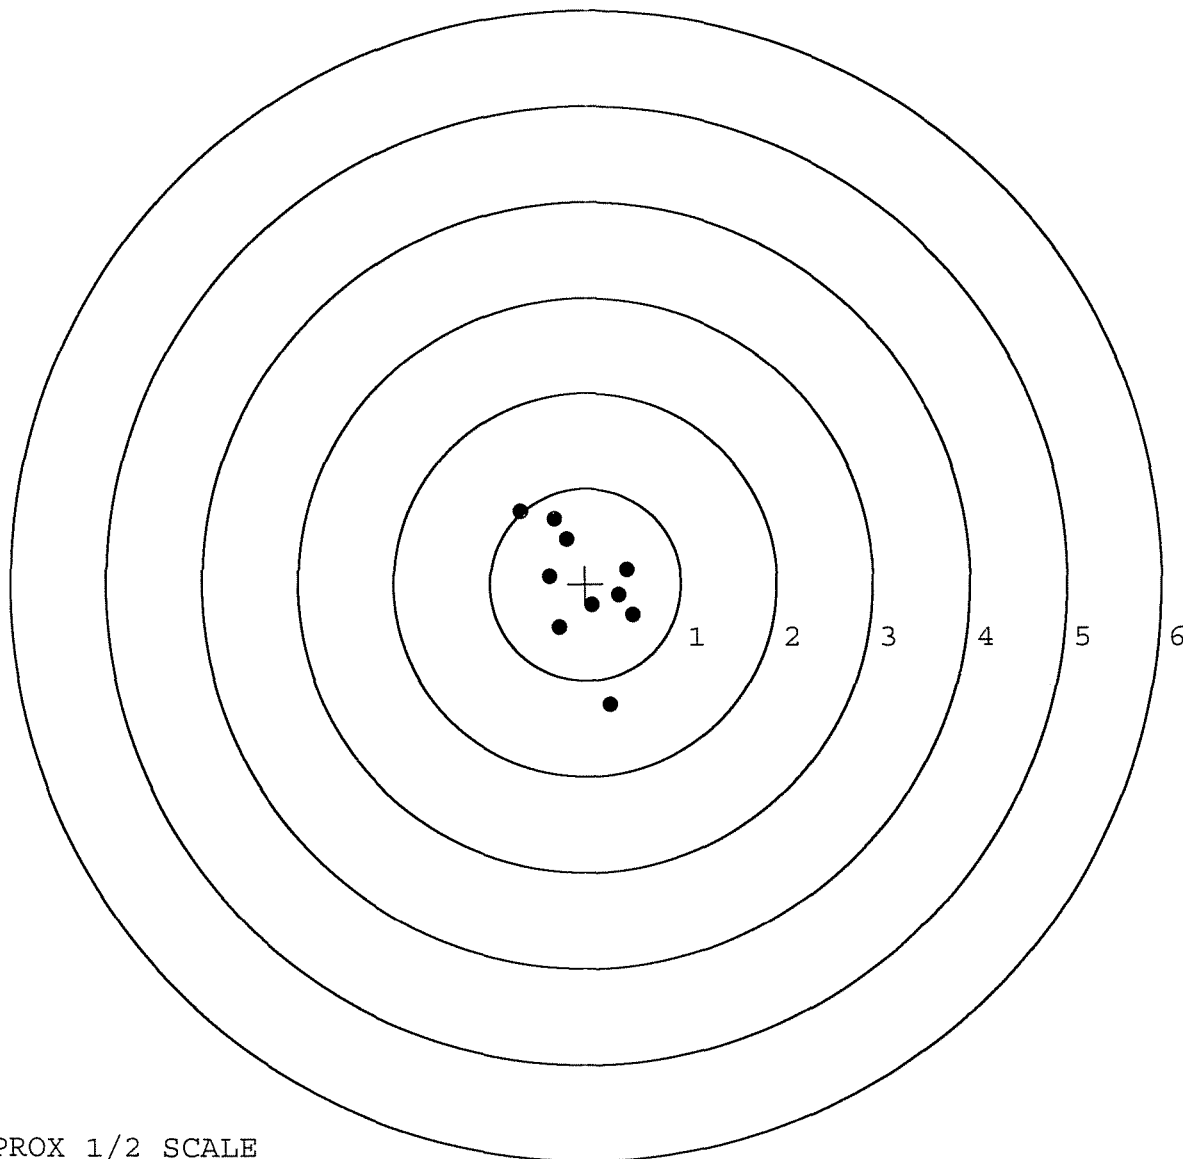

TARGET APPROX 1/2 SCALE