


G-6391075

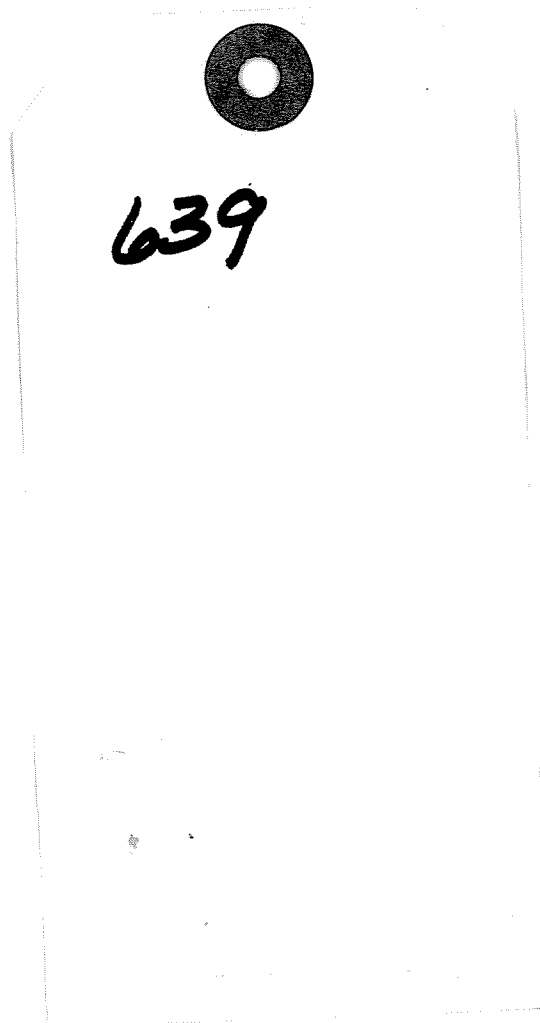

**STOCK****R #****DATE****SER. #****GRADE****ACCT. #****RE-FINISH****FIT STOCK DIM****FIT BUTT PLATE****RE-FIT STOCK****FIT RECOIL PAD**

9/27/2004 10:33:18 AM

Crib

92

Original

25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)



.MA25716

Shop Order: SWS631059



.ABSWS631059

Start Date: 8/9/2004

Finish Date: 10/26/2004

0540

Flat Black Powder Coat, Barrel and

01PC001



0003451403

0560

Reassemble Action.

89SWS1



0003451404

0690

Pack Rifle

89SWS1



0003451397

0700

Stencil SWS Container

89SWS1



.OP0700

VER
Inst
encl
sale
firea

Remington®

SE
G
DR
2


M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

BOLT ACTION CENTERFIRE RIFLE

24" BARREL 7.62 NATO

DD

Made in Illion, NY Reg. U.S. Pat & tm. Off. Marca Registrada Marque Deposee.



5716 G6391075

ORDER

25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTI

UPC



0 47700 25716 7

ORDER

25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTI

UPC



0 47700 25716 7

SERIAL NO.



G6391075

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



owner registration sticker




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

G6391075

UPC



7/22/2004 3:21:04 PM

ctib

62

Original

25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)



.MA25716

Shop Order: SWS631055



.ABSWS631055

Start Date: 7/23/2004

Finish Date: 9/23/2004

0630

Flat Black Powder Coat, Barrel and

01PC001



0003338116

0640

Reassemble Action.

89SWS1



0003338117

0685

Attach Front and Rear Sight Assemblies

89SWS1



0003338122

0710

Pack Rifle & Stencil SWS Container

89SWS1



.OP0710

INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # 66391075

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		6-15-04	RTL
600	PROOF		6-15-04	RTL
607	CHECK HEADSPACE	MAGNA - FLUX INSPECTED	6-15-04	RTL
610	DIS-ASSEMBLE GUN	6-15-04	6-15-04	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <u>BS</u>		
615	ROLLMARK CALIBER		6-16-04	SB
617	DRILL AND TAP SIGHT HOLES		6-15-04	RTL
620	APPLY COATINGS (BARREL ACTION)		6/28	HP
	(BOLT)		6/28	HP
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		7-6-04	RW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		7-6-04	RW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		7-6-04	RW
	D) OIL FIRING PIN ASSEMBLY		7-6-04	RW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		9-21-04	TRW

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>7.0</u> <u>7.4</u> <u>8.2</u>	8/13/04	DA
CONT.	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.2</u> <u>3.2</u> <u>3.2</u>	8/13/04	DA
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>1025</u> <u>1023</u> <u>.024</u>	8/13/04	DA
	J) ASSEMBLE STOCK		7-7-04	TRW
	K) ASSEMBLE SWIVEL STUDS		9-10-04	RR
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		8-30-04	RR
	M) IRON SIGHT ALIGNMENT		8-30-04	RR
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		8-30-04	RR
640	GALLERY TEST AND TARGET	PASS FAIL	7-7-04	TRW
	MALFUNCTION	CORRECTION	7-7-04	TRW
	MALFUNCTION	CORRECTION	7-7-04	TRW
	MALFUNCTION	CORRECTION	7-7-04	TRW
	MALFUNCTION	CORRECTION	7-7-04	TRW
645	INSPECT FOR LIVE AMMO		7-7-04	TRW
655	FINAL INSPECTION A) HEADSPACE		9-10-04	RR
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.35</u> <u>2.39</u> <u>2.35</u> <u>2.69</u> <u>2.37</u>	8/13/04	DA
	C) FUNCTION		9-10-04	RR
660	PACK		9/14/04	DA

INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

DATE 7-7-04

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.60	2.62		2.67	
PULL #2	2.55	2.33		2.79	
PULL #3	2.77	2.51		2.60	
PULL #4	2.72	2.44		2.54	
PULL #5	2.52	2.49		2.72	
TOTAL	13.16	12.39		13.32	
AVERAGE	2.63	2.47		2.66	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.49	3.24		
PULL #2	3.23	3.26		
PULL #3	3.19	3.20		
PULL #4	3.28	3.21		
PULL #5	3.31	3.27		
TOTAL	16.50	16.18		
AVERAGE	3.30	3.23		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.43	4.19		4.58
PULL #2	4.36	4.25		4.51
PULL #3	4.37	4.30		4.47
PULL #4	4.33	4.54		4.46
PULL #5	4.37	4.31		4.44
TOTAL	21.86	21.59		22.46
AVERAGE	4.37	4.31		4.49

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6391075.___0
FILE DATE AND TIME: 07/08/2004 10:05

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.065
The Average Y Centroid of the Five Target Set:	-0.089
The Average Point of Impact of the Five Target Set:	0.110
The Average Mean Radius of the Five Target Set:	1.004
The Distance from POA to Centroid Target #1:	0.334
The Distance from Centroid Target #2 to Centroid Target #1:	0.311
The Distance from Centroid Target #3 to Centroid Target #1:	0.206
The Distance from Centroid Target #4 to Centroid Target #1:	0.428
The Distance from Centroid Target #5 to Centroid Target #1:	0.417

SERIAL NUMBER: G6391075. __0

TARGET NUMBER: 1

FILE DATE: 07/08/2004

FILE TIME: 10:05

X CENTROID: -0.125

Y CENTROID: -0.310

POA TO CENTROID: 0.334

HORZ SPREAD: 2.411

VERT SPREAD: 2.541

GROUP SPREAD: 3.088

MIN RADIUS: 0.245

MAX RADIUS: 1.578


MEAN RADIUS: 0.904

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.227	-1.069
2:	0.961	-0.637
3:	-0.497	-1.681
4:	-0.515	-0.673
5:	-0.807	-0.397
6:	0.117	-0.275
7:	0.166	0.329
8:	-0.412	0.591
9:	-1.184	0.860
10:	-0.310	-0.146

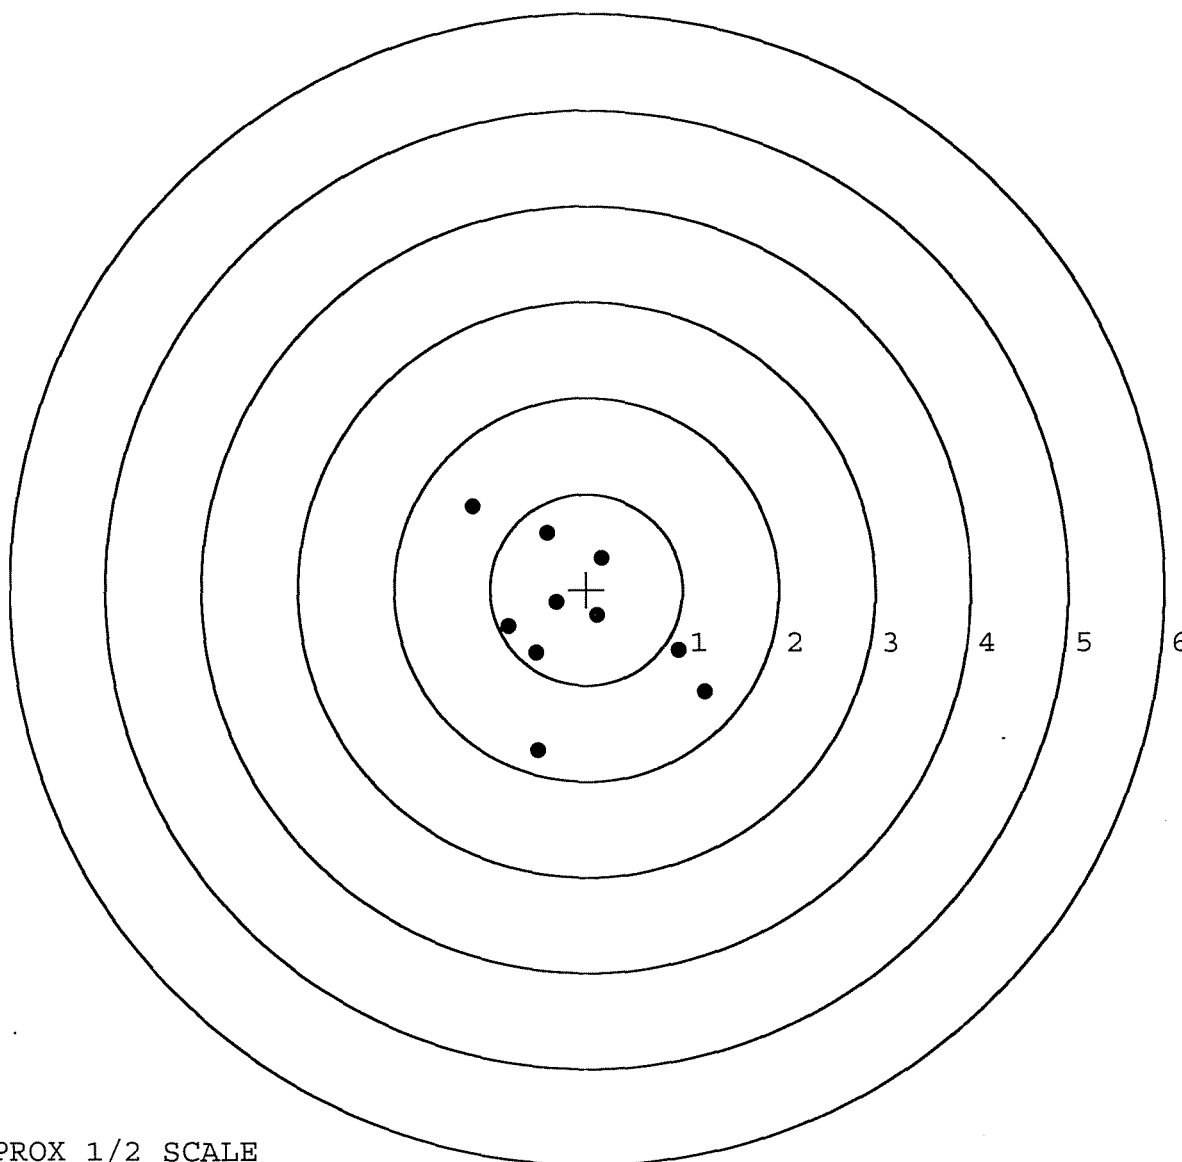

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6391075. __0

TARGET NUMBER: 2

FILE DATE: 07/08/2004

FILE TIME: 10:05

X CENTROID: -0.133

Y CENTROID: 0.001

POA TO CENTROID: 0.133

HORZ SPREAD: 1.685

VERT SPREAD: 3.361

GROUP SPREAD: 3.432

MIN RADIUS: 0.472

MAX RADIUS: 1.777


MEAN RADIUS: 1.211

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.759	-1.149
2:	0.154	-1.752
3:	-0.204	-1.328
4:	-0.662	-1.060
5:	0.397	0.245
6:	0.206	0.329
7:	-0.551	0.283
8:	-0.926	1.262
9:	-0.700	1.572
10:	0.193	1.609

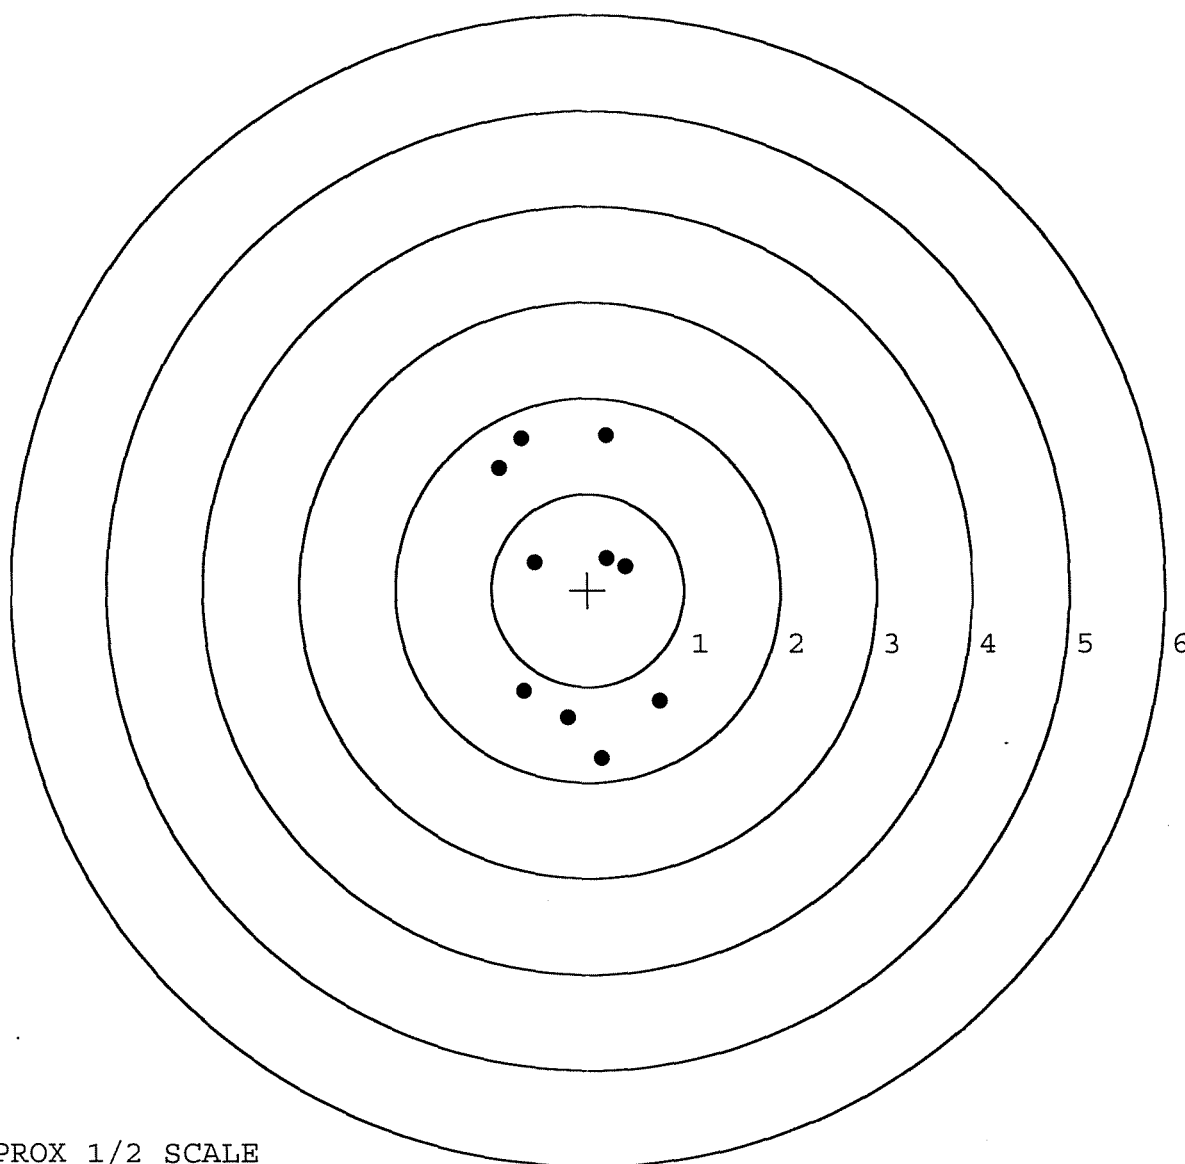

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6391075. __0

TARGET NUMBER: 3


FILE DATE: 07/08/2004

FILE TIME: 10:05

X CENTROID: 0.054
 Y CENTROID: -0.208
 POA TO CENTROID: 0.214
 HORZ SPREAD: 1.860
 VERT SPREAD: 2.247
 GROUP SPREAD: 2.758
 MIN RADIUS: 0.356
 MAX RADIUS: 1.527
 MEAN RADIUS: 0.881

POINT#	X	Y
1:	0.481	-1.513
2:	-0.052	-1.156
3:	-0.483	-1.406
4:	0.413	-0.106
5:	0.293	0.056
6:	0.675	0.300
7:	0.258	0.734
8:	-0.339	0.348
9:	-1.185	0.685
10:	0.474	-0.017

IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

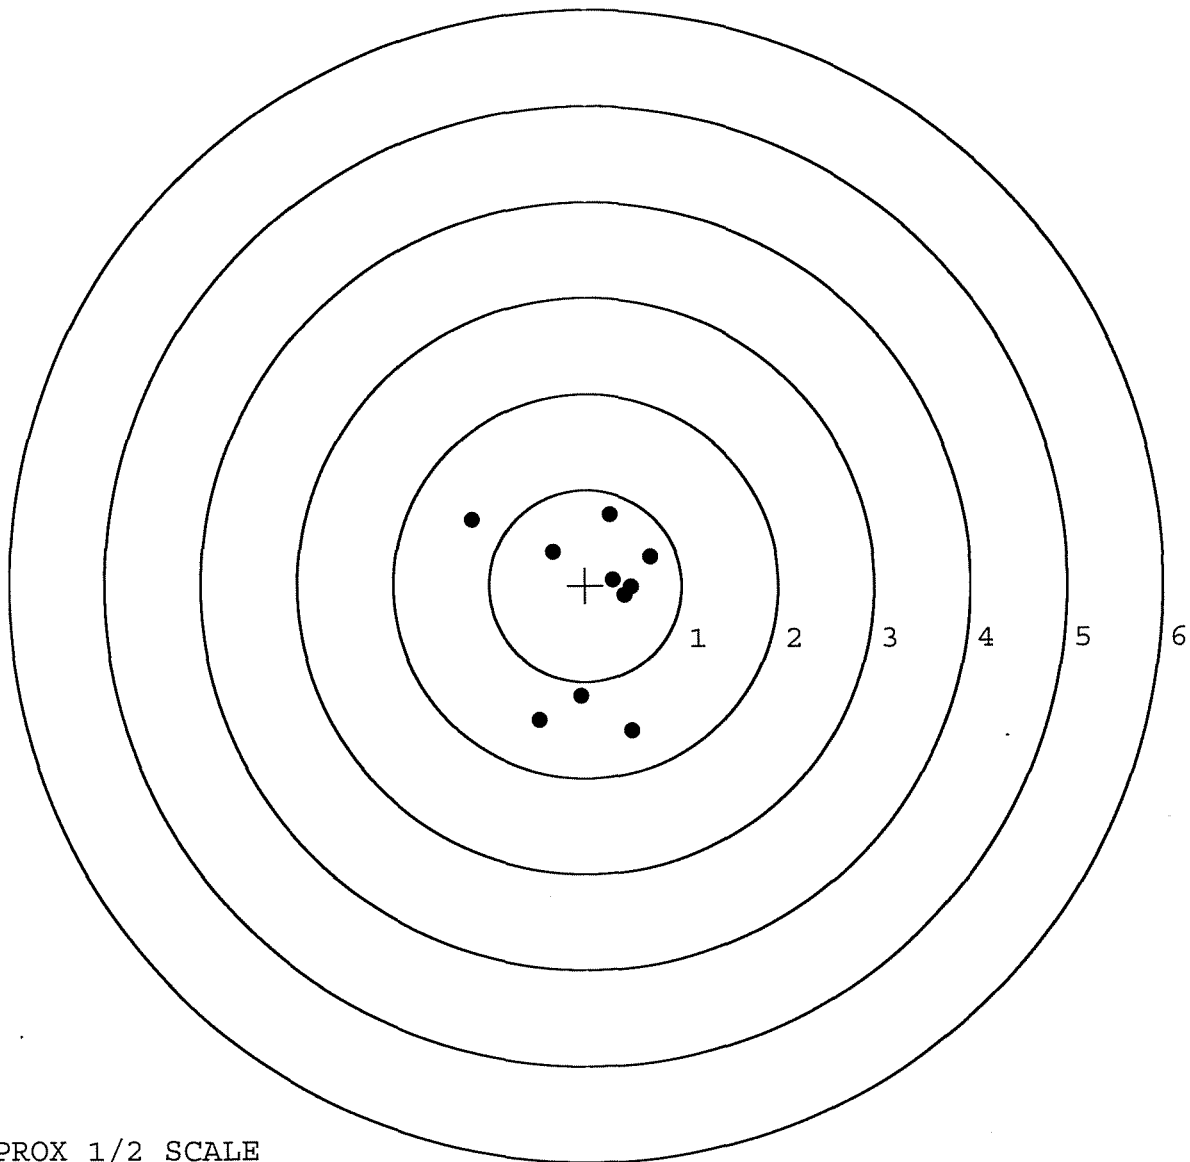

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6391075. __0

TARGET NUMBER: 4

FILE DATE: 07/08/2004

FILE TIME: 10:05

X CENTROID: -0.288

Y CENTROID: 0.086

POA TO CENTROID: 0.301

HORZ SPREAD: 1.651

VERT SPREAD: 3.707

GROUP SPREAD: 3.732

MIN RADIUS: 0.538

MAX RADIUS: 2.118


MEAN RADIUS: 1.212

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	-0.664	-1.504
2:	-0.947	-1.184
3:	0.068	-0.861
4:	0.546	-0.745
5:	0.234	-0.538
6:	0.158	0.386
7:	0.028	0.546
8:	-1.105	0.984
9:	-0.965	1.569
10:	-0.235	2.203

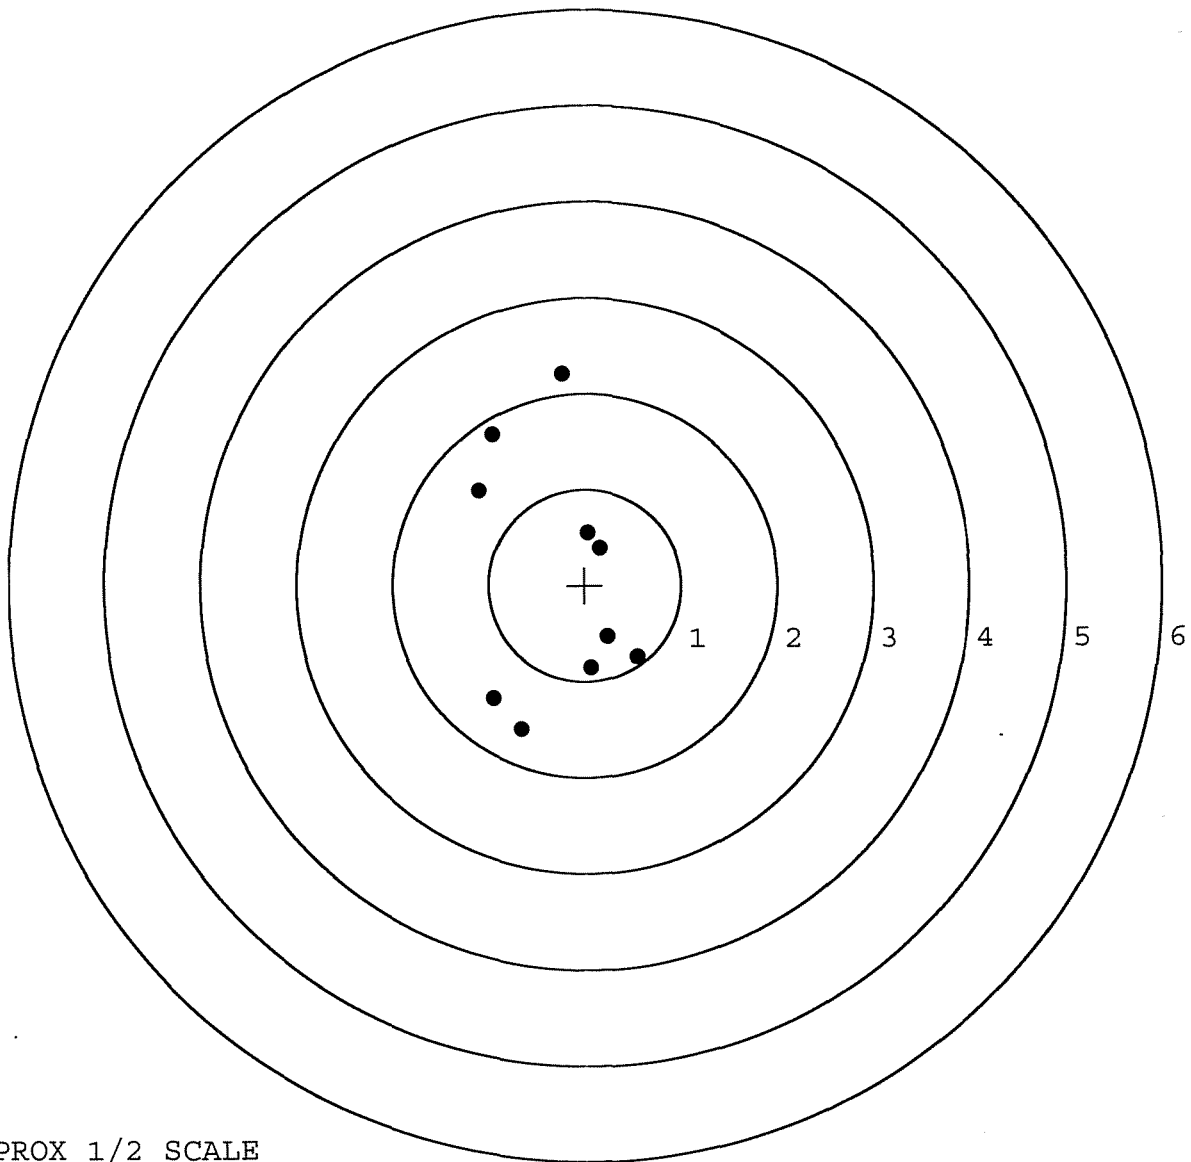


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6391075. __0
 TARGET NUMBER: 5
 FILE DATE: 07/08/2004
 FILE TIME: 10:05

X CENTROID: 0.167
 Y CENTROID: -0.013
 POA TO CENTROID: 0.168
 HORZ SPREAD: 2.463
 VERT SPREAD: 2.672
 GROUP SPREAD: 2.836
 MIN RADIUS: 0.099
 MAX RADIUS: 1.621
 MEAN RADIUS: 0.809
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.334	-1.495
2:	1.774	-0.229
3:	0.619	1.115
4:	-0.689	1.177
5:	-0.326	0.359
6:	-0.012	-0.012
7:	-0.327	-0.055
8:	0.131	-0.468
9:	0.089	-0.457
10:	0.081	-0.062

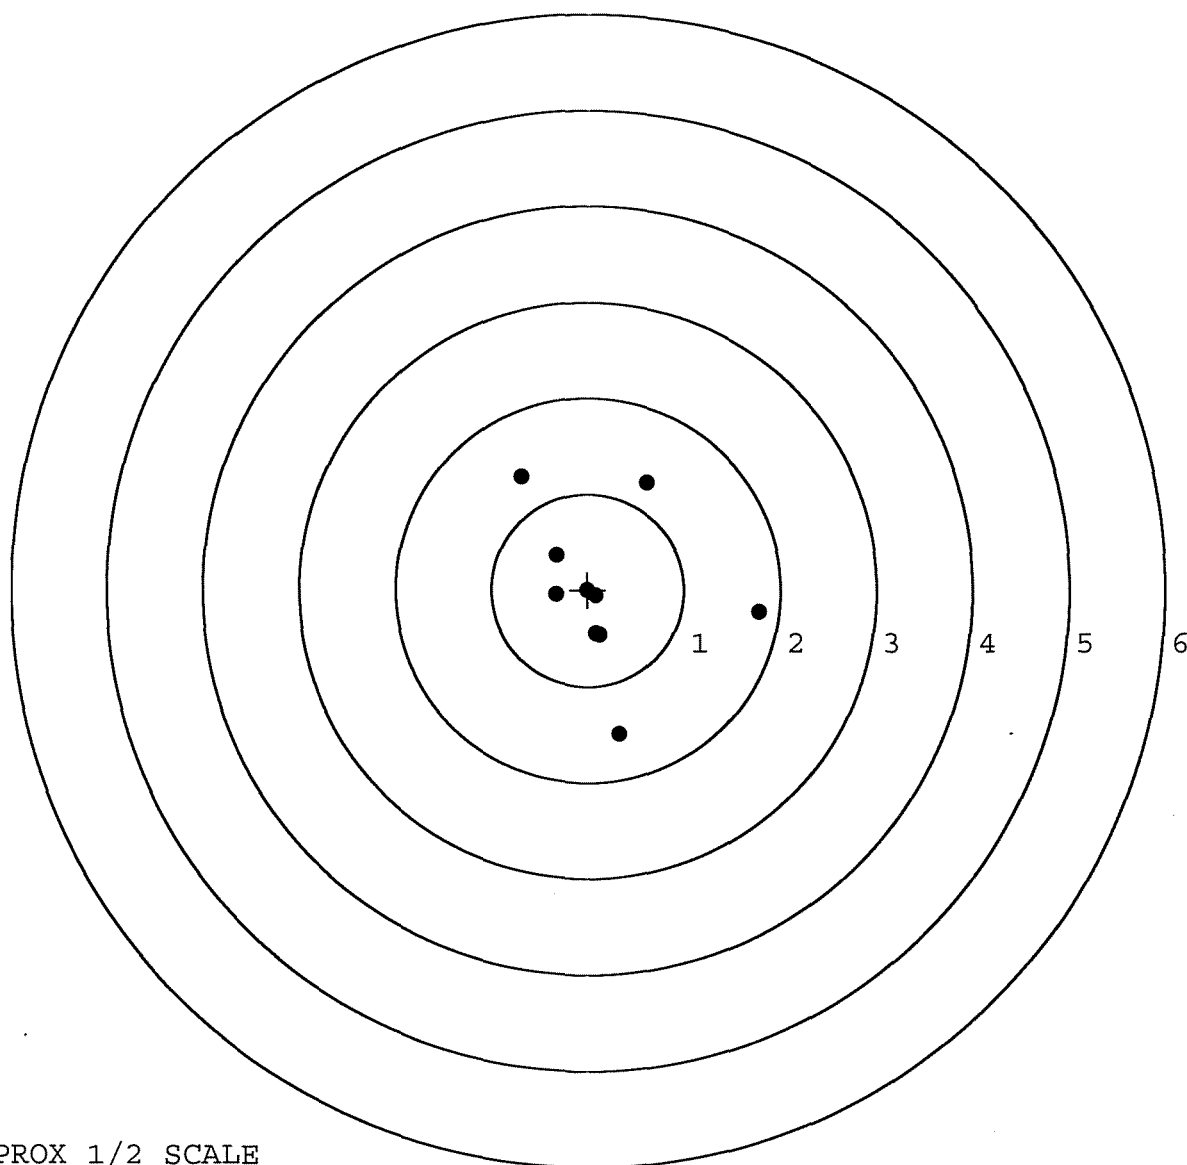

TARGET APPROX 1/2 SCALE