

**BARBER - M24 0152841**

G-6046 1548

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON**

**BARBER - M24 0152841** **M2400152880**

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)  
BOLT ACTION CENTERFIRE RIFLE  
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



owner registration sticker




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

G6461548

UPC




BARBER - M24 0152843

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

UPC



0 47700 25716 7

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

UPC



0 47700 25716 7

SERIAL NO.



G6461548

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER  
KINZER V. REMINGTON

BARBER - M24 0152843 0152882

## INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6461548

| OP #         | OPERATION NAME                                                                                                                         | READINGS          | DATE     | INITIAL      |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------|--------------|
| 420 &<br>430 | ASSEMBLE ACTION<br>ASSEMBLE TO STOCK                                                                                                   |                   | 11-1-05  | RTL          |
| 440          | PROOF                                                                                                                                  |                   | 11-1-05  | RTL          |
| 460          | CHECK HEADSPACE                                                                                                                        |                   | 11-1-05  | RTL          |
| 470          | DIS-ASSEMBLE ACTION                                                                                                                    |                   | 11-1-05  | RTL          |
| 480 &<br>490 | MAGNAFLUX BBL ACTION<br>MAGNAFLUX BOLT                                                                                                 | 2.50 <i>under</i> | 11/14/05 | <i>under</i> |
| 500          | ROLLMARK CALIBER                                                                                                                       |                   | 11-14-05 | CW           |
| 510          | DRILL AND TAP<br>SIGHT HOLES                                                                                                           |                   | 11/3/05  | BR           |
| 520          | GOFF BLAST BBL / REC                                                                                                                   |                   | 11/15/05 | LB           |
| 530 &<br>540 | APPLY COATINGS<br>(BARREL ACTION)                                                                                                      |                   |          |              |
|              | (BOLT)                                                                                                                                 |                   | 11/16/05 | ZB           |
| 560          | RE-ASSEMBLE ACTION<br>A) CLEAN INSIDE OF<br>BOLT ASSEMBLY                                                                              |                   | 11/22/05 | DA           |
|              | B) INSPECT REAR FIRING<br>PIN HOLE FOR CHAMFER<br>IN BOLT HEAD                                                                         |                   | 11/22/05 | DA           |
|              | C) INSPECT EJECTOR<br>HOLE FOR CHAMFER                                                                                                 |                   | 11/22/05 | DA           |
|              | D) OIL FIRING PIN ASSEMBLY                                                                                                             |                   | 11-28-05 | RTL          |
|              | E) ADJUST TRIGGER PULL<br>TO MIN. SETTING AND<br>STAKE <span style="border: 1px solid black; padding: 2px;">2.50 LBS +/- .5 LBS</span> |                   | 12-13-05 | BG           |
| REV-8405     |                                                                                                                                        |                   |          |              |

| OP # OPERATION NAME |                                                                        | READINGS        |             |              | DATE        | INITIAL     |          |      |
|---------------------|------------------------------------------------------------------------|-----------------|-------------|--------------|-------------|-------------|----------|------|
| 560                 | F) SAFETY ON FORCE <div>2 LBS MIN<br/>10 LBS MAX</div>                 | <u>5.0</u>      | <u>5.0</u>  | <u>5.0</u>   | 12-12-05    | TRW         |          |      |
| CONT.               |                                                                        |                 |             |              |             |             |          |      |
|                     | G) SAFETY OFF FORCE <div>2 LBS MIN</div>                               | <u>2.0</u>      | <u>2.5</u>  | <u>2.5</u>   | 12-12-05    | TRW         |          |      |
|                     | H) TRIGGER PULL TEST<br>AND RETAINABILITY                              |                 |             |              |             |             |          |      |
|                     | I) FIRING PIN INDENT <div>.020 MIN</div>                               | <u>.025</u>     | <u>.024</u> | <u>.0235</u> | 12-12-05    | TRW         |          |      |
|                     | J) ASSEMBLE STOCK                                                      |                 |             |              | 11-28-05    | RTL         |          |      |
|                     | K) ASSEMBLE SWIVEL<br>STUDS                                            |                 |             |              | 12-13-05    | BG          |          |      |
|                     | L) ATTACH FRONT AND<br>REAR SIGHT ASSY'S                               |                 |             |              | 11-30-05    | BG          |          |      |
|                     | M) IRON SIGHT<br>ALIGNMENT                                             |                 |             |              | 11-30-05    | BG          |          |      |
|                     | N) DETACH FRONT AND<br>REAR SIGHTS AND PLACE<br>IN NUMBERED CONTAINER  |                 |             |              | 11-30-05    | BG          |          |      |
| 640 &<br>650        | FUNCTION TEST AND<br>TARGET                                            | <div>PASS</div> | FAIL        |              | 12/2/05     | MFD         |          |      |
|                     |                                                                        | <div>PASS</div> | FAIL        |              |             |             |          |      |
|                     | MALFUNCTION                                                            | CORRECTION      |             |              |             |             |          |      |
|                     | MALFUNCTION                                                            | CORRECTION      |             |              |             |             |          |      |
|                     | MALFUNCTION                                                            | CORRECTION      |             |              |             |             |          |      |
|                     | MALFUNCTION                                                            | CORRECTION      |             |              |             |             |          |      |
| 660                 | INSPECT FOR LIVE AMMO                                                  |                 |             |              | 12/2/05     | MTM         |          |      |
| 670                 | FINAL INSPECTION<br>A) HEADSPACE                                       |                 |             |              | 12-13-05    | BG          |          |      |
|                     | B) TRIGGER PULL <div>+/- .5 LBS<br/>MIN 2.50 LBS<br/>MAX 4.0 LBS</div> | <u>2.74</u>     | <u>2.65</u> | <u>2.68</u>  | <u>2.75</u> | <u>2.70</u> | 12/12/05 | R.R. |
|                     | C) FUNCTION                                                            |                 |             |              | 12-13-05    | BG          |          |      |
| 690                 | PACK                                                                   |                 |             |              |             |             |          |      |

**BARBER - M24 0152846**

AVERAGE PULL FORCE BETWEEN  
INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. \_\_\_\_\_

DATE 11-28-05

TESTER R.P.

|         | 2.50 LBS<br>INITIAL | 2.50 LBS AFTER<br>50 CYCLES | FINAL TEST & TO RESET<br>2.50 LBS |       | COMMENTS |
|---------|---------------------|-----------------------------|-----------------------------------|-------|----------|
| PULL #1 | 2.55                | 2.55                        |                                   | 2.59  |          |
| PULL #2 | 2.42                | 2.57                        |                                   | 2.51  |          |
| PULL #3 | 2.63                | 2.53                        |                                   | 2.54  |          |
| PULL #4 | 2.37                | 2.51                        |                                   | 2.61  |          |
| PULL #5 | 2.52                | 2.58                        |                                   | 2.55  |          |
| TOTAL   | 12.49               | 12.74                       |                                   | 12.80 |          |
| AVERAGE | 2.49                | 2.54                        |                                   | 2.56  |          |

|         | 3.00 LBS<br>INITIAL | 3.00 LBS AFTER<br>20 CYCLES |  | COMMENTS |
|---------|---------------------|-----------------------------|--|----------|
| PULL #1 | 3.00                | 3.08                        |  |          |
| PULL #2 | 3.17                | 3.07                        |  |          |
| PULL #3 | 3.15                | 3.15                        |  |          |
| PULL #4 | 2.92                | 3.06                        |  |          |
| PULL #5 | 3.12                | 3.09                        |  |          |
| TOTAL   | 15.36               | 15.45                       |  |          |
| AVERAGE | 3.07                | 3.09                        |  |          |

|         | 4.00 LBS<br>INITIAL | 4.00 LBS AFTER<br>20 CYCLES | MAX SETTING GREATER<br>THAN 4 LBS | RESET TO 4 LBS FOR<br>TARGET & ACCURACY |
|---------|---------------------|-----------------------------|-----------------------------------|-----------------------------------------|
| PULL #1 | 4.16                | 4.02                        |                                   | 4.00                                    |
| PULL #2 | 4.18                | 4.08                        |                                   | 4.09                                    |
| PULL #3 | 4.15                | 3.85                        |                                   | 4.05                                    |
| PULL #4 | 4.11                | 3.87                        |                                   | 4.00                                    |
| PULL #5 | 4.05                | 4.05                        |                                   | 4.08                                    |
| TOTAL   | 20.65               | 19.87                       |                                   | 20.22                                   |
| AVERAGE | 4.13                | 3.97                        |                                   | 4.04                                    |

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6461548.\_\_\_0  
FILE DATE AND TIME: 12/02/2005 22:36

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

|                                                             |        |
|-------------------------------------------------------------|--------|
| The Average X Centroid of the Five Target Set:              | 0.015  |
| The Average Y Centroid of the Five Target Set:              | -0.061 |
| The Average Point of Impact of the Five Target Set:         | 0.063  |
| The Average Mean Radius of the Five Target Set:             | 0.711  |
| The Distance from POA to Centroid Target #1:                | 0.283  |
| The Distance from Centroid Target #2 to Centroid Target #1: | 0.242  |
| The Distance from Centroid Target #3 to Centroid Target #1: | 0.197  |
| The Distance from Centroid Target #4 to Centroid Target #1: | 0.387  |
| The Distance from Centroid Target #5 to Centroid Target #1: | 0.385  |


**BARBER - M24 0152848**

SERIAL NUMBER: G6461548. \_\_0  
TARGET NUMBER: 1  
FILE DATE: 12/02/2005  
FILE TIME: 22:36

X CENTROID: -0.091  
Y CENTROID: -0.268  
POA TO CENTROID: 0.283  
HORZ SPREAD: 2.400  
VERT SPREAD: 2.703  
GROUP SPREAD: 2.962  
MIN RADIUS: 0.347  
MAX RADIUS: 1.844  
MEAN RADIUS: 0.991

# IN 1 IN DIAMETER: 1  
# IN 2 IN DIAMETER: 5  
# in 3 IN DIAMETER: 9

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.218  | -0.426 |
| 2:     | 0.493  | -0.202 |
| 3:     | 0.400  | 0.124  |
| 4:     | 1.024  | -0.582 |
| 5:     | -0.027 | 0.990  |
| 6:     | -0.221 | 0.566  |
| 7:     | -0.452 | 0.084  |
| 8:     | -1.376 | 0.099  |
| 9:     | 0.264  | -1.623 |
| 10:    | -1.238 | -1.713 |

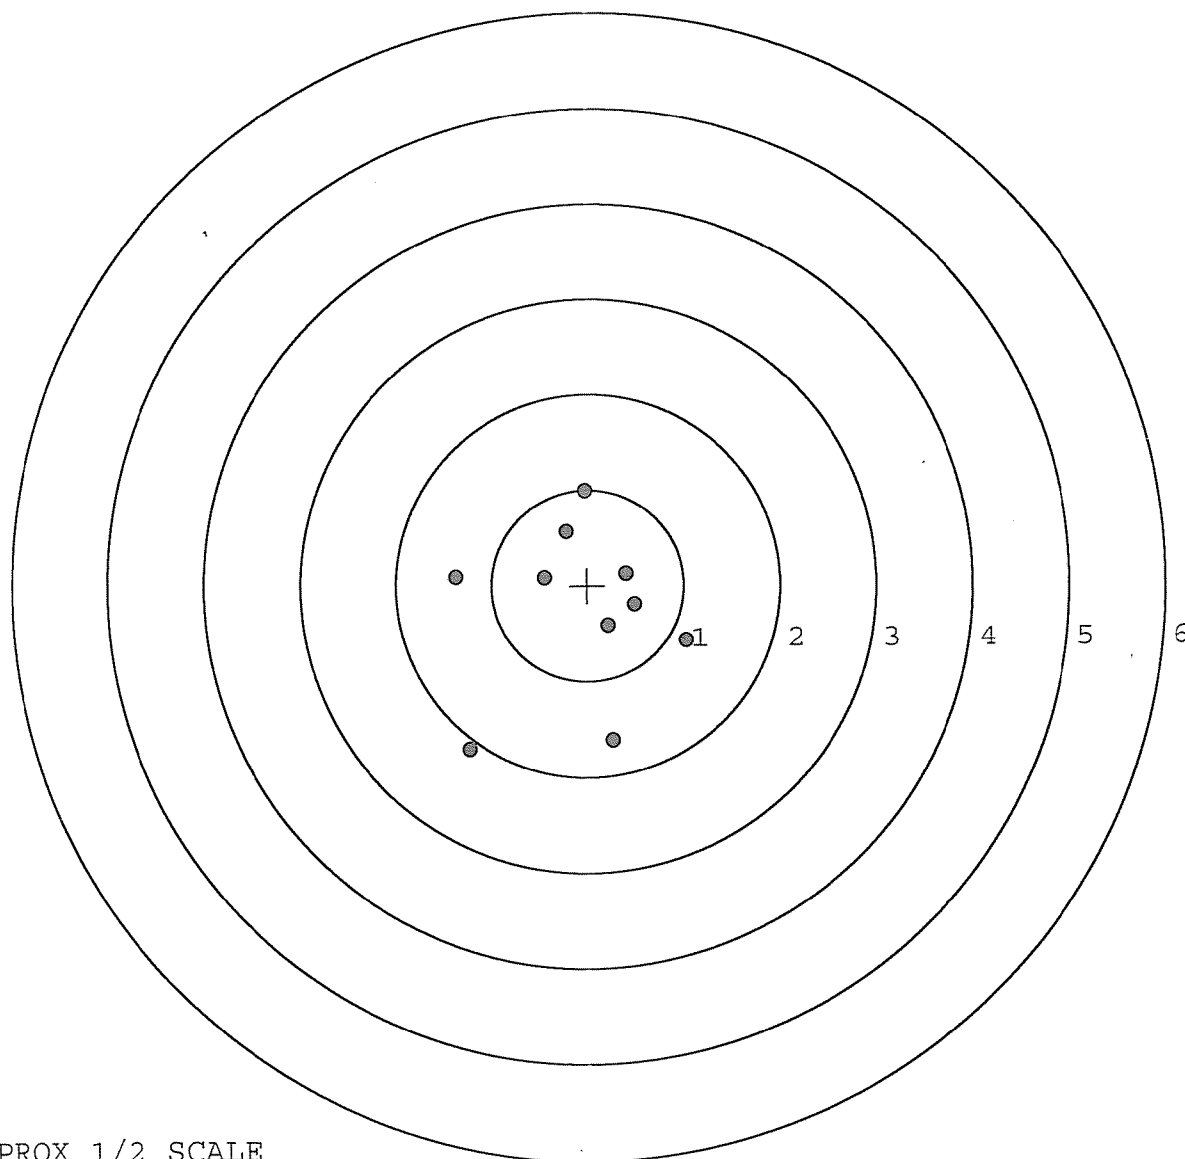


TARGET APPROX 1/2 SCALE

**BARBER - M24 0152849**

SERIAL NUMBER: G6461548. \_\_0  
TARGET NUMBER: 2  
FILE DATE: 12/02/2005  
FILE TIME: 22:36

X CENTROID: -0.031  
Y CENTROID: -0.034  
POA TO CENTROID: 0.046  
HORZ SPREAD: 0.965  
VERT SPREAD: 1.510  
GROUP SPREAD: 1.514  
MIN RADIUS: 0.272  
MAX RADIUS: 0.816  
MEAN RADIUS: 0.512  
# IN 1 IN DIAMETER: 5  
# IN 2 IN DIAMETER: 10  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.539  | 0.109  |
| 2:     | 0.234  | 0.259  |
| 3:     | -0.078 | 0.297  |
| 4:     | 0.057  | 0.534  |
| 5:     | -0.205 | 0.662  |
| 6:     | -0.426 | -0.121 |
| 7:     | -0.369 | -0.328 |
| 8:     | -0.036 | -0.306 |
| 9:     | 0.061  | -0.599 |
| 10:    | -0.090 | -0.848 |

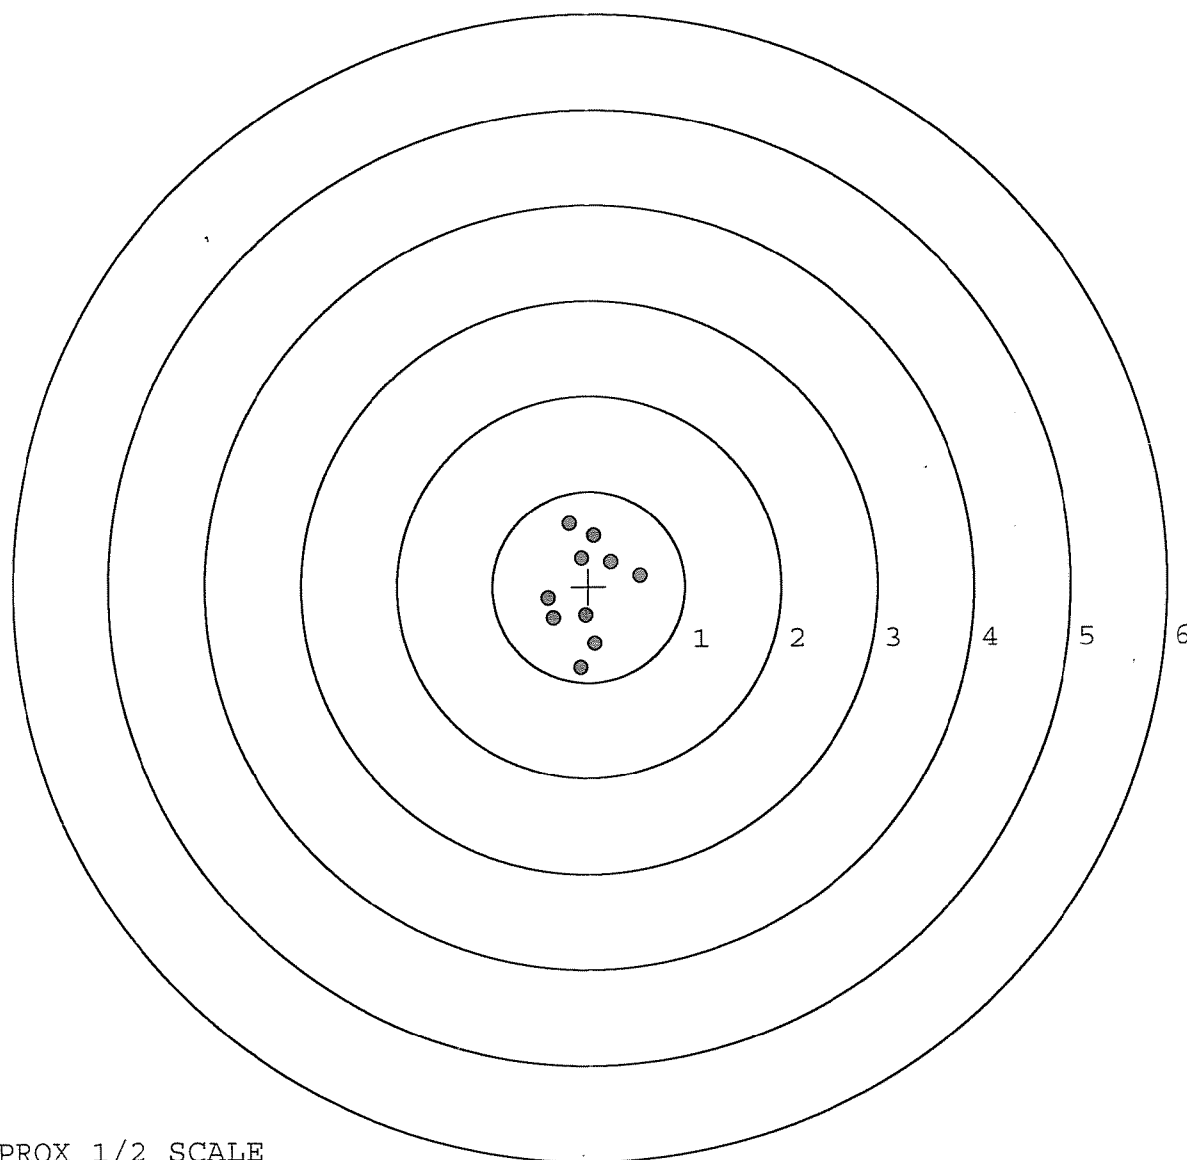


TARGET APPROX 1/2 SCALE

**BARBER - M24 0152850**

SERIAL NUMBER: G6461548. \_\_0  
TARGET NUMBER: 3  
FILE DATE: 12/02/2005  
FILE TIME: 22:36

X CENTROID: -0.023  
Y CENTROID: -0.084  
POA TO CENTROID: 0.087  
HORZ SPREAD: 1.566  
VERT SPREAD: 1.367  
GROUP SPREAD: 1.910  
MIN RADIUS: 0.187  
MAX RADIUS: 1.233  
MEAN RADIUS: 0.675  
# IN 1 IN DIAMETER: 2  
# IN 2 IN DIAMETER: 9  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.503  | 0.572  |
| 2:     | -0.843 | 0.838  |
| 3:     | -0.397 | 0.008  |
| 4:     | -0.718 | -0.391 |
| 5:     | -0.894 | -0.529 |
| 6:     | 0.039  | -0.260 |
| 7:     | 0.385  | -0.398 |
| 8:     | 0.672  | -0.325 |
| 9:     | 0.514  | -0.044 |
| 10:    | 0.504  | -0.307 |

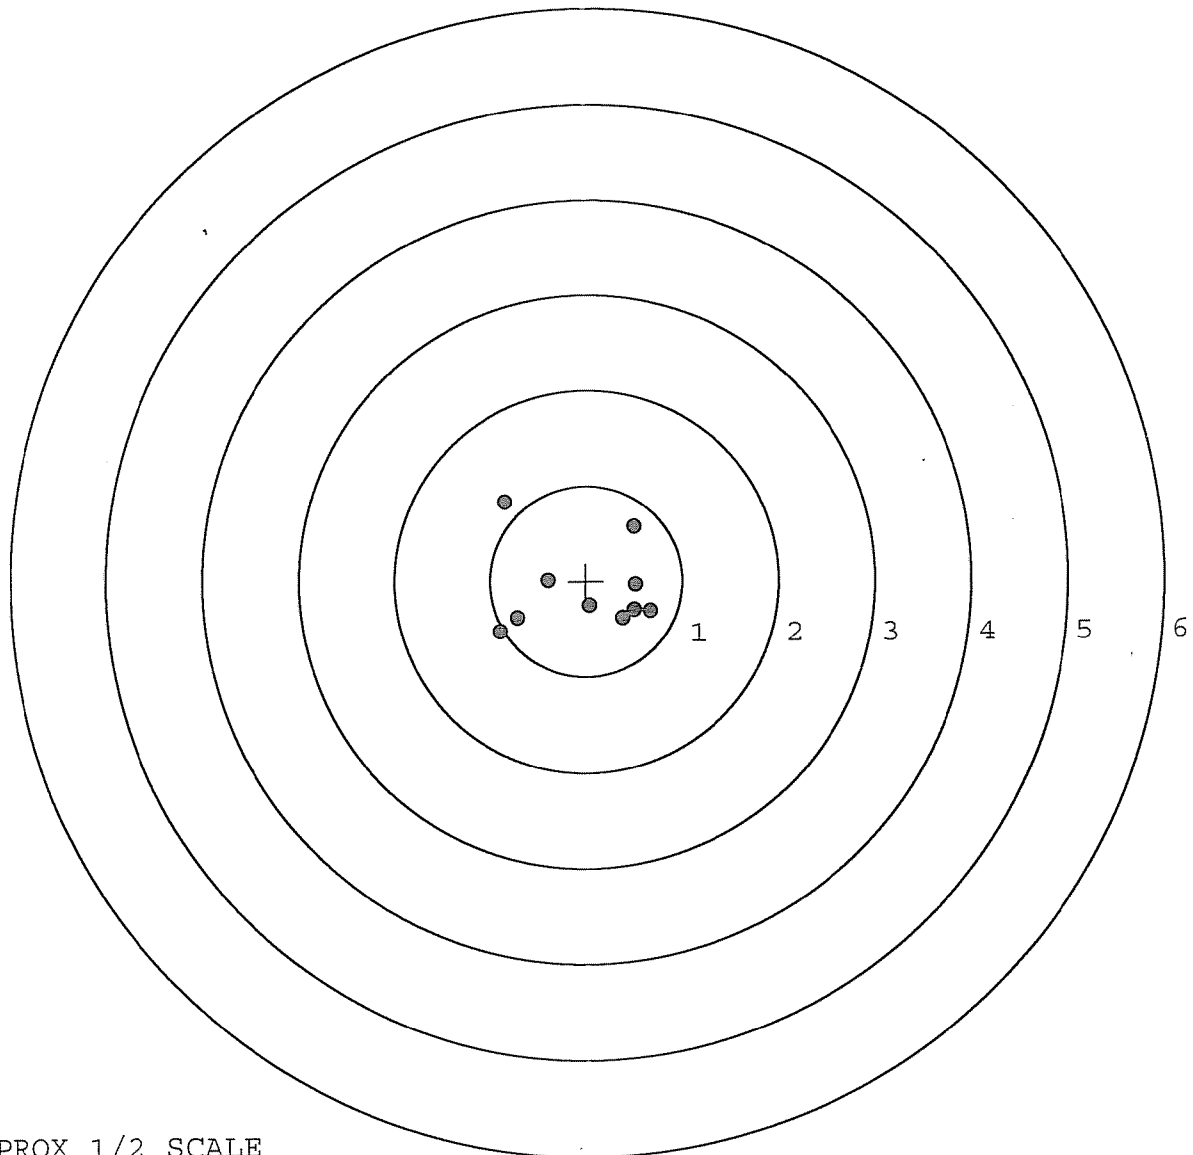

TARGET APPROX 1/2 SCALE


**BARBER - M24 0152851**

SERIAL NUMBER: G6461548. 0  
TARGET NUMBER: 4  
FILE DATE: 12/02/2005  
FILE TIME: 22:36

X CENTROID: 0.019  
Y CENTROID: 0.102  
POA TO CENTROID: 0.104  
HORZ SPREAD: 1.508  
VERT SPREAD: 1.594  
GROUP SPREAD: 1.774  
MIN RADIUS: 0.192  
MAX RADIUS: 1.003  
MEAN RADIUS: 0.693

# IN 1 IN DIAMETER: 1  
# IN 2 IN DIAMETER: 9  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.212  | -0.435 |
| 2:     | 0.505  | -0.599 |
| 3:     | 0.590  | -0.161 |
| 4:     | -0.186 | -0.484 |
| 5:     | -0.164 | 0.161  |
| 6:     | -0.918 | 0.460  |
| 7:     | -0.534 | 0.616  |
| 8:     | 0.046  | 0.872  |
| 9:     | 0.315  | 0.995  |
| 10:    | 0.325  | -0.404 |

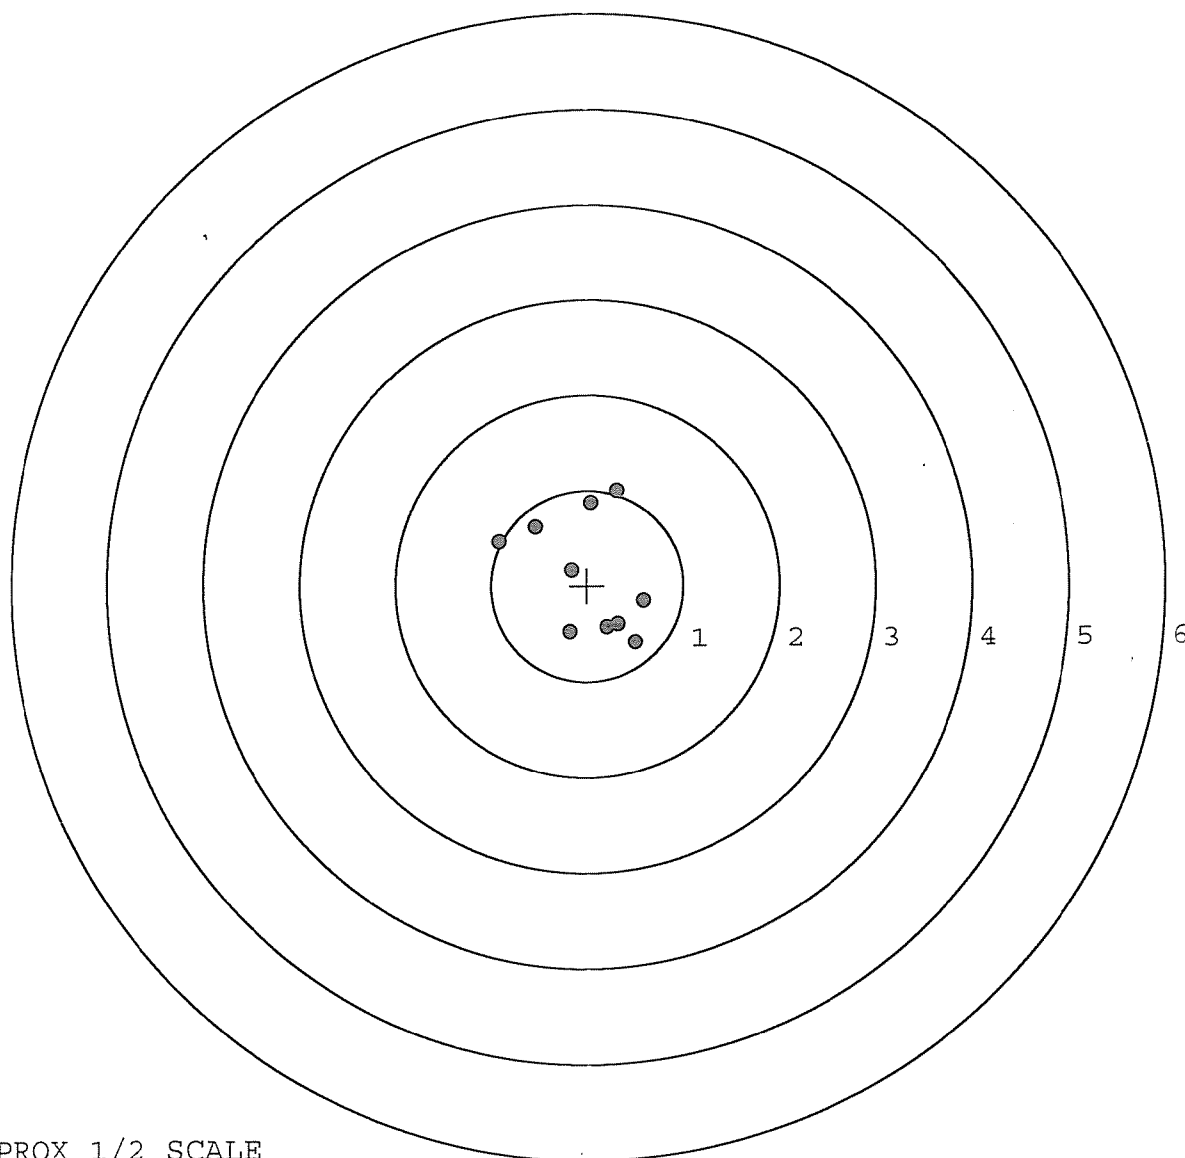

TARGET APPROX 1/2 SCALE


**BARBER - M24 0152852**

SERIAL NUMBER: G6461548. \_\_0  
TARGET NUMBER: 5  
FILE DATE: 12/02/2005  
FILE TIME: 22:36

X CENTROID: 0.203  
Y CENTROID: -0.020  
POA TO CENTROID: 0.204  
HORZ SPREAD: 1.664  
VERT SPREAD: 1.836  
GROUP SPREAD: 2.182  
MIN RADIUS: 0.151  
MAX RADIUS: 1.186  
MEAN RADIUS: 0.682

# IN 1 IN DIAMETER: 3  
# IN 2 IN DIAMETER: 8  
# in 3 IN DIAMETER: 10

| POINT# | X      | Y      |
|--------|--------|--------|
| 1:     | 0.831  | 0.987  |
| 2:     | 1.045  | 0.793  |
| 3:     | -0.248 | 0.404  |
| 4:     | -0.619 | -0.051 |
| 5:     | 0.320  | 0.193  |
| 6:     | 0.111  | -0.139 |
| 7:     | 0.594  | -0.486 |
| 8:     | 0.087  | -0.749 |
| 9:     | -0.348 | -0.849 |
| 10:    | 0.257  | -0.299 |

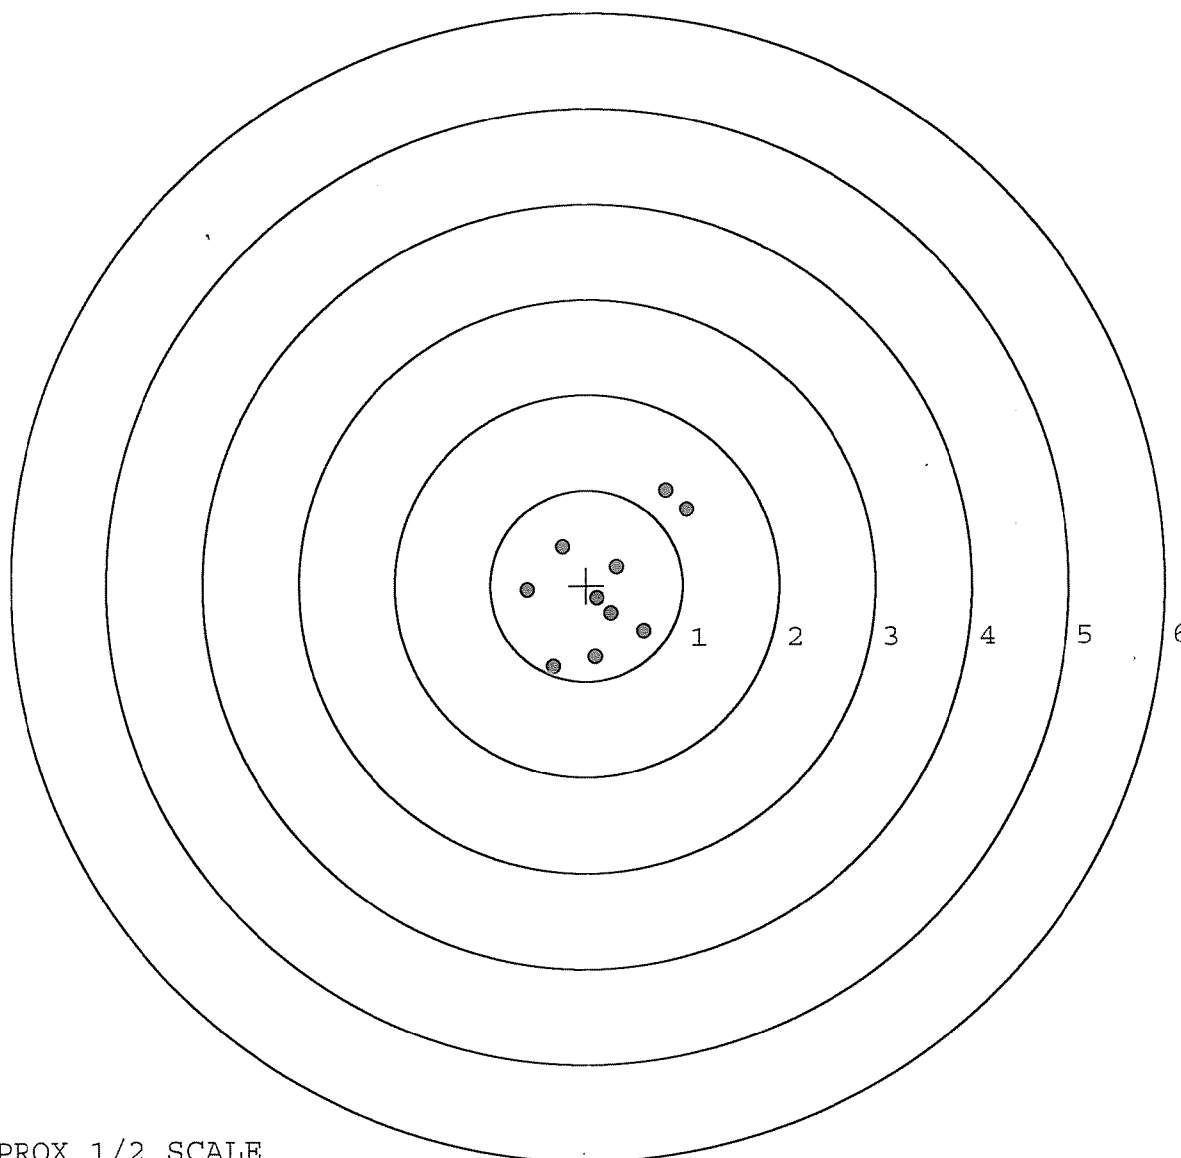

TARGET APPROX 1/2 SCALE