

G 6288132

VERY IMPORTANT
 REMINGTON
 2010-2011
 2012-2013
 2014-2015
 2016-2017
 2018-2019
 2020-2021

Remington®

M/24 .300 WIN MAG (RIFLE ONLY)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL .300 WIN MAG

SERIAL NO.
66288132

ORDER NO.
25736

46

Made in Illinois, NY Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee

20LX

5736 66288132

ORDER 25736

M/24 .300 WIN MAG (RIFLE ONLY)

UPC



ORDER 25736

M/24 .300 WIN MAG (RIFLE ONLY)

UPC



SERIAL NO.



M/24 .300 WIN MAG (RIFLE ONLY)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL .300 WIN MAG


- INSTRUCTION BOOK 3518

46 FORM 200348

proof of purchase



owner registration sticker




ORDER NO. **25736**

BARREL LENGTH **24"**

CAPACITY **5**

G6288132

UPC



THIS
BOOK
IS
NOT

INSPECTION CHECKLIST-NEW GUNS

300 WIN

GUN SERIAL # 66288132

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		1/16/03	RW
600	PROOF		1/16/03	RW
607	CHECK HEADSPACE	MAGNA - FLUX INSPECTED	1/16/03	RW
610	DIS-ASSEMBLE GUN		1/16/03	RW
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	JAN 17 2003 OPERATOR ARS		
615	ROLLMARK CALIBER		1/16/03	RW
617	DRILL AND TAP SIGHT HOLES		1-20-03	TRW
620	APPLY COATINGS (BARREL ACTION)		2-12	TA
	(BOLT)		2-12	TA
625	FINAL ASSEMBLY A) CLEAN INSIDE OF BOLT ASSEMBLY		2/14/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2/14/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2/14/03	DA
	D) OIL FIRING PIN ASSEMBLY		2/14/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>9</u> <u>9</u> <u>9.5</u>	2-19-03	Ru
CONT.	G) SAFETY OFF FORCE 2 LBS MIN	<u>3</u> <u>2</u> <u>3</u>	2-19-03	Ru
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN			
	J) ASSEMBLE STOCK		2-18-03	RTL
	K) ASSEMBLE SWIVEL STUDS			
	L) ATTACH FRONT AND REAR SIGHT ASSY'S			
	M) IRON SIGHT ALIGNMENT			
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER			
640	GALLERY TEST AND TARGET	PASS FAIL	2-18-03	Ac
	MALFUNCTION <i>BWCFM</i>	CORRECTION	2-18-03	Ac
	MALFUNCTION	CORRECTION	2-18-03	Ac
	MALFUNCTION	CORRECTION	2-18-03	Ac
	MALFUNCTION	CORRECTION	2-18-03	Ac
645	INSPECT FOR LIVE AMMO		2-18-03	Ac
655	FINAL INSPECTION A) HEADSPACE		2-19-03	Ru
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.60</u> <u>2.60</u> <u>2.53</u> <u>2.51</u> <u>2.49</u>	2-19-03	Ru
	C) FUNCTION		2-19-03	Ru
660	PACK		2/29/03	OPA

AVERAGE PULL FORCE BETWEEN

SERIAL NO.

BARBER - M24-0157299

DATE 2-13-03

2.50# ± .50#

3.00# ± .75#

4.00# ± 1.00#

TESTER

TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.40	2.49		2.35	MIN. SETTING,
PULL #2	2.36	2.46		2.32	NO AVG. OF 5
PULL #3	2.38	2.44		2.34	READINGS ACCEPT-
PULL #4	2.40	2.40		2.33	ABLE LESS THAN 2
PULL #5	2.39	2.31		2.35	
TOTAL	11.93	12.10		11.69	
AVG.	2.38	2.42		2.33	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.19	3.14		
PULL #2	3.17	3.29		
PULL #3	3.22	3.26		
PULL #4	3.17	3.28		
PULL #5	3.09	3.30		
TOTAL	15.84	16.27		
AVG.	3.16	3.25		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCUR.
PULL #1	4.38	4.28		4.29
PULL #2	4.27	4.22		3.94
PULL #3	4.06	4.21		4.17
PULL #4	4.35	4.23		4.26
PULL #5	4.34	4.17		4.27
TOTAL	21.40	21.11		20.93
AVG.	4.28	4.22		4.18

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6288132.__0
FILE DATE AND TIME: 02/19/2003 12:44

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.074
The Average Y Centroid of the Five Target Set:	0.095
The Average Point of Impact of the Five Target Set:	0.121
The Average Mean Radius of the Five Target Set:	1.096
The Distance from POA to Centroid Target #1:	0.097
The Distance from Centroid Target #2 to Centroid Target #1:	0.357
The Distance from Centroid Target #3 to Centroid Target #1:	0.191
The Distance from Centroid Target #4 to Centroid Target #1:	0.264
The Distance from Centroid Target #5 to Centroid Target #1:	0.160

SERIAL NUMBER: G6288132. 0

TARGET NUMBER: 1

FILE DATE: 02/19/2003

FILE TIME: 12:44

X CENTROID: -0.083

Y CENTROID: 0.051

POA TO CENTROID: 0.097

HORZ SPREAD: 2.664

VERT SPREAD: 2.713

GROUP SPREAD: 3.242

MIN RADIUS: 0.432

MAX RADIUS: 1.887


MEAN RADIUS: 1.181

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.589	-1.186
2:	1.008	-0.592
3:	0.147	-0.315
4:	1.154	0.593
5:	0.225	0.644
6:	0.400	1.419
7:	-1.384	-1.294
8:	-1.006	-0.381
9:	-1.510	1.285
10:	-0.450	0.332

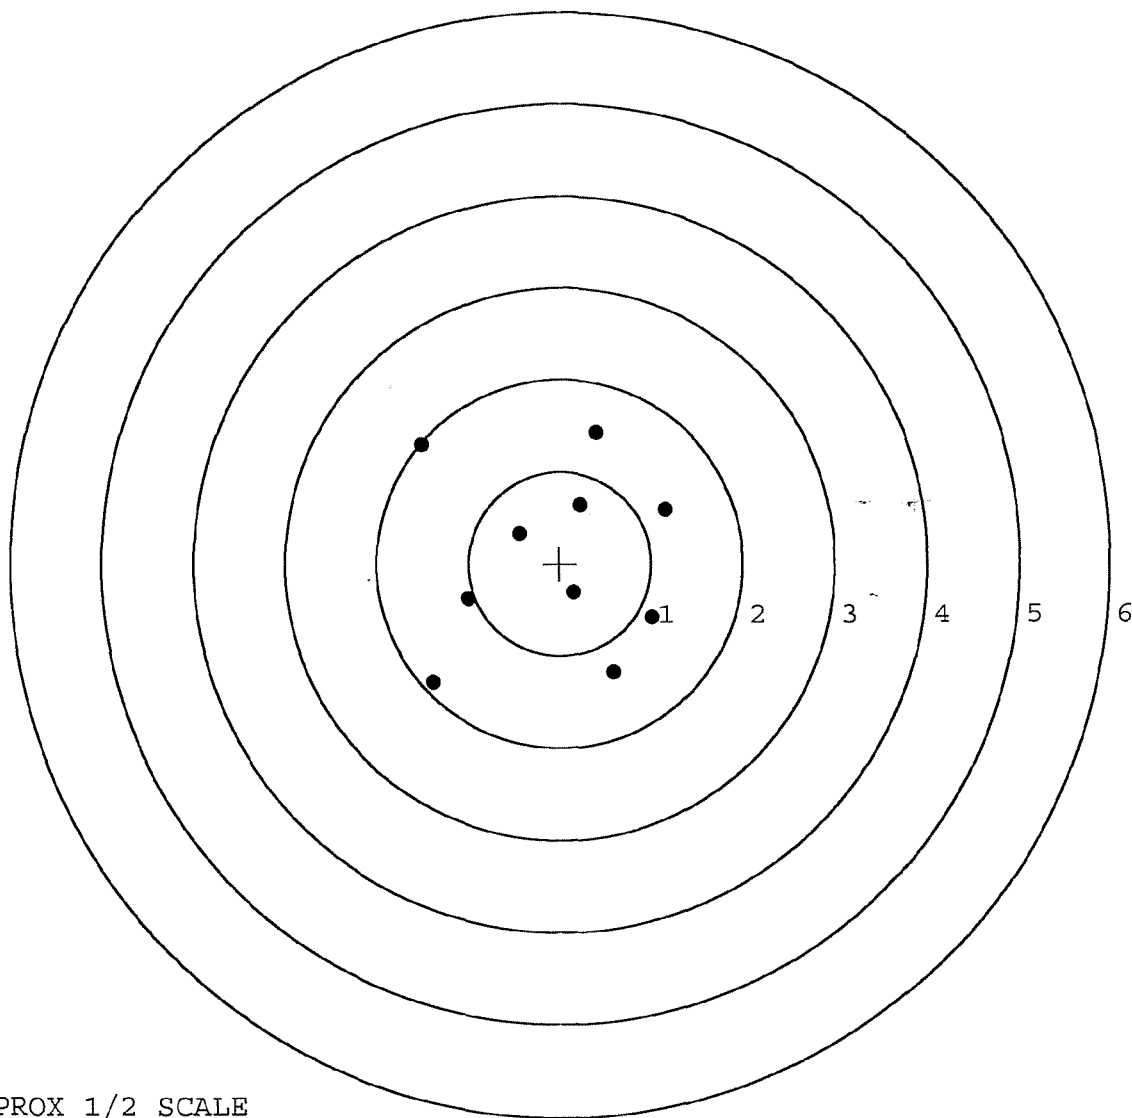

TARGET APPROX 1/2 SCALE

BARBER - M24 0157302

SERIAL NUMBER: G6288132. __0

TARGET NUMBER: 2

FILE DATE: 02/19/2003

FILE TIME: 12:44

POINT#	X	Y
1:	-1.161	-2.501
2:	-1.685	0.649
3:	-0.997	1.653
4:	-0.612	0.469
5:	-0.612	0.322
6:	-0.327	0.020
7:	-0.049	0.644
8:	0.113	-0.554
9:	0.547	-0.876
10:	0.573	-0.475

X CENTROID: -0.421

Y CENTROID: -0.065

POA TO CENTROID: 0.426

HORZ SPREAD: 2.258

VERT SPREAD: 4.154

GROUP SPREAD: 4.157

MIN RADIUS: 0.127


MAX RADIUS: 2.546

MEAN RADIUS: 1.080

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 8

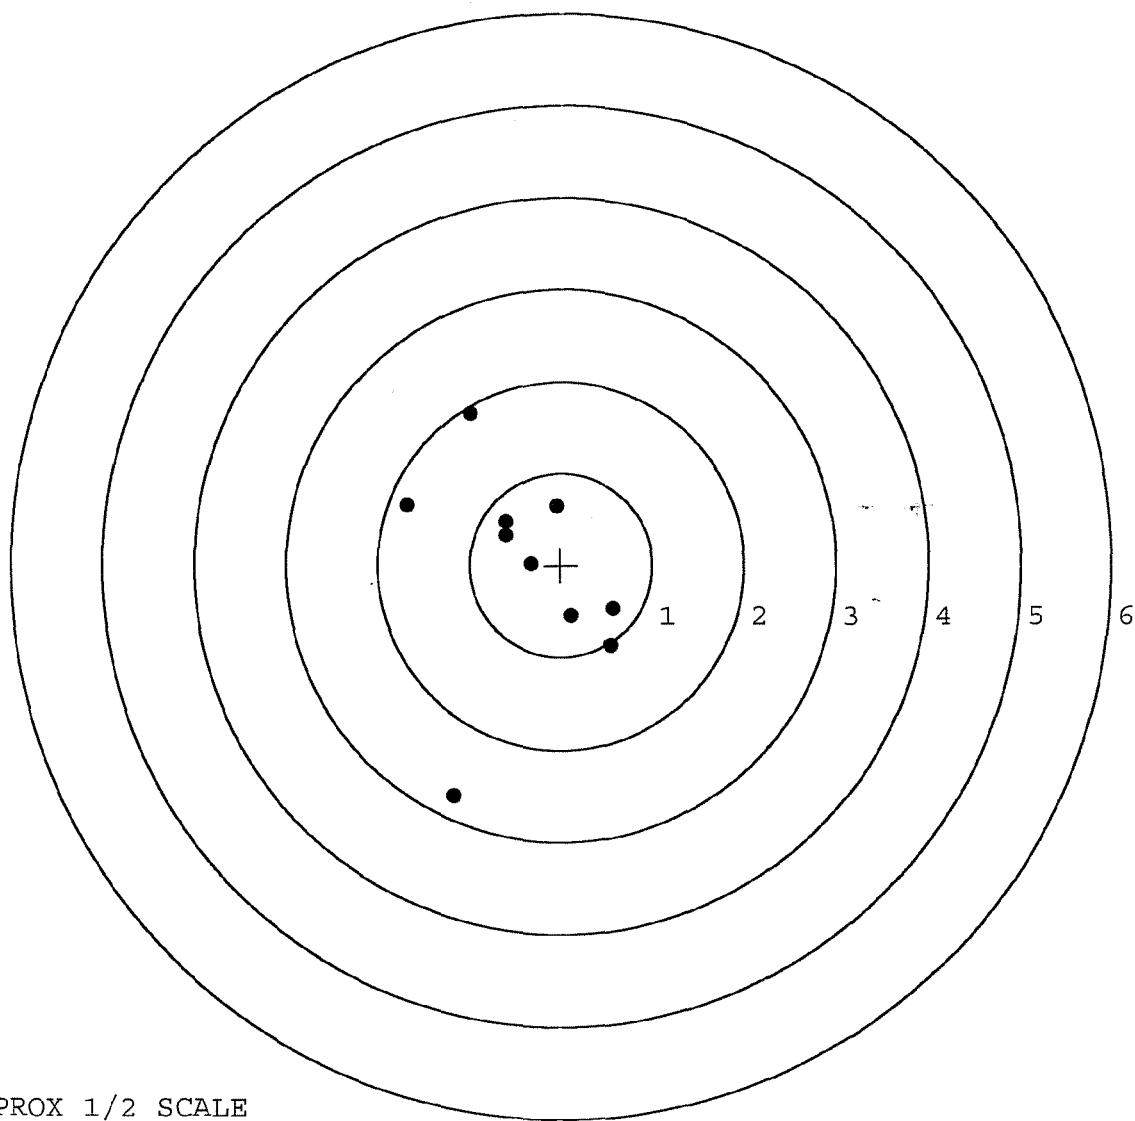

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288132. 0

TARGET NUMBER: 3

FILE DATE: 02/19/2003

FILE TIME: 12:44

POINT#	X	Y
1:	1.083	-0.634
2:	0.918	-0.557
3:	0.309	-0.173
4:	-0.499	-0.525
5:	-0.469	-0.347
6:	-0.595	-0.128
7:	-0.446	0.356
8:	0.059	0.495
9:	0.371	0.513
10:	0.302	1.921

X CENTROID: 0.103

Y CENTROID: 0.092

POA TO CENTROID: 0.138

HORZ SPREAD: 1.678

VERT SPREAD: 2.555

GROUP SPREAD: 2.672

MIN RADIUS: 0.336


MAX RADIUS: 1.840

MEAN RADIUS: 0.827

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

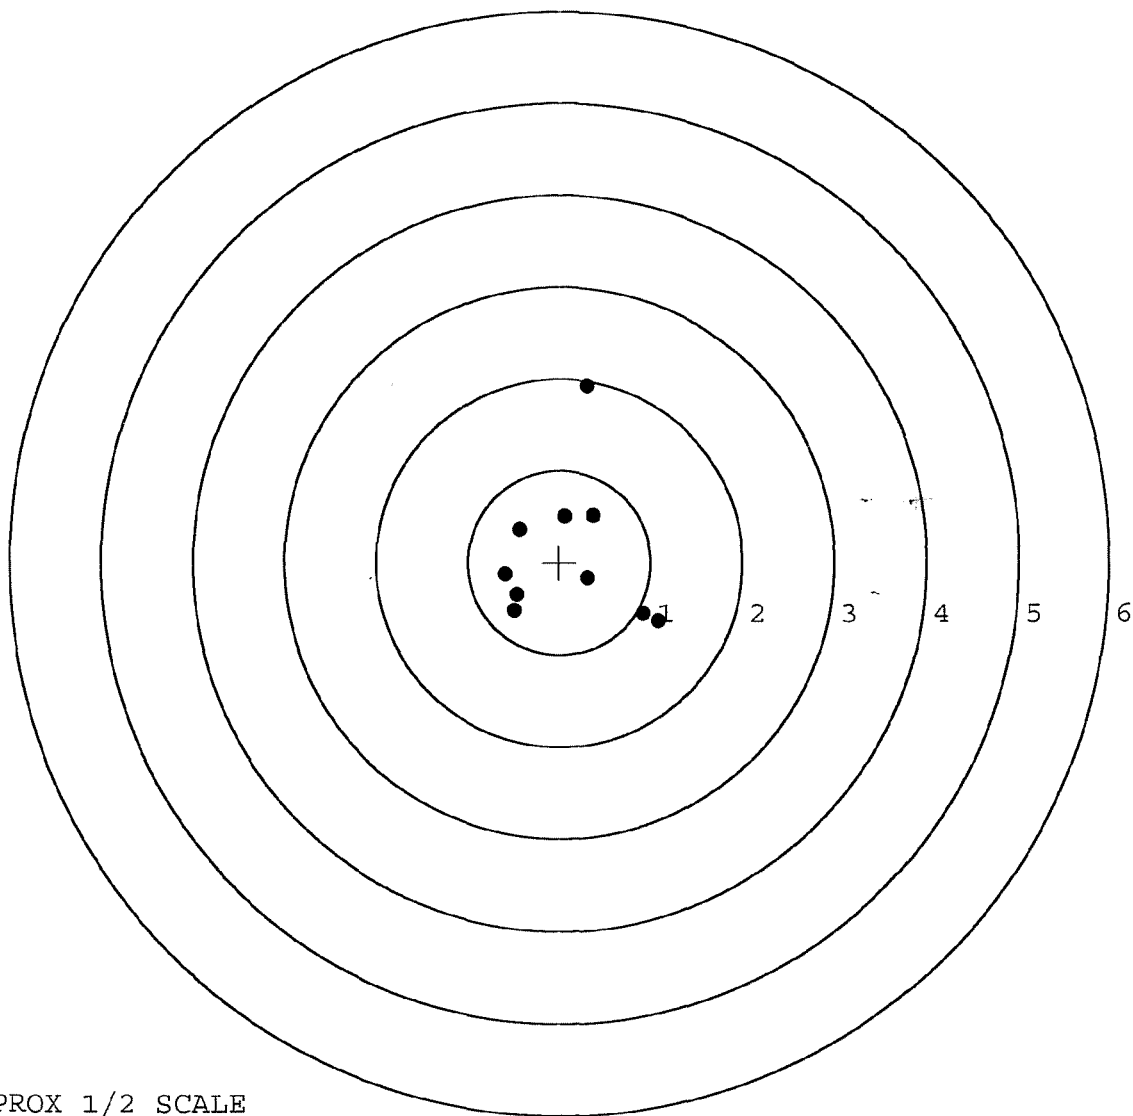

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288132. 0

TARGET NUMBER: 4

FILE DATE: 02/19/2003

FILE TIME: 12:44

X CENTROID: 0.141

Y CENTROID: 0.191

POA TO CENTROID: 0.237

HORZ SPREAD: 3.411

VERT SPREAD: 4.603

GROUP SPREAD: 5.353

MIN RADIUS: 0.221

MAX RADIUS: 2.960


MEAN RADIUS: 1.297

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	2.086	-2.040
2:	1.690	0.152
3:	0.865	0.504
4:	0.601	-0.407
5:	0.063	0.398
6:	-0.440	-0.317
7:	-0.818	0.114
8:	-1.325	0.161
9:	-0.666	0.782
10:	-0.647	2.563

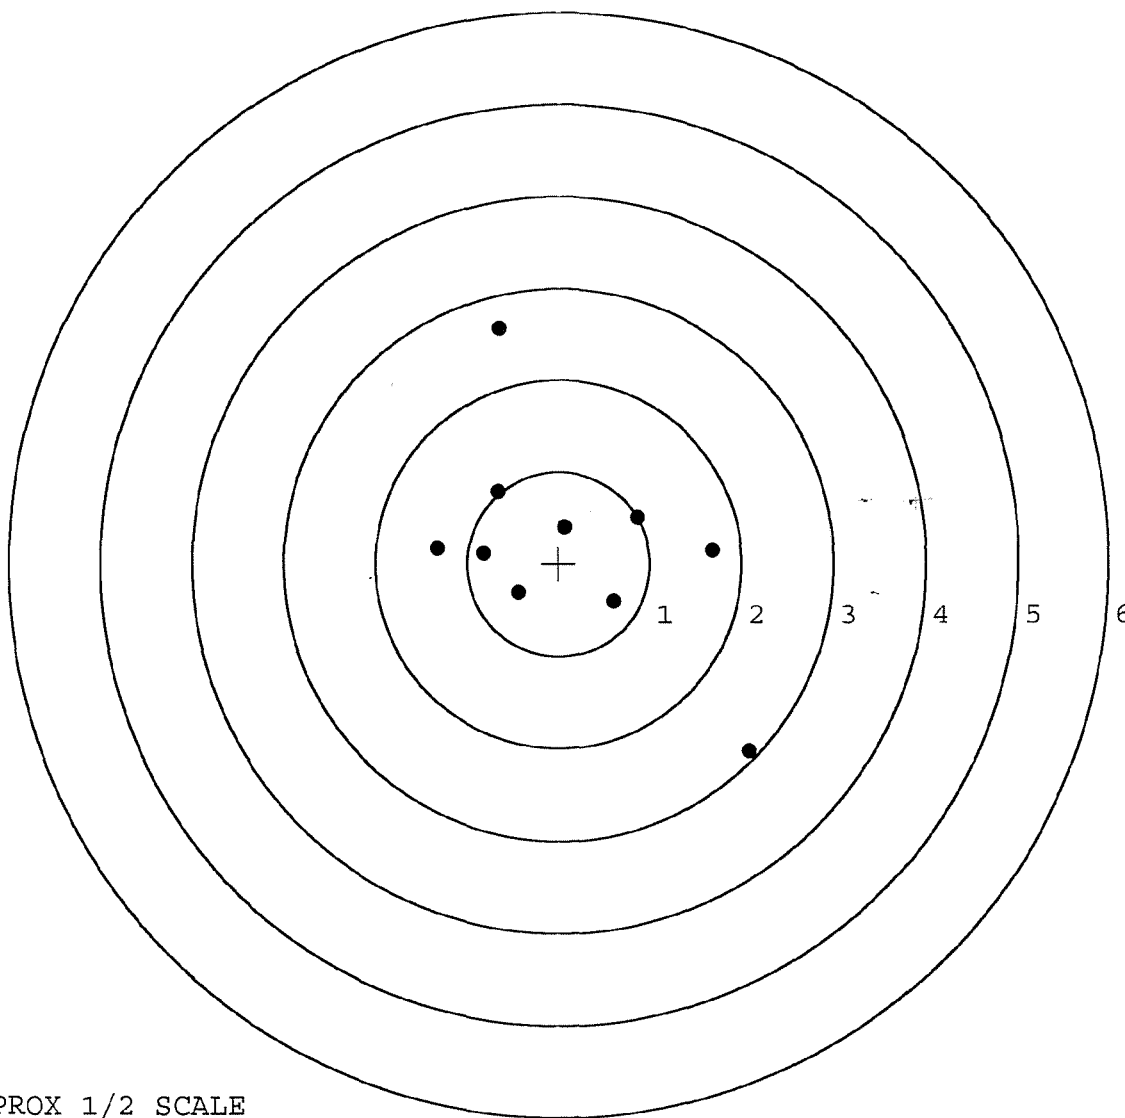

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288132. 0

TARGET NUMBER: 5

FILE DATE: 02/19/2003

FILE TIME: 12:44

X CENTROID: -0.108

Y CENTROID: 0.208

POA TO CENTROID: 0.235

HORZ SPREAD: 2.726

VERT SPREAD: 3.337

GROUP SPREAD: 3.906

MIN RADIUS: 0.503

MAX RADIUS: 2.410


MEAN RADIUS: 1.093

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.338	-0.546
2:	0.400	-0.010
3:	1.194	0.708
4:	-0.227	-1.086
5:	-0.877	-0.664
6:	-0.401	-0.201
7:	-0.616	0.000
8:	0.114	0.680
9:	-0.622	0.953
10:	-1.388	2.251

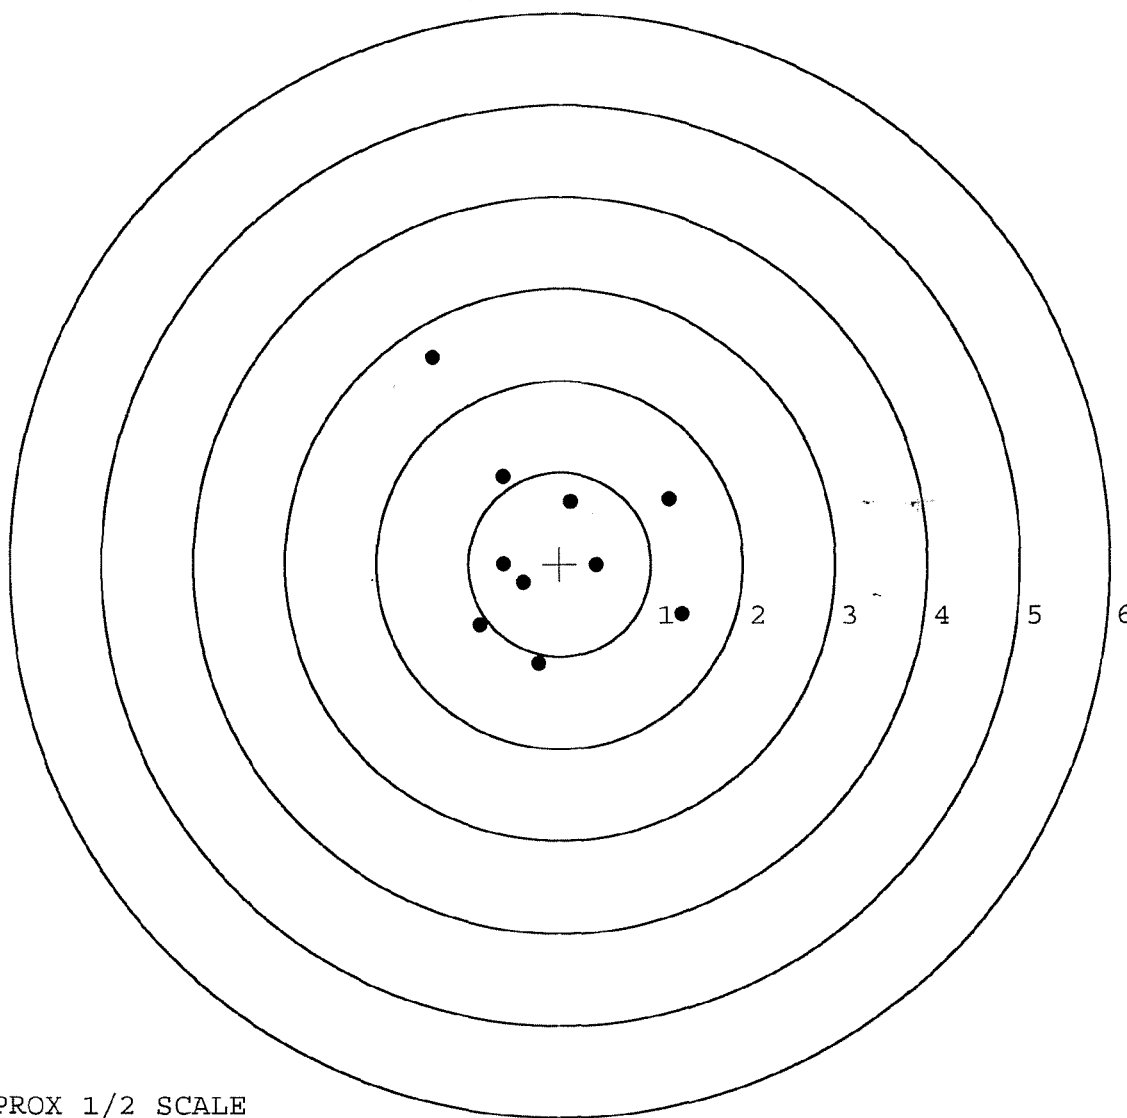

TARGET APPROX 1/2 SCALE