

6288136

VERY IMPORTANT: FOR INFORMATION: FOR THE PROSECUTOR: FOR THE ATTORNEY GENERAL: FOR THE FBI: FOR THE DEPARTMENT OF JUSTICE: FOR THE DEPARTMENT OF DEFENSE: FOR THE DEPARTMENT OF ENERGY: FOR THE DEPARTMENT OF AGRICULTURE: FOR THE DEPARTMENT OF COMMERCE: FOR THE DEPARTMENT OF TRANSPORTATION: FOR THE DEPARTMENT OF HEALTH AND HUMAN SERVICES: FOR THE DEPARTMENT OF EDUCATION: FOR THE DEPARTMENT OF THE INTERIOR: FOR THE DEPARTMENT OF THE ARMY: FOR THE DEPARTMENT OF THE NAVY: FOR THE DEPARTMENT OF THE AIR FORCE: FOR THE DEPARTMENT OF THE SPACE FORCE: FOR THE DEPARTMENT OF THE COAST GUARD: FOR THE DEPARTMENT OF THE MARINE CORPS: FOR THE DEPARTMENT OF THE ARMY: FOR THE DEPARTMENT OF THE NAVY: FOR THE DEPARTMENT OF THE AIR FORCE: FOR THE DEPARTMENT OF THE SPACE FORCE: FOR THE DEPARTMENT OF THE COAST GUARD: FOR THE DEPARTMENT OF THE MARINE CORPS:

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

46

Serial No. **66288136**
Order No. **25716**

Made in Union, NY Reg. U.S. Pat. & tm. Off. Force Registered Marque Deposee.

02EX

5716 66288136

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



 /24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

-- INSTRUCTION BOOK 3518

46 FORM

proof of purchase

owner registration sticker




ORDER NO. **25716**

BARREL LENGTH 24"

CAPACITY 6


G6288136

UPC



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G6288136

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		8-7-03	RL
600	PROOF		8-8-03	AC
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	8-8-03	AC
610	DIS-ASSEMBLE GUN		8-8-03	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR 		
615	ROLLMARK CALIBER		8-12-03	SB
617	DRILL AND TAP SIGHT HOLES		8-11-03	TRW
620	APPLY COATINGS (BARREL ACTION)		8-26	TA
	(BOLT)		8-26	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		8/28/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		8/28/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		8/28/03	DA
	D) OIL FIRING PIN ASSEMBLY		8/28/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS			

OP #	OPERATION NAME	57343	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>6⁰</u> <u>6⁰</u> <u>6⁰</u>	9-29-03	RJC
CONT.	G) SAFETY OFF FORCE	2 LBS MIN	<u>2.25</u> <u>2.25</u> <u>2.0</u>	9-29-03	RJC
	H) TRIGGER PULL TEST AND RETAINABILITY				
	I) FIRING PIN INDENT	.020 MIN	<u>.022</u> <u>.023</u> <u>.023</u>	9-29-03	RJC
	J) ASSEMBLE STOCK			9-12-03	RJC
	K) ASSEMBLE SWIVEL STUDS			9-29-03	RJC
	L) ATTACH FRONT AND REAR SIGHT ASSY'S			9-12-03	RJC
	M) IRON SIGHT ALIGNMENT			9-12-03	RJC
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER			9-12-03	RJC
640	GALLERY TEST AND TARGET		PASS FAIL	9-24-03	TRW
	MALFUNCTION		CORRECTION	9-24-03	TRW
	MALFUNCTION		CORRECTION	9-24-03	TRW
	MALFUNCTION		CORRECTION	9-24-03	TRW
	MALFUNCTION		CORRECTION	9-24-03	TRW
645	INSPECT FOR LIVE AMMO			9-24-03	TRW
655	FINAL INSPECTION A) HEADSPACE			9-29-03	RJC
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.20</u> <u>2.33</u> <u>2.25</u> <u>2.18</u> <u>2.18</u>	9/29/03	DA
	C) FUNCTION			9-29-03	RJC
660	PACK			9-30-03	DA

INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

DATE 9-8-03

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.46	2.75		2.65	
PULL #2	2.55	2.67		2.77	
PULL #3	2.48	2.54		2.67	
PULL #4	2.49	2.43		2.66	
PULL #5	2.55	2.54		2.76	
TOTAL	12.53	12.93		13.51	
AVERAGE	2.50	2.58		2.70	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.33		
PULL #2	3.21	3.45		
PULL #3	3.23	3.19		
PULL #4	3.18	3.17		
PULL #5	3.17	3.21		
TOTAL	16.02	16.35		
AVERAGE	3.20	3.27		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX. SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.32	4.40		4.35
PULL #2	4.49	4.21		4.17
PULL #3	4.23	4.17		4.01
PULL #4	4.15	4.16		4.22
PULL #5	4.10	4.13		4.20
TOTAL	21.29	21.07		20.95
AVERAGE	4.25	4.21		4.19

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6288136.___0
FILE DATE AND TIME: 09/24/2003 07:51

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

mean. 8435

SERIAL NUMBER: G6288136. 0
 TARGET NUMBER: 1
 FILE DATE: 09/24/2003
 FILE TIME: 07:51

POINT#	X	Y
1:	0.522	-0.586
2:	-0.173	-0.371
3:	-0.474	-0.619
4:	0.144	1.084
5:	-0.329	1.480

X CENTROID: -0.062
 Y CENTROID: 0.198
 POA TO CENTROID: 0.207
 HORZ SPREAD: 0.996
 VERT SPREAD: 2.099
 GROUP SPREAD: 2.234
 MIN RADIUS: 0.579
 MAX RADIUS: 1.310
 MEAN RADIUS: 0.938
 # IN 1 IN DIAMETER: 0
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 5

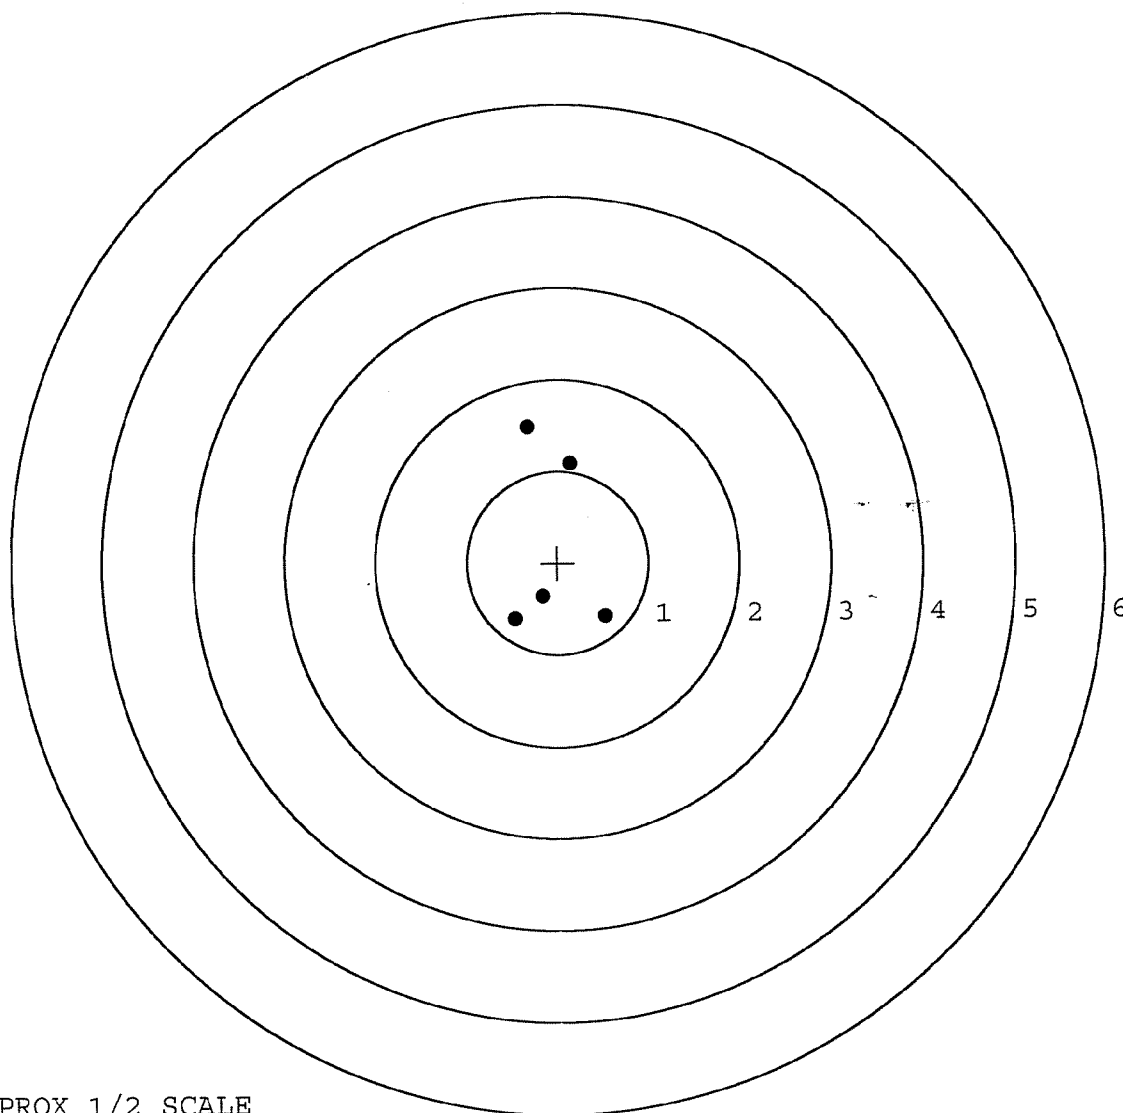


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288136. __ 0
 TARGET NUMBER: 2
 FILE DATE: 09/24/2003
 FILE TIME: 07:51

POINT#	X	Y
1:	1.045	-0.179
2:	0.242	-0.446
3:	-1.006	-0.640
4:	-0.176	0.231
5:	-0.644	0.346

X CENTROID: -0.108
 Y CENTROID: -0.138
 POA TO CENTROID: 0.175
 HORZ SPREAD: 2.051
 VERT SPREAD: 0.986
 GROUP SPREAD: 2.102
 MIN RADIUS: 0.375
 MAX RADIUS: 1.154
 MEAN RADIUS: 0.749
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 3
 # in 3 IN DIAMETER: 5

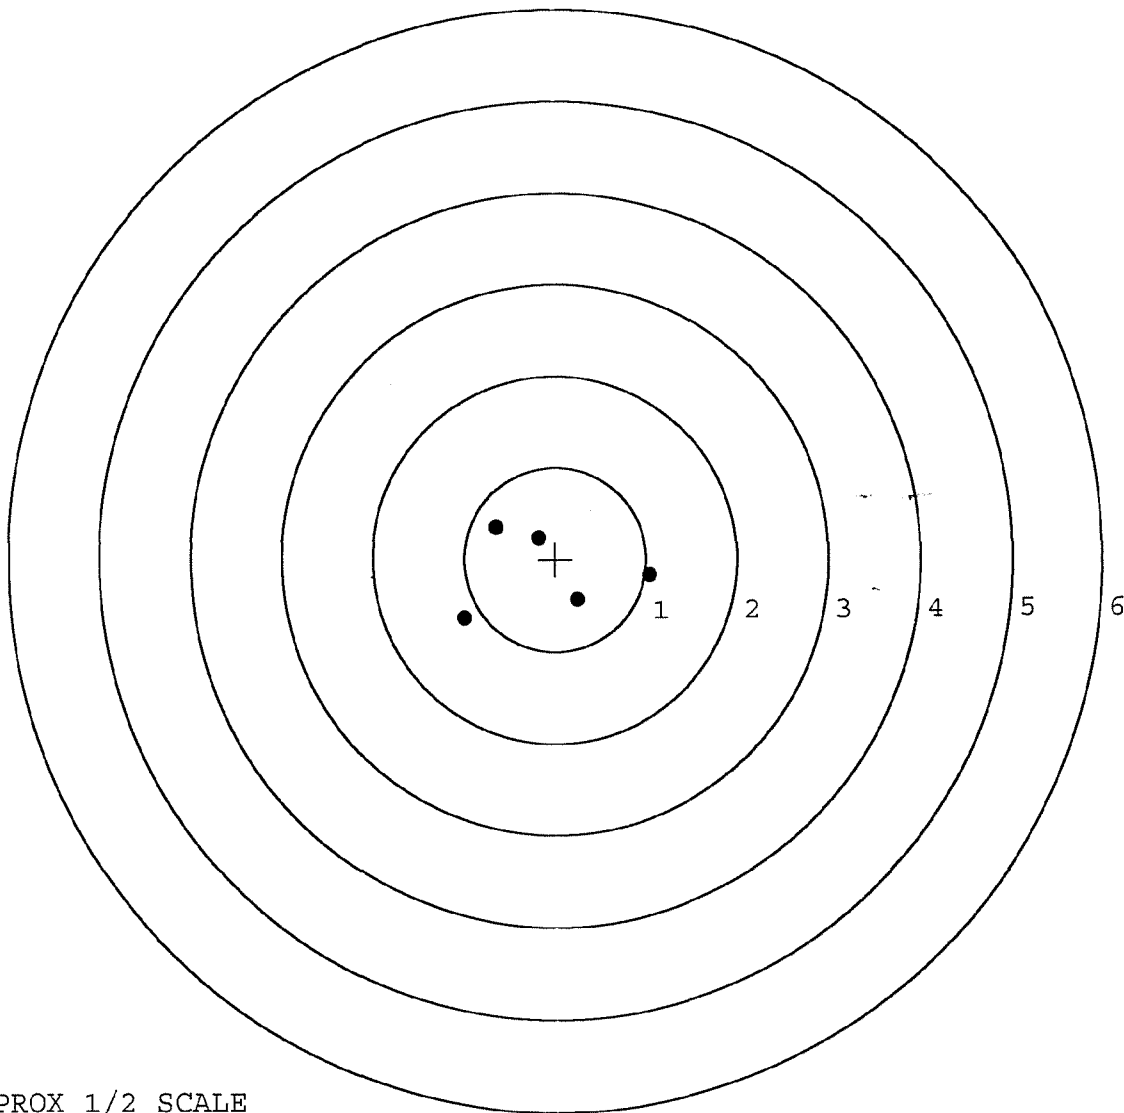

TARGET APPROX 1/2 SCALE