

BARBER - M24 0157439

✓
G6288147

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0157439
M2409157478

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Serial No. **G6288147**
Order No. **25716**

46

Made in Illinois, NY Reg. U.S. Pat. & tm. Off. Marca Registrada. Marque Deposee.

02EX



5716 G6288147

ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716
M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO


— INSTRUCTION BOOK 3518

46 FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6288147

UPC



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G 6288147

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		8-7-03	RL
600	PROOF		8-8-03	AC
607	CHECK HEADSPACE	MAGNA FLUX INSPECTED	8-8-03	AC
610	DIS-ASSEMBLE GUN		8-8-03	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <u>RY</u>		
615	ROLLMARK CALIBER		8-12-03	SB
617	DRILL AND TAP SIGHT HOLES		8-11-03	TRLW
620	APPLY COATINGS (BARREL ACTION)		8-26	TA
	(BOLT)		8-26	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		8/27/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		8/27/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		8/27/03	DA
	D) OIL FIRING PIN ASSEMBLY		8/27/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS		

OP # 625		READINGS			DATE	INITIAL
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	7.0	7.0	7.25	9-23-03 TRW
CONT.	G) SAFETY OFF FORCE	2 LBS MIN	2.5	2.0	2.0	9-23-03 TRW
	H) TRIGGER PULL TEST AND RETAINABILITY					
	I) FIRING PIN INDENT	.020 MIN	.022	.022	.022	9-23-03 TRW
	J) ASSEMBLE STOCK					9-10-03 RW
	K) ASSEMBLE SWIVEL STUDS					9-24-03 RTL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					9-17-03 RW
	M) IRON SIGHT ALIGNMENT					9-17-03 RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					9-17-03 RW
640	GALLERY TEST AND TARGET		PASS	FAIL		9-23-03 A
	MALFUNCTION	CORRECTION				9-23-03 A
	MALFUNCTION	CORRECTION				9-23-03 A
	MALFUNCTION	CORRECTION				9-23-03 A
	MALFUNCTION	CORRECTION				9-23-03 A
645	INSPECT FOR LIVE AMMO					9-23-03 A
655	FINAL INSPECTION A) HEADSPACE					9-24-03 RTL
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.41	2.44	2.42 2.53 2.53	9/24/03 OA
	C) FUNCTION					9-24-03 RTL
660	PACK					9/26/03 OA

BARBER - M24 0157444

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6288147.__0
FILE DATE AND TIME: 09/23/2003 09:07

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE


mean .7595

BARBER - M24 0157445

SERIAL NUMBER: G6288147. __0
TARGET NUMBER: 1
FILE DATE: 09/23/2003
FILE TIME: 09:07

POINT#	X	Y
1:	0.317	-1.568
2:	-0.245	-0.150
3:	0.282	-0.087
4:	-0.061	0.476
5:	0.180	0.477

X CENTROID: 0.095
Y CENTROID: -0.170
POA TO CENTROID: 0.195
HORZ SPREAD: 0.562
VERT SPREAD: 2.045
GROUP SPREAD: 2.079
MIN RADIUS: 0.205
MAX RADIUS: 1.415
MEAN RADIUS: 0.656
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 4
in 3 IN DIAMETER: 5

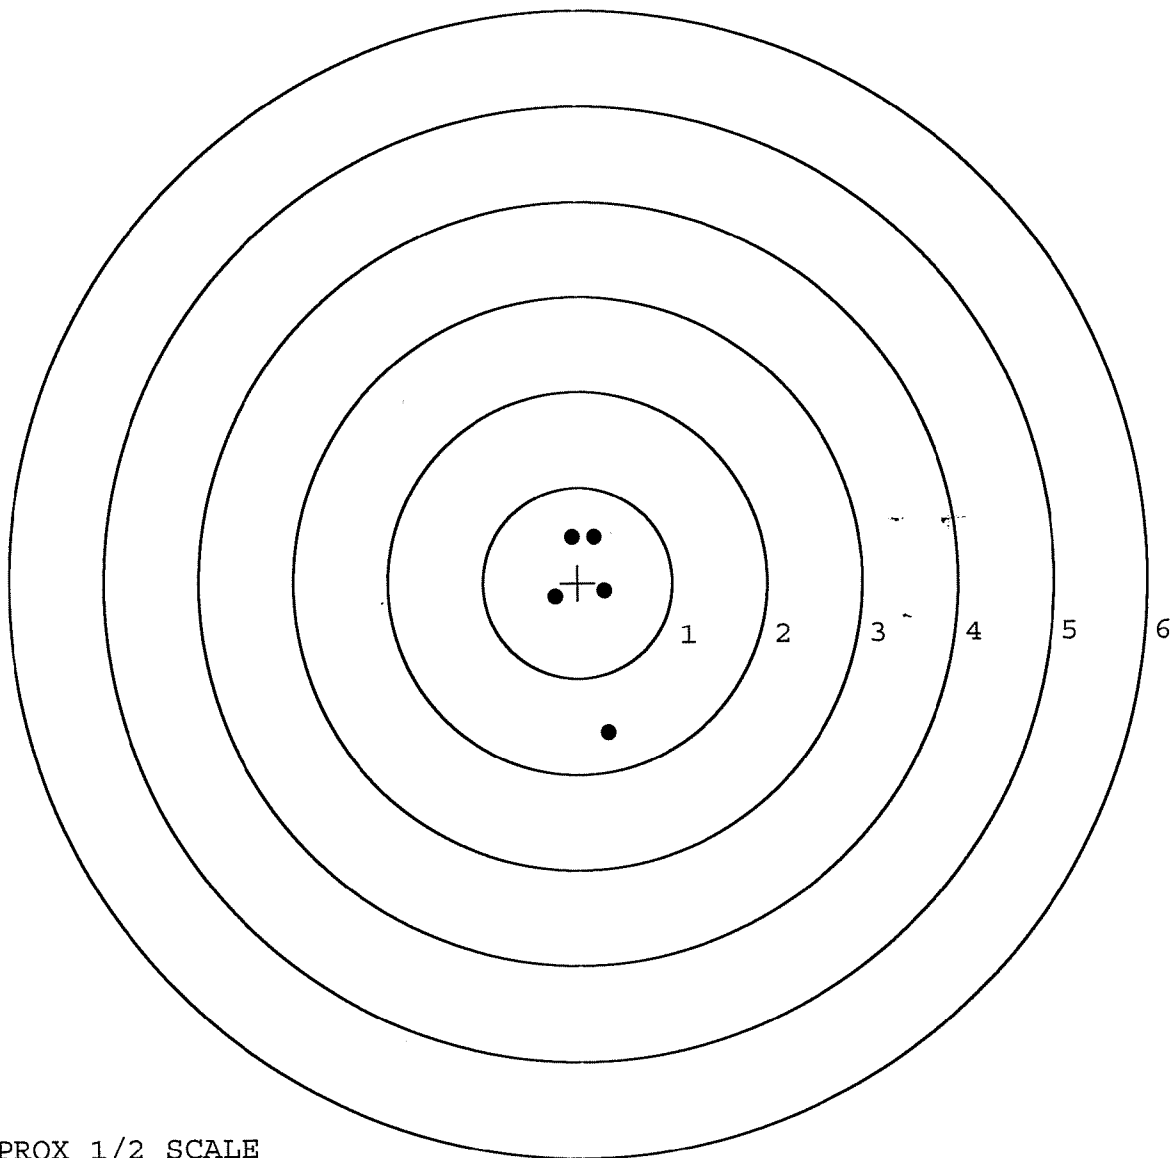


TARGET APPROX 1/2 SCALE

BARBER - M24 0157446

SERIAL NUMBER: G6288147. __0
TARGET NUMBER: 2
FILE DATE: 09/23/2003
FILE TIME: 09:07

POINT#	X	Y
1:	0.581	-1.037
2:	-0.466	-0.145
3:	-0.143	0.271
4:	0.685	0.422
5:	1.231	1.002

X CENTROID: 0.378
Y CENTROID: 0.103
POA TO CENTROID: 0.391
HORZ SPREAD: 1.697
VERT SPREAD: 2.039
GROUP SPREAD: 2.140
MIN RADIUS: 0.443
MAX RADIUS: 1.240
MEAN RADIUS: 0.853
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 5

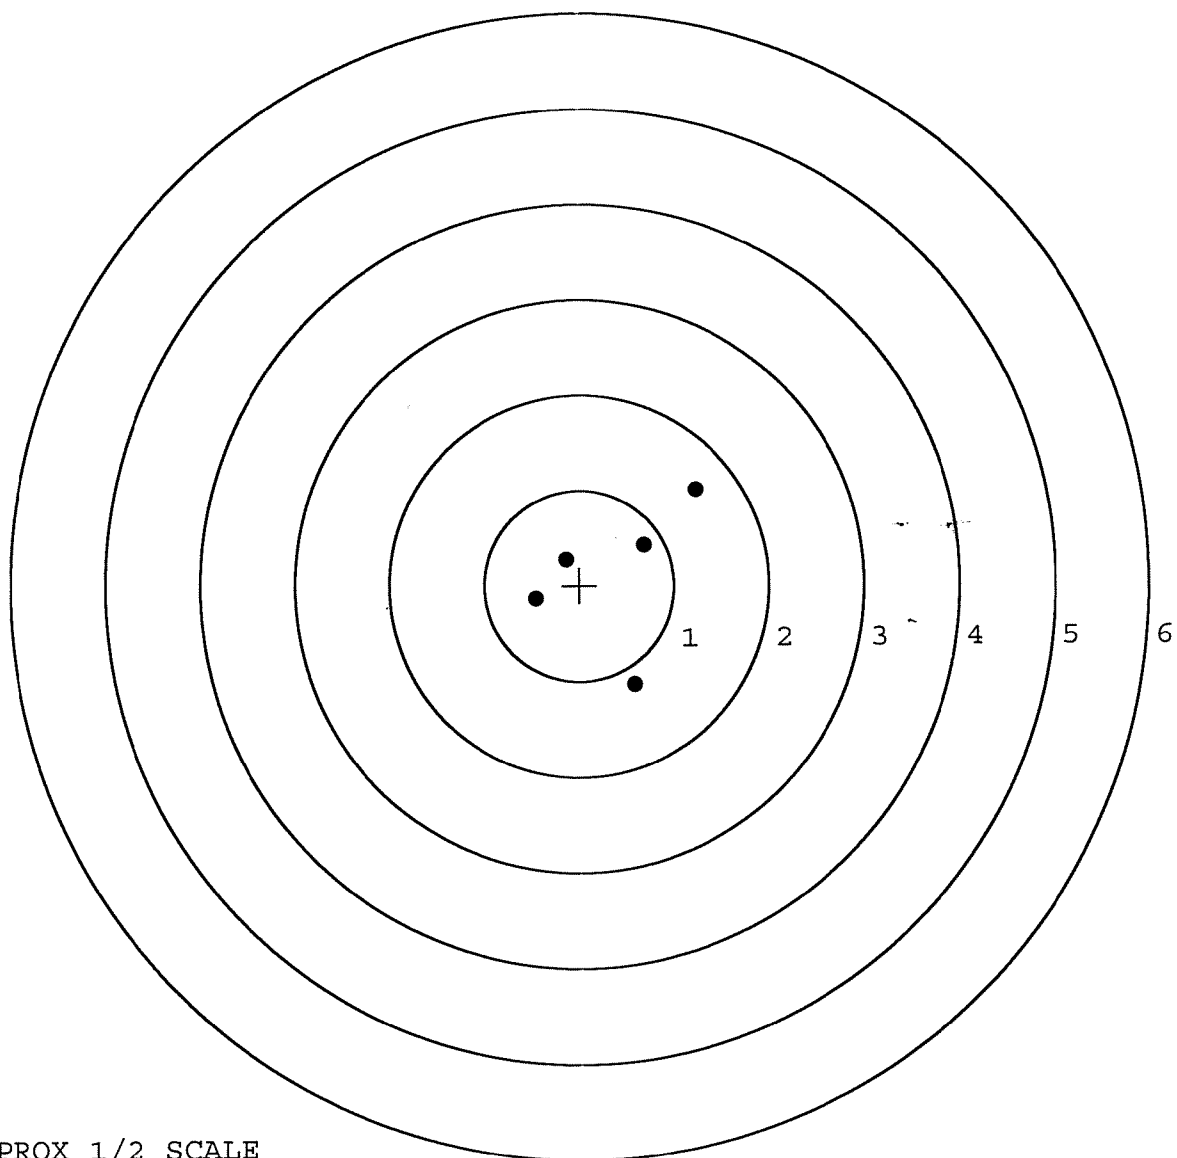

TARGET APPROX 1/2 SCALE

BARBER M24 0157447
 AVERAGE PULL FORCE BETWEEN
 INITIAL & CYCLE TESTS
 2.50 LBS (plus or minus 0.50 LBS)
 3.00 LBS (plus or minus 0.75 LBS)
 4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE

8-15-03

TESTER

TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.26	2.23		2.37	
PULL #2	2.13	2.20		2.33	
PULL #3	2.11	2.19		2.32	
PULL #4	2.07	2.20		2.21	
PULL #5	2.11	2.16		2.22	
TOTAL	10.68	10.98		11.45	
AVERAGE	2.13	2.19		2.29	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.31	3.37		
PULL #2	3.30	3.33		
PULL #3	3.25	3.37		
PULL #4	3.26	3.36		
PULL #5	3.21	3.34		
TOTAL	16.33	16.77		
AVERAGE	3.26	3.35		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.25	4.48		4.39
PULL #2	4.24	4.37		4.36
PULL #3	4.31	4.46		4.40
PULL #4	4.34	4.47		4.38
PULL #5	4.28	4.36		4.40
TOTAL	21.42	22.14		21.93
AVERAGE	4.28	4.42		4.38