

G-6288243

M24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

— INSTRUCTION BOOK 3518

46 FORM

proof of purchase



owner registration sticker




ORDER NO. 25716

BARREL LENGTH 24"

CAPACITY 6

G6288243

UPC



VERY IMPORTANT
INSTRUCTION BOOK
ENCLOSED TO ASSURE
SAFE USE OF THIS
WEAPON

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

46

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marque Déposée.
Made in Illinois, NY

SERIAL NO.
66288243

ORDER NO.
25716

02EX

5716 66288243

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYS

UPC



0 47700 25716 7

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYS

UPC



0 47700 25716 7

SERIAL NO.



66288243

INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # 66288243

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11-12-03	RTL
600	PROOF		8-12-03	AC
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	8-12-03	AC
610	DIS-ASSEMBLE GUN		11-12-03	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER		8-15-03	SB
617	DRILL AND TAP SIGHT HOLES		8-13-03	TRW
620	APPLY COATINGS (BARREL ACTION)		9-19-03	TA
	(BOLT)		9-19-03	TR
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		9-26-03	RLW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		9-26-03	RLW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		9-26-03	RLW
	D) OIL FIRING PIN ASSEMBLY		9-26-03	RLW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		9-29-03	TRW

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>5.75</u> <u>5.5</u> <u>5.75</u>	9-29-03	TRW
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>2.0</u> <u>2.25</u> <u>2.5</u>	9-29-03	TRW
	H) TRIGGER PULL TEST AND RETAINABILITY			
	I) FIRING PIN INDENT .020 MIN	<u>.022</u> <u>.022</u> <u>.022</u>	9-29-03	TRW
	J) ASSEMBLE STOCK		9-26-03	RW
	K) ASSEMBLE SWIVEL STUDS		9-30-03	RJL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		9-26-03	RW
	M) IRON SIGHT ALIGNMENT		9-26-03	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		9-26-03	RW
640	GALLERY TEST AND TARGET	PASS FAIL	9-29-03	TRW
	MALFUNCTION	CORRECTION	9-29-03	TRW
	MALFUNCTION	CORRECTION	9-29-03	TRW
	MALFUNCTION	CORRECTION	9-29-03	TRW
	MALFUNCTION	CORRECTION	9-29-03	TRW
645	INSPECT FOR LIVE AMMO		9-29-03	TRW
655	FINAL INSPECTION A) HEADSPACE		9-30-03	RJL
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.33</u> <u>2.32</u> <u>2.14</u> <u>2.43</u> <u>2.27</u>	9-29-03	TRW
	C) FUNCTION		9-30-03	RJL
660	PACK		9-30-03	DA

INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

DATE 9-2-03

3.00 LBS (plus or minus 0.75 LBS)

TESTER

4.00 LBS (plus or minus 1.00 LBS)

TRLW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.54	2.50		2.62	
PULL #2	2.68	2.77		2.85	
PULL #3	2.72	2.76		2.78	
PULL #4	2.75	2.79		2.63	
PULL #5	2.82	2.78		2.89	
TOTAL	13.51	13.60		13.77	
AVERAGE	2.70	2.72		2.75	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.45	3.34		
PULL #2	3.09	3.35		
PULL #3	3.37	3.31		
PULL #4	3.39	3.27		
PULL #5	3.42	3.43		
TOTAL	16.72	16.70		
AVERAGE	3.34	3.34		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.02	4.24		4.36
PULL #2	4.17	4.28		4.04
PULL #3	4.15	4.08		4.37
PULL #4	4.26	4.26		4.47
PULL #5	4.30	4.25		4.37
TOTAL	20.90	21.11		21.71
AVERAGE	4.18	4.22		4.32

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6288243.__0
FILE DATE AND TIME: 09/29/2003 06:44

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

mean .740

SERIAL NUMBER: G6288243. __0

TARGET NUMBER: 1

FILE DATE: 09/29/2003

FILE TIME: 06:44

POINT#	X	Y
1:	0.393	-0.509
2:	1.360	0.336
3:	-0.247	-0.153
4:	-0.626	0.355
5:	0.323	1.483

X CENTROID: 0.241

Y CENTROID: 0.302

POA TO CENTROID: 0.386

HORZ SPREAD: 1.986

VERT SPREAD: 1.992

GROUP SPREAD: 1.993

MIN RADIUS: 0.667


MAX RADIUS: 1.183

MEAN RADIUS: 0.933

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 3

in 3 IN DIAMETER: 5

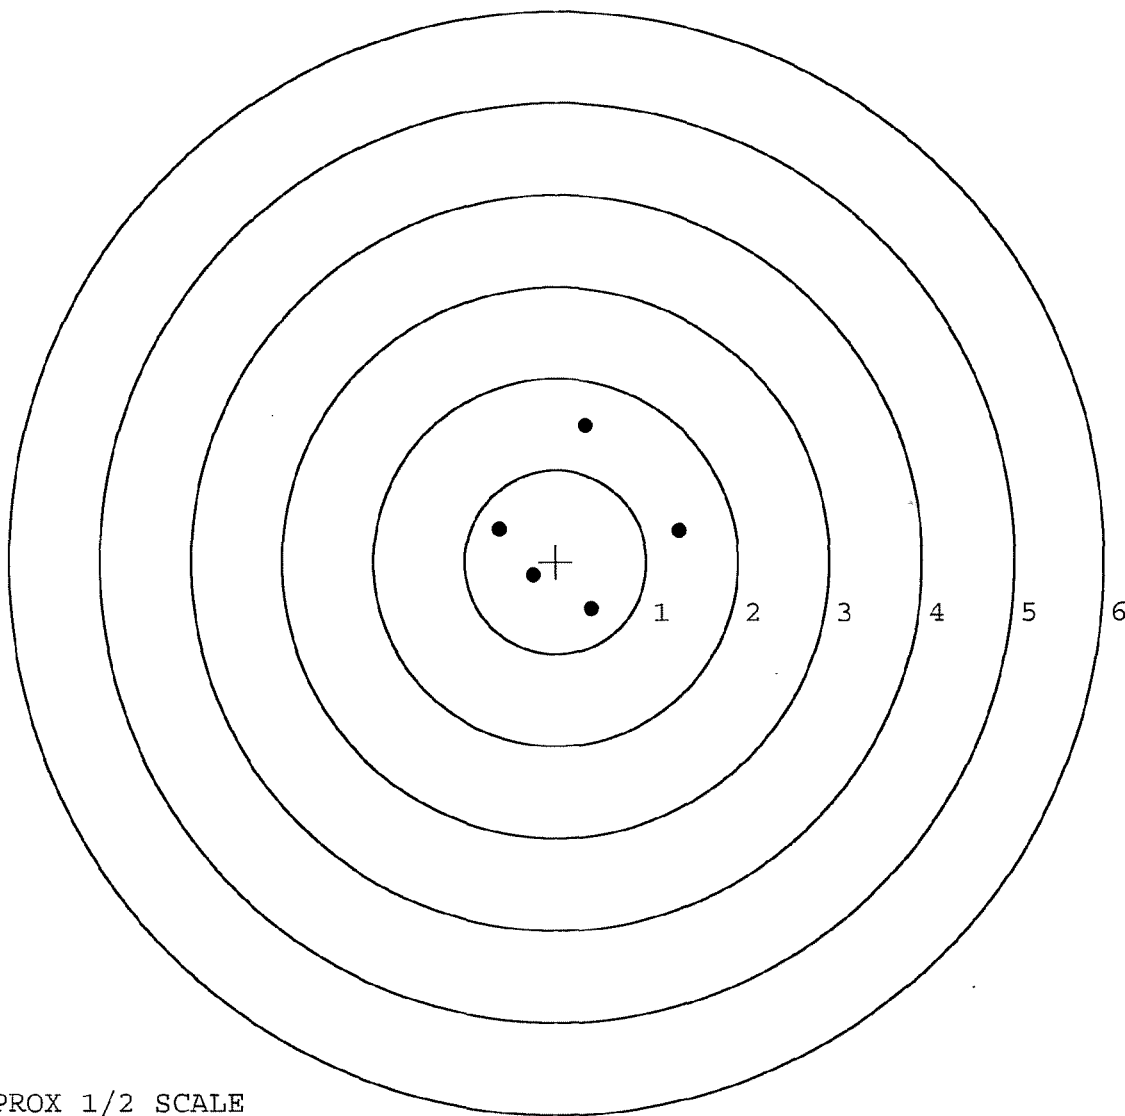

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6288243. 0

TARGET NUMBER: 2

FILE DATE: 09/29/2003

FILE TIME: 06:44

POINT#	X	Y
1:	0.599	-0.206
2:	0.038	-0.395
3:	0.175	-0.192
4:	-0.634	-0.360
5:	-0.035	0.832

X CENTROID: 0.029

Y CENTROID: -0.064

POA TO CENTROID: 0.070

HORZ SPREAD: 1.233

VERT SPREAD: 1.227

GROUP SPREAD: 1.334

MIN RADIUS: 0.194


MAX RADIUS: 0.898

MEAN RADIUS: 0.547

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 5

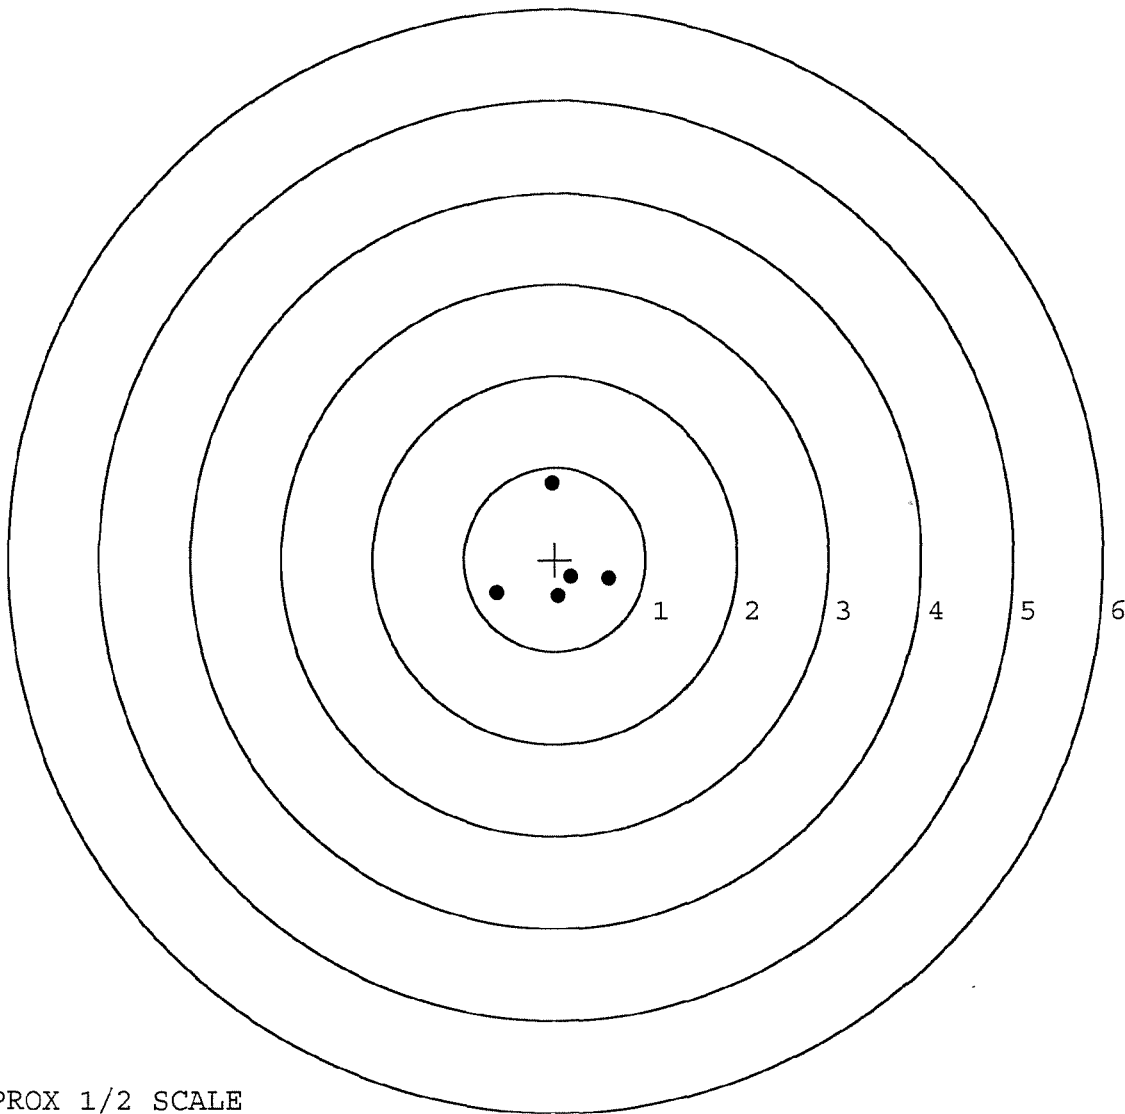

TARGET APPROX 1/2 SCALE