

G6296728

VER

Instr

enclo

safe

firea

SE

G

ORI

2

46

2

5716

66296728

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

BOLT ACTION CENTERFIRE RIFLE

24" BARREL 7.62 NATO

Made in Ilion, NY

Reg. U.S. Pat & tm. Off. Marca Registrada

Marque Deposee.

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

46 FORM

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6296728

UPC



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # 66296728

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		2/3/03	TRW
600	PROOF		2/3/03	TRW
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	2/3/03	TRW
610	DIS-ASSEMBLE GUN	FEB 08 2003	2/3/03	TRW
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <u>RL</u>		
615	ROLLMARK CALIBER		2/6/03	SB
617	DRILL AND TAP SIGHT HOLES		2-7-03	TRW
620	APPLY COATINGS (BARREL ACTION)		2-14	TA
	(BOLT)		2-14	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		2/15/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		2/15/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		2/15/03	DA
	D) OIL FIRING PIN ASSEMBLY		2/15/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	3-11-03	RL

BARBER - M24 0158838			READINGS			DATE	INITIAL		
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>6.5</u>	<u>6.0</u>	<u>6.0</u>	3-11-03	DA		
CONT.									
	G) SAFETY OFF FORCE	2 LBS MIN	<u>3.0</u>	<u>3.0</u>	<u>3.0</u>	3-11-03	DA		
	H) TRIGGER PULL TEST AND RETAINABILITY					3-11-03	RTL		
	I) FIRING PIN INDENT	.020 MIN	<u>.022</u>	<u>.022</u>	<u>.021</u>	3-11-03	DA		
	J) ASSEMBLE STOCK					3-20-03	PW		
	K) ASSEMBLE SWIVEL STUDS					4-25-03	RTL		
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					4-25-03	RTL		
	M) IRON SIGHT ALIGNMENT					4-25-03	RTL		
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					4-25-03	RTL		
640	GALLERY TEST AND TARGET		PASS	FAIL		4-25-03	TRW		
	MALFUNCTION		CORRECTION			4-25-03	TRW		
	MALFUNCTION		CORRECTION			2-25-03	TRW		
	MALFUNCTION		CORRECTION			2-25-03	TRW		
	MALFUNCTION		CORRECTION			2-25-03	TRW		
645	INSPECT FOR LIVE AMMO					2-25-03	TRW		
655	FINAL INSPECTION A) HEADSPACE					4-25-03	RTL		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.76</u>	<u>2.73</u>	<u>2.75</u>	<u>2.75</u>	<u>2.65</u>	3-11-03	DA
	C) FUNCTION					4-25-03	RTL		
660	PACK					4/25/03	DA		

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.45	2.62		2.60	MIN. SETTING,
PULL #2	2.41	2.76		2.50	NO AVG. OF 5
PULL #3	2.67	2.66		2.62	READINGS ACCEPT
PULL #4	2.70	2.63		2.60	ABLE LESS THAN
PULL #5	2.66	2.72		2.55	
TOTAL	12.89	13.39		12.87	
AVG.	2.57	2.67		2.57	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.21	3.29		
PULL #2	3.39	3.44		
PULL #3	3.41	3.24		
PULL #4	3.32	3.41		
PULL #5	3.48	3.46		
TOTAL	16.81	16.84		
AVG.	3.36	3.36		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# & TARGET & ACCU
PULL #1	4.20	4.08		4.34
PULL #2	4.17	4.18		4.46
PULL #3	4.05	4.07		4.47
PULL #4	4.18	3.96		4.25
PULL #5	4.13	4.17		4.44
TOTAL	20.73	20.46		21.96
AVG.	4.14	4.09		4.39

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6296728.___0
FILE DATE AND TIME: 02/26/2003 14:38

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

$$\begin{array}{r} .912 \\ .707 \\ \hline 2 \overline{) 1.619} \\ \underline{.8095} \end{array} \text{ MEAN RADIUS}$$

SERIAL NUMBER: G6296728. __0
 TARGET NUMBER: 1
 FILE DATE: 02/26/2003
 FILE TIME: 14:38

POINT#	X	Y
1:	0.650	-0.695
2:	-0.446	-1.792
3:	-0.001	0.195
4:	-0.405	0.119
5:	-0.065	0.931

X CENTROID: -0.053
 Y CENTROID: -0.248
 POA TO CENTROID: 0.254
 HORZ SPREAD: 1.096
 VERT SPREAD: 2.723
 GROUP SPREAD: 2.750
 MIN RADIUS: 0.446
 MAX RADIUS: 1.593
 MEAN RADIUS: 0.912
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 3
 # in 3 IN DIAMETER: 4

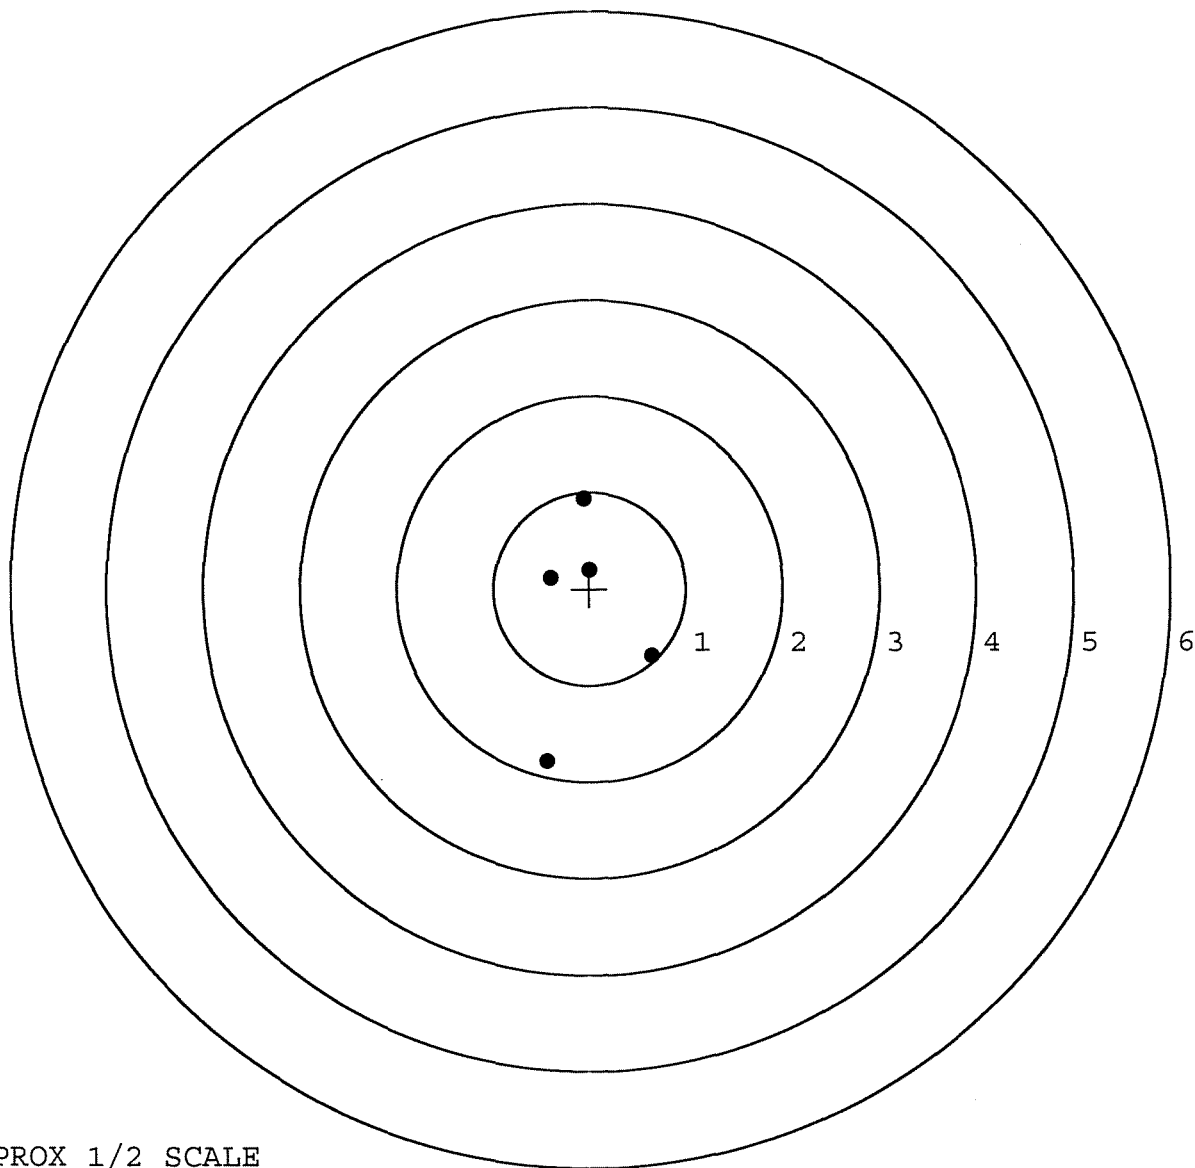


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296728. __0
 TARGET NUMBER: 2
 FILE DATE: 02/26/2003
 FILE TIME: 14:38

POINT#	X	Y
1:	-0.094	-0.010
2:	0.327	0.373
3:	0.984	-0.546
4:	-0.486	0.093
5:	-1.133	0.796

X CENTROID: -0.080
 Y CENTROID: 0.141
 POA TO CENTROID: 0.162
 HORZ SPREAD: 2.117
 VERT SPREAD: 1.342
 GROUP SPREAD: 2.507
 MIN RADIUS: 0.152
 MAX RADIUS: 1.267
 MEAN RADIUS: 0.707
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 3
 # in 3 IN DIAMETER: 5

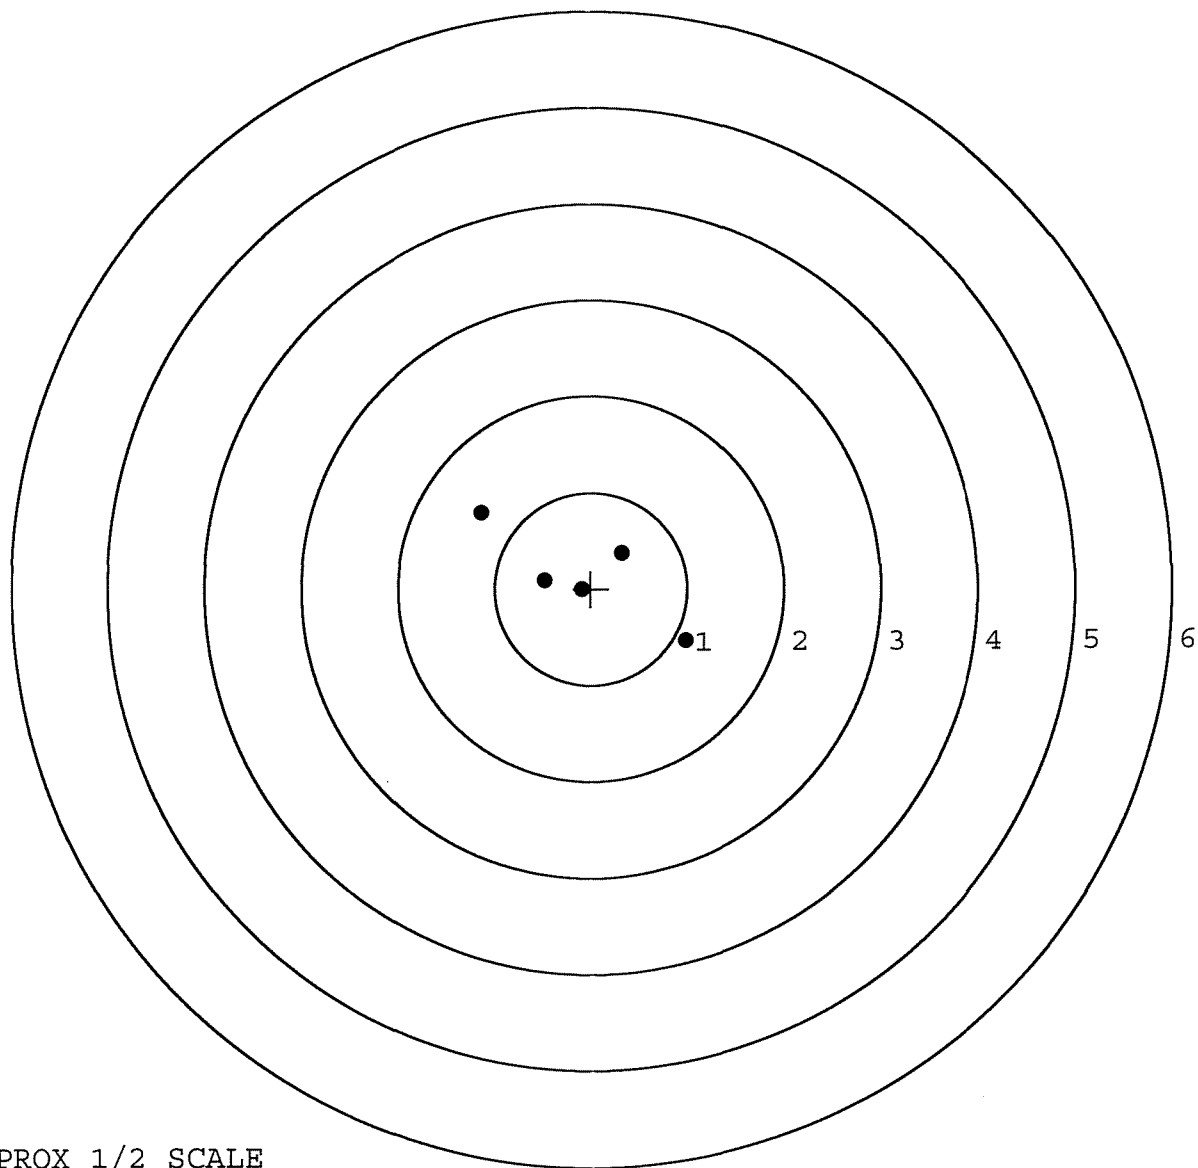

TARGET APPROX 1/2 SCALE