

G 6296786
Rephoc
E 6413491

Repair Inquiry																															
Repair Number: RE00158816	Serial: G6296786 Model: M24 SWS Center Fire Caliber: 7.62 NATO																														
Verify Repair	Repairman: _____ Status: Closed 1/14/2009 9:44:51 AM																														
Address Information																															
Customer: ☒ Received From	Return To: ☐ Received From																														
Name: DEPARTMENT OF THE ARMY SUPPLY	DEPARTMENT OF THE ARMY SUPPLY																														
Address 1: B CO 2ND BN 3RD INFANTRY REGIMENT	B CO 2ND BN 3RD INFANTRY REGIMENT																														
Address 2: 3RD BRIGADE 2ND INFANTRY PO Box: _____	3RD BRIGADE 2ND INFANTRY PO Box: _____																														
City: FORT LEWIS	FORT LEWIS																														
State: IWA Zip Code: 193433 Country: US	State: IWA Zip Code: 193433 Country: US																														
FPL: _____																															
Contact / Condition	Problems																														
Estimate	History / Status																														
Shipping / Billing																															
<table border="1"> <thead> <tr> <th colspan="2">Contact Information</th> <th colspan="2">Received Condition</th> <th colspan="2">Accessories Received</th> </tr> </thead> <tbody> <tr> <td>Phone: IN</td> <td></td> <td>Fair</td> <td></td> <td>Code</td> <td>Desc Qty</td> </tr> <tr> <td>Fax: _____</td> <td></td> <td>Condition Notes: _____</td> <td></td> <td>A010</td> <td>Hard Case 1</td> </tr> <tr> <td>Email: _____</td> <td></td> <td>CSR Notes: _____</td> <td></td> <td>A025</td> <td>Scope 1</td> </tr> <tr> <td>Comments: _____</td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>		Contact Information		Received Condition		Accessories Received		Phone: IN		Fair		Code	Desc Qty	Fax: _____		Condition Notes: _____		A010	Hard Case 1	Email: _____		CSR Notes: _____		A025	Scope 1	Comments: _____					
Contact Information		Received Condition		Accessories Received																											
Phone: IN		Fair		Code	Desc Qty																										
Fax: _____		Condition Notes: _____		A010	Hard Case 1																										
Email: _____		CSR Notes: _____		A025	Scope 1																										
Comments: _____																															
Repair Search Refresh Close																															

naglet 1/26/2009 11:33 AM CAPS NUM INS SCPL



Inbox - Micros...

FW: Request...

Mon 19 Feb...

(UNCLASSIFIED...

Microsoft Exc...

Arms Services...

Serial Number: **G6296786**Model: **M24 SWS****RE00158816***B: Pool**Iron Sights
Flash Suppressor*

EQUIPMENT INSPECTION AND MAINTENANCE WORKSHEET

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG


1. ORGANIZATION <i>A 10 2/3 INF</i>				2. NOMENCLATURE AND MODEL <i>MAT SWS</i>			
3. REGISTRATION/SERIAL/NSN <i>64296786</i>		4a. MILES	b. HOURS	c. ROUNDS FIRED	d. HOT STARTS	5. DATE <i>05 Jan 69</i>	6. TYPE INSPECTION <i>PMIS / Turn-in</i>
7. APPLICABLE REFERENCE							
TM NUMBER <i>9-1005-300-10</i>		TM DATE <i>04/2003</i>		TM NUMBER		TM DATE	
COLUMN a - Enter TM item number. COLUMN b - Enter the applicable condition status symbol. COLUMN c - Enter deficiencies and shortcomings.				COLUMN d - Show corrective action for deficiency or shortcoming listed in Column c. COLUMN e - Individual ascertaining completed corrective action initial in this column.			
STATUS SYMBOLS							
"X" - Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X" - Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH "(-)" - Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.				DIAGONAL "(/)" - Indicates a material defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL - Indicates that a completely satisfactory condition exists. FOR AIRCRAFT - Status symbols will be recorded in red.			
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.							
8a. SIGNATURE (Person(s) performing inspection)			8b. TIME		9a. SIGNATURE (Maintenance Supervisor)		9b. TIME
							10. MANHOURS REQUIRED
TM ITEM NO a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c			CORRECTIVE ACTION d		INITIAL WHEN CORRECTED e
1		<i>Missing Slings # 7141245</i>			<i>✓</i>		
1		<i>Missing Day Optic Sight CASE</i>			<i>✓</i>		
		<i>PT # 960081</i>					
2		<i>Missing Day optic Sight</i>					
		<i>Adj. Dial JUST COVER X 3</i>					
		<i>PART # 96042</i>					
2		<i>Missing Front and Rear</i>			<i>✓</i>		
		<i>IRON SIGHTS</i>					
20		<i>Missing Flash suppressor</i>			<i>✓</i>		
5		<i>Ball release mechanism</i>					
		<i>sticks</i>					

R & E NUMBER	<u>158816</u>			
SERIAL NUMBER	<u>G60296286</u>			
LOG-IN DATE	<u>1-14-09</u>			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		1-27-09	RT
505	RE-BARREL		1-29-09	RT
560	ASSEMBLE		1-29-09	RT
600	PROOF		1-29-09	J.P.D.
605	CHECK HEADSPACE		1-29-09	J.P.D.
610	DIS-ASSEMBLE GUN		1-29-09	J.P.D.
612	MAGNAFLUX		2/2/09	
510	DRILL AND TAP		1-30-09	SP
615	ROLLMARK CALIBER		2/2/09	RT
618	ROTO-BLAST		2/2/09	Hand
620	APPLY COATINGS		2-5	
625	FINAL ASSEMBLY		2-9-09	RT
640	FUNCTION TEST AND	PASS FAIL	2-10-09	TL
650	TARGET	PASS FAIL	2-10-09	TL
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION	2-10-09	W/W
670	FINAL INSPECTION		2-10-09	J.P.D.
	A) HEADSPACE	PASS FAIL	2-10-09	J.P.D.
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.22 2.17 2.19 2.22 2.27	2-10-09 W/W
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	3.0 3.0 3.0	2-10-09 J.P.D.
	G) SAFETY OFF FORCE	2 LBS MAX	4.0 4.0 4.0	2-10-09 J.P.D.
	I) FIRING PIN INDENT	.020	.023 .023 .024	2-10-09 J.P.D.
690	PACK		3/3/09	For

Trigger Profile [lbs,inch]

Profile: SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. ini. +/- .50 lbs.

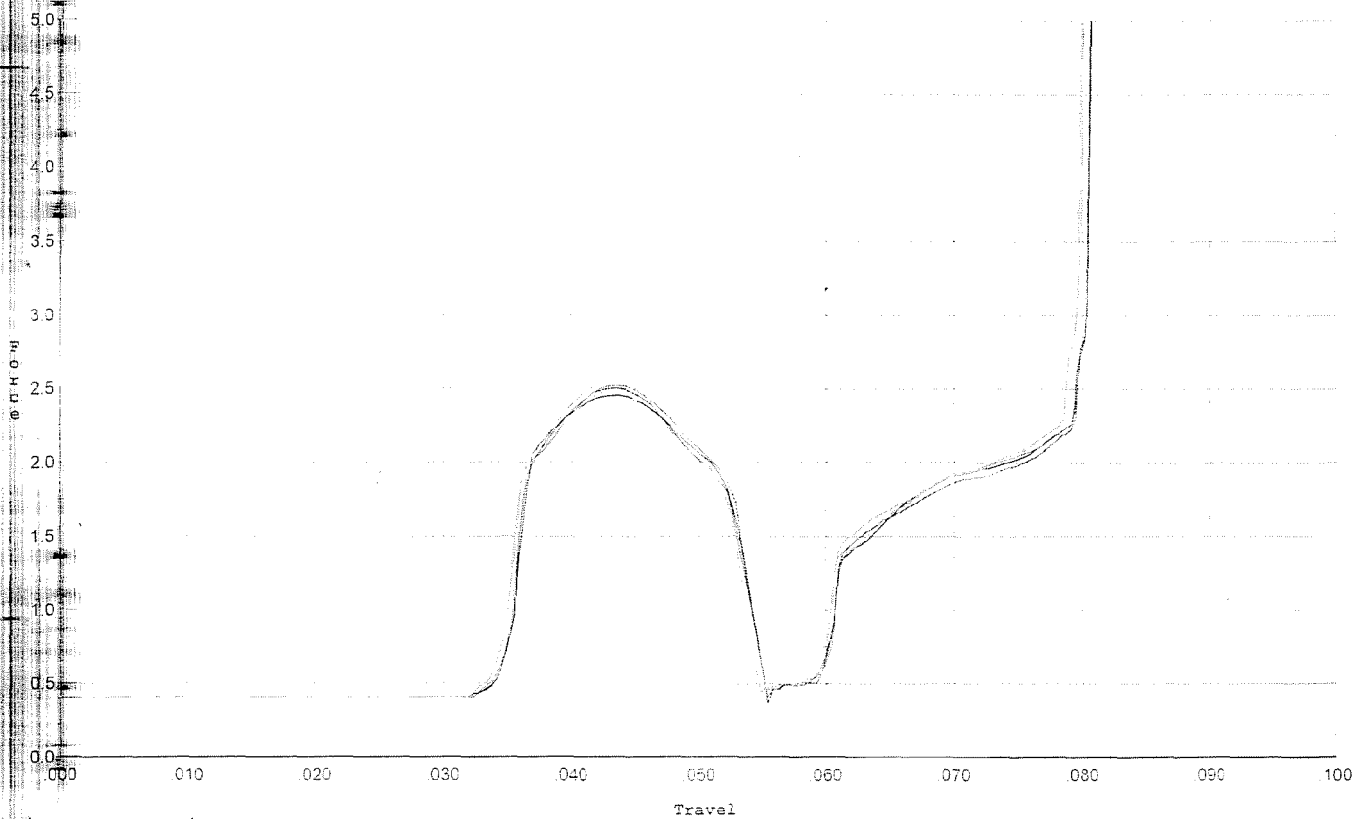


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.501	0.054	0.035	0.034	0.053		Set Trigger
2	2.453	0.053	0.034	0.034	0.053		Set Trigger
3	2.523	0.053	0.035	0.034	0.053		Set Trigger
4	2.478	0.052	0.034	0.034	0.053		Set Trigger
5	2.546	0.052	0.034	0.034	0.053		Set Trigger

Avg 2.50

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M24
Serial No: Form #F005
Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

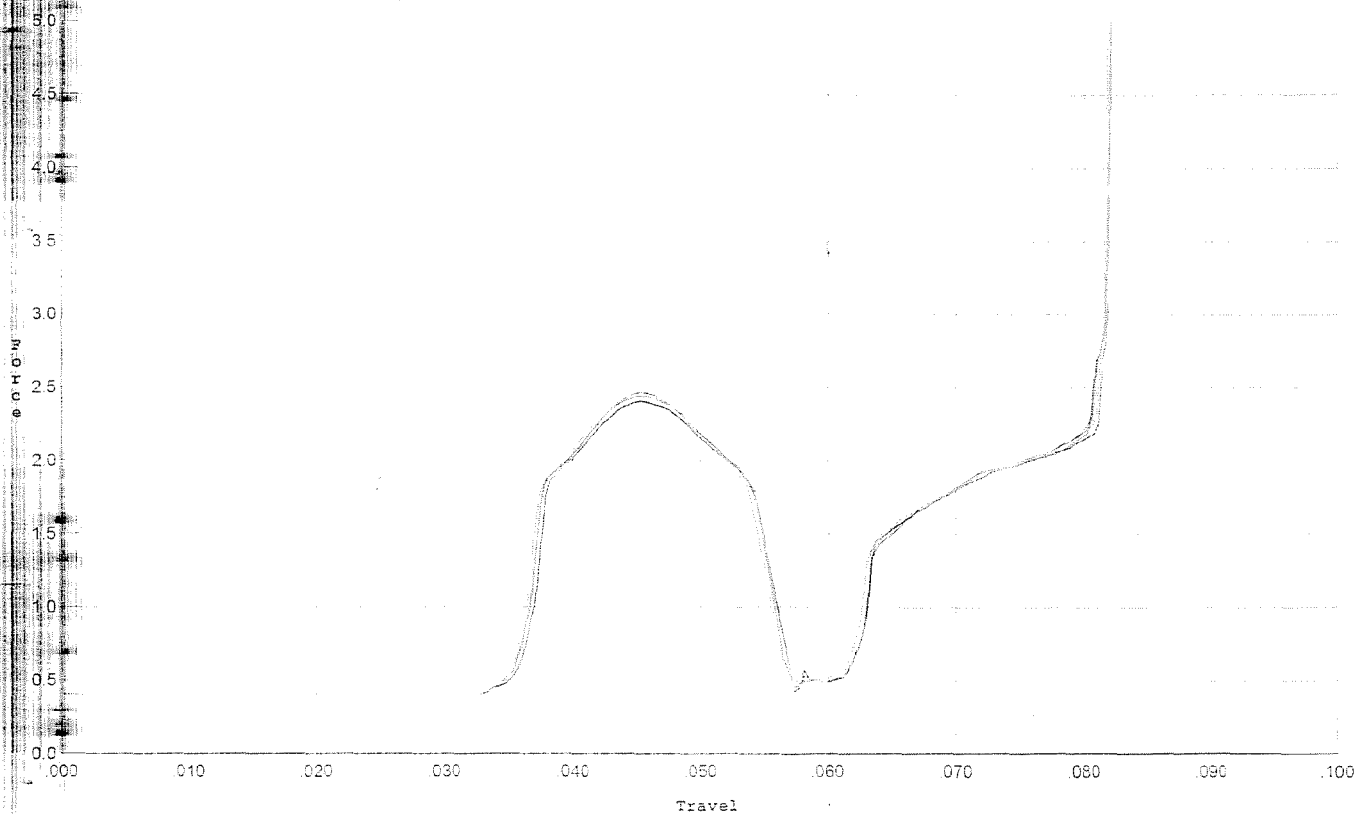


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.466	0.054	0.036	0.034	0.054		Set Trigger
2	2.405	0.054	0.036	0.034	0.053		Set Trigger
3	2.439	0.054	0.036	0.034	0.053		Set Trigger
4	2.453	0.054	0.036	0.034	0.053		Set Trigger
5	2.442	0.055	0.036	0.034	0.054		Set Trigger

Aug 24

Trigger Profile [lbs,inch]

Profile
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. ini. +/- .75 lbs.

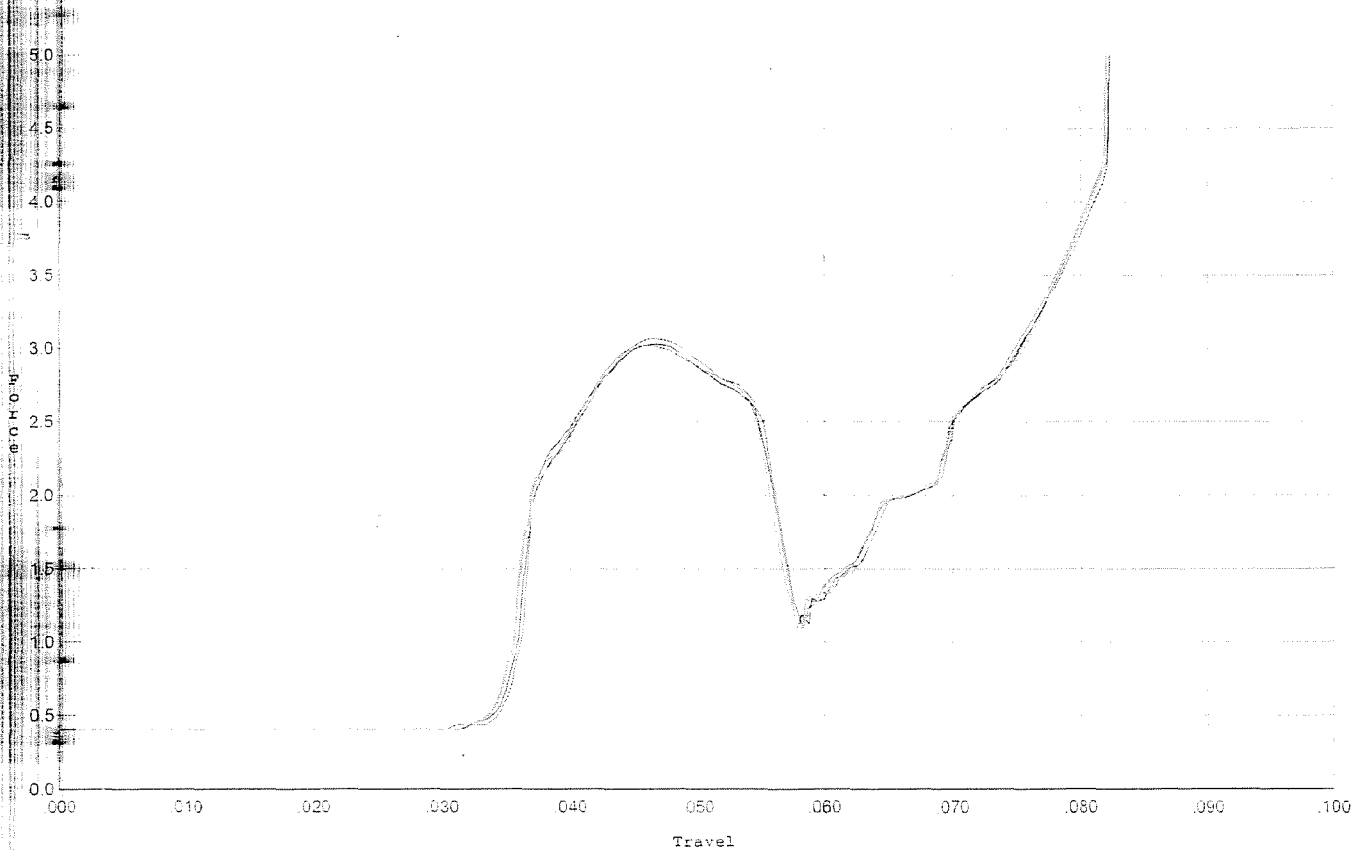


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.066	0.055	0.035	0.032	0.067		Set Trigger
2	3.028	0.056	0.035	0.032	0.068		Set Trigger
3	3.019	0.055	0.034	0.032	0.067		Set Trigger
4	3.047	0.055	0.035	0.032	0.068		Set Trigger
5	3.016	0.055	0.034	0.032	0.066		Set Trigger

Avg 3.03

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

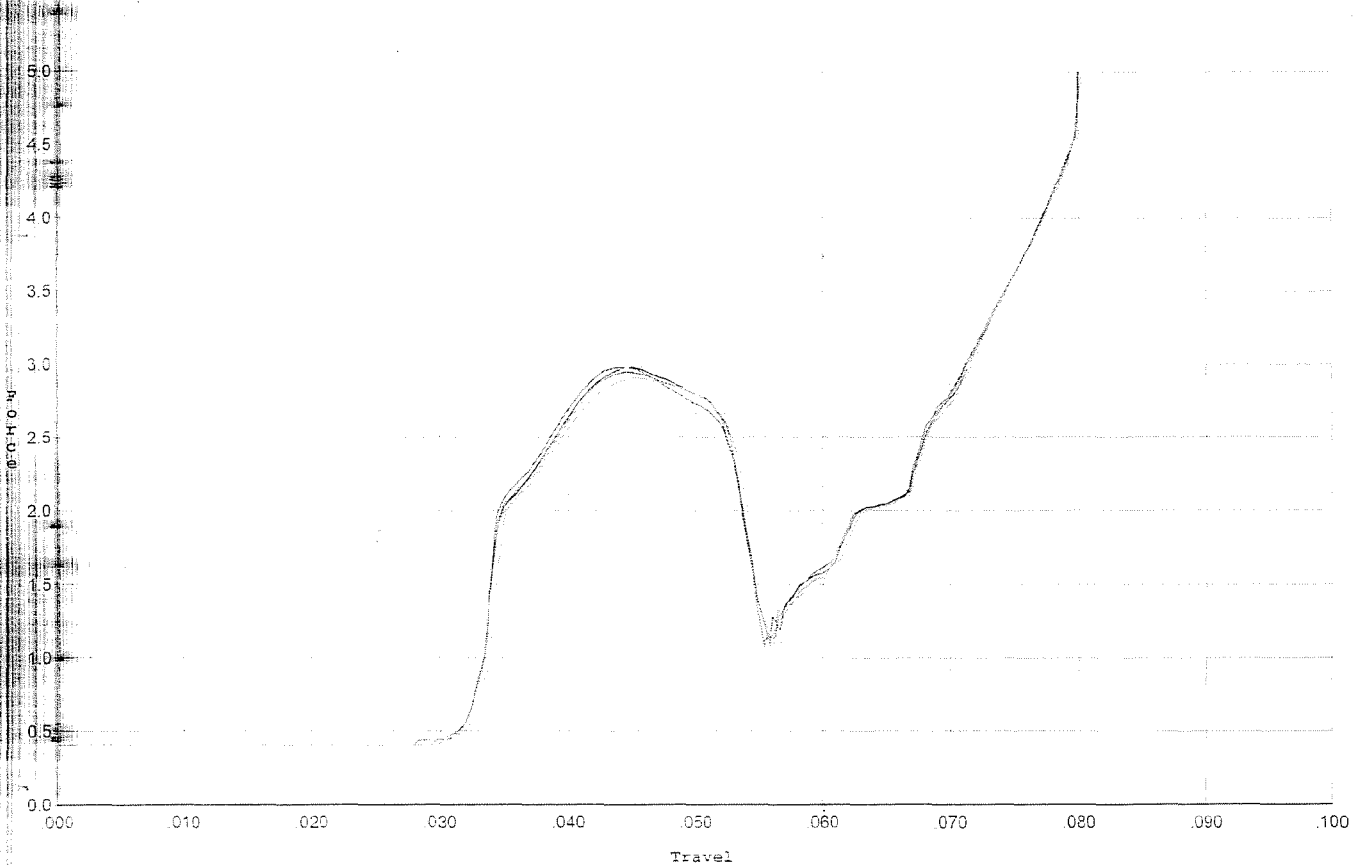


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.977	0.053	0.032	0.032	0.065		Set Trigger
2	2.977	0.053	0.032	0.032	0.065		Set Trigger
3	2.945	0.053	0.032	0.032	0.065		Set Trigger
4	2.903	0.053	0.032	0.032	0.064		Set Trigger
5	2.983	0.054	0.033	0.032	0.066		Set Trigger

Avg 295

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

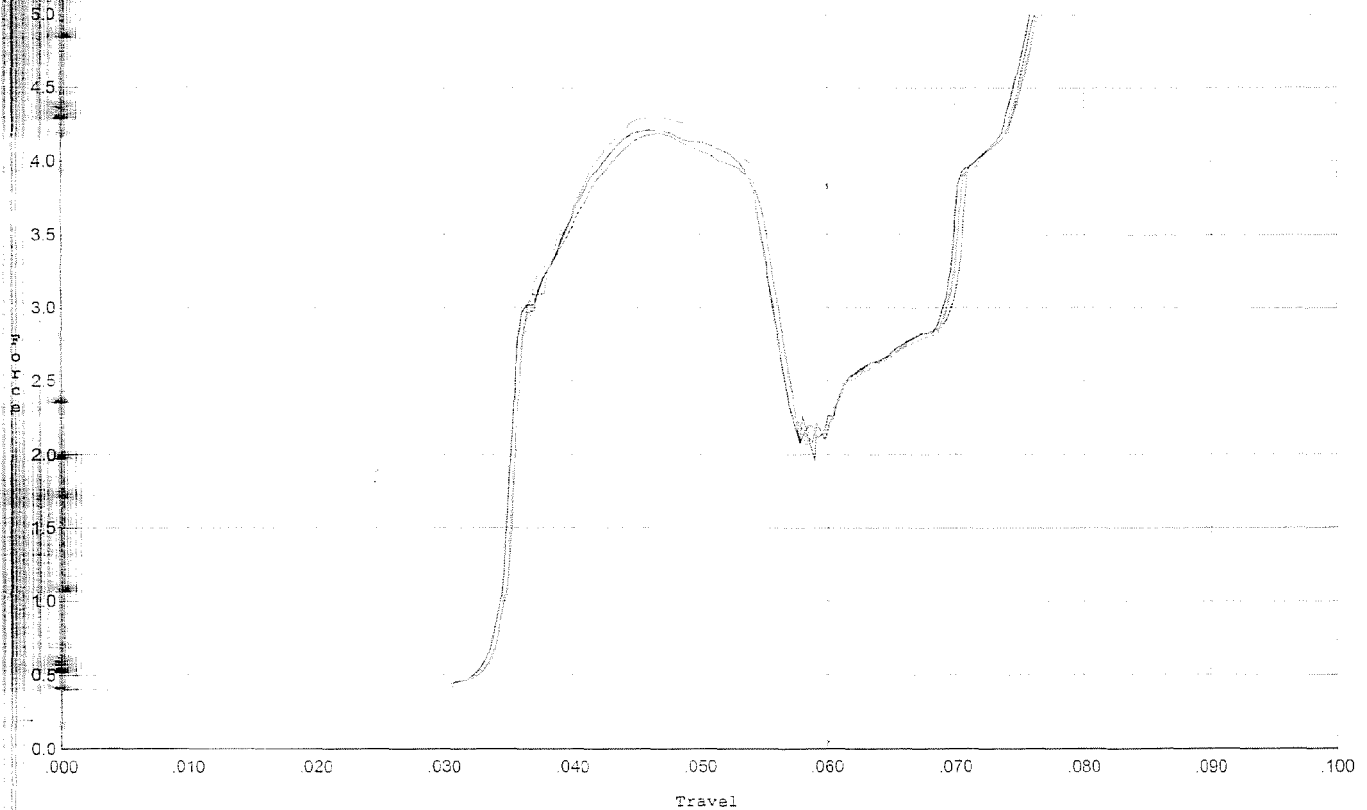


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.190	0.055	0.034	0.026	0.092		Set Trigger
2	4.214	0.054	0.033	0.026	0.091		Set Trigger
3	4.301	0.055	0.034	0.026	0.093		Set Trigger
4	4.303	0.055	0.034	0.026	0.093		Set Trigger
5	4.210	0.054	0.034	0.027	0.090		Set Trigger

Aug 4.24

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

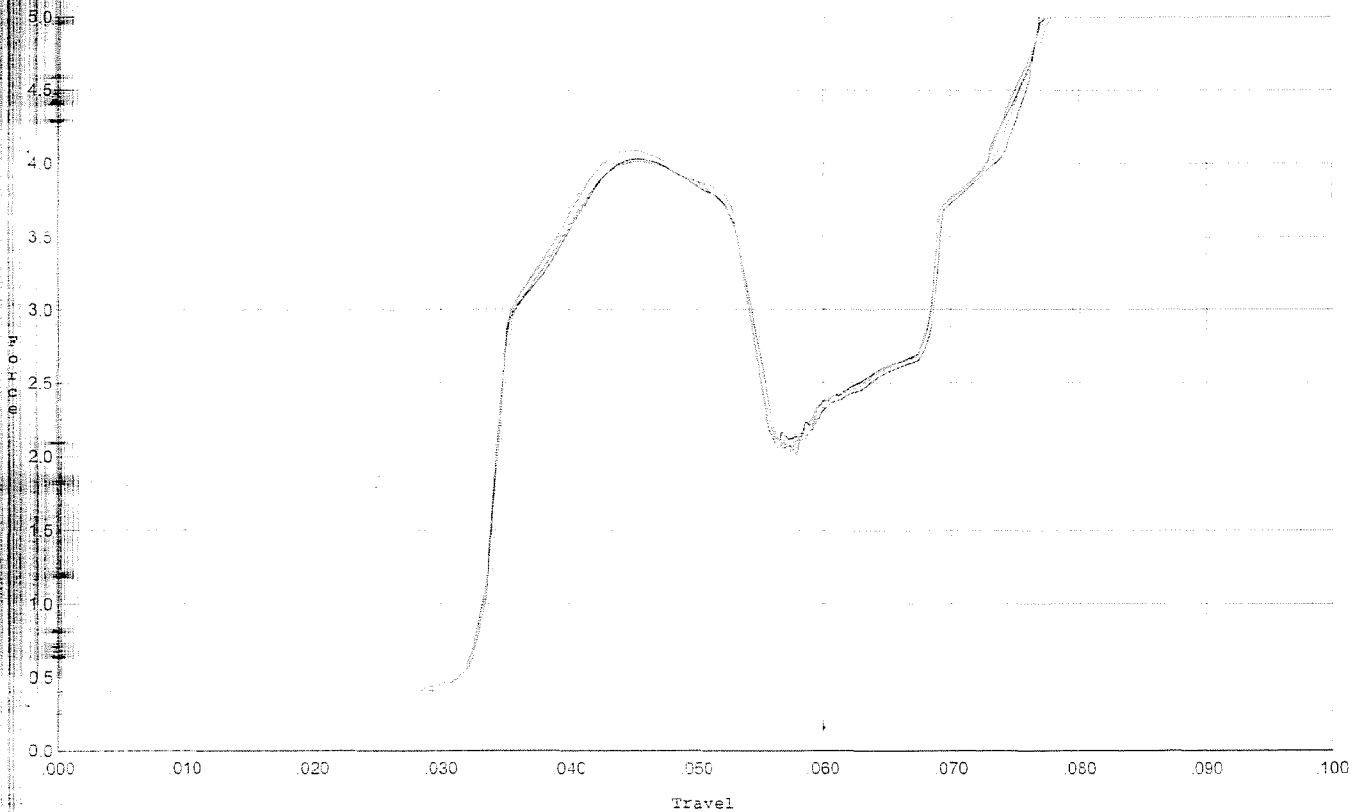


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.013	0.053	0.032	0.030	0.086		Set Trigger
2	4.030	0.053	0.033	0.030	0.086		Set Trigger
3	4.082	0.053	0.032	0.030	0.086		Set Trigger
4	4.090	0.053	0.032	0.030	0.087		Set Trigger
5	4.055	0.054	0.033	0.030	0.087		Set Trigger

Aug 4.05

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: 1/20/09

Model: M/24
Serial No: Form #F005
Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

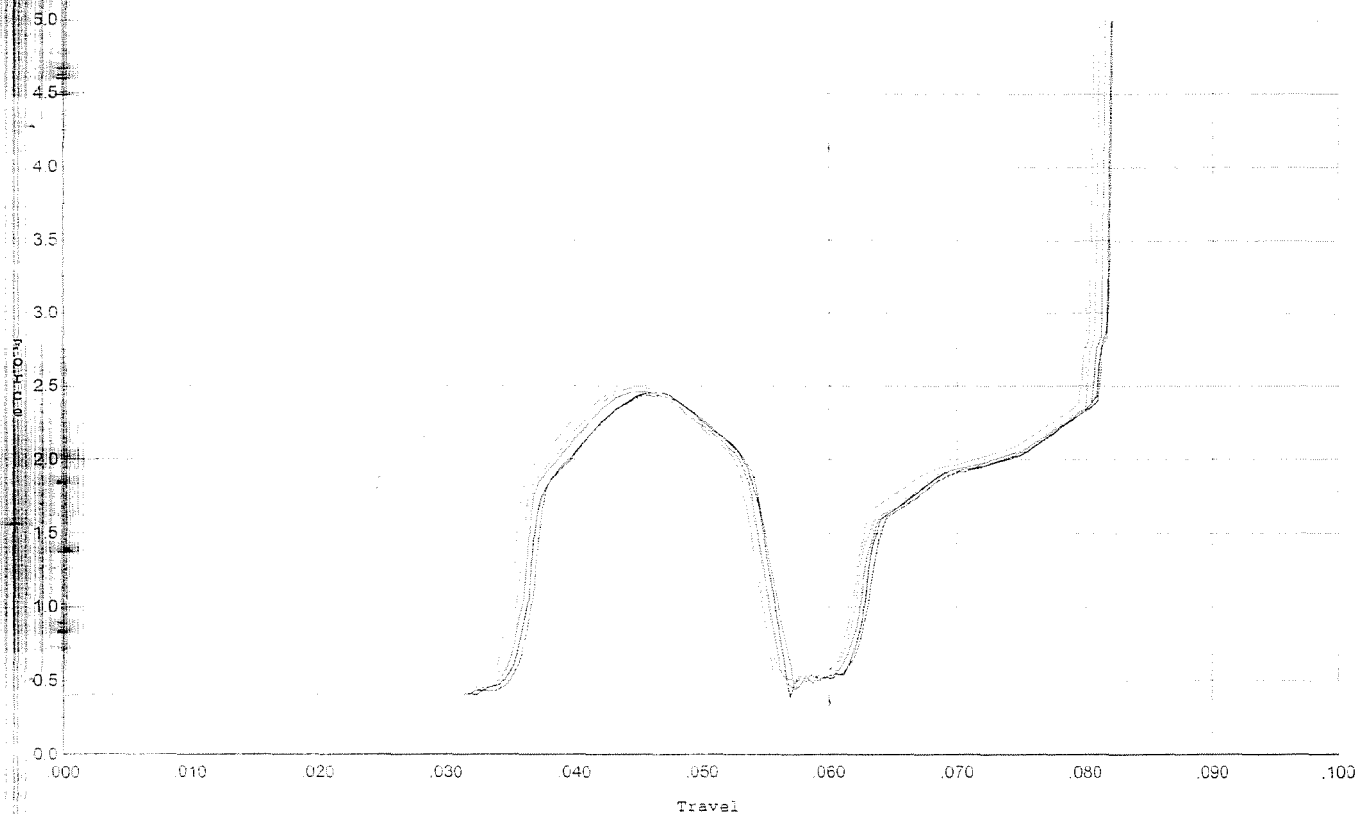


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.433	0.054	0.035	0.034	0.054		Set Trigger
2	2.455	0.054	0.035	0.034	0.054		Set Trigger
3	2.459	0.054	0.035	0.034	0.054		Set Trigger
4	2.480	0.053	0.035	0.034	0.054		Set Trigger
5	2.494	0.053	0.034	0.034	0.056		Set Trigger

Avg 2.46

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: 1/20/09

Model: M/24
 Serial No: Form #F005
 Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

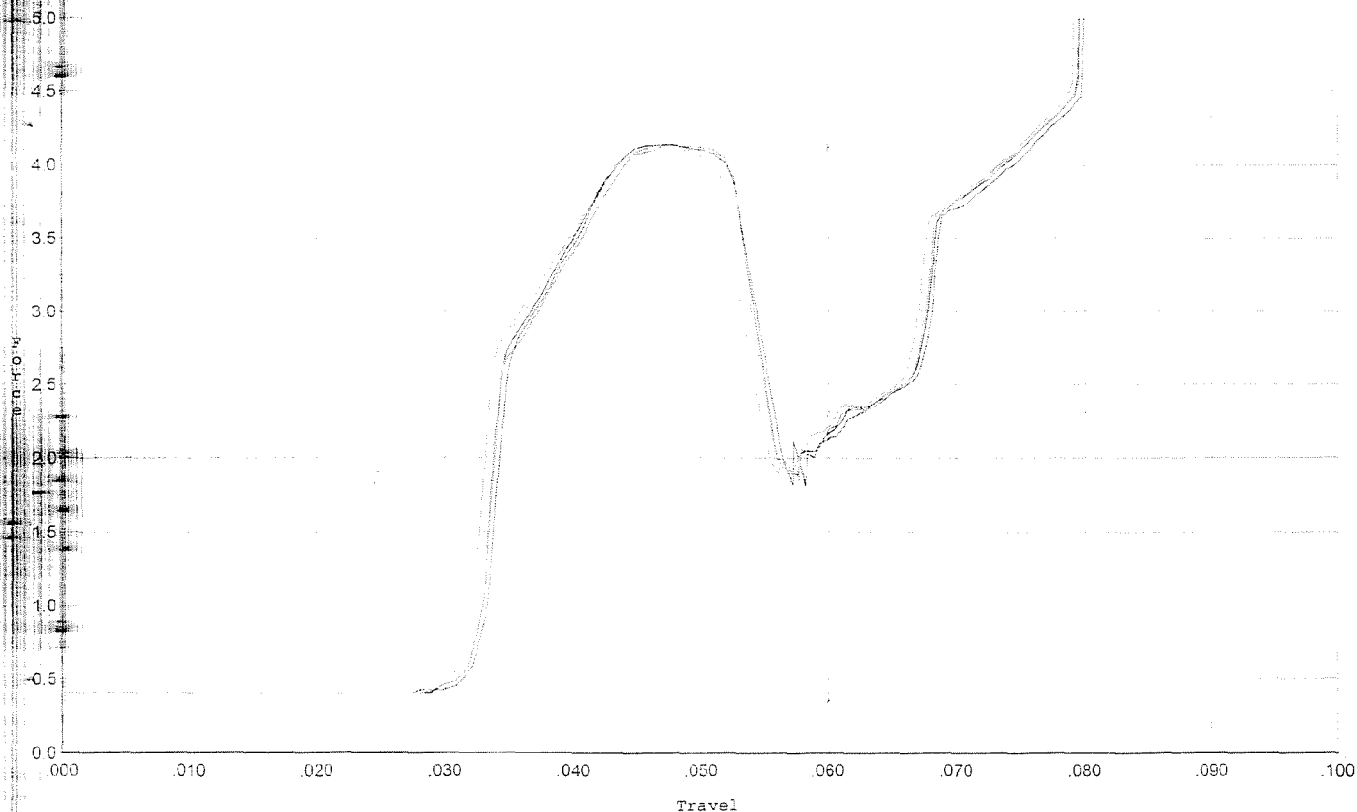

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.139	0.053	0.032	0.030	0.086		Set Trigger
2	4.137	0.053	0.032	0.030	0.087		Set Trigger
3	4.113	0.053	0.032	0.030	0.086		Set Trigger
4	4.164	0.054	0.032	0.030	0.089		Set Trigger
5	4.113	0.052	0.031	0.030	0.085		Set Trigger

Avg 4.13

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6296786.__0
FILE DATE AND TIME: 02/10/2009 11:37

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.046
The Average Y Centroid of the Five Target Set:	-0.011
The Average Point of Impact of the Five Target Set:	0.048
The Average Mean Radius of the Five Target Set:	0.497
The Distance from POA to Centroid Target #1:	0.156
The Distance from Centroid Target #2 to Centroid Target #1:	0.365
The Distance from Centroid Target #3 to Centroid Target #1:	0.130
The Distance from Centroid Target #4 to Centroid Target #1:	0.263
The Distance from Centroid Target #5 to Centroid Target #1:	0.271

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 1

FILE DATE: 02/10/2009

FILE TIME: 11:37

X CENTROID: 0.152

Y CENTROID: -0.032

POA TO CENTROID: 0.156

HORZ SPREAD: 1.177

VERT SPREAD: 1.316

GROUP SPREAD: 1.322

MIN RADIUS: 0.150

MAX RADIUS: 0.793


MEAN RADIUS: 0.461

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.436	-0.773
2:	0.566	0.543
3:	-0.384	0.158
4:	0.260	0.250
5:	-0.611	-0.138
6:	-0.175	-0.269
7:	0.483	0.234
8:	0.369	0.002
9:	0.390	-0.151
10:	0.189	-0.178

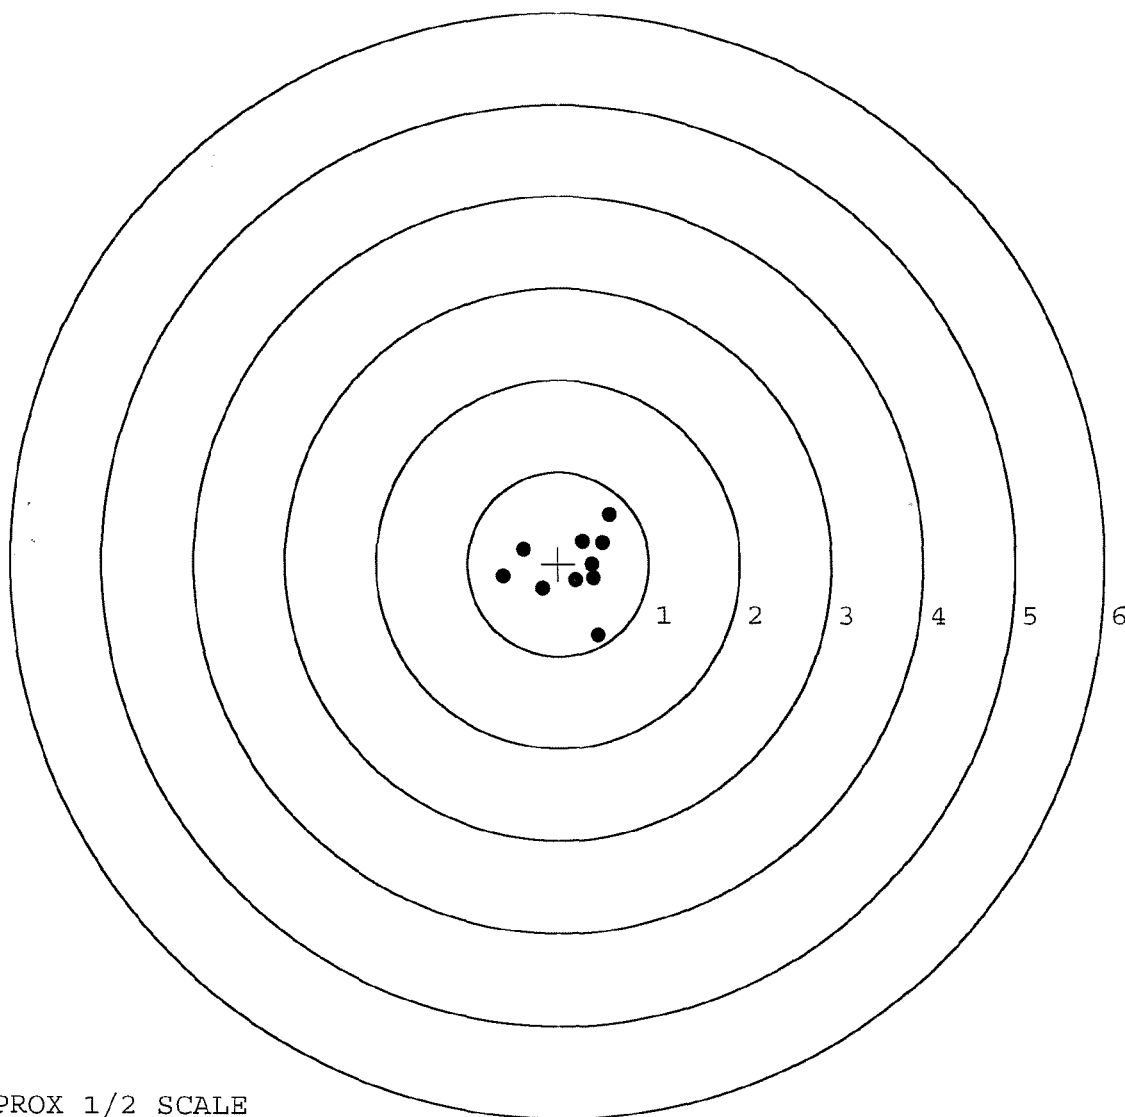


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. __0
 TARGET NUMBER: 2
 FILE DATE: 02/10/2009
 FILE TIME: 11:37

POINT#	X	Y
1:	-0.057	-0.723
2:	0.386	-0.011
3:	0.344	0.050
4:	-0.189	-0.321
5:	0.733	0.410
6:	-0.749	0.369
7:	-0.782	0.214
8:	-0.561	0.376
9:	-0.423	0.425
10:	-0.561	0.259

X CENTROID: -0.186
 Y CENTROID: 0.105
 POA TO CENTROID: 0.213
 HORZ SPREAD: 1.515
 VERT SPREAD: 1.148
 GROUP SPREAD: 1.528
 MIN RADIUS: 0.398
 MAX RADIUS: 0.968
 MEAN RADIUS: 0.584
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

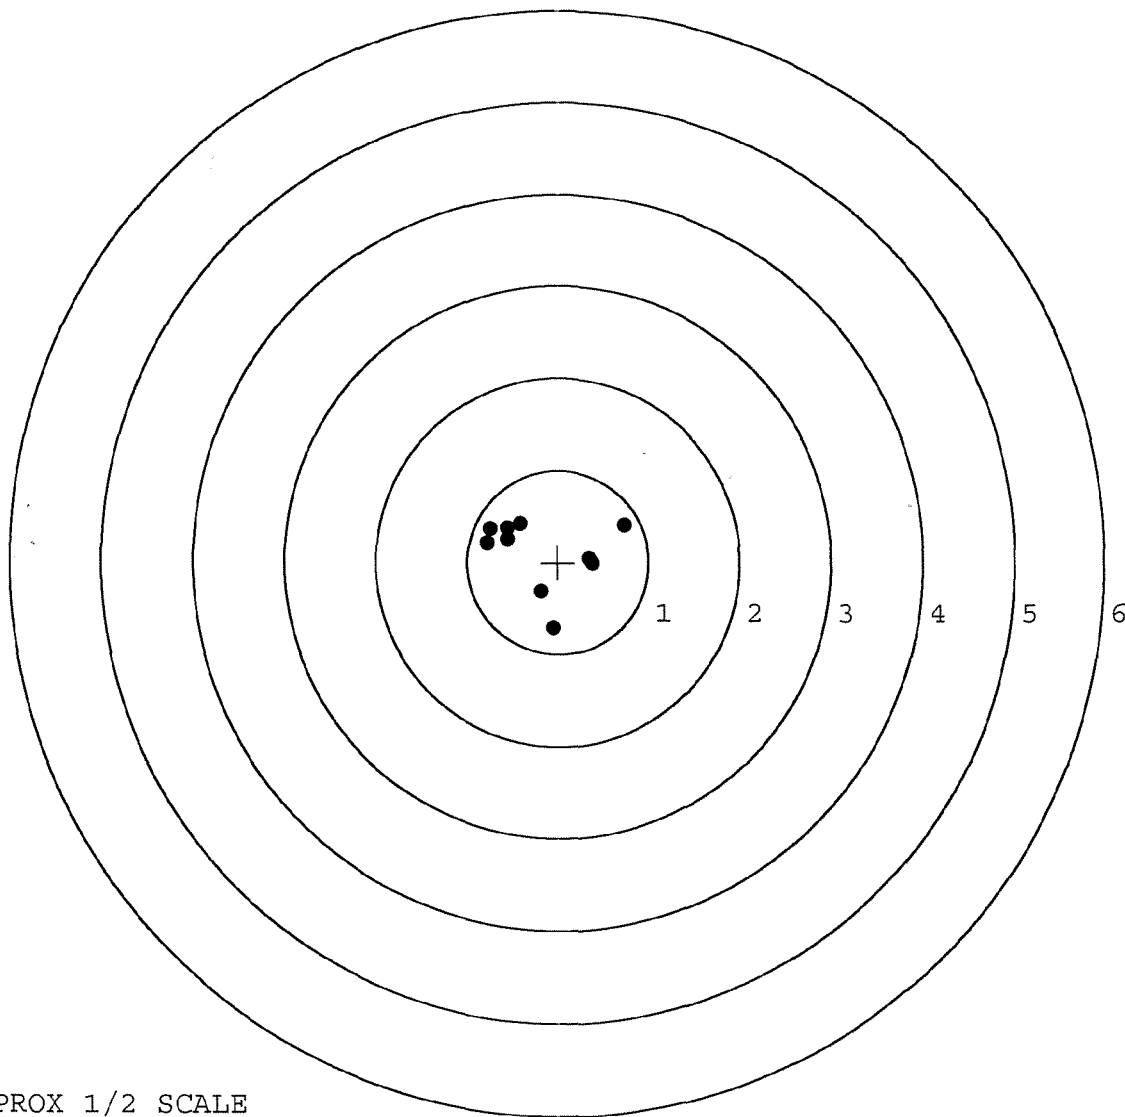

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 3

FILE DATE: 02/10/2009

FILE TIME: 11:37

X CENTROID: 0.027

Y CENTROID: 0.004

POA TO CENTROID: 0.028

HORZ SPREAD: 0.997

VERT SPREAD: 2.008

GROUP SPREAD: 2.065

MIN RADIUS: 0.137

MAX RADIUS: 1.104


MEAN RADIUS: 0.542

IN 1 IN DIAMETER: 7

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.335	0.922
2:	-0.010	0.494
3:	-0.573	0.460
4:	0.250	0.448
5:	0.424	-0.114
6:	-0.148	-1.086
7:	0.007	-0.479
8:	-0.026	-0.338
9:	-0.115	-0.177
10:	0.128	-0.088

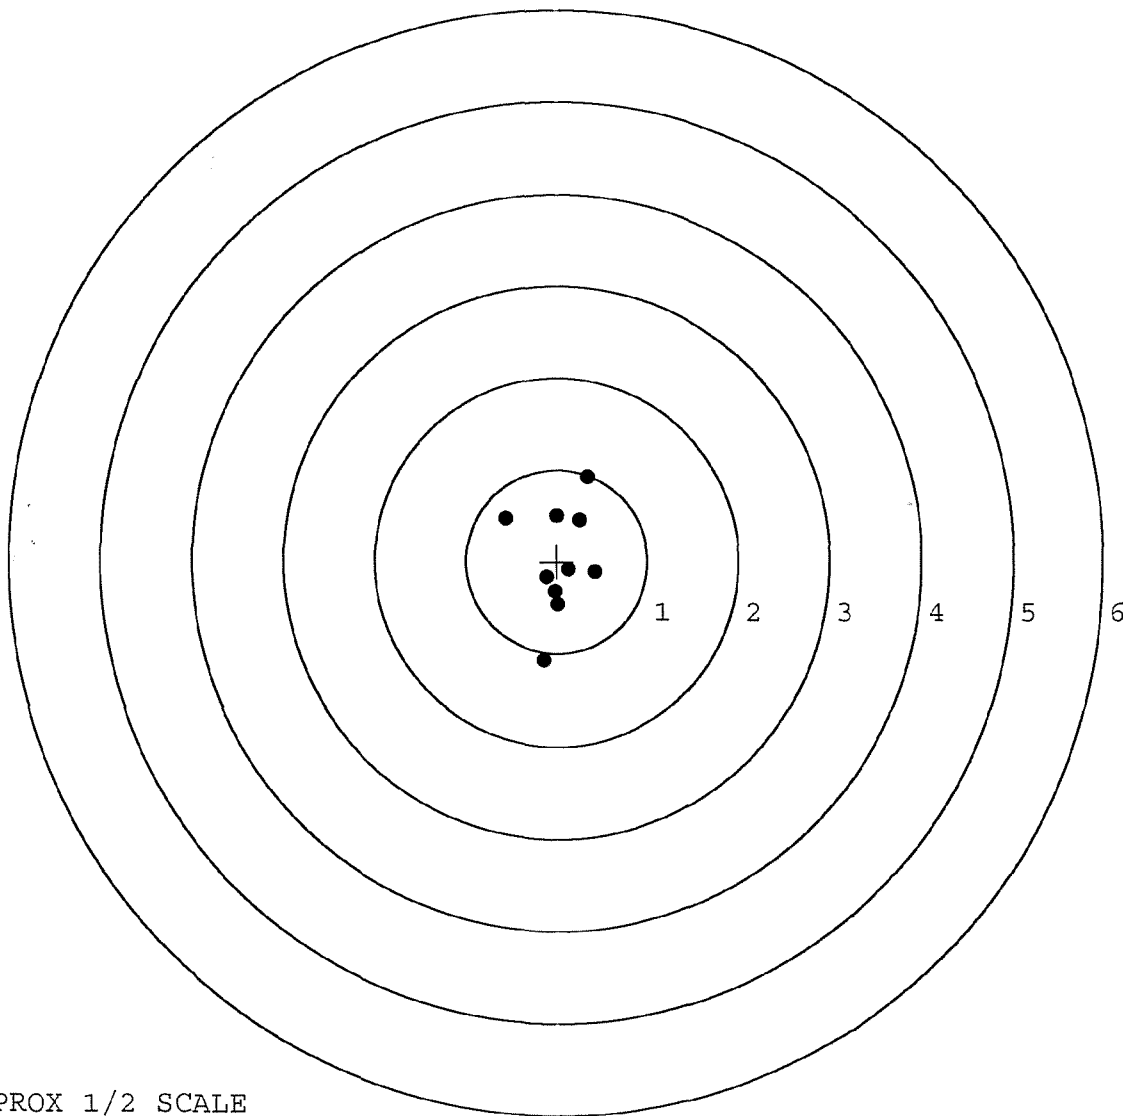

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 4

FILE DATE: 02/10/2009

FILE TIME: 11:37

X CENTROID: -0.107

Y CENTROID: -0.077

POA TO CENTROID: 0.132

HORZ SPREAD: 1.712

VERT SPREAD: 1.316

GROUP SPREAD: 1.718

MIN RADIUS: 0.075

MAX RADIUS: 1.014


MEAN RADIUS: 0.560

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.901	-0.187
2:	0.422	0.616
3:	-0.379	0.531
4:	-0.422	-0.700
5:	-0.811	-0.326
6:	-0.581	-0.515
7:	0.182	0.256
8:	-0.300	-0.247
9:	-0.158	-0.132
10:	0.077	-0.065

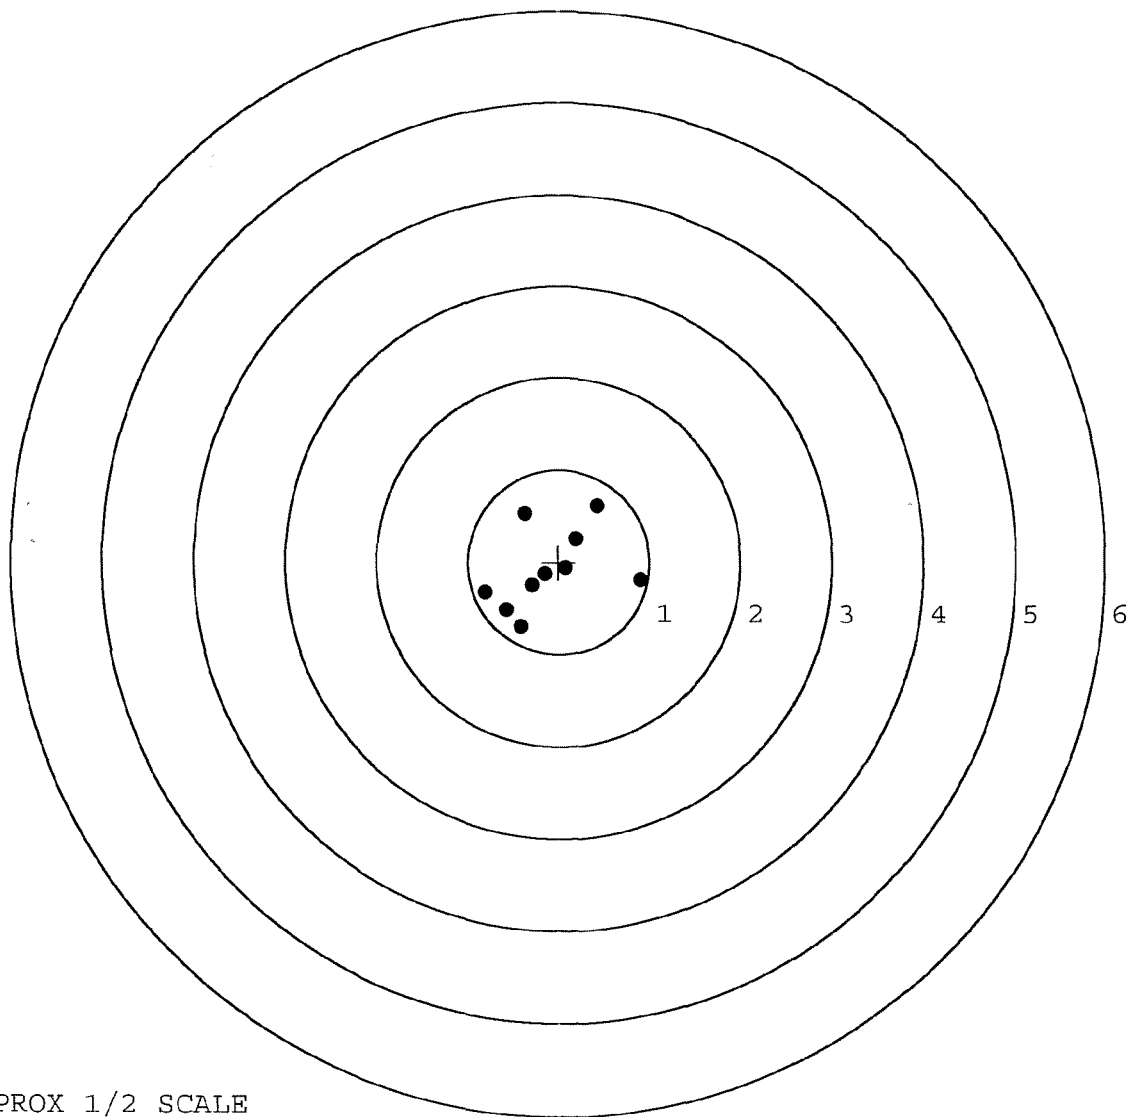

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 5

FILE DATE: 02/10/2009

FILE TIME: 11:37

X CENTROID: -0.118

Y CENTROID: -0.055

POA TO CENTROID: 0.130

HORZ SPREAD: 0.918

VERT SPREAD: 0.765

GROUP SPREAD: 1.017

MIN RADIUS: 0.079

MAX RADIUS: 0.629


MEAN RADIUS: 0.339

IN 1 IN DIAMETER: 8

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.445	-0.018
2:	0.387	-0.067
3:	0.178	0.321
4:	0.473	0.159
5:	-0.363	-0.015
6:	-0.346	-0.444
7:	-0.302	-0.279
8:	-0.298	-0.156
9:	-0.288	-0.053
10:	-0.175	-0.001

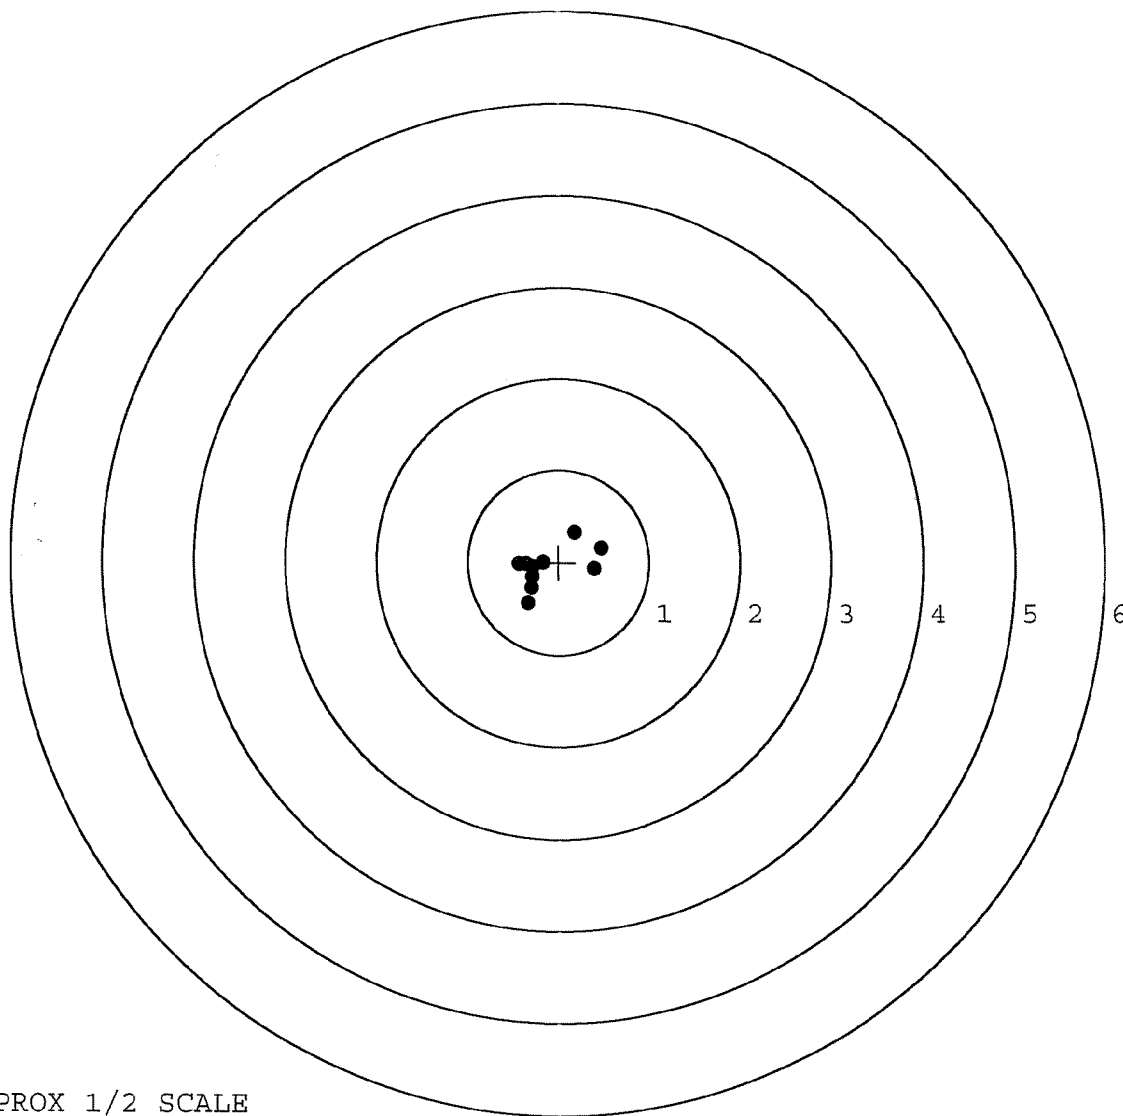

TARGET APPROX 1/2 SCALE

Repair Inquiry

Repair Number: RE00069147

Serial: C6413491 Model 700 Center Fire Caliber: 7
62 NATO M/24 SWS

Repairman:

Verify Repair

Status:

New 8/25/2003 11:41:01 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received From

Name: 3RD BDE

3RD BDE

Address 1: BLDG 03213 FAITH AVE

BLDG 03213 FAITH AVE

Address 2: 1 LT MCCULLOUGH 2539665588

PO Box:

1 LT MCCULLOUGH 2539665588

PO Box:

City: FT LEWIS

FT LEWIS

State: WA

Zip Code: 98433

Country: US

State: WA

Zip Code: 98433

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Good

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A006	Sling Strap	1
A007	With Stud	2
A010	Hard Case	1
A017	Scope Base	1
A026	Scope	1
A045	Bi Pod	1
C000	FRT AND REAR BASE	1
C001	DEPLOYMENT KIT	1

Repair Search

Refresh

Close

naglej

8/25/2003

12:43 PM

CAPS

NUM

INS

SCL

start

5 Micros

Arms Serv...

Part Search

2 Intern...

2 Micros

CERTIFIC

12:43 PM

6629 6786

~~Serial: E6413491~~

Model: 700



RE00069147

INITIAL & CYCLE TESTS

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

SERIAL NO. _____

DATE 9-11-03

TESTER TRW

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.36	2.36		2.67	
PULL #2	2.56	2.37		2.45	
PULL #3	2.50	2.33		2.65	
PULL #4	2.51	2.34		2.69	
PULL #5	2.52	2.34		2.75	
TOTAL	12.45	11.74		13.21	
AVERAGE	2.49	2.34		2.64	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.32	3.39		
PULL #2	3.37	3.23		
PULL #3	3.17	3.21		
PULL #4	3.30	3.19		
PULL #5	3.33	3.24		
TOTAL	16.49	16.26		
AVERAGE	3.29	3.25		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX-SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.27	4.28		4.35
PULL #2	4.20	4.23		4.18
PULL #3	4.20	4.12		4.36
PULL #4	4.21	4.31		4.29
PULL #5	4.22	4.39		4.35
TOTAL	21.17	21.33		21.53
AVERAGE	4.23	4.26		4.30

SERIAL # G 6296786INSPECTED BY: RTLDATE REC'D: 8-25-03DATE RET'D: 9-16-03

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS: New Bipod, SLING
and deployment KIT.

R & E NUMBER	69147		
SERIAL NUMBER	E10413491 66296286 (NEW)		
LOG-IN DATE	8-25-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-26-03	RTL
560 A	RE-BARREL	8-27-03	RTL
B	DRILL AND TAP	8-27-03	TRW
575	ASSEMBLE	8-27-03	RTL
600	PROOF	8-27-03	AC
605	CHECK HEADSPACE	8-27-03	AC
610	DIS-ASSEMBLE GUN	8-27-03	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	8-28-03	JB
618	ROTO-BLAST	8-29-03	JB
620	APPLY COATINGS	9-12	TA
625 A	FINAL ASSEMBLY	9-13-03	RTL
B	TRIGGER PULL TEST	9/17/03 270 271, 260, 270, 265	DA
C	SAFETY "ON" FORCE	9/17/03 7.0 7.0 7.0	DA
D	SAFETY "OFF" FORCE	9/17/03 2.0 2.0 2.0	DA
E	FIRING PIN INDENT	9/17/03 1.022, 1.021, 1.021	DA
640	TARGET	9-16-03	TRW
655	FINAL INSPECT	9-16-03	RTL
660	PACK	9-16-03	DA
		SHIP DATE	
QAR INSPECTION DATE			


18 Aug 03


Mr. Nagle,

I would like to request a new deployment kit and Harris bipod. My deployment kit is missing many pieces of which were not issued to me. The padding on the Harris bipod is starting to fall off. There is also a issue with the trigger. The trigger pull seems to be inconsistent with each shot I take. My barrel also has a unknown round count from the previous sniper team. If you can please inspect the barrel, it would be much appreciated.

Garrett Scott
Scott, Garrett
SGT
A co. 2/3 Inf
253-966-5663

C-641 3491

PACKING LIST		PACKED BY SCOTT GARRETT SGT	1. NO. BOXES 1	2. REQUISITION NO.		
3. END ITEM M24 SWS				4. ORDER NO.		
				5. DATE		
				PAGE 1 OF 1 PAGES		
BOX NO. (a)	CONTENTS - STOCK NUMBER AND NOMENCLATURE (b)	UNIT OF ISSUE (c)	INITIAL OPERATIO (d)	RUNNING SPARES (e)	TOTAL (f)	
1	M24 SWS SN# E6413491	1	1		1	
	LEUPOLD M3A RIFLE SCOPE SN# 89 0132	1	1		1	
	DEPLOYMENT KIT	1	1		1	
	SLING	1	1		1	
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES						
TYPED NAME AND TITLE SCOTT GARRETT SGT A CO 2-3 INF SNIPER SECT.			SIGNATURE 			

PACKING LIST		PACKED BY SCOTT, GARRETT SGT	1. NO. BOXES 1	2a. REQUISITION NO.		
				2b. ORDER NO.		
3. END ITEM M24 SWS				4. DATE		
				5. PAGE 1 OF 1 PAGES		
BOX NO. (a)	CONTENTS - STOCK NUMBER AND NOMENCLATURE (b)	UNIT OF ISSUE (c)	QUANTITIES REQUIRED			
			INITIAL OPERATIO (d)	RUNNING SPARES (e)	TOTAL (f)	
1	M24 SWS SN# E6413491	1	1		1	
	LEUPOLD M3A RIFLE SCOPE SN# 89 0132	1	1		1	
	DEPLOYMENT KIT	1	1		1	
	SLING	1	1		1	
6. THIS CERTIFIES THAT ITEMS LISTED HEREON ARE WITHIN THE SPECIFIED BOXES						
TYPED NAME AND TITLE SCOTT, GARRETT SGT A CO 2-3 INF SNIPER SECT.		SIGNATURE 				

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6296786.___0
FILE DATE AND TIME: 09/16/2003 09:40

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.005
The Average Y Centroid of the Five Target Set:	-0.033
The Average Point of Impact of the Five Target Set:	0.034
The Average Mean Radius of the Five Target Set:	0.746
The Distance from POA to Centroid Target #1:	0.278
The Distance from Centroid Target #2 to Centroid Target #1:	0.460
The Distance from Centroid Target #3 to Centroid Target #1:	0.456
The Distance from Centroid Target #4 to Centroid Target #1:	0.291
The Distance from Centroid Target #5 to Centroid Target #1:	0.332

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 1

FILE DATE: 09/16/2003

FILE TIME: 09:40

X CENTROID: -0.267

Y CENTROID: -0.076

POA TO CENTROID: 0.278

HORZ SPREAD: 1.869

VERT SPREAD: 3.210

GROUP SPREAD: 3.346

MIN RADIUS: 0.065

MAX RADIUS: 2.138


MEAN RADIUS: 0.865

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.089	-1.075
2:	-1.254	-1.972
3:	-0.838	-0.472
4:	-0.331	-0.065
5:	0.210	0.132
6:	0.615	-0.094
7:	-0.275	0.379
8:	-0.650	0.462
9:	0.070	0.711
10:	-0.309	1.238

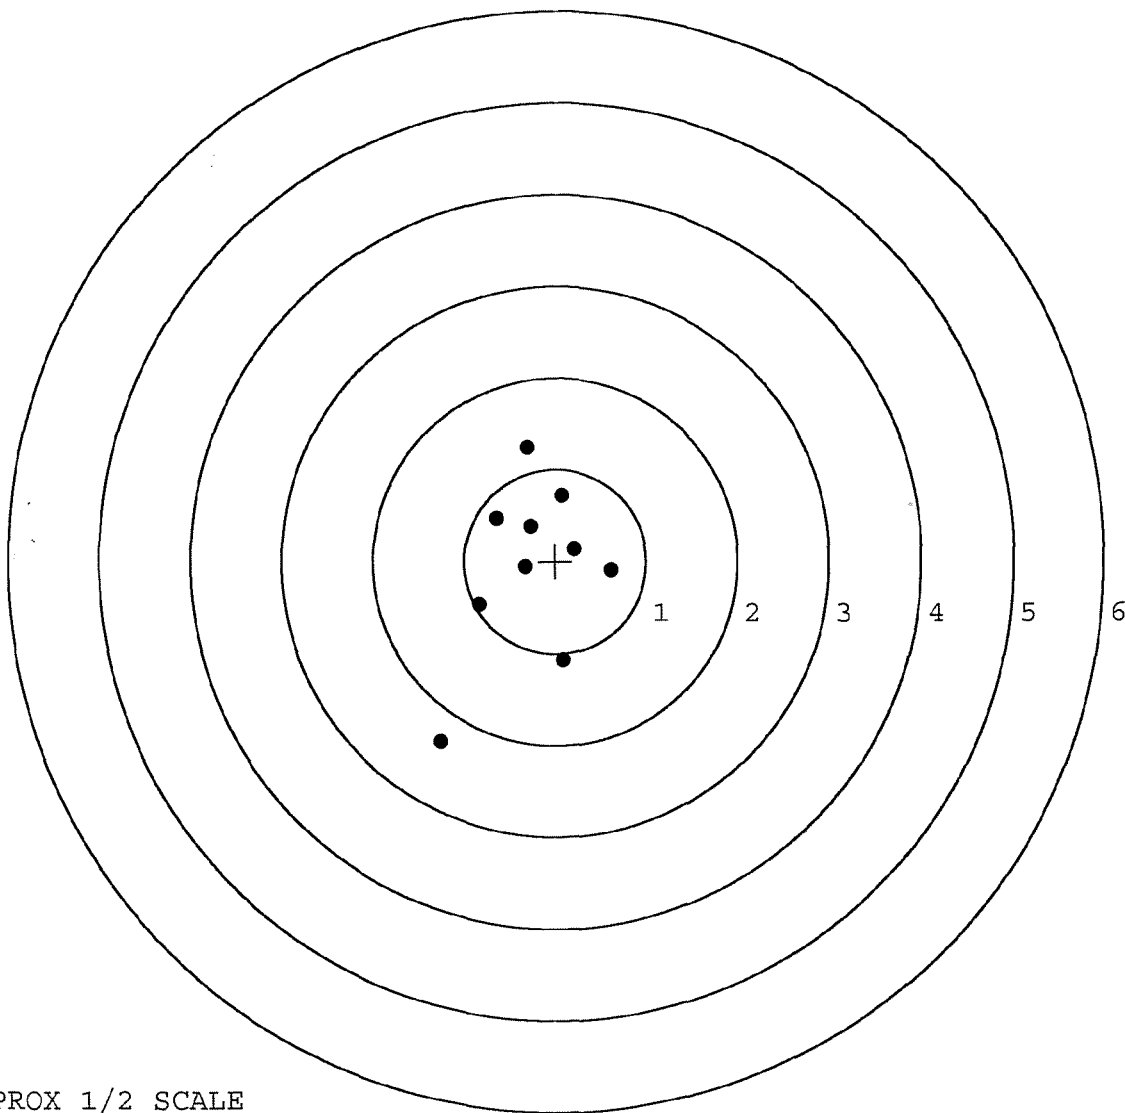

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 2

FILE DATE: 09/16/2003

FILE TIME: 09:40

X CENTROID: 0.190

Y CENTROID: -0.020

POA TO CENTROID: 0.191

HORZ SPREAD: 1.681

VERT SPREAD: 1.851

GROUP SPREAD: 2.149

MIN RADIUS: 0.204

MAX RADIUS: 1.206


MEAN RADIUS: 0.767

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.603	-0.853
2:	-0.418	-1.062
3:	-0.733	-0.674
4:	0.124	-0.474
5:	-0.014	-0.031
6:	0.948	0.306
7:	0.705	0.770
8:	0.459	0.585
9:	0.275	0.440
10:	-0.054	0.789

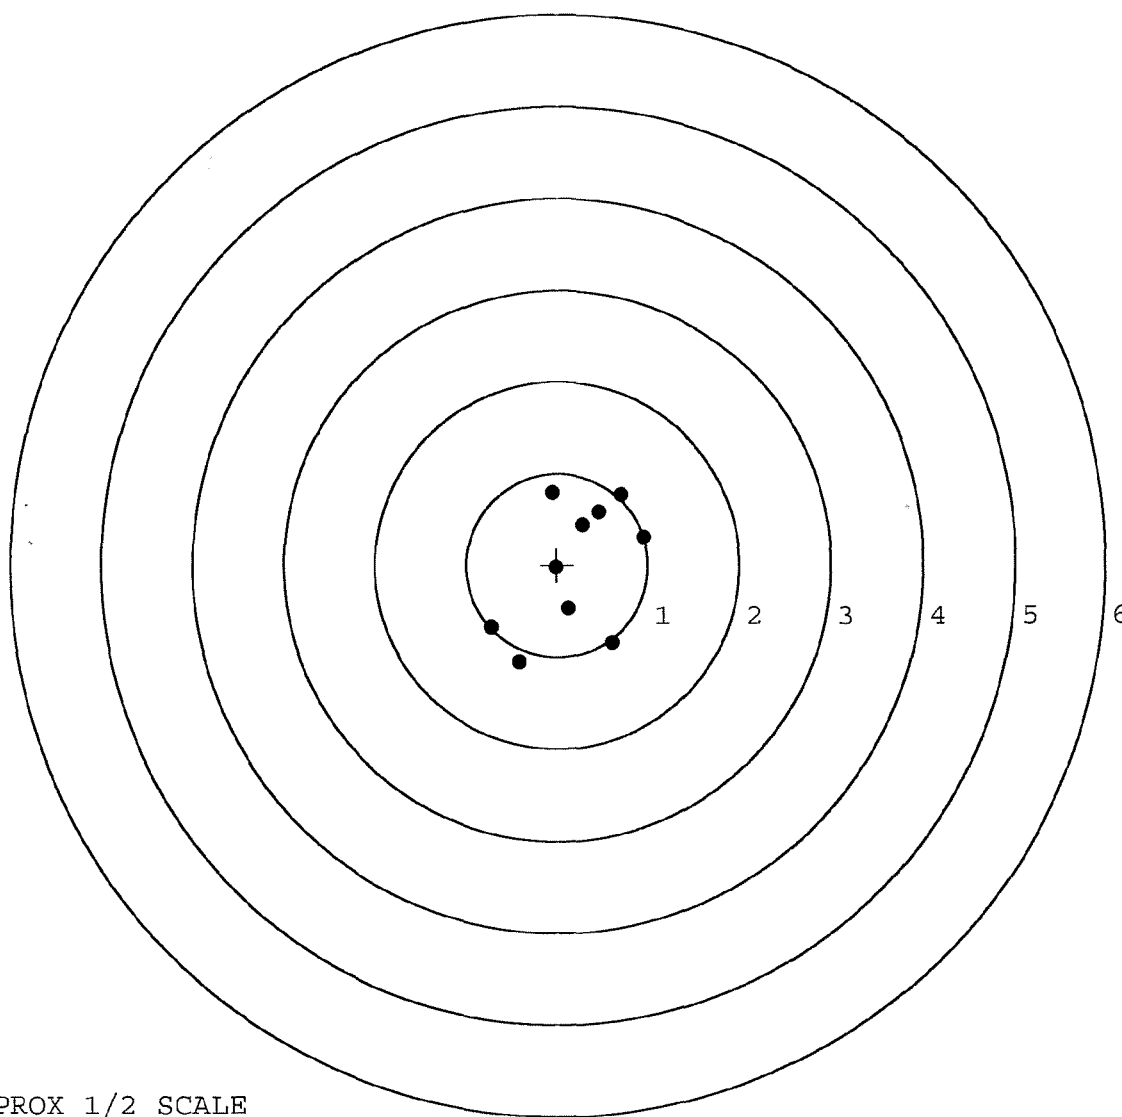

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 3

FILE DATE: 09/16/2003

FILE TIME: 09:40

X CENTROID: 0.172

Y CENTROID: -0.200

POA TO CENTROID: 0.263

HORZ SPREAD: 1.685

VERT SPREAD: 1.130

GROUP SPREAD: 1.738

MIN RADIUS: 0.331

MAX RADIUS: 1.108


MEAN RADIUS: 0.606

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.263	-0.391
2:	0.151	-0.709
3:	-0.272	-0.791
4:	-0.264	-0.382
5:	-0.422	-0.621
6:	0.492	-0.116
7:	0.476	0.153
8:	0.421	0.296
9:	0.186	0.224
10:	-0.314	0.339

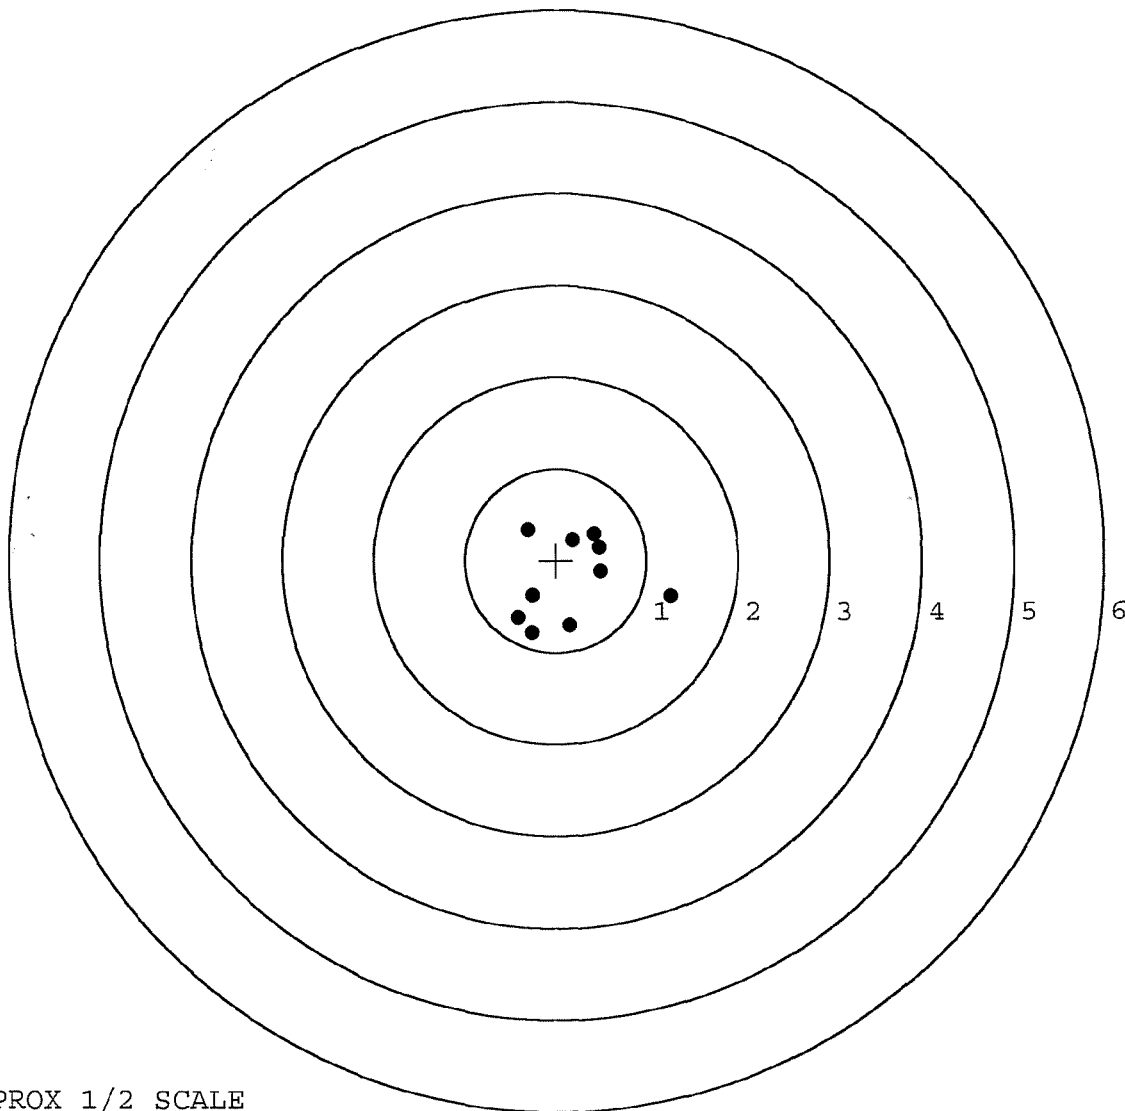

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 4

FILE DATE: 09/16/2003

FILE TIME: 09:40

POINT#	X	Y
1:	0.358	0.509
2:	0.629	0.648
3:	0.407	1.010
4:	-0.359	0.620
5:	-1.358	0.388
6:	0.014	-0.197
7:	-0.068	-0.470
8:	-0.362	-0.396
9:	-0.332	-0.086
10:	-0.243	-0.207

X CENTROID: -0.131

Y CENTROID: 0.182

POA TO CENTROID: 0.224

HORZ SPREAD: 1.987

VERT SPREAD: 1.480

GROUP SPREAD: 2.004

MIN RADIUS: 0.335


MAX RADIUS: 1.244

MEAN RADIUS: 0.663

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

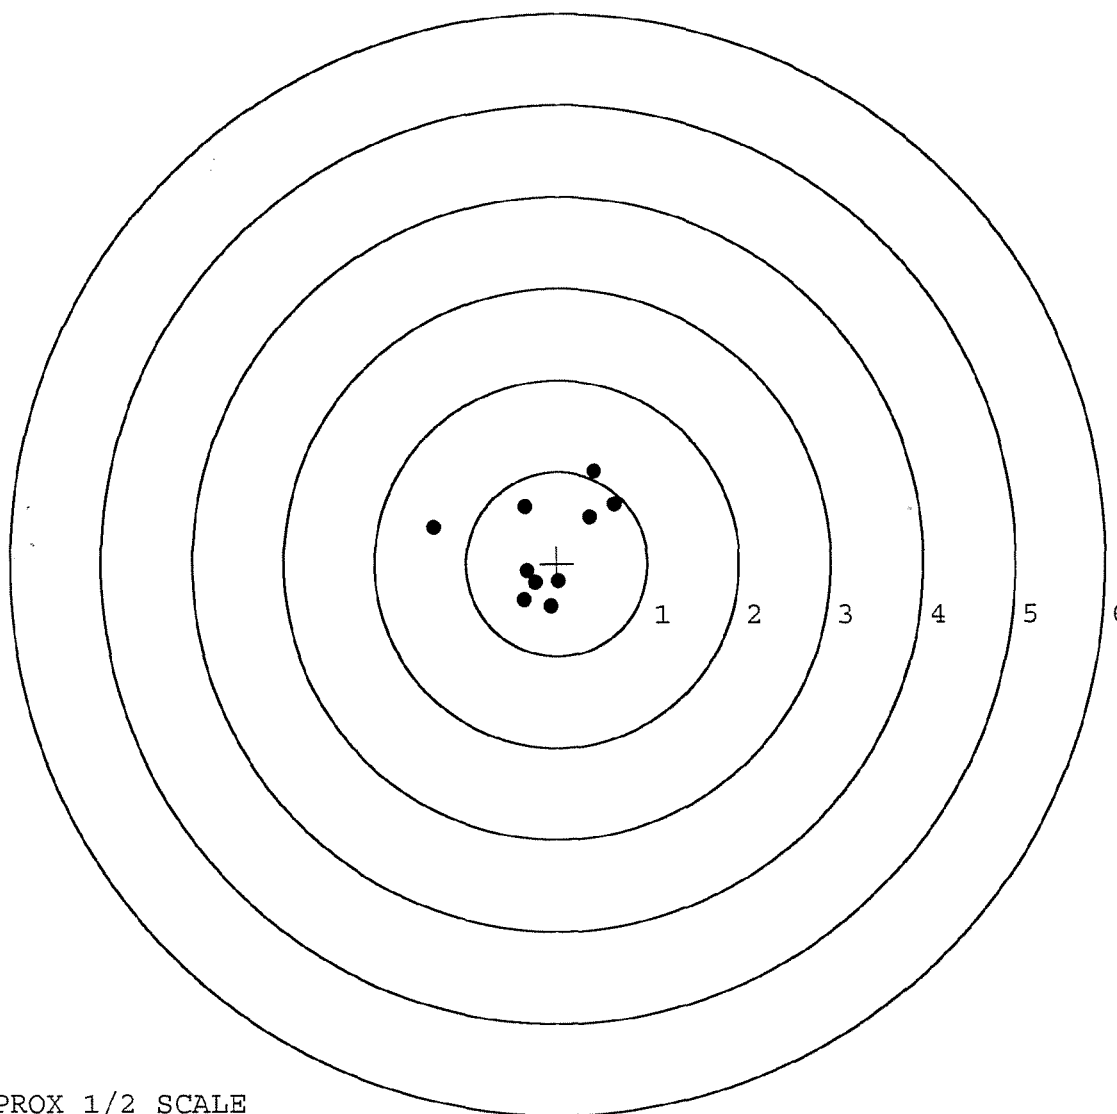

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296786. 0

TARGET NUMBER: 5

FILE DATE: 09/16/2003

FILE TIME: 09:40

POINT#	X	Y
1:	0.840	-0.007
2:	0.475	-0.066
3:	0.196	0.104
4:	0.733	0.660
5:	-0.790	0.716
6:	-0.811	1.301
7:	0.125	-1.192
8:	0.115	-0.990
9:	-0.085	-0.829
10:	-0.155	-0.214

X CENTROID: 0.064

Y CENTROID: -0.052

POA TO CENTROID: 0.083

HORZ SPREAD: 1.651

VERT SPREAD: 2.493

GROUP SPREAD: 2.663

MIN RADIUS: 0.204


MAX RADIUS: 1.611

MEAN RADIUS: 0.827

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 9

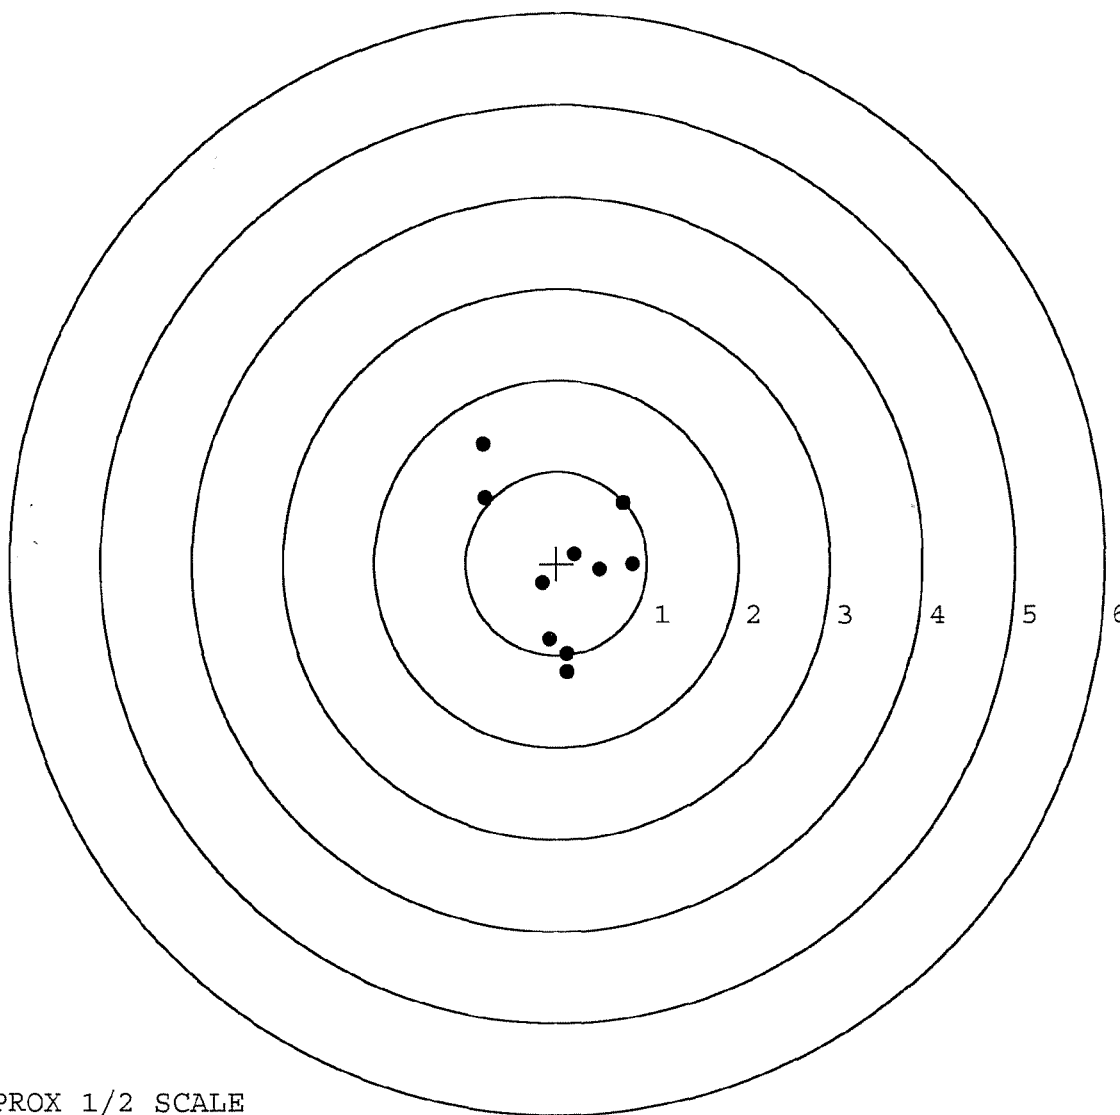

TARGET APPROX 1/2 SCALE