

56296818

BARBER

VERY IMPORTANT: Book enclosed to ensure safe use of this firearm

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

46

Reg. U.S. Pat. & Tm. Off. Marca Registrada. Marquee Deposée.

Serial No. **66296818**

Order No. **25716**

24CX

5716 66296818

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



66296818

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO


- INSTRUCTION BOOK 3518

46 FORM

proof of purchase




owner registration sticker



ORDER NO.	25716
BARREL LENGTH	24"
CAPACITY	6

G6296818

UPC



INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G6296818

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		3-25-03	RTL
600	PROOF			
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	3-26-03	RTL
610	DIS-ASSEMBLE GUN	JAN 25 2003	3-26-03	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	OPERATOR <u>RY</u>		
615	ROLLMARK CALIBER		3/27/03	JS
617	DRILL AND TAP SIGHT HOLES		3-26-03	TRW
620	APPLY COATINGS (BARREL ACTION)		4-4	TR
	(BOLT)		4-4	TR
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		4/8/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		4/8/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		4/8/03	DA
	D) OIL FIRING PIN ASSEMBLY		4/8/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	4-15-03	TRW

OP #	OPERATION NAME	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE 2 LBS MIN 10 LBS MAX	<u>9.5</u> <u>9.25</u> <u>9.5</u>	4-15-03	TRW
CONT.				
	G) SAFETY OFF FORCE 2 LBS MIN	<u>3.5</u> <u>3.25</u> <u>3.25</u>	4-15-03	TRW
	H) TRIGGER PULL TEST AND RETAINABILITY		4-15-03	RTL
	I) FIRING PIN INDENT .020 MIN	<u>.0235</u> <u>.024</u> <u>.023</u>	4-15-03	TRW
	J) ASSEMBLE STOCK		4-10-03	RW
	K) ASSEMBLE SWIVEL STUDS		4-16-03	RTL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S		4-10-03	RW
	M) IRON SIGHT ALIGNMENT		4-10-03	RW
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER		4-10-03	RW
640	GALLERY TEST AND TARGET	PASS FAIL	4-11-03	TRW
	MALFUNCTION	CORRECTION	4-11-03	TRW
	MALFUNCTION	CORRECTION	4-11-03	TRW
	MALFUNCTION	CORRECTION	4-11-03	TRW
	MALFUNCTION	CORRECTION	4-11-03	TRW
645	INSPECT FOR LIVE AMMO		4-11-03	TRW
655	FINAL INSPECTION A) HEADSPACE		4-16-03	RTL
	B) TRIGGER PULL +/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.83</u> <u>2.82</u> <u>2.42</u> <u>2.83</u> <u>2.82</u>	4-15-03	TRW
	C) FUNCTION		4-16-03	RTL
660	PACK		4/14/03	RTA

2.50# + .50#
 3.00# + .75#
 4.00# + 1.00#

DATE 11-21-02

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.31	2.41		2.20	MIN. SETTING,
PULL #2	2.60	2.29		2.19	NO AVG. OF 5
PULL #3	2.34	2.35		2.21	READINGS ACCEPT
PULL #4	2.46	2.26		2.28	ABLE LESS THAN
PULL #5	2.50	2.41		2.27	
TOTAL	12.21	11.72		11.15	
AVG.	2.44	2.34		2.23	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.08	3.06		
PULL #2	3.04	3.08		
PULL #3	3.14	3.05		
PULL #4	3.03	3.10		
PULL #5	3.00	3.04		
TOTAL	15.29	15.33		
AVG.	3.05	3.06		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# & TARGET & ACCU
PULL #1	4.14	4.04		4.30
PULL #2	4.04	4.17		4.21
PULL #3	4.16	4.00		4.09
PULL #4	4.04	4.12		4.12
PULL #5	4.02	4.05		4.23
TOTAL	20.40	20.38		20.95
AVG.	4.08	4.07		4.19

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6296818.___0
FILE DATE AND TIME: 04/12/2003 00:28

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

Ave. mean .959

SERIAL NUMBER: G6296818. __0

TARGET NUMBER: 1

FILE DATE: 04/12/2003

FILE TIME: 00:28

POINT#	X	Y
1:	1.632	-0.273
2:	2.240	0.256
3:	0.308	0.157
4:	-0.576	-0.187
5:	-1.406	-0.895

X CENTROID: 0.440

Y CENTROID: -0.188

POA TO CENTROID: 0.478

HORZ SPREAD: 3.646

VERT SPREAD: 1.151

GROUP SPREAD: 3.823

MIN RADIUS: 0.370


MAX RADIUS: 1.976

MEAN RADIUS: 1.282

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 1

in 3 IN DIAMETER: 3

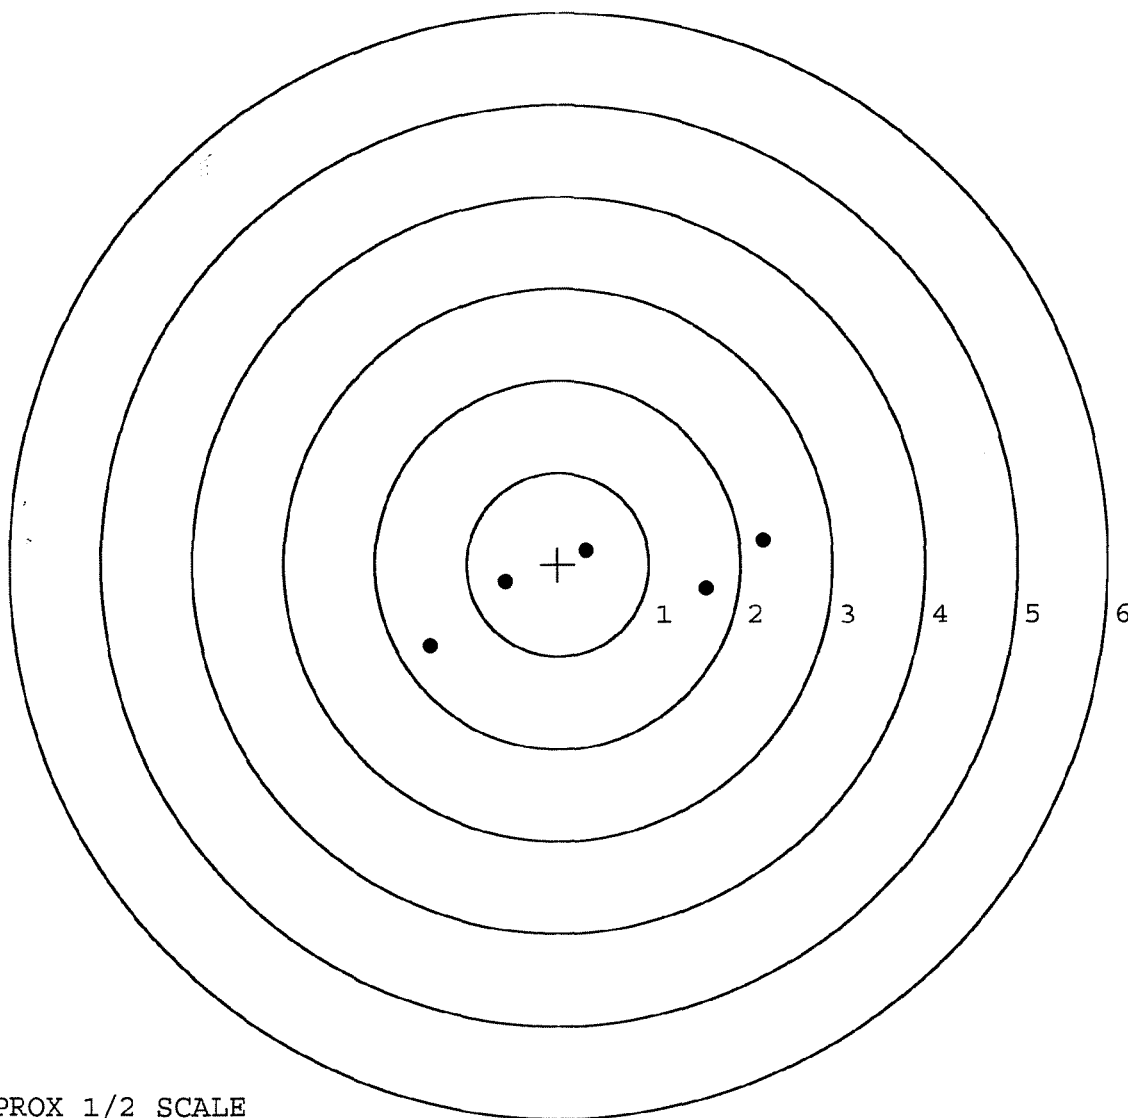

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6296818. __0

TARGET NUMBER: 2

FILE DATE: 04/12/2003

FILE TIME: 00:28

POINT#	X	Y
1:	0.861	-0.399
2:	0.737	0.162
3:	0.417	0.026
4:	0.212	-0.092
5:	-1.335	0.028

X CENTROID: 0.178

Y CENTROID: -0.055

POA TO CENTROID: 0.187

HORZ SPREAD: 2.196

VERT SPREAD: 0.561

GROUP SPREAD: 2.237

MIN RADIUS: 0.050


MAX RADIUS: 1.516

MEAN RADIUS: 0.636

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 4

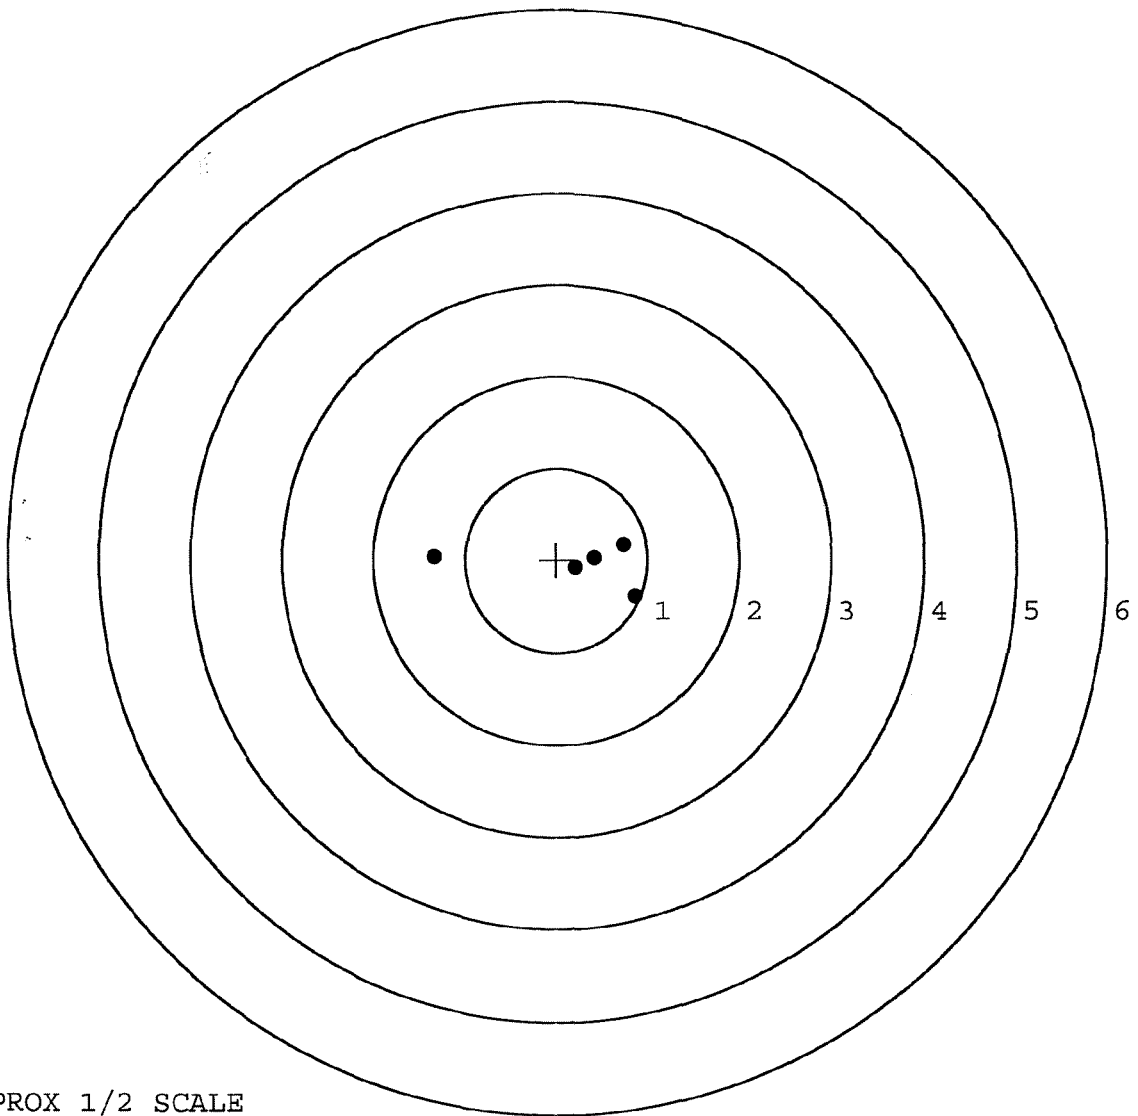

TARGET APPROX 1/2 SCALE