

66300501

VERY IMPORTANT: INSTRUCTION: READ CAREFULLY TO ENSURE SAFE USE OF THIS WEAPON.

Remington®

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

Made in Illinois, Inc. Reg. U.S. Pat. & Tm. Off. Marks Registered Parquet Deposee.

SERIAL NO. **G6300501**
ORDER NO. **25716**

46

08KX

5716 G6300501

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYST

UPC



SERIAL NO.



M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

proof of purchase



owner registration sticker




ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6300501

UPC



46 FORM

INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G6300501

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		3-25-03	RTL
600	PROOF			
607	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	3-26-03	RTL
610	DIS-ASSEMBLE GUN		3-26-03	RTL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	JAN 2 - 2000 OPERATOR <i>RL</i>		
615	ROLLMARK CALIBER		3/27/03	JB
617	DRILL AND TAP SIGHT HOLES		3-26-03	TRW
620	APPLY COATINGS (BARREL ACTION)		4-4	TA
	(BOLT)		4-4	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		4/9/03	DA
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		4/9/03	DA
	C) INSPECT EJECTOR HOLE FOR CHAMFER		4/9/03	DA
	D) OIL FIRING PIN ASSEMBLY		4/9/03	DA
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE	2.50 LBS +/- .5 LBS	5-7-03	TRW

OP #	OPERATION NAME	BARBER - M240161304	READINGS	DATE	INITIAL
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>8 lbs</u> <u>9 lbs</u> <u>9 lbs</u>	5-7-03	AC
CONT.					
	G) SAFETY OFF FORCE	2 LBS MIN	<u>2.5 lbs</u> <u>2.5 lbs</u> <u>3 lbs</u>	5-7-03	AC
	H) TRIGGER PULL TEST AND RETAINABILITY			5-7-03	RTL
	I) FIRING PIN INDENT	.020 MIN	<u>.022</u> <u>.022</u> <u>.022</u>	5-7-03	AC
	J) ASSEMBLE STOCK			04-09-03	RTL
	K) ASSEMBLE SWIVEL STUDS			5-7-03	RTL
	L) ATTACH FRONT AND REAR SIGHT ASSY'S			5-7-03	RTL
	M) IRON SIGHT ALIGNMENT			5-7-03	RTL
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER			5-7-03	RTL
640	GALLERY TEST AND TARGET		PASS FAIL	4-15-03	TRW
	MALFUNCTION		CORRECTION	4-15-03	TRW
	MALFUNCTION		CORRECTION	4-15-03	TRW
	MALFUNCTION		CORRECTION	4-15-03	TRW
	MALFUNCTION		CORRECTION	4-15-03	TRW
645	INSPECT FOR LIVE AMMO			4-15-03	TRW
655	FINAL INSPECTION A) HEADSPACE			5-7-03	RTL
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.68</u> <u>2.26</u> <u>2.30</u> <u>2.29</u> <u>2.28</u>	5-7-03	TRW
	C) FUNCTION			5-7-03	RTL
660	PACK			5/7/03	WFA

AVERAGE PULL FORCE BETWEEN

BARBER M24 0161305 TESTS

SERIAL NO.

DATE 11-22-02

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.43	2.41		2.22	MIN. SETTING
PULL #2	2.28	2.34		2.29	NO AVG. OF 5
PULL #3	2.53	2.36		2.28	READINGS ACCEPT
PULL #4	2.55	2.39		2.32	ABLE LESS THAN
PULL #5	2.70	2.43		2.22	
TOTAL	12.49	11.93		11.33	
AVG.	2.49	2.38		2.26	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.13	3.18		
PULL #2	3.32	3.11		
PULL #3	3.36	3.10		
PULL #4	3.19	3.12		
PULL #5	3.16	3.12		
TOTAL	16.16	15.63		
AVG.	3.23	3.12		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# & TARGET & ACCU
PULL #1	4.27	4.03		4.27
PULL #2	4.14	4.00		4.26
PULL #3	4.13	4.01		4.25
PULL #4	4.16	4.00		4.20
PULL #5	4.17	4.04		4.46
TOTAL	20.87	20.08		21.44
AVG.	4.17	4.01		4.28

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300501. __0
FILE DATE AND TIME: 04/16/2003 01:00

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

ERROR - NOT POSSIBLE TO REPORT SWS STATS ON DATA
WHERE TOTAL TARGETS ARE NOT EQUAL TO FIVE

Ave. mean 6975

SERIAL NUMBER: G6300501. __0

TARGET NUMBER: 1

FILE DATE: 04/16/2003

FILE TIME: 01:00

POINT#	X	Y
1:	0.671	0.381
2:	0.216	0.423
3:	-0.311	-0.116
4:	-0.121	-0.976
5:	-0.962	0.443

X CENTROID: -0.101

Y CENTROID: 0.031

POA TO CENTROID: 0.106

HORZ SPREAD: 1.633

VERT SPREAD: 1.419

GROUP SPREAD: 1.649

MIN RADIUS: 0.256


MAX RADIUS: 1.007

MEAN RADIUS: 0.714

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 5

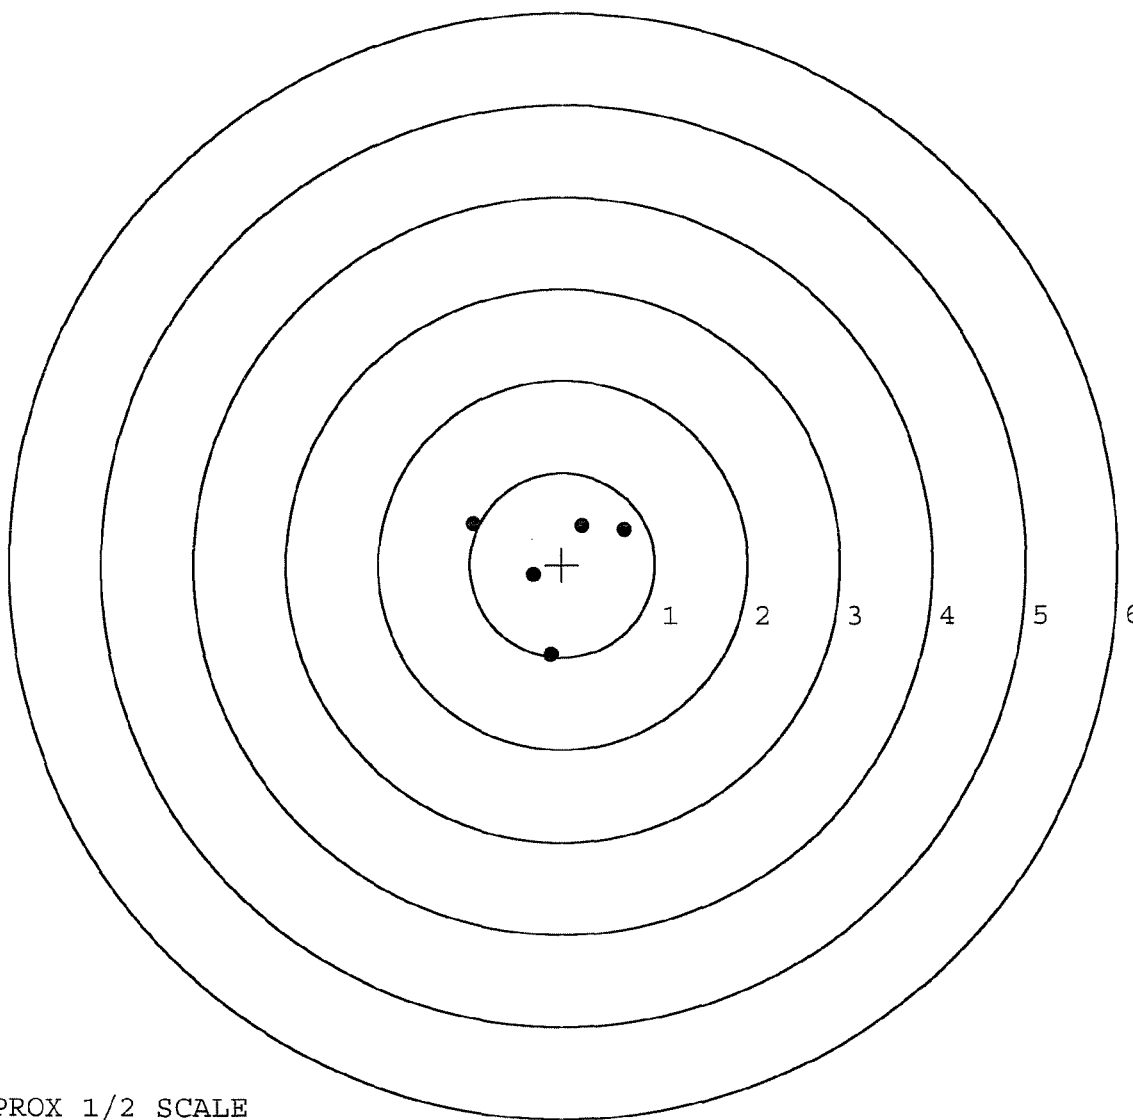


TARGET APPROX 1/2 SCALE

BARBER - M24 0161308

SERIAL NUMBER: G6300501. __0
 TARGET NUMBER: 2
 FILE DATE: 04/16/2003
 FILE TIME: 01:00

POINT#	X	Y
1:	1.485	-0.076
2:	0.166	0.243
3:	-0.407	0.310
4:	-0.532	-0.193
5:	-0.299	-0.343

X CENTROID: 0.083
 Y CENTROID: -0.012
 POA TO CENTROID: 0.083
 HORZ SPREAD: 2.017
 VERT SPREAD: 0.653
 GROUP SPREAD: 2.020
 MIN RADIUS: 0.268
 MAX RADIUS: 1.404
 MEAN RADIUS: 0.681
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 4
 # in 3 IN DIAMETER: 5

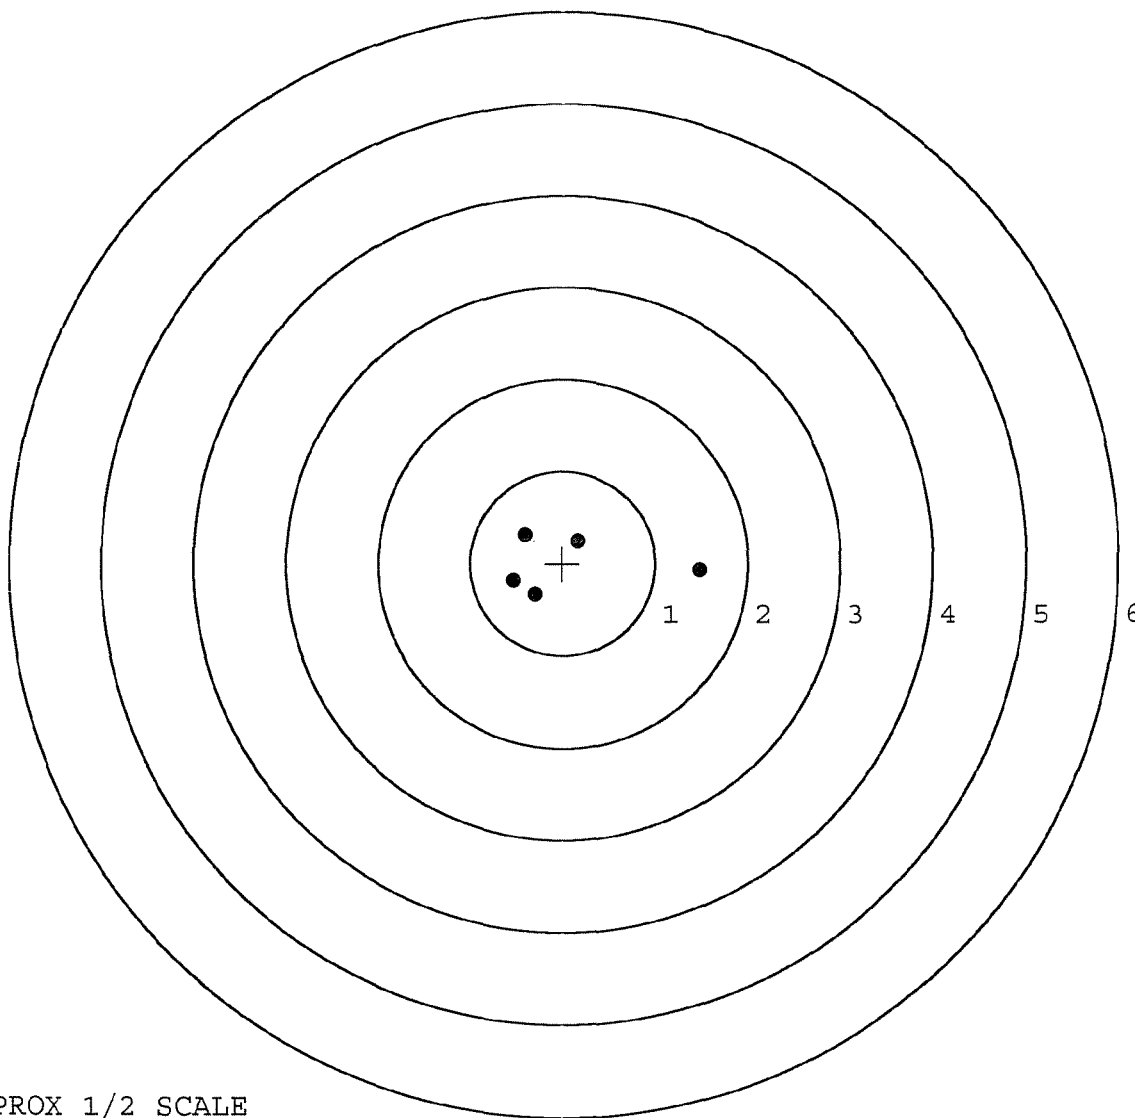

TARGET APPROX 1/2 SCALE