

G6300559
Rd/ace
C-6225449

SCORE CASE
SLING

RE00165129

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: W52H09-07-C-0207

ISSUED 10/1/2007

R & E NUMBER		<u>165729</u>	
SERIAL NUMBER		<u>66300559</u>	
LOG-IN DATE		<u>3-25-09</u>	

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-26-09	RTZ
505	RE-BARREL	3-27-09	RTZ
420	ASSEMBLE	3-27-09	RTZ
440	PROOF	3-27-09	TL
460	CHECK HEADSPACE	3-27-09	TL
470	DIS-ASSEMBLE GUN		
480	MAGNAFLUX	4/2/09	(S)
510	DRILL AND TAP	3-28-09	SP
500	ROLLMARK CALIBER	4/2/09	RT
520	GOFF BLAST BBL / REC	4-2	BT
530 & 540	APPLY COATINGS	4-3	
560	FINAL ASSEMBLY	4-7-09	RTZ
640	FUNCTION TEST AND	PASS	FAIL
650	TARGET	PASS	FAIL
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION N/A	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION		
	A) HEADSPACE	PASS	FAIL
	B) TRIGGER PULL	2.76 2.76 2.75 2.75 2.70	4-9-09
680	F) SAFETY ON FORCE	4 6 6	4-15-09
	G) SAFETY OFF FORCE	4.5 4.5 4.5	4-15-09
	I) FIRING PIN INDENT	.022 .022 .023	4-15-09
690	PACK		4/20/09

F006 REV 1/2009

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300559.___0
FILE DATE AND TIME: 04/08/2009 14:58

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	0.038
The Average Y Centroid of the Five Target Set:	0.082
The Average Point of Impact of the Five Target Set:	0.091
The Average Mean Radius of the Five Target Set:	0.662
The Distance from POA to Centroid Target #1:	0.040
The Distance from Centroid Target #2 to Centroid Target #1:	0.270
The Distance from Centroid Target #3 to Centroid Target #1:	0.206
The Distance from Centroid Target #4 to Centroid Target #1:	0.150
The Distance from Centroid Target #5 to Centroid Target #1:	0.020

BARBER - M24 0162138

SERIAL NUMBER: G6300559. __0
 TARGET NUMBER: 1
 FILE DATE: 04/08/2009
 FILE TIME: 14:58

POINT#	X	Y
1:	0.069	0.063
2:	-0.271	-0.091
3:	0.036	0.264
4:	0.478	-0.273
5:	0.780	-0.200
6:	0.633	0.214
7:	0.040	-0.559
8:	-0.287	-0.590
9:	-0.511	0.421
10:	-0.925	0.353

X CENTROID: 0.004
 Y CENTROID: -0.040
 POA TO CENTROID: 0.040
 HORZ SPREAD: 1.705
 VERT SPREAD: 1.011
 GROUP SPREAD: 1.792
 MIN RADIUS: 0.122
 MAX RADIUS: 1.009
 MEAN RADIUS: 0.555
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

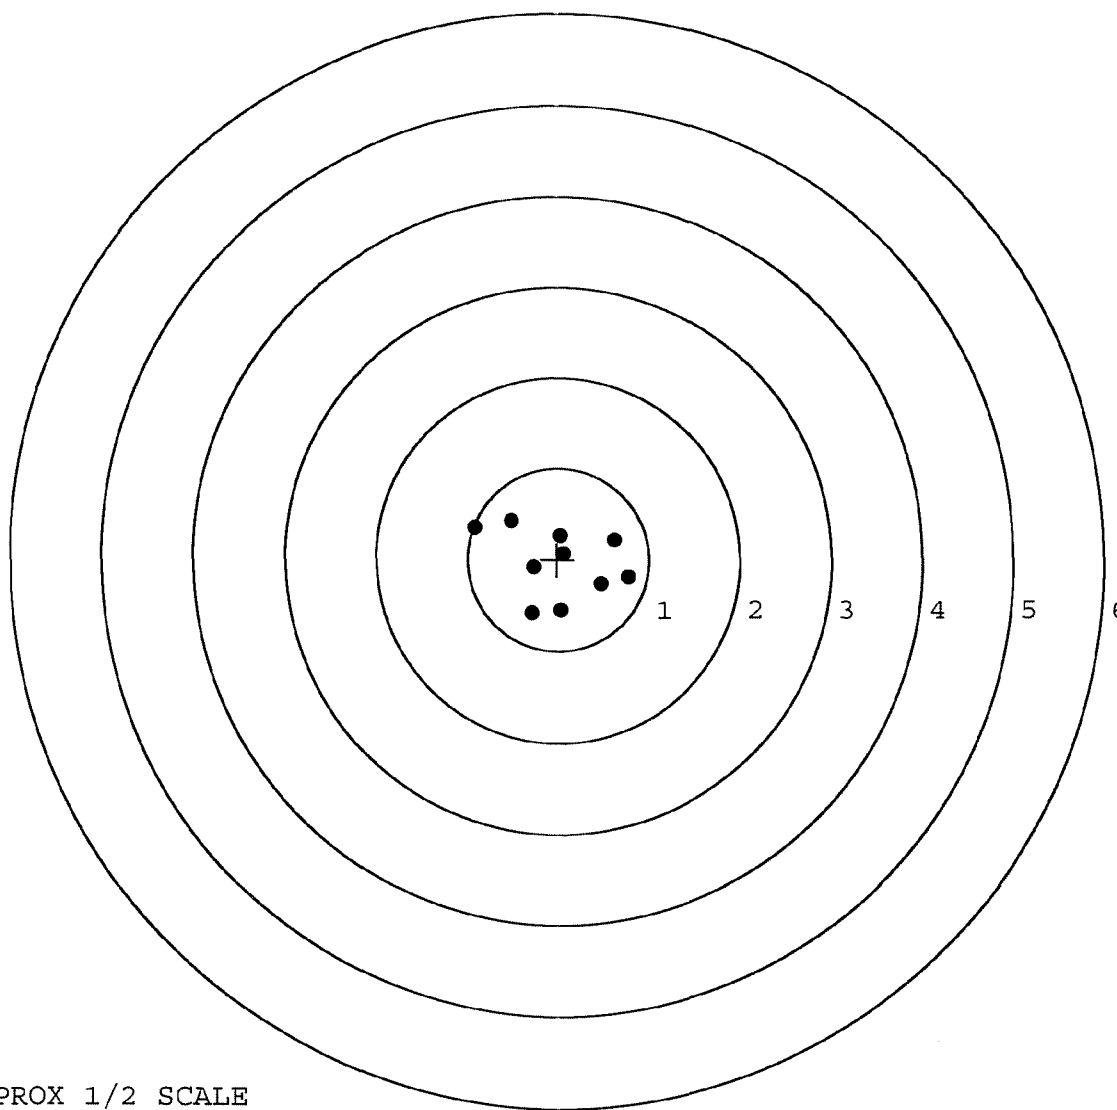


TARGET APPROX 1/2 SCALE

BARBER - M24 0162139

SERIAL NUMBER: G6300559. __0
 TARGET NUMBER: 2
 FILE DATE: 04/08/2009
 FILE TIME: 14:58

POINT#	X	Y
1:	0.470	0.587
2:	0.392	0.799
3:	-0.127	0.480
4:	-0.735	0.533
5:	-0.861	0.293
6:	0.936	-0.003
7:	0.361	-0.913
8:	-0.509	-0.578
9:	0.506	0.625
10:	-0.125	0.463

X CENTROID: 0.031
 Y CENTROID: 0.229
 POA TO CENTROID: 0.231
 HORZ SPREAD: 1.797
 VERT SPREAD: 1.712
 GROUP SPREAD: 1.814
 MIN RADIUS: 0.281
 MAX RADIUS: 1.188
 MEAN RADIUS: 0.725
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

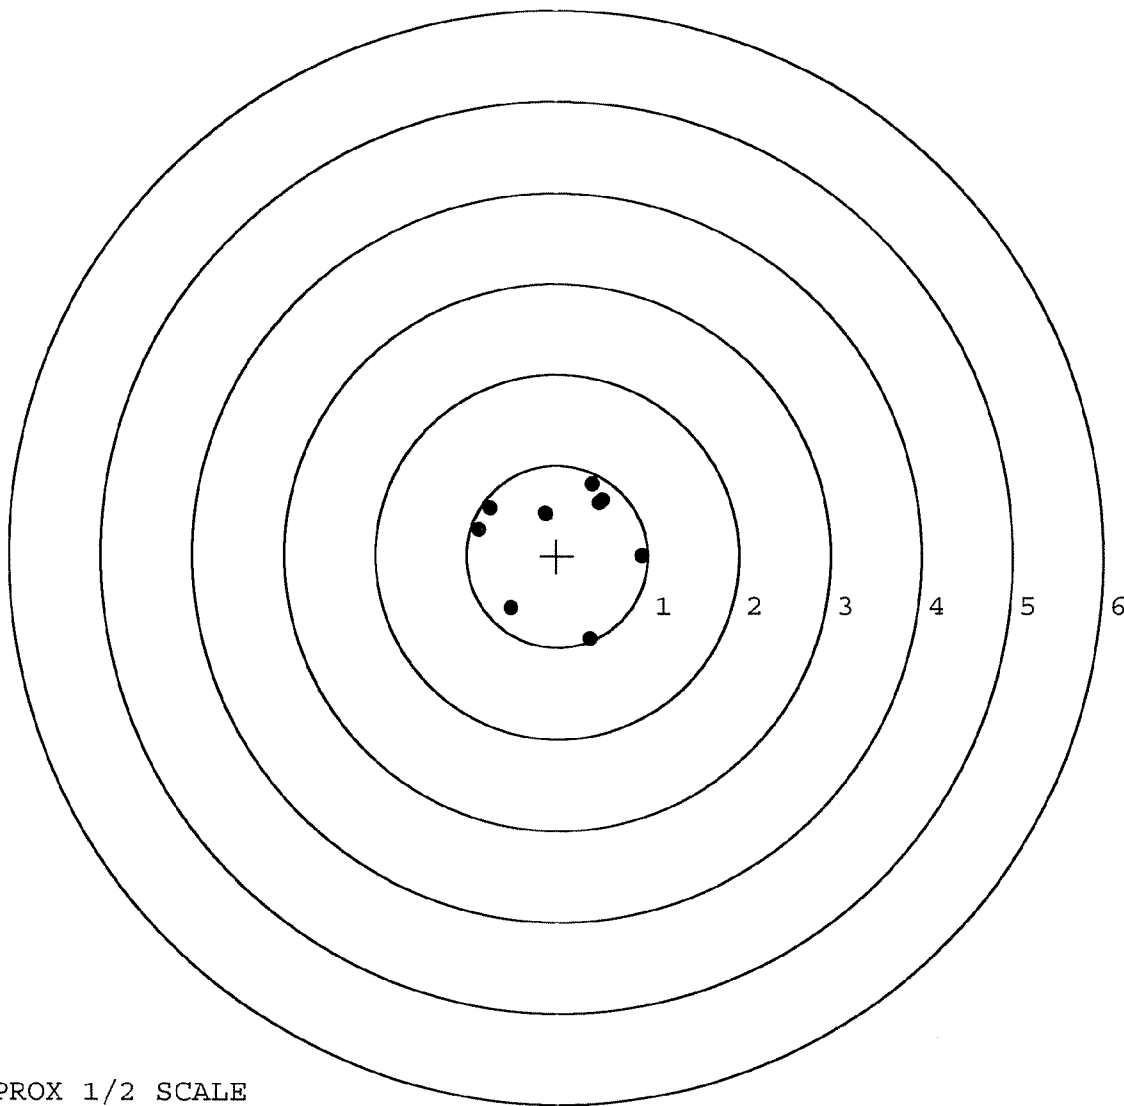

TARGET APPROX 1/2 SCALE

BARBER - M24 0162140

SERIAL NUMBER: G6300559. 0

TARGET NUMBER: 3

FILE DATE: 04/08/2009

FILE TIME: 14:58

POINT#	X	Y
1:	-0.291	-0.669
2:	-0.160	-0.366
3:	-0.032	-0.153
4:	-0.222	0.038
5:	0.168	0.174
6:	0.688	-0.102
7:	0.063	0.745
8:	0.669	1.210
9:	-0.011	-0.132
10:	0.093	0.703

X CENTROID: 0.097

Y CENTROID: 0.145

POA TO CENTROID: 0.174

HORZ SPREAD: 0.979

VERT SPREAD: 1.879

GROUP SPREAD: 2.110

MIN RADIUS: 0.077


MAX RADIUS: 1.209

MEAN RADIUS: 0.552

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

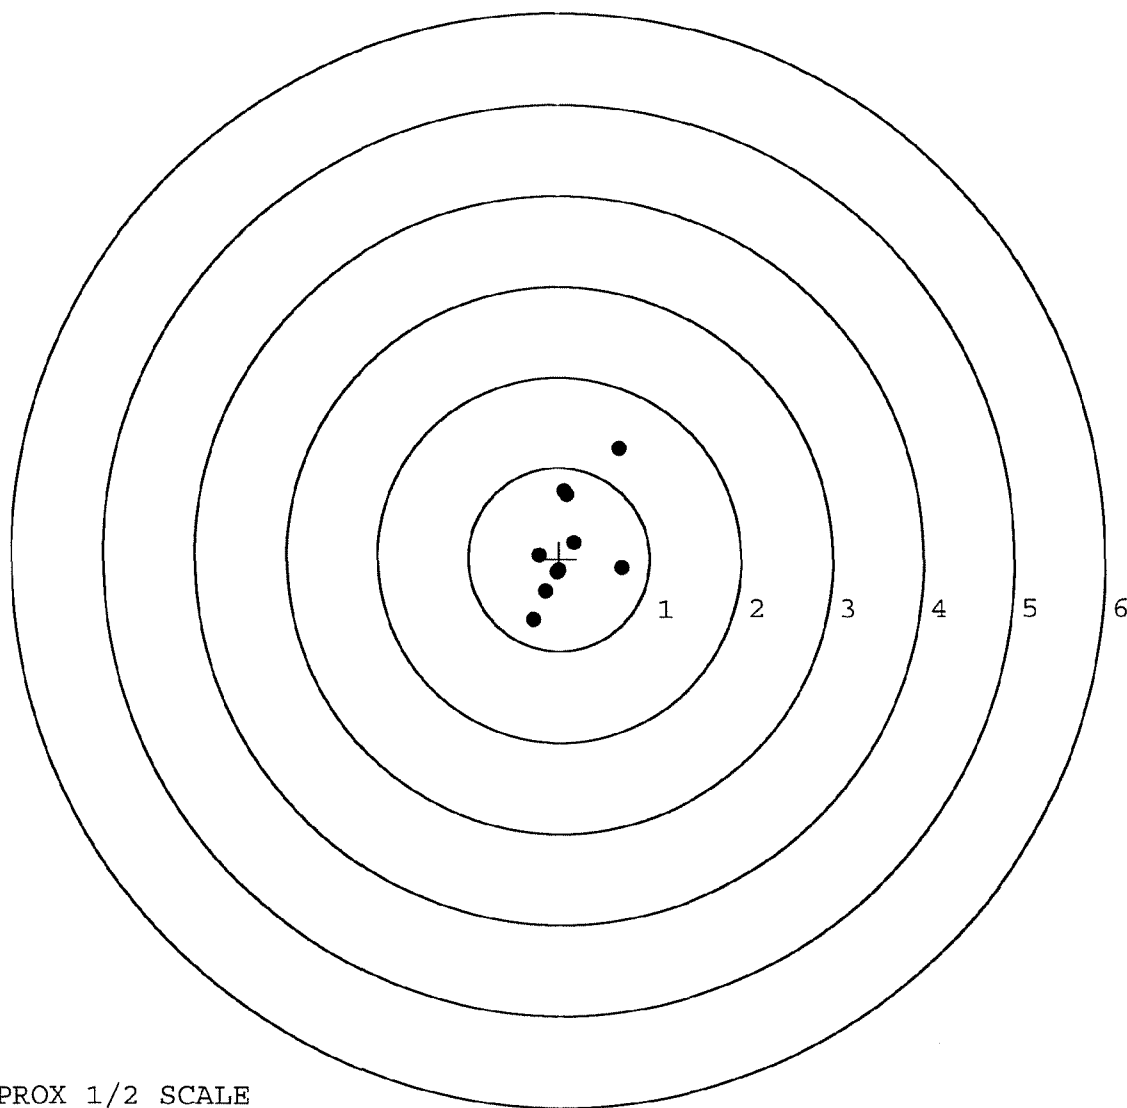

TARGET APPROX 1/2 SCALE

BARBER - M24 0162141

SERIAL NUMBER: G6300559. __0

TARGET NUMBER: 4

FILE DATE: 04/08/2009

FILE TIME: 14:58

POINT#	X	Y
1:	0.094	-0.383
2:	-0.255	-0.583
3:	0.508	-0.047
4:	0.729	-0.584
5:	0.913	0.447
6:	-0.033	0.678
7:	-0.035	0.692
8:	0.110	0.298
9:	-0.558	0.513
10:	-0.854	-0.041

X CENTROID: 0.062

Y CENTROID: 0.099

POA TO CENTROID: 0.117

HORZ SPREAD: 1.767

VERT SPREAD: 1.276

GROUP SPREAD: 1.691

MIN RADIUS: 0.205


MAX RADIUS: 0.955

MEAN RADIUS: 0.664

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

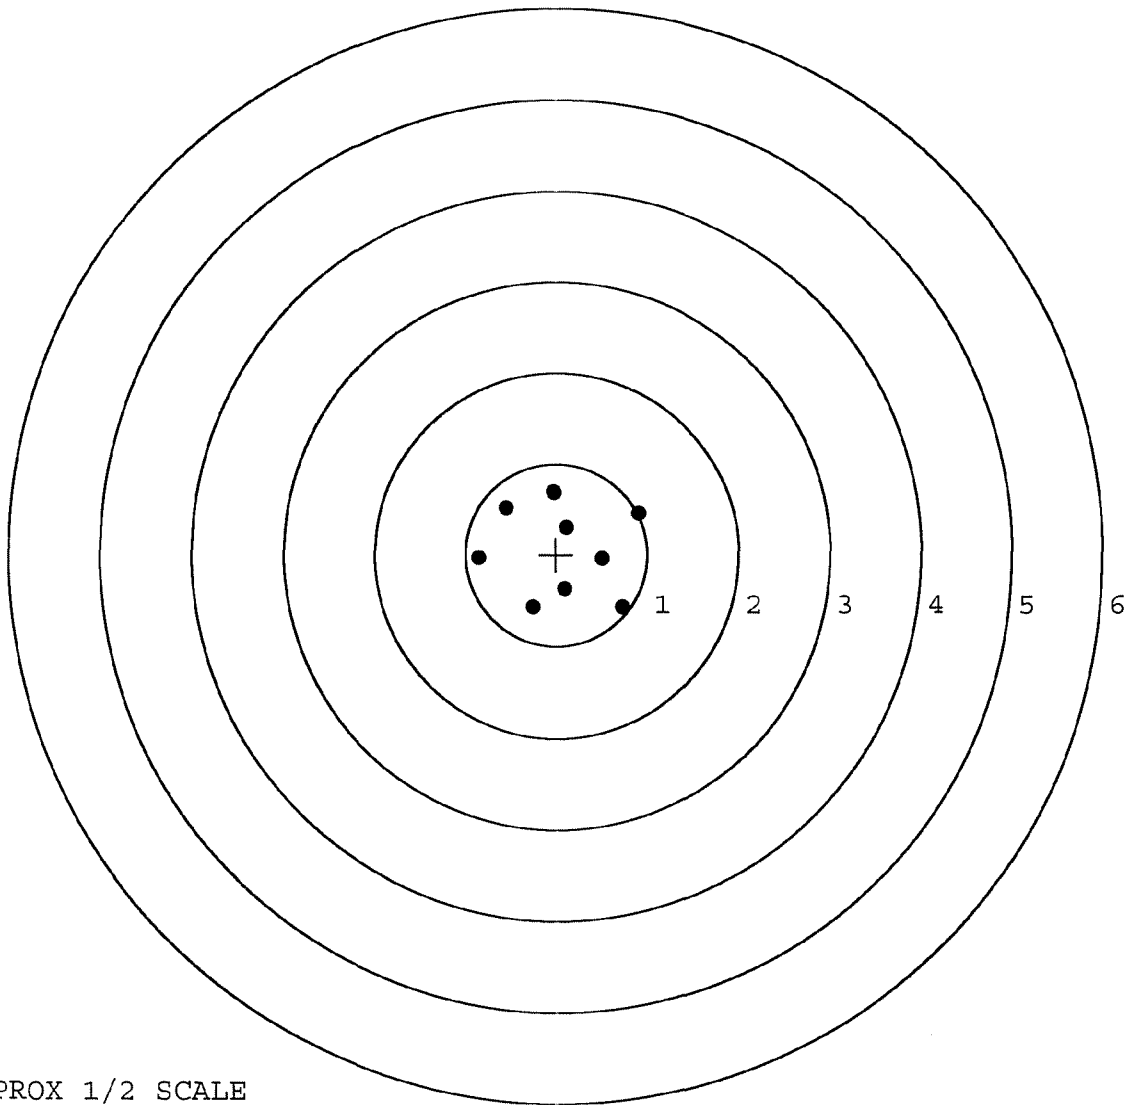


TARGET APPROX 1/2 SCALE

BARBER - M24 0162142

SERIAL NUMBER: G6300559. __0
 TARGET NUMBER: 5
 FILE DATE: 04/08/2009
 FILE TIME: 14:58

POINT#	X	Y
1:	-0.554	-0.783
2:	-0.507	-0.897
3:	-0.102	-0.520
4:	-1.052	-0.076
5:	-0.447	0.124
6:	-0.174	0.446
7:	0.269	0.711
8:	0.526	-0.259
9:	0.448	0.242
10:	1.562	0.802

X CENTROID: -0.003
 Y CENTROID: -0.021
 POA TO CENTROID: 0.021
 HORZ SPREAD: 2.614
 VERT SPREAD: 1.699
 GROUP SPREAD: 2.758
 MIN RADIUS: 0.467
 MAX RADIUS: 1.768
 MEAN RADIUS: 0.813
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 9

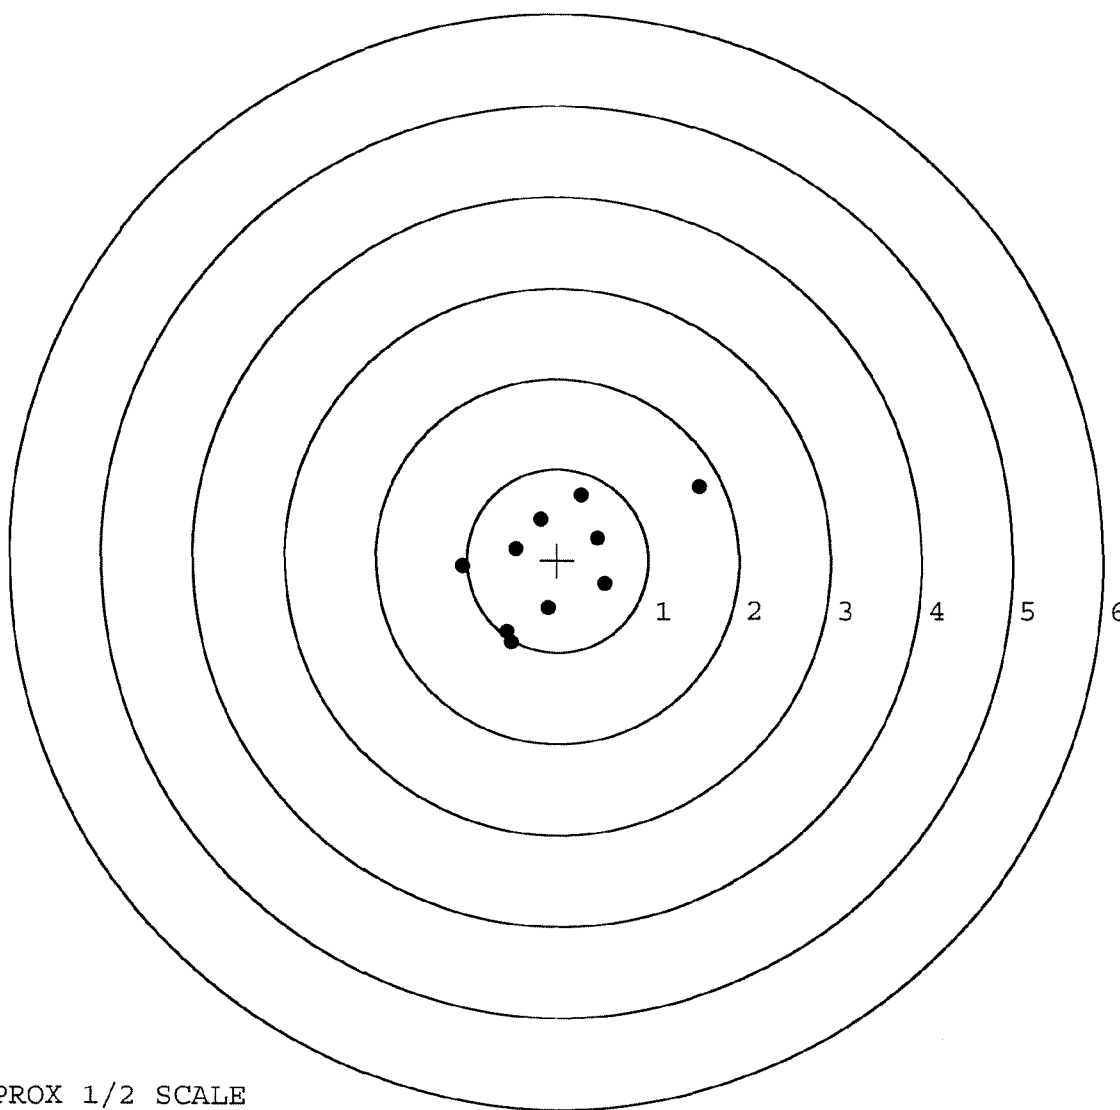

TARGET APPROX 1/2 SCALE

Repair Inquiry

Repair Number: RE00130023

Serial: G6300559 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Status:

New 6/5/2007 7:14:02 AM

Verify Repair

Address Information

Customer:

Received From

Return To:

Received From

Name: ISSD ARMS ROOM

ISSD ARMS ROOM

Address 1: 8TH DESERT STORM

8TH DESERT STORM

Address 2: BLDG 5210 BAY DOOR #30

PO Box:

BLDG 5210 BAY DOOR #30

PO Box:

City: FORT CAMPBELL

FORT CAMPBELL

State: KY

Zip Code: 42223

Country: US

State: KY

Zip Code: 42223

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

6/5/2007

7:24 AM

CAPS

NUM

INS

SCRL



Arms Services Repair ...



7:24 AM

Serial Number: G6300559

Model: M24 SWS



RE00130023

BARBER - M24 0162144

MAINTENANCE REQUEST For use of this form, see DA PAM 750-8; the proponent agency is DCS, G-4.				PAGE NO	NO OF PAGES	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)	
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA			
1a. UIC CUSTOMER 44C,HT,0	1b. CUSTOMER UNIT NAME HMC 2/327	1c. PHONE NO (270) 786-4422	3a. WORK ORDER NUMBER (WON)		3b. SHOP	3c. PHONE NO	
2a. SAMS-2 UIC/SAMS-I/TDA		2b. UTILIZATION CODE	2c. MCSR		4b. SUPPORT UNIT NAME		
SECTION III - EQUIPMENT DATA							
5. TYPE MNT REQ CODE	6. ID	7. NSN 10051-0112402136	15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751				
8. MODEL REMINGTON 700		9. NOUN M24 SW5		15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751		16. MILES/KILOMETERS/HOURS/ROUNDS M K H R	
10a. ORG WON/DOC NO		10b. EIC		17. PROJECT CODE (if assigned)		18. ACCOUNT PROCESSING CODE	19. IN WARRANTY? (enter Y or N)
11. SERIAL NUMBER 66300559		12. QTY	13. PD	21. REIMBURSABLE CUSTOMER (if intransit customer enter Y or N)		20. ADMIN NO	
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use)				22. LEVEL OF WORK		23. SIGNATURE	
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) BARREL WORN OUT							
25. REMARKS INSTALL M24A2 BARREL							
PREPARATION INSTRUCTIONS FOR THIS PAGE							
SECTION I				SECTION III (Cont'd)			
Block 1a. Enter UIC of submitting organization. Block 1b. Enter name of submitting organization. Block 1c. Enter number to be called when maint. is completed. Block 2a. Enter UIC of supporting SAMS-2/SAMS-I/TDA if work is requested while intransit and away from your support maintenance unit. Block 2b. Enter utilization code. See DA Pamphlets 738-750 and 738-751. Block 2c. Enter "Y" if reportable under AR 700-138. If not, leave blank.				Block 12. Enter the quantity of items being submitted. Block 13. Enter the maintenance priority designator determined from DA PAM 710-2-1. Block 14. For DSU, GSU/AVIM, DEPOT use. Block 15a. Enter the code that most accurately describes when the fault or deficiency was detected. See DA Pamphlets 738-750 and 738-751. Block 15b. Select one. Enter the code. See DA Pamphlets 738-750 and 738-751. Block 16. Enter the accumulated usage data in blocks, when equipment is subject to usage reporting. Block 17. Enter the project code if one has been assigned. If not, leave blank. Block 18. See DA Pamphlets 738-750 and 738-751. Block 19. Enter "Y" or "N" to indicate whether equipment is still under manufacturer's warranty. Block 20. Enter the admin number assigned for property control purposes for the equipment being submitted. Block 21. For DSU/GSU/AVIM/Depot use. Block 22. Enter level of work performed "O" for UNIT LEVEL/AVUM, "F" for DSU/AVIM, "H" for GSU, "D" for DEPOT, "K" for contractor or "L" for Spc Rpr Act. Block 23. Enter the signature of the CO or the CO's designated representative when the priority designator is 01-10. For priority designators 11-15, leave blank. Block 24. Enter a brief description of the deficiencies or symptoms that you feel require attention at this level of maint. Block 25. Self-explanatory.			
SECTION II							
Leave blank. To be completed by the support maintenance DSU/GSU/AVIM/DEPOT.							
SECTION III							
Block 5. Enter the Type Maintenance Request Code. See DA Pamphlets 738-750 and 738-751. Block 6. Enter ID associated with block 7. See DA Pamphlets 738-750 and 738-751. Block 7. Enter the NSN or stock number of the item being submitted. Block 8. Enter model of item being submitted. Block 9. Enter noun/nomenclature of item being submitted. Block 10a. Enter Work Order Number (WON)/DOC NO assigned when item is submitted. Otherwise, leave blank. Block 10b. Enter End Item Code. See AMDF. Block 11. Enter serial number of item being submitted.							
34a. SUBMITTED BY J. SEPULVEDA 35a. ACCEPTED BY 35c. DATE				Block 34a. Enter first initial and last name of submitter. Block 34b. Enter ordinal date submitted (YYDDD). Block 35a. Enter first initial and last name of person accepting maint. request. Block 35b. Enter the initial status. See DA Pamphlets 738-750 and 738-751. Block 35c. Enter ordinal date accepted (YYDDD). Block 35d. Enter military time.			
34b. DATE		35b. STATUS		35d. TIME			

DA FORM 2407, JUL 94

PREVIOUS EDITIONS OF DA FORM 2407 AND DA FORM 5504 ARE OBSOLETE

RECEIPT COPY 1

[illegible]

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: C6300559.___0
FILE DATE AND TIME: 07/18/2007 23:05

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.006
The Average Y Centroid of the Five Target Set:	0.056
The Average Point of Impact of the Five Target Set:	0.056
The Average Mean Radius of the Five Target Set:	0.615
The Distance from POA to Centroid Target #1:	0.147
The Distance from Centroid Target #2 to Centroid Target #1:	0.091
The Distance from Centroid Target #3 to Centroid Target #1:	0.205
The Distance from Centroid Target #4 to Centroid Target #1:	0.177
The Distance from Centroid Target #5 to Centroid Target #1:	0.225

BARBER - M24 0162147

SERIAL NUMBER: C6300559. __0

TARGET NUMBER: 1

FILE DATE: 07/18/2007

FILE TIME: 23:05

POINT#	X	Y
1:	0.234	0.765
2:	0.519	0.818
3:	-0.019	0.383
4:	0.127	0.235
5:	0.516	0.182
6:	0.147	-0.611
7:	-0.310	-0.432
8:	-0.503	-0.103
9:	-0.802	0.080

X CENTROID: -0.010

Y CENTROID: 0.146

POA TO CENTROID: 0.147

HORZ SPREAD: 1.321

VERT SPREAD: 1.429

GROUP SPREAD: 1.513

MIN RADIUS: 0.163


MAX RADIUS: 0.855

MEAN RADIUS: 0.580

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 9


in 3 IN DIAMETER: 9

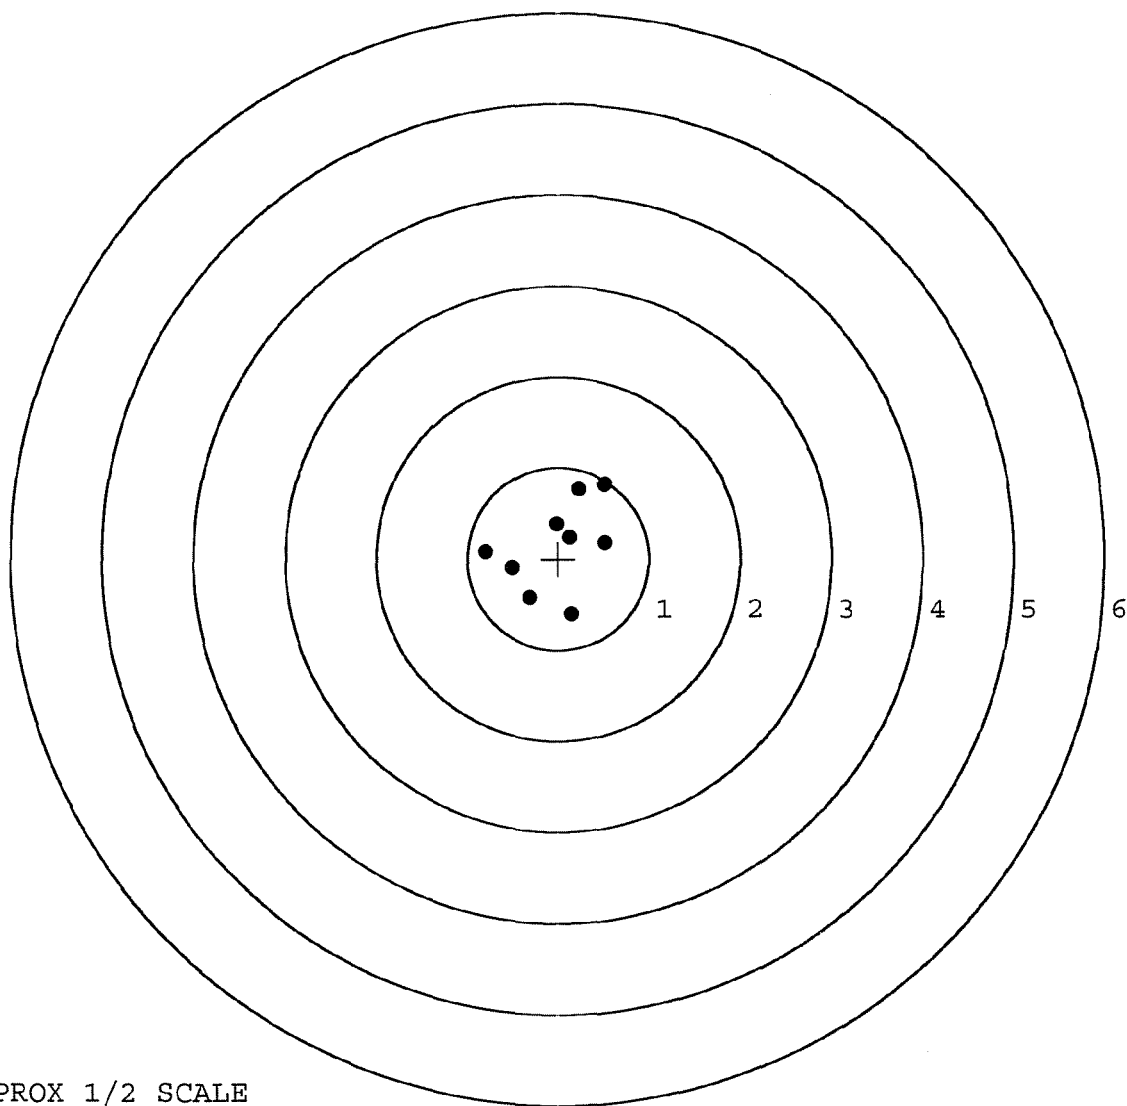

TARGET APPROX 1/2 SCALE

BARBER - M24 0162148

SERIAL NUMBER: C6300559. __0	POINT#	X	Y
TARGET NUMBER: 2	1:	-0.103	1.225
FILE DATE: 07/18/2007	2:	-0.076	0.492
FILE TIME: 23:05	3:	-0.036	0.228
	4:	-0.829	0.391
X CENTROID: -0.090	5:	-0.551	-0.034
Y CENTROID: 0.103	6:	-0.239	0.008
POA TO CENTROID: 0.137	7:	0.017	-0.200
HORZ SPREAD: 1.751	8:	-0.456	-0.577
VERT SPREAD: 1.802	9:	0.449	-0.537
GROUP SPREAD: 1.846	10:	0.922	0.035
MIN RADIUS: 0.136			
MAX RADIUS: 1.122			
MEAN RADIUS: 0.604			
# IN 1 IN DIAMETER: 5			
# IN 2 IN DIAMETER: 8			
# in 3 IN DIAMETER: 10			

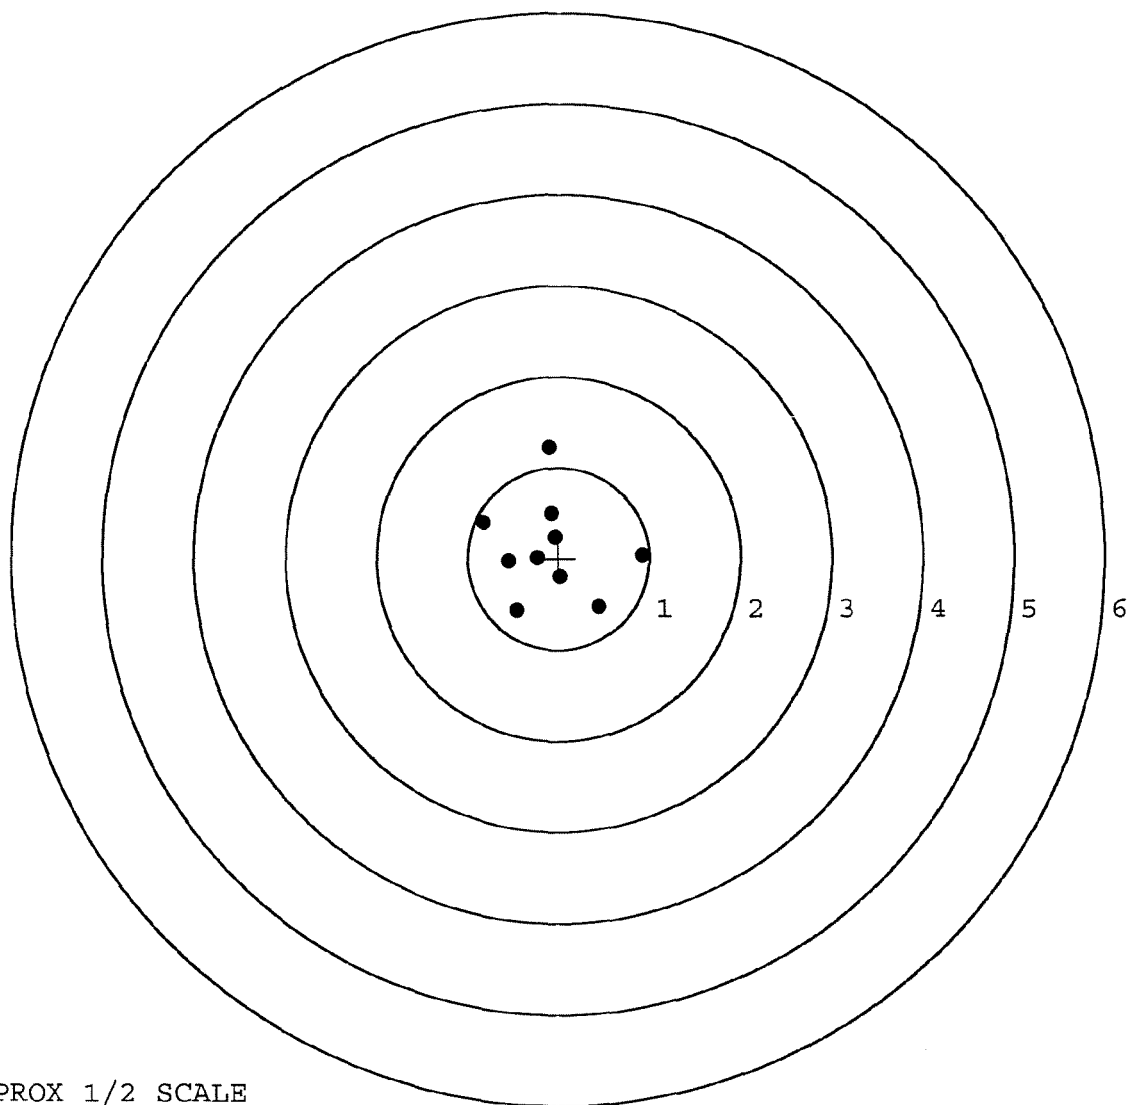

TARGET APPROX 1/2 SCALE

BARBER - M24 0162149

SERIAL NUMBER: C6300559. __0

TARGET NUMBER: 3

FILE DATE: 07/18/2007

FILE TIME: 23:05

POINT#	X	Y
1:	-0.731	0.796
2:	-0.540	0.195
3:	-0.264	-0.104
4:	0.153	0.071
5:	0.313	0.326
6:	0.782	0.663
7:	1.075	-0.140
8:	0.344	-0.345
9:	0.380	-0.800
10:	0.288	0.046

X CENTROID: 0.180

Y CENTROID: 0.071

POA TO CENTROID: 0.193

HORZ SPREAD: 1.806

VERT SPREAD: 1.596

GROUP SPREAD: 2.034

MIN RADIUS: 0.027


MAX RADIUS: 1.164

MEAN RADIUS: 0.590

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

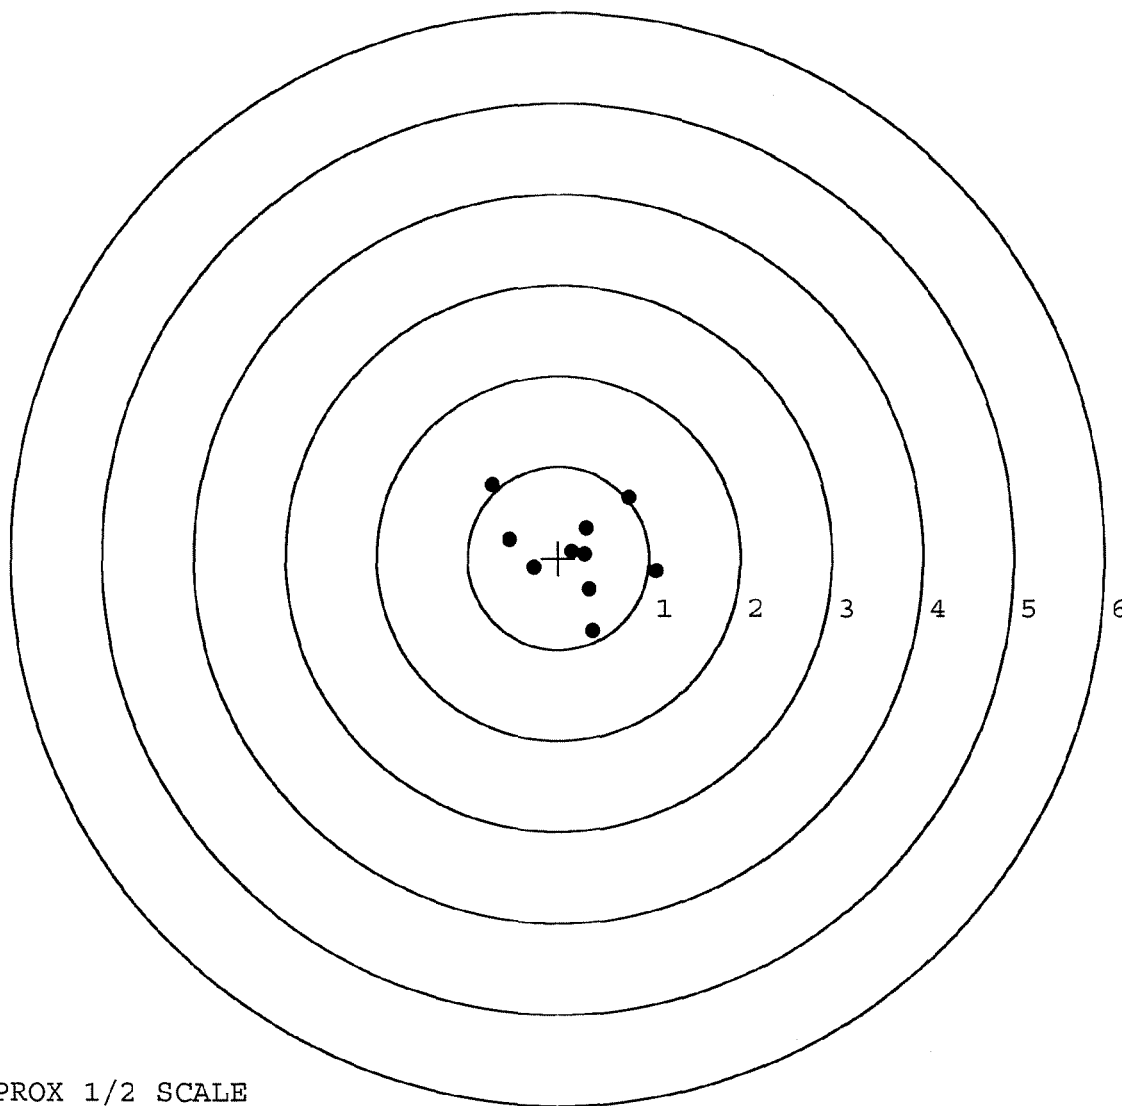

TARGET APPROX 1/2 SCALE

BARBER - M24 0162150

SERIAL NUMBER: C6300559. __0

TARGET NUMBER: 4

FILE DATE: 07/18/2007

FILE TIME: 23:05

POINT#	X	Y
1:	-0.260	1.164
2:	0.163	0.888
3:	-0.122	0.502
4:	-0.451	0.211
5:	0.436	0.085
6:	0.345	-0.075
7:	0.244	-0.470
8:	0.152	-0.752
9:	0.667	-1.121
10:	-0.681	-0.632

X CENTROID: 0.049

Y CENTROID: -0.020

POA TO CENTROID: 0.053

HORZ SPREAD: 1.348

VERT SPREAD: 2.285

GROUP SPREAD: 2.466

MIN RADIUS: 0.301


MAX RADIUS: 1.262

MEAN RADIUS: 0.739

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

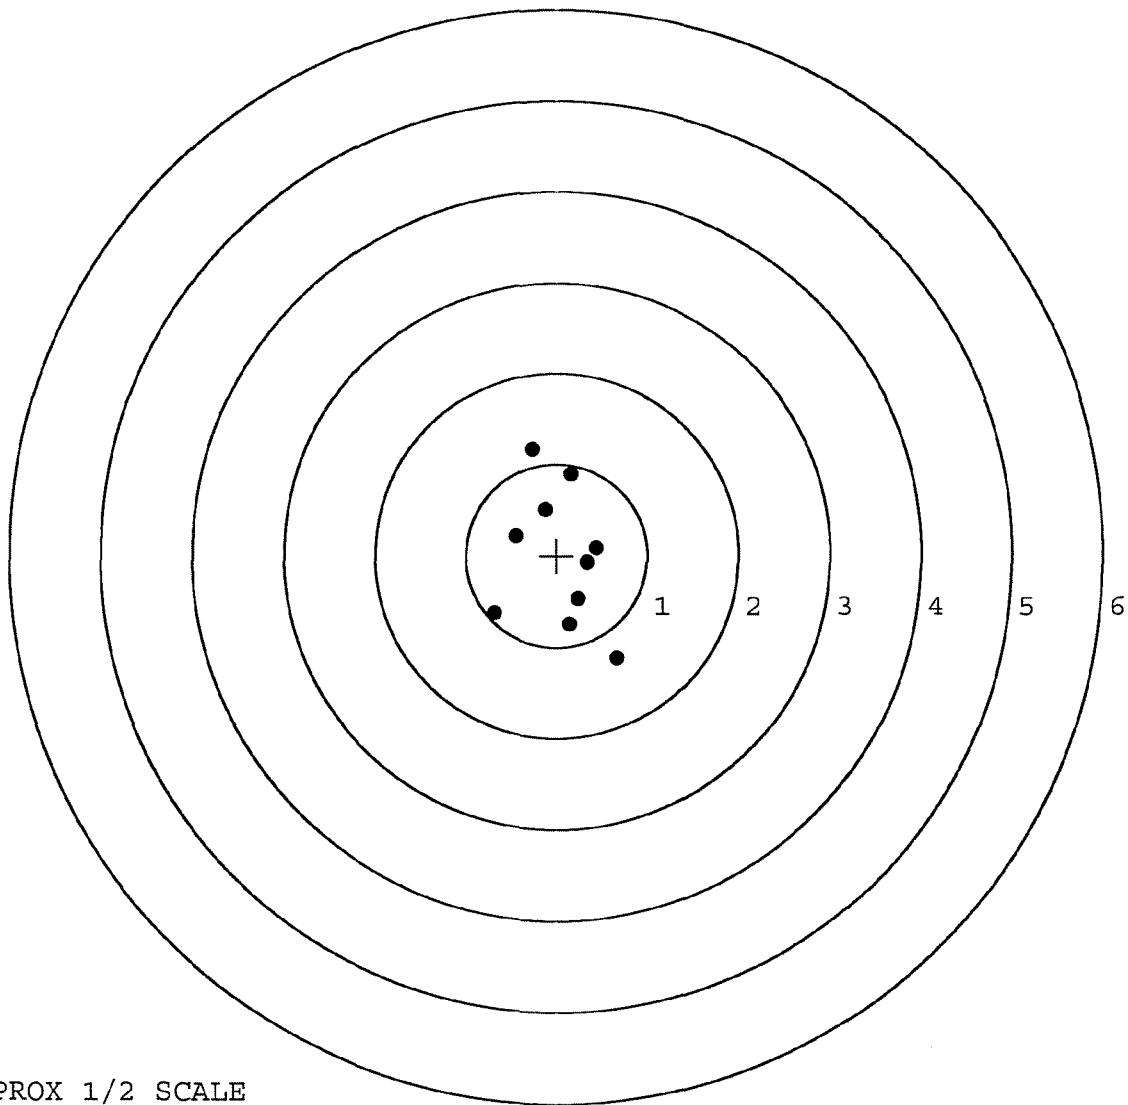

TARGET APPROX 1/2 SCALE

BARBER - M24 0162151

SERIAL NUMBER: C6300559. __0

TARGET NUMBER: 5

FILE DATE: 07/18/2007

FILE TIME: 23:05

POINT#	X	Y
--------	---	---

1:	-0.298	0.956
----	--------	-------

2:	-0.318	0.275
----	--------	-------

3:	-0.311	0.093
----	--------	-------

4:	-0.680	-0.133
----	--------	--------

5:	-0.851	-0.659
----	--------	--------

6:	-0.106	-0.414
----	--------	--------

7:	0.408	-0.376
----	-------	--------

8:	0.593	-0.333
----	-------	--------

9:	0.276	0.216
----	-------	-------

10:	-0.323	0.173
-----	--------	-------

X CENTROID: -0.161

Y CENTROID: -0.020

POA TO CENTROID: 0.162

HORZ SPREAD: 1.444

VERT SPREAD: 1.615

GROUP SPREAD: 1.707

MIN RADIUS: 0.188


MAX RADIUS: 0.986

MEAN RADIUS: 0.561

IN 1 IN DIAMETER: 5

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

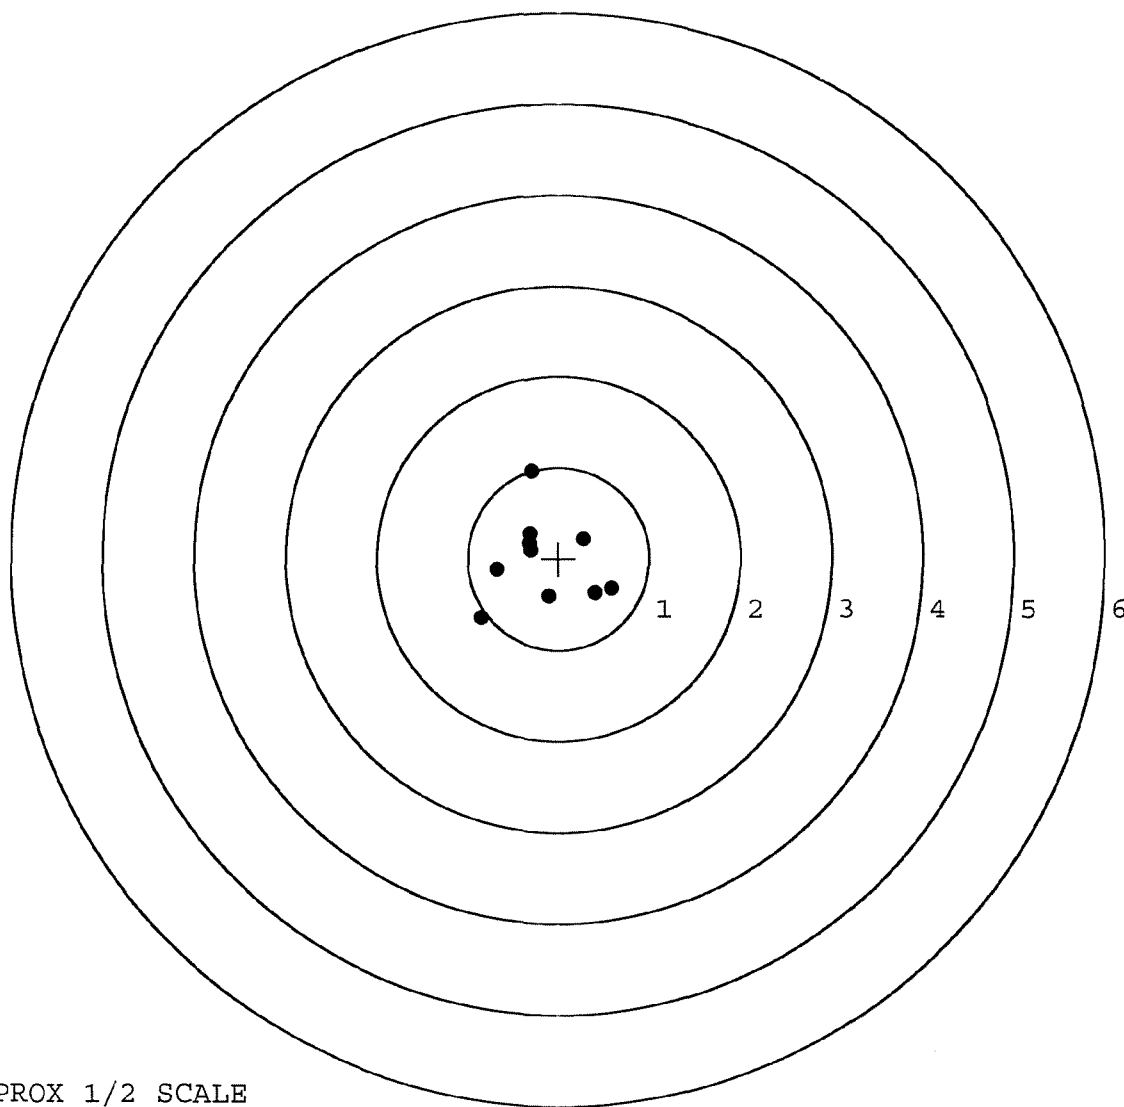

TARGET APPROX 1/2 SCALE

R & E NUMBER 130 023
 SERIAL NUMBER C66300559
 LOG-IN DATE 6-5-07

OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		7-11-07	RTZ
505	RE-BARREL		7-13-07	RTZ
560	ASSEMBLE		7-16-07	TRW
600	PROOF	MAGNA - FLUX	7-16-07	TRW
605	CHECK HEADSPACE		7-16-07	TRW
610	DIS-ASSEMBLE GUN		7-16-07	RTZ
612	MAGNAFLUX	OPERATOR <u>unus</u>	7/17/07	unus
510	DRILL AND TAP	N/A	7-16-07	TRW
615	ROLLMARK CALIBER		7-16-07	CW
618	ROTO-BLAST		7-17-07	LB
620	APPLY COATINGS		7-18-07	CW
625	FINAL ASSEMBLY		7-18-07	S.P.D.
640	FUNCTION TEST AND	PASS FAIL		
650	TARGET	PASS FAIL	7/18/07	unus
	MALFUNCTION <u>citover (over)</u>	CORRECTION OK	7-19-07	TRW
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION N/A		
	MALFUNCTION	CORRECTION	7-18-07	SD
670	FINAL INSPECTION		7-19-07	DA
	A) HEADSPACE	PASS FAIL	7-19-07	DA
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.19 2.42 2.17 2.25 2.31 7-19-07	TRW
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	5.25 5.25 5.0 7-19-07	TRW
	G) SAFETY OFF FORCE	2 LBS MIN	2.25 2.25 2.0 7-19-07	TRW
	I) FIRING PIN INDENT	.020	.023 .023 .023 7-19-07	TRW
690	PACK		7-19-07	DA

Repair Number: RE00080480	Serial: C6225449 Model M24 SWS Center Fire Caliber: 7.62 NATO	Repairman:	Status: Closed 4/30/2004 8:01:06 AM																
Address Information Customer: ☒ Received From Return To: ☐ Received From Name: TRANSPORTATION OFFICE TRANSPORTATION OFFICE Address 1: BLDG 873 BLDG 873 Address 2: BASTOGNE BASTOGNE PO Box: City: FORT CAMPBELL FORT CAMPBELL State: KY Zip Code: 42223 Country: US State: KY Zip Code: 42223 Country: US FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐																			
<table border="1"> <tr> <td>Contact / Condition</td> <td>Problems</td> <td>Estimate</td> <td>History / Status</td> <td>Shipping / Billing</td> </tr> </table>				Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing											
Contact / Condition	Problems	Estimate	History / Status	Shipping / Billing															
Contact Information Phone: Fax: Email: Comments: 		Received Condition: Fair Condition Notes: CSR Notes: 		Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A007</td> <td>With Studs</td> <td>3</td> </tr> <tr> <td>A010</td> <td>Hard Case</td> <td>1</td> </tr> <tr> <td>A017</td> <td>Scope Bases</td> <td>3</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> </tbody> </table>	Code	Desc	Qty	A007	With Studs	3	A010	Hard Case	1	A017	Scope Bases	3	A026	Scope	1
Code	Desc	Qty																	
A007	With Studs	3																	
A010	Hard Case	1																	
A017	Scope Bases	3																	
A026	Scope	1																	
Repair Search		Refresh Close																	
<table border="1"> <tr> <td>naglet</td> <td>4/30/2004</td> <td>8:14 AM</td> <td>CAPS</td> <td>NUM</td> <td>RES</td> <td>SCF</td> </tr> </table>				naglet	4/30/2004	8:14 AM	CAPS	NUM	RES	SCF									
naglet	4/30/2004	8:14 AM	CAPS	NUM	RES	SCF													

G 6300559 New

Serial Number: **C6225449**

Model: **M24 SWS**



RE00080480

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6300559.___0
FILE DATE AND TIME: 05/21/2004 08:06

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.132
The Average Y Centroid of the Five Target Set:	-0.091
The Average Point of Impact of the Five Target Set:	0.161
The Average Mean Radius of the Five Target Set:	0.742
The Distance from POA to Centroid Target #1:	0.067
The Distance from Centroid Target #2 to Centroid Target #1:	0.184
The Distance from Centroid Target #3 to Centroid Target #1:	0.270
The Distance from Centroid Target #4 to Centroid Target #1:	0.269
The Distance from Centroid Target #5 to Centroid Target #1:	0.397

SERIAL NUMBER: G6300559. __0

TARGET NUMBER: 1

FILE DATE: 05/21/2004

FILE TIME: 08:06

POINT#	X	Y
1:	0.761	-1.175
2:	0.288	-0.436
3:	0.456	0.896
4:	0.410	0.301
5:	0.184	0.349
6:	-0.001	-0.019
7:	-0.070	-0.319
8:	-0.267	-0.229
9:	-0.302	0.517
10:	-0.792	0.165

X CENTROID: 0.067

Y CENTROID: 0.005

POA TO CENTROID: 0.067

HORZ SPREAD: 1.553

VERT SPREAD: 2.071

GROUP SPREAD: 2.093

MIN RADIUS: 0.072


MAX RADIUS: 1.369

MEAN RADIUS: 0.599

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 9

in 3 IN DIAMETER: 10

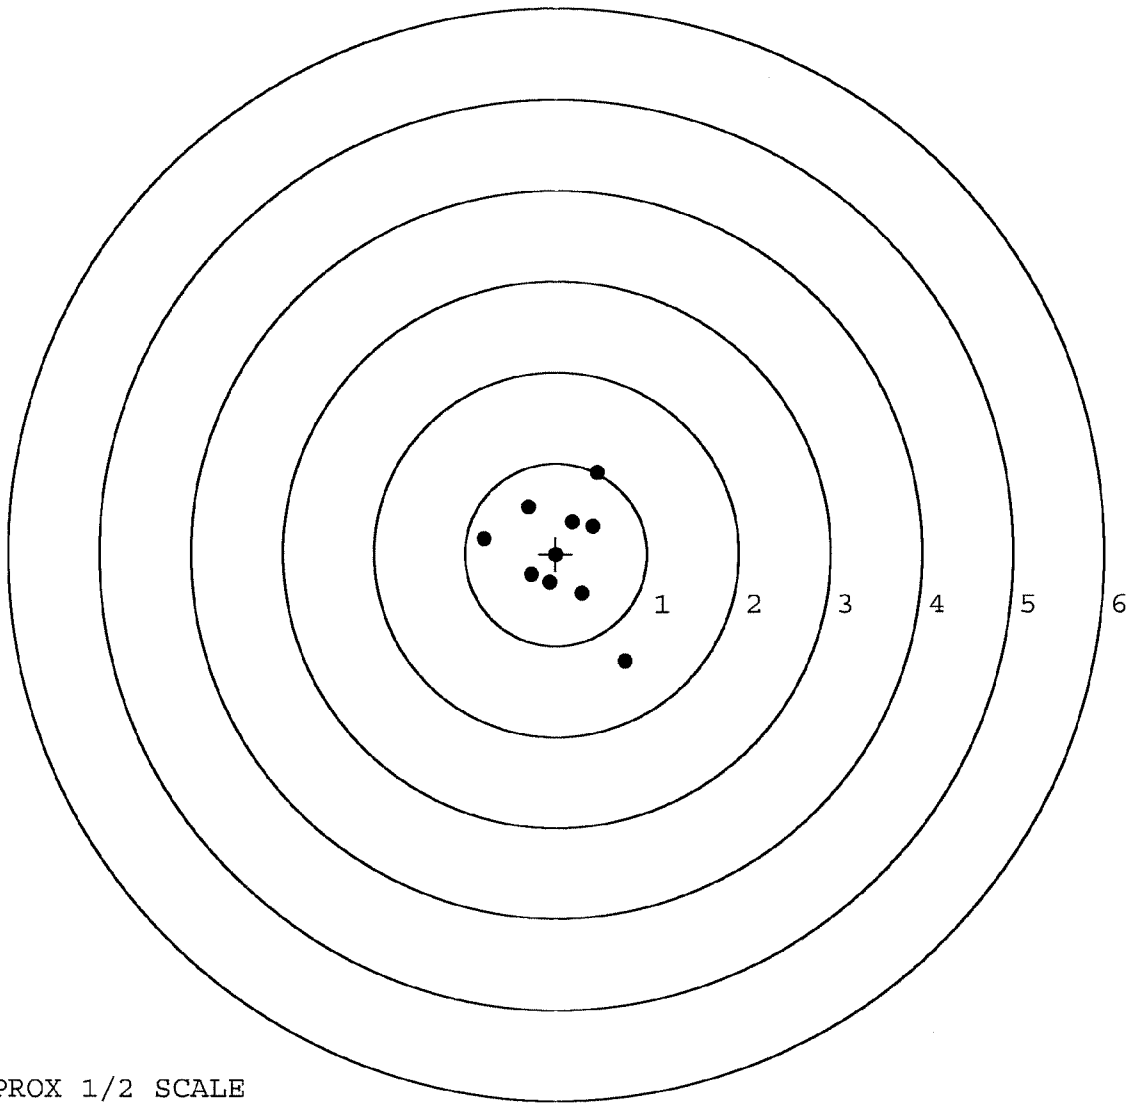

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300559. __0

TARGET NUMBER: 2

FILE DATE: 05/21/2004

FILE TIME: 08:06

POINT#	X	Y
1:	0.711	-0.805
2:	0.979	-0.377
3:	0.998	-0.175
4:	0.389	-0.322
5:	0.040	-0.044
6:	0.097	0.911
7:	-0.808	-0.128
8:	-1.027	-0.350
9:	-1.294	0.162
10:	-1.230	0.881

X CENTROID: -0.114

Y CENTROID: -0.025

POA TO CENTROID: 0.117

HORZ SPREAD: 2.292

VERT SPREAD: 1.716

GROUP SPREAD: 2.571

MIN RADIUS: 0.156


MAX RADIUS: 1.437

MEAN RADIUS: 0.941

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 10

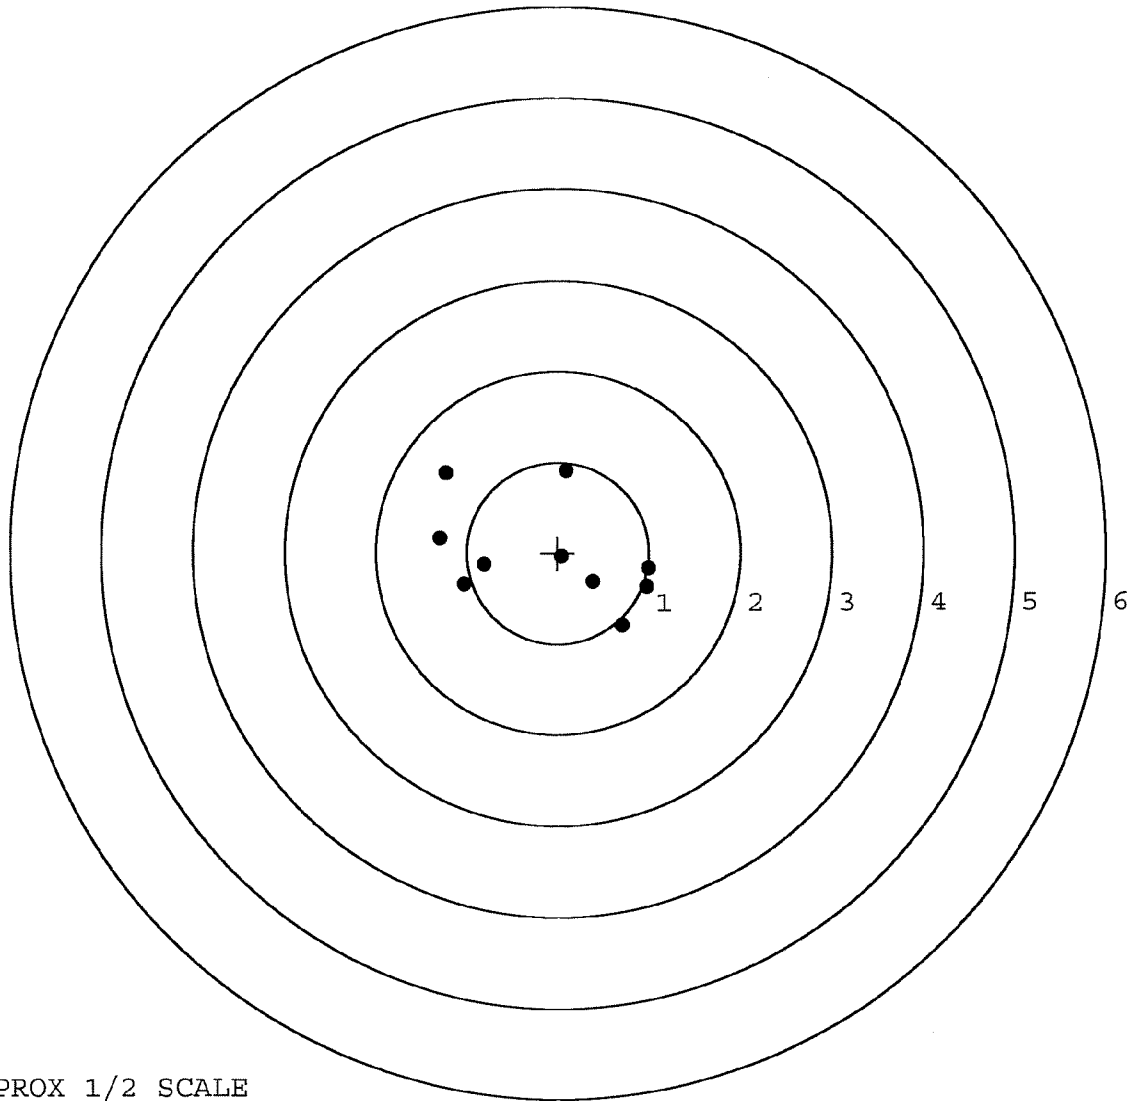


TARGET APPROX 1/2 SCALE

BARBER - M24 0162157

SERIAL NUMBER: G6300559. __0
TARGET NUMBER: 3
FILE DATE: 05/21/2004
FILE TIME: 08:06


	POINT#	X	Y
	1:	0.346	-0.731
	2:	0.258	-0.622
	3:	0.716	0.001
	4:	0.329	0.374
X CENTROID:	5:	-0.028	-0.047
Y CENTROID:	6:	-0.352	0.201
POA TO CENTROID:	7:	-0.568	0.548
HORZ SPREAD:	8:	-0.831	0.281
VERT SPREAD:	9:	-0.733	-0.318
GROUP SPREAD:	10:	-0.989	-0.621
MIN RADIUS:		0.164	
MAX RADIUS:		0.961	
MEAN RADIUS:		0.667	
# IN 1 IN DIAMETER:		2	
# IN 2 IN DIAMETER:		10	
# in 3 IN DIAMETER:		10	

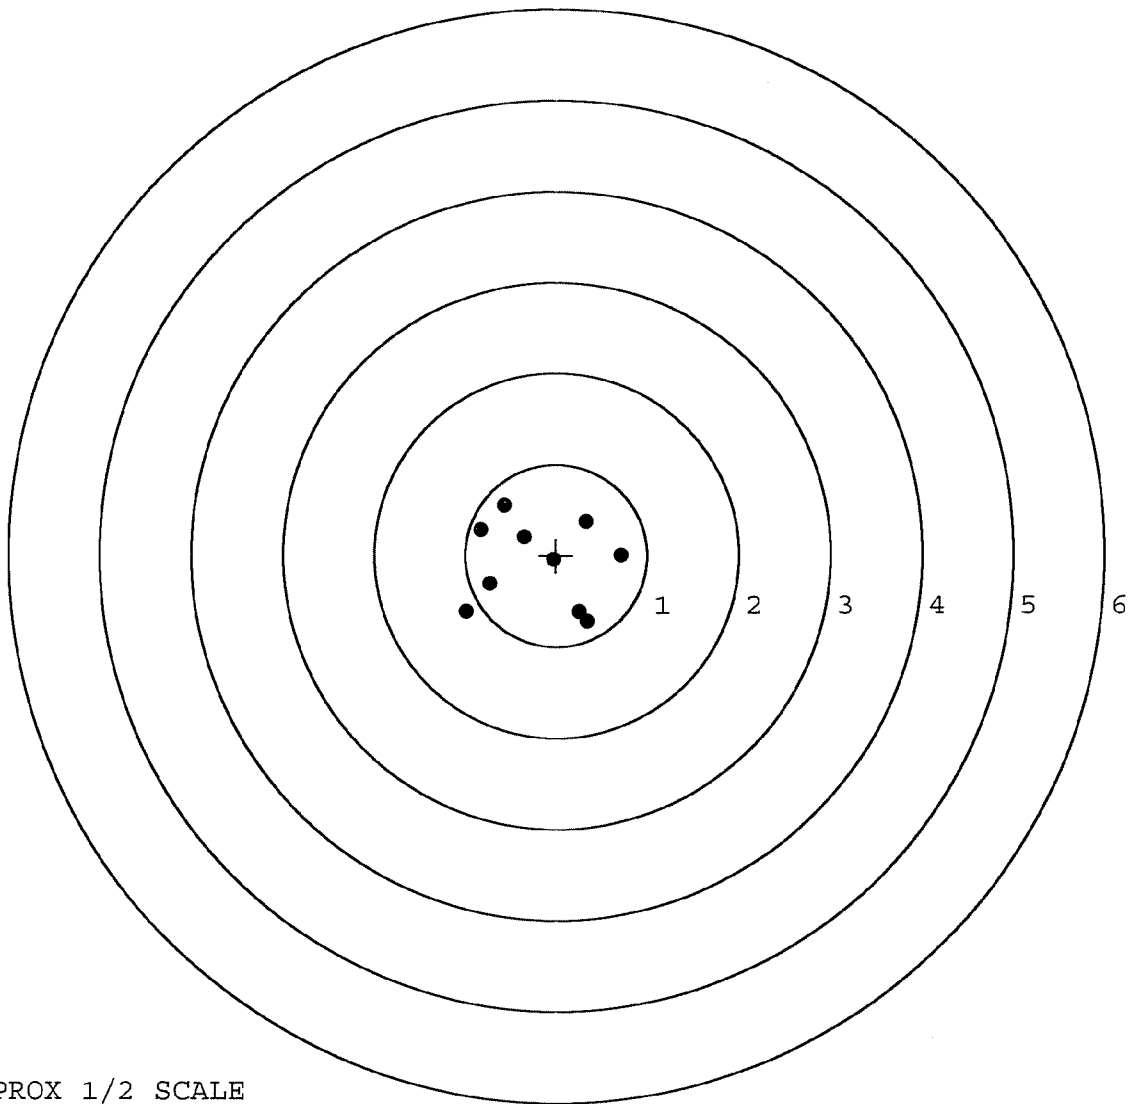

TARGET APPROX 1/2 SCALE

BARBER - M24 0162158

SERIAL NUMBER: G6300559. __0	POINT#	X	Y
TARGET NUMBER: 4	1:	-0.799	-1.192
FILE DATE: 05/21/2004	2:	-0.699	-0.734
FILE TIME: 08:06	3:	-1.052	-0.252
	4:	-0.630	-0.163
X CENTROID: -0.144	5:	1.379	-0.006
Y CENTROID: -0.162	6:	-0.207	0.384
POA TO CENTROID: 0.217	7:	0.280	0.998
HORZ SPREAD: 2.431	8:	0.050	-0.008
VERT SPREAD: 2.190	9:	0.254	-0.314
GROUP SPREAD: 2.480	10:	-0.014	-0.334
MIN RADIUS: 0.215			
MAX RADIUS: 1.531			
MEAN RADIUS: 0.762			
# IN 1 IN DIAMETER: 4			
# IN 2 IN DIAMETER: 7			
# in 3 IN DIAMETER: 9			

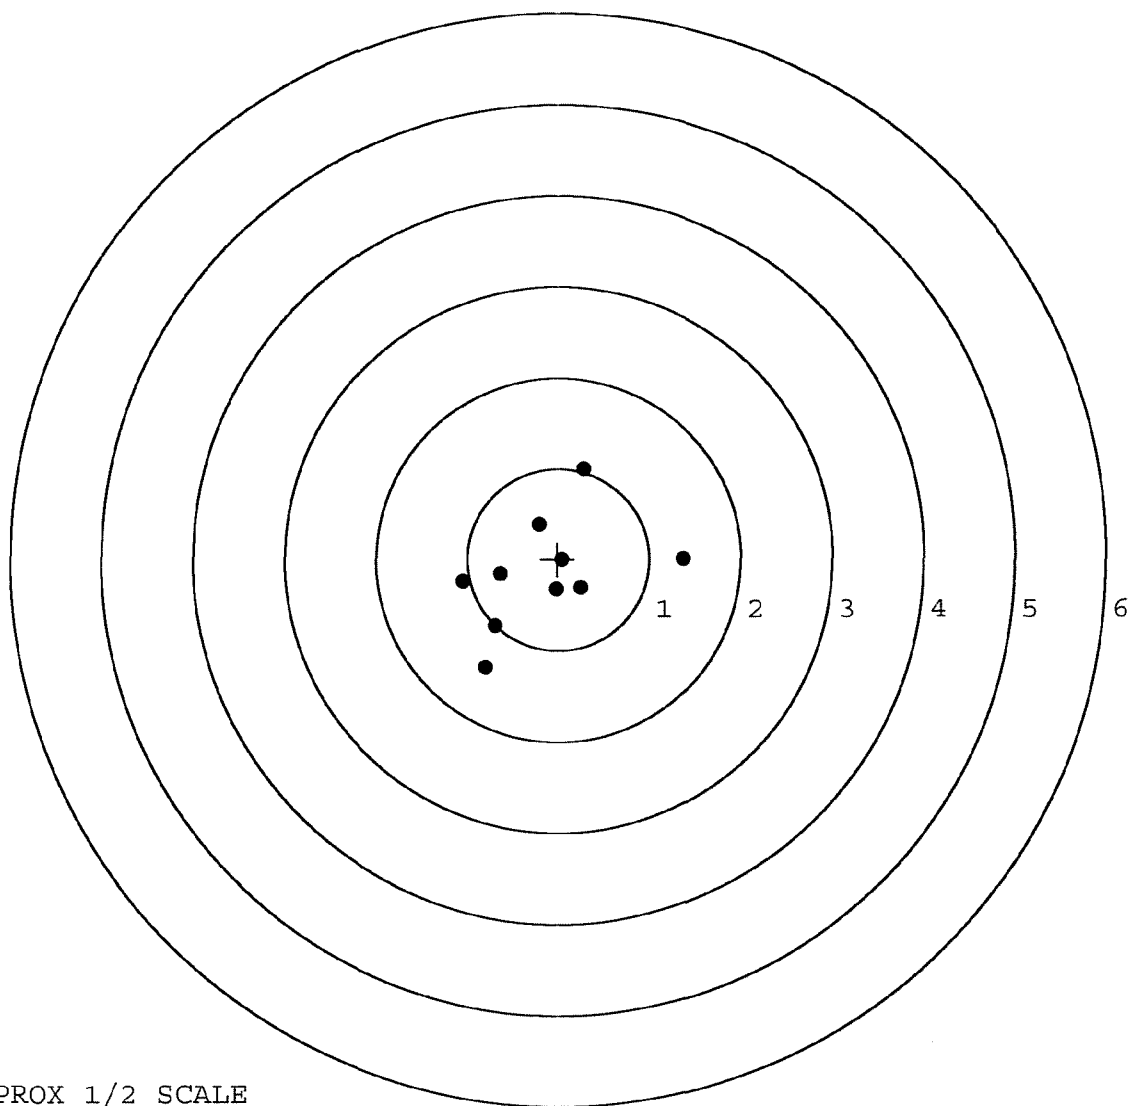

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6300559. __0

TARGET NUMBER: 5

FILE DATE: 05/21/2004

FILE TIME: 08:06

POINT#	X	Y
1:	0.866	0.597
2:	0.151	0.736
3:	-0.402	-1.057
4:	-0.002	-0.503
5:	0.300	-0.077
6:	-0.029	0.002
7:	-0.687	-0.418
8:	-0.931	-0.507
9:	-1.009	-0.148
10:	-1.110	-0.408

X CENTROID: -0.285

Y CENTROID: -0.178

POA TO CENTROID: 0.336

HORZ SPREAD: 1.976

VERT SPREAD: 1.793

GROUP SPREAD: 2.217

MIN RADIUS: 0.313


MAX RADIUS: 1.388

MEAN RADIUS: 0.740

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

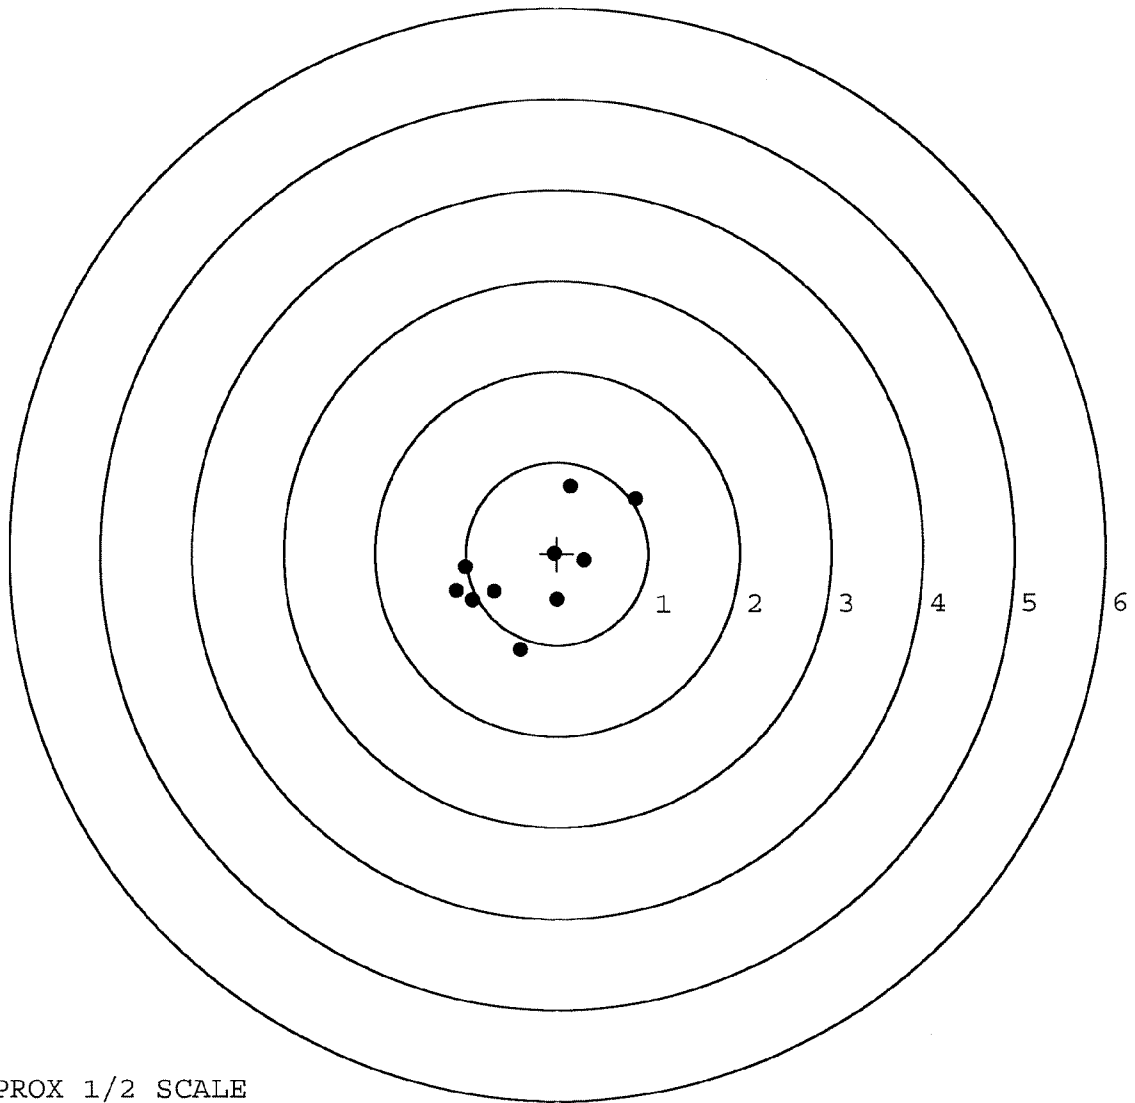

TARGET APPROX 1/2 SCALE

R & E NUMBER	80480		
SERIAL NUMBER	C6223449 G6300559 New		
LOG-IN DATE	430-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	5-3-04	RTL
560 A	RE-BARREL	5-4-04	RR
B	DRILL AND TAP	5-5-04	TRW
575	ASSEMBLE	5-4-04	RTL
600	PROOF	5-4-04	RR
605	CHECK HEADSPACE	5-4-04	RR
610	DIS-ASSEMBLE GUN	5-4-04	RTL
612	MAGNAFLUX RR		
615	ROLLMARK CALIBER	5/6/04	AB
618	ROTO-BLAST	5/7/04	SW
620	APPLY COATINGS	5-10	TA
625 A	FINAL ASSEMBLY	5-19-04	RR
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	5-21-04	TRW
655	FINAL INSPECT	5-26-04	RTL
660	PACK	5-29-04	DA
		SHIP DATE	
	QAR INSPECTION DATE		

SERIAL # C6225449INSPECTED BY: RTZDATE REC'D: 4-30-04DATE RET'D: 6-7-04

ITEM

BARREL ASSEMBLY

☒ BARREL
☒ RECEIVER
☒ FRONT SIGHT BASE
☒ REAR SIGHT BASE
☒ SCREWS
☒ FINISH

SCOPE ASSEMBLY

☒ SCOPE
☒ SCOPE RINGS
☒ MOUNTING SCREWS
☒ MOUNTING BASE
☒ SCREWS
☒ FINISH
☒ CLARITY

ITEM

STOCK ASSEMBLY

☒ STOCK
☒ SLING AWIVEL STUDS
☒ ADJUSTABLE
☒ BUTT PLATE
☒ LOCK NUTS
☒ BARREL CLEARANCE
☒ COLOR / FINISH

SYSTEMS CASE

☒ SCOPE CASE
☒ IRON SIGHTS
☒ DEPLOYMENT KIT

TRIGGER ASSEMBLY

☒ SAFETY OPERATION
☒ RE-SET TO FACTORY SPECS

COMMENTS:

Serial Number:

C6225449

Model: 700



RE00034188

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

R & E NUMBER 34188			
SERIAL NUMBER C622 5449			
LOG-IN DATE 10-18-01			
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	10-19-01	KPK
560 A	RE-BARREL AT CUSTOM SHOP	10/19/01	BWT
B	DRILL AND TAP	10/19/01	BWT
C	POLISH	10/19/01	GD
575	ASSEMBLE	10/19/01	KPK
600	PROOF	10-19-01	AC
605	CHECK HEADSPACE	10-20-01	RH
610	DIS-ASSEMBLE GUN	10-20-01	RH
612	MAGNAFLUX	10-20-01	RH
615	ROLLMARK CALIBER	10-20-01	RH
618	ROTO-BLAST	10-20-01	KO
620	APPLY COATINGS	10/20	RH
625 A	FINAL ASSEMBLY	10-24-01	RH
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	10-24-01	AC
655	FINAL INSPECT	10-29-01	RH
660	PACK	10-29-01	RH
		SHIP DATE	
		QAR INSPECTION DATE	

BARBER - M24 0162164

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225449
25 Oct 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1276
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1128
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .17031

THE AMR FOR THIS RIFLE IS: .9644

CENTROIDAL DISTANCES

0 TO	1	.538281
1 TO	2	.360257
1 TO	3	.390928
1 TO	4	.551711
1 TO	5	.675563

3 1
54 2 <----POA

BARBER - M24 0162165

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .552

MIN RADIUS : .232

MEAN RADIUS : .885


MAX RADIUS : 1.883

CENTROID X : .489

CENTROID Y : .255

25 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225449

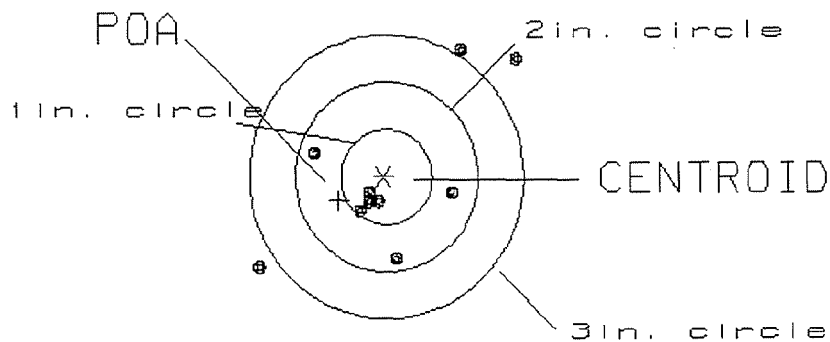CENTERFIRE PATTERN # 1

OF SHOTS= 10

IN CIRCLE

HS= 2.88

4

VS= 2.31

7

GS= 3.58


7

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .197
 MIN RADIUS : .438
 MEAN RADIUS : 1.065
 MAX RADIUS : 2.229
 CENTROID X : .197
 CENTROID Y : .014

25 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG225449

CENTERFIRE PATTERN # 2

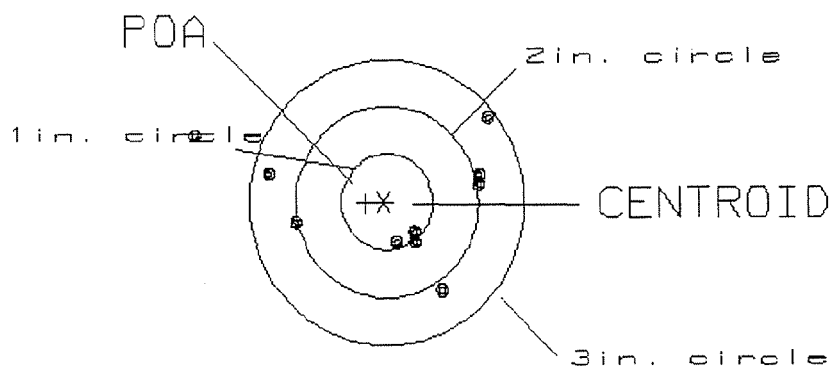

OF SHOTS= 10

IN CIRCLE

HS= 3.27

2

VS= 1.77

3

GS= 3.27

9

BARBER - M24 0162167

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .351
 MIN RADIUS : .201
 MEAN RADIUS : 1.021
 MAX RADIUS : 2.403
 CENTROID X : .113
 CENTROID Y : .332

25 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225449

CENTERFIRE PATTERN # 3

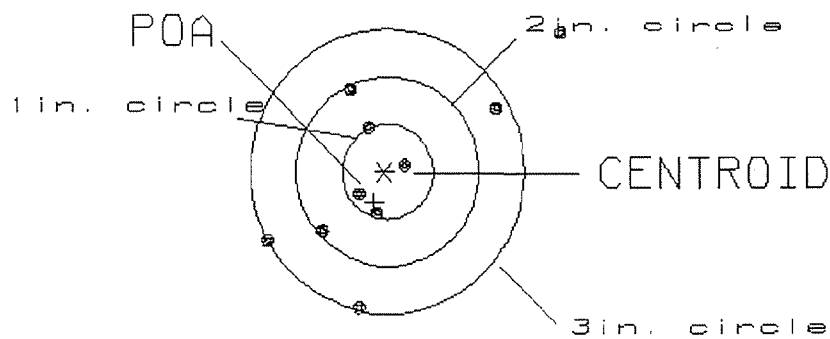

OF SHOTS= 10

IN CIRCLE

HS= 3.26

3

VS= 2.64

6

GS= 3.94


8

PATTERN #: 4
 POA TO CENTROID: .028
 MIN RADIUS : .392
 MEAN RADIUS : .848
 MAX RADIUS : 1.427
 CENTROID X : -.022
 CENTROID Y : .017

25 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225449

CENTERFIRE PATTERN # 4

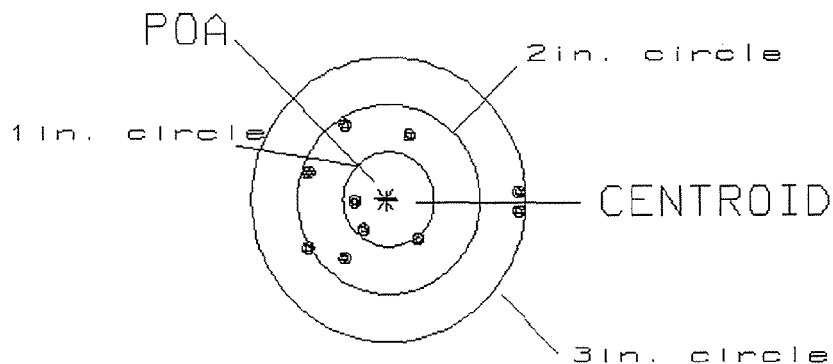

OF SHOTS= 10

IN CIRCLE

HS= 2.32

2

VS= 1.43

6

GS= 2.33

10


PATTERN #: 5

POA TO CENTROID: .141
 MIN RADIUS : .537
 MEAN RADIUS : 1.003
 MAX RADIUS : 1.472
 CENTROID X : -.139
 CENTROID Y : -.024

25 Oct 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/CG225449

CENTERFIRE PATTERN # 5

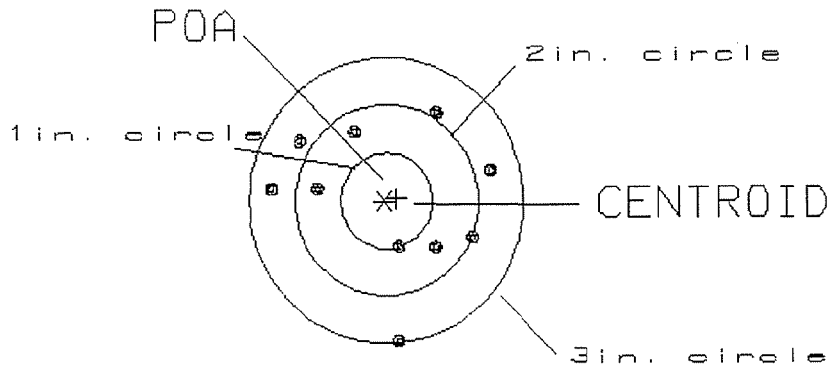

OF SHOTS= 10

IN CIRCLE

HS= 2.39

0

VS= 2.43

4

GS= 2.47

10

Final Inspection

In: C 16225449

DATE REC'D: 10-18-01

DATE RET'D: 10-30-01

EDITOR *llh*

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ SCOPE
- ☒ SCOPE RINGS
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☒ SCREWS
- ☒ FINISH
- ☒ LOOSENESS
- ☒ CLARITY

Misc.

- ☒ DD-250
- ☒ BAR CODE
- ☒ PACKAGING

Item:

Stock Assy.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☒ SCOPE CASE
- ☒ IRON SIGHTS
- ☒ DEPLOYMENT KIT

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments: _____

BARBER - M24 0162172

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6225249
4 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .1704
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.0286
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .172783

THE AMR FOR THIS RIFLE IS: 1.166

CENTROIDAL DISTANCES

0 TO 1	.305634
1 TO 2	.334337
1 TO 3	.561894
1 TO 4	.346204
1 TO 5	.5086

3 + 2 5
4 <----POA
1

BARBER - M24 0162173

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .306
 MIN RADIUS : .406
 MEAN RADIUS : 1.274
 MAX RADIUS : 2.227
 CENTROID X : .154
 CENTROID Y : -.264

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225249

CENTERFIRE PATTERN # 1

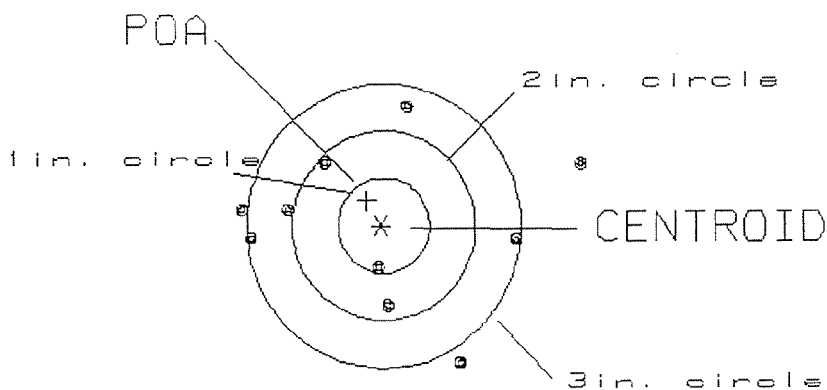


OF SHOTS= 10

IN CIRCLE


HS= 3.71
 VS= 2.63
 GS= 3.75

1
 3
 7

PATTERN #: ☐ 2 ☐
 POA TO CENTROID: .183
 MIN RADIUS : .540
 MEAN RADIUS : 1.278
 MAX RADIUS : 2.475
 CENTROID X : .169
 CENTROID Y : .070

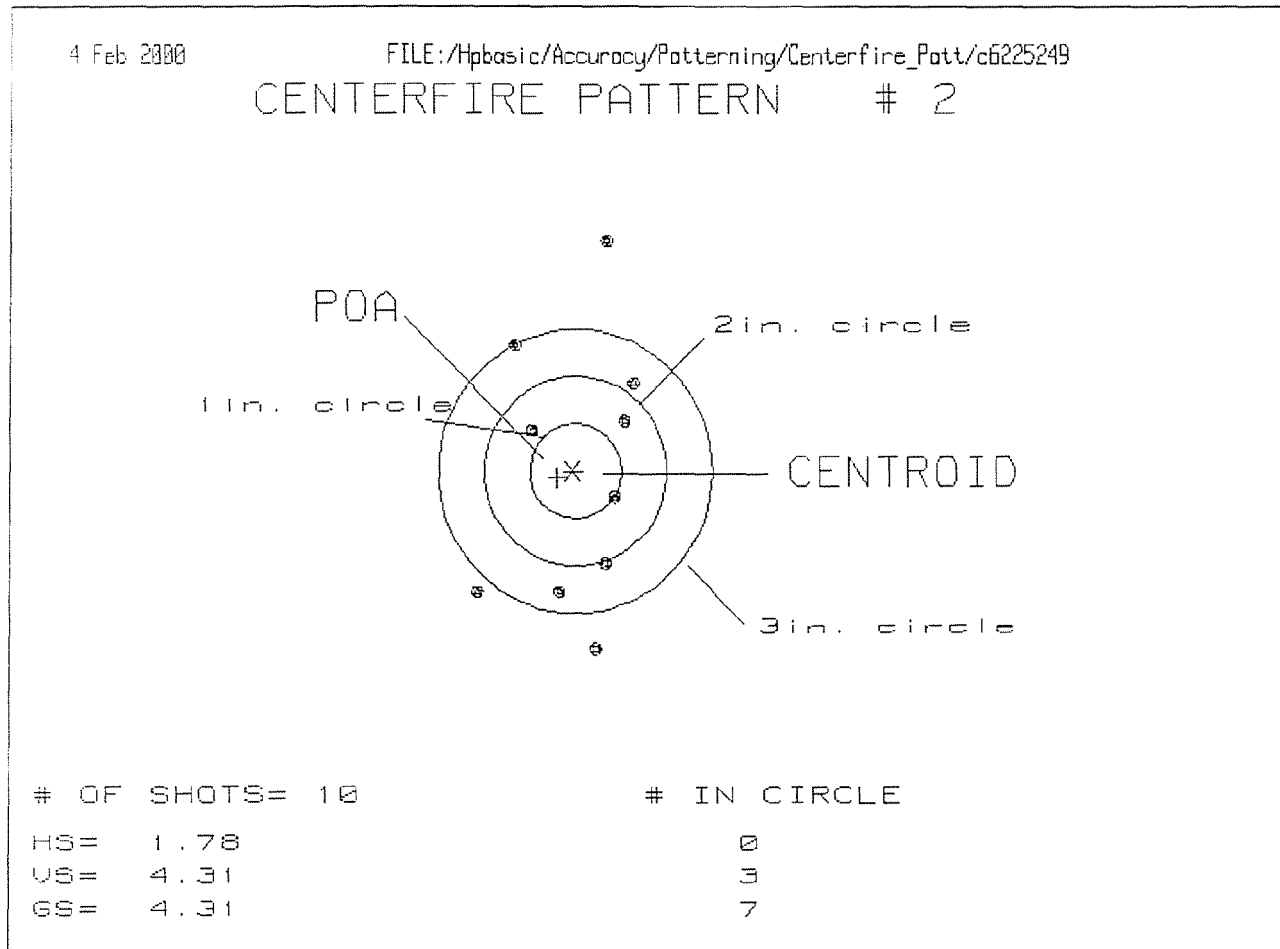

PATTERN #: 3
 POA TO CENTROID: .362
 MIN RADIUS : .159
 MEAN RADIUS : .876
 MAX RADIUS : 1.738
 CENTROID X : -.360
 CENTROID Y : -.037

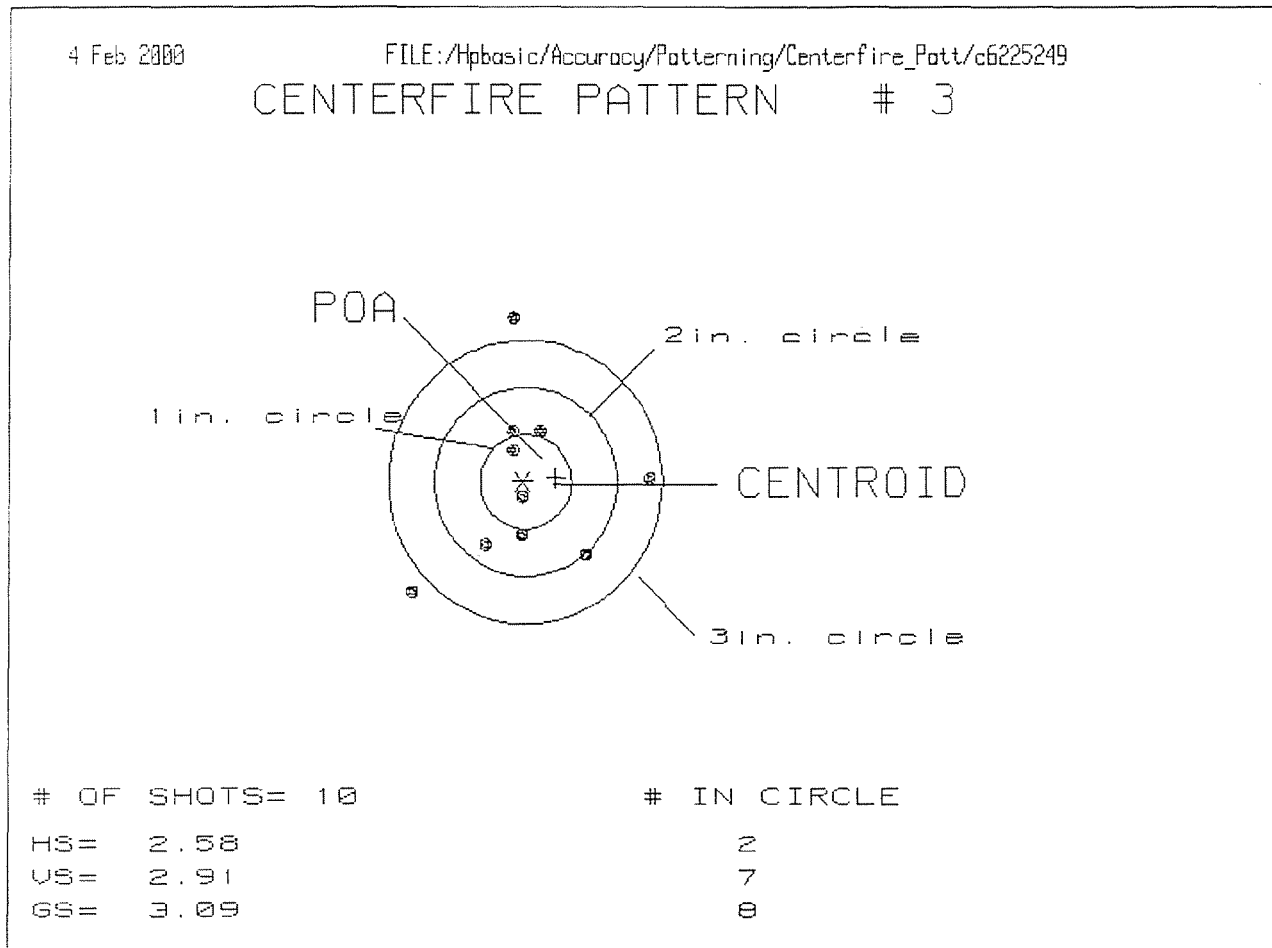

BARBER - M24 0162176

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .434

MIN RADIUS : .516

MEAN RADIUS : 1.400


MAX RADIUS : 2.285

CENTROID X : .430

CENTROID Y : -.055

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225249

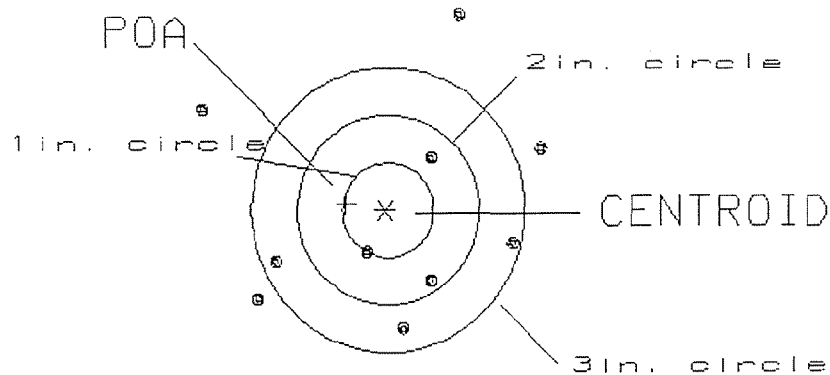CENTERFIRE PATTERN # 4

OF SHOTS= 10

IN CIRCLE

HS= 3.72

0

VS= 3.28

3

GS= 3.74


6

PATTERN #: 5
 POA TO CENTROID: .480
 MIN RADIUS : .127
 MEAN RADIUS : 1.001
 MAX RADIUS : 2.010
 CENTROID X : .459
 CENTROID Y : .143

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6225249

CENTERFIRE PATTERN # 5

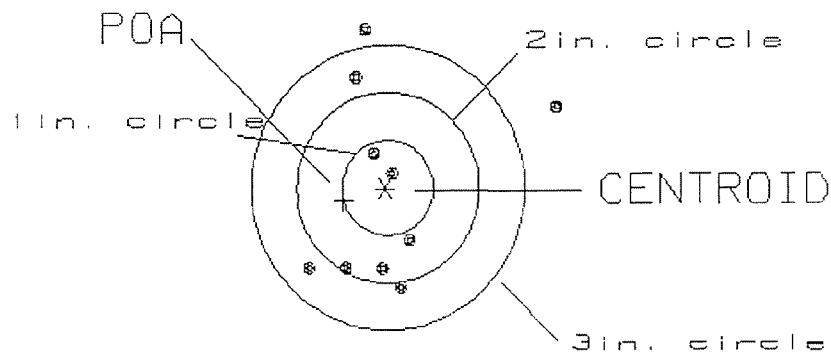

OF SHOTS= 10

IN CIRCLE

HS= 2.74
 VS= 2.73
 GS= 3.20

2
 5
 8

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6225249

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	12-12-99	RW
605	CHECK HEADSPACE	12-12-99	RW
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	1-31-00	RW
655	FINAL INSPECT	2-8-00	RW
660	PACK		
QAR INSPECTION		SHIP DATE	

Final Inspection

Sn: C6225249

DATE REC'D: 10-18-99

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☒ SCREWS
- ☒ FINISH
- ☒ LOOSENESS
- ☒ CLARITY

MISC.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ IRON SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments:

Remington



VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700™ H24

SERIAL NO.
C6225449

ORDER NO.
5716

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6225449

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225449

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 4 09		RW
600	Proof	4 4 89		RW
607	Check Headspace	4 4 89		RW
610	Dis-assemble Gun	4 4 89		RW
612	Magnaflux Barrel Action	4-6	89	KCR
	Magnaflux Bolt	4-7	89	KCR
615	Rollmark Caliber	4-7	89	G.S.
617	Drill and Tap Sight Holes	4 7 89		FB
618	Polish Barrel	4 7 89		BT
620	Apply Coatings (Barrel Action)		4-19-89	TA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/19/89	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/19/89	RW
	C) Inspect Ejector Hole for Chamfer		4/19/89	RW
	D) Oil Firing Pin Ass'y		4/19/89	RW
	E) Adjust Trigger Pull to Min Setting and Stake		4/20/89	JL

op. #	BARBER - M24 0162182 OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	7	6	6			4/20/89	JH
	G) Safety Off Force	3	3	3			4/20/89	JH
	H) Trigger Pull Test & Retainability						4/20/89	S.S.
	I) Firing Pin Indent	.020	.020	.020			4/20/89	JH
	J) Assemble Stock						4/21/89	EW
	K) Assemble Swivel Studs						25 April 89	JS
	L) Attach Front and Rear Sight Assemblies						4/21/89	EW
	M) Iron Sight Alignment						4/21/89	EW
	N) Detach Front & Rear Sights & place in numbered container						4/21/89	EW
	O) Attach Scope to Rifle						4/21/89	JH
	P) Detach & Attach Scope 20 Times						4/21/89	JH
640	Gallery Target & Test	40 R	111 L				4/21/89	DH
	A) Time						4/21/89	DH
	B) Malfunctions						4/21/89	DH
	C) Pierced Primers						4/21/89	DH
	D) Optical Clarity of Scope						4/21/89	DH
645	Inspect for Live Ammo						4/21/89	DH
655	Final Inspection							
	A) Headspace						25 April 89	JS
	B) Trigger Pull	2.17	2.14	2.16	2.14	2.17	25 April 89	JS
	C) Function						25 April 89	JS
660	Pack						26 April 89	JS

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 6225449

DATE 4-9-90

TESTER JR

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.35	2.33		2.58	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.27	2.36		2.52	
PULL #3	2.26	2.36		2.56	
PULL #4	2.36	2.38		2.49	
PULL #5	2.35	2.36		2.53	
TOTAL	11.59	11.79		12.68	
AVG.	2.318	2.358		2.536	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.57	3.54		
PULL #2	3.57	3.55		
PULL #3	3.55	3.57		
PULL #4	3.53	3.52		
PULL #5	3.55	3.50		
TOTAL	17.97	17.68		
AVG.	3.554	3.536		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.27	4.05		
PULL #2	4.18	4.22		
PULL #3	4.19	4.22		
PULL #4	4.18	4.26		
PULL #5	4.22	4.25		
TOTAL	21.04	21.00		
AVG.	4.208	4.2		

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225449
24 Apr 1989

CENTROIDAL DISTANCES

0 TO	1	.799123
1 TO	2	.242012
1 TO	3	.437778
1 TO	4	.204463
1 TO	5	.814007

$\bar{x} = .7316$ ---- POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .7316
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0676
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .734716

THE AMP FOR THIS RIFLE IS: .997


21 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/06225449

CENTERFIRE PATTERNS

1

POA

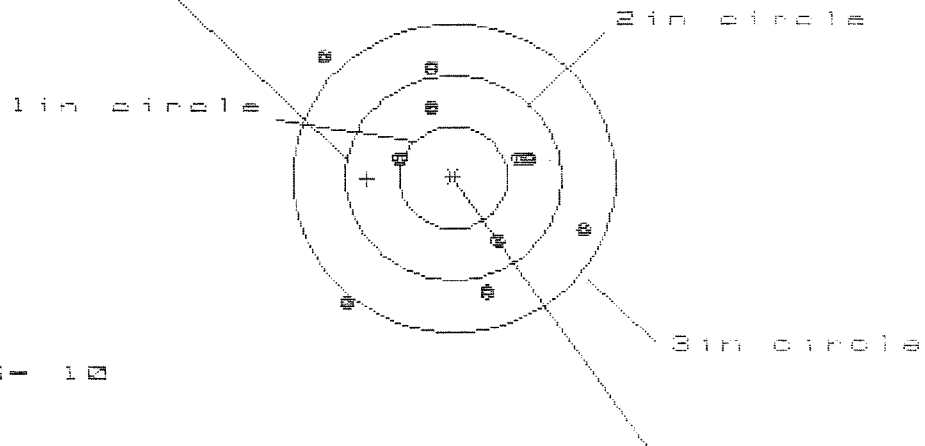

OF SHOTS- 10

IN CIR

1 in = 0

2 in = 5

3 in = 8

HS= 2.360

VS= 2.397

GS= 2.907

CENTROID *


PATTERN #	:	1	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.159	1.026	.882
MINIMUM X	:	-1.201	-1.148	-.805
MAXIMUM Y	:	1.157	1.191	1.052
MINIMUM Y	:	-1.240	-1.112	-1.157
CENTROID X	:	.799	.932	1.076
CENTROID Y	:	.014	-.114	.025
POA TO CENTROID in.	:	.799	.939	1.076
MIN RADIUS	:	.561	.523	.341
MEAN RADIUS	:	1.011	.921	.798
MAX RADIUS	:	1.667	1.598	1.157
HORIZONTAL SPREAD	:	2.360	2.174	1.687
VERTICAL SPREAD	:	2.397	2.303	2.209
EXTREME SPREAD	:	2.907	2.453	2.255
NUMBER IN ONE INCH CIRCLE	=	0		
NUMBER IN TWO INCH CIRCLE	=	5		
NUMBER IN THREE INCH CIRCLE	=	8		

21 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225449

CENTERFIRE PATTERNS # 2

POA

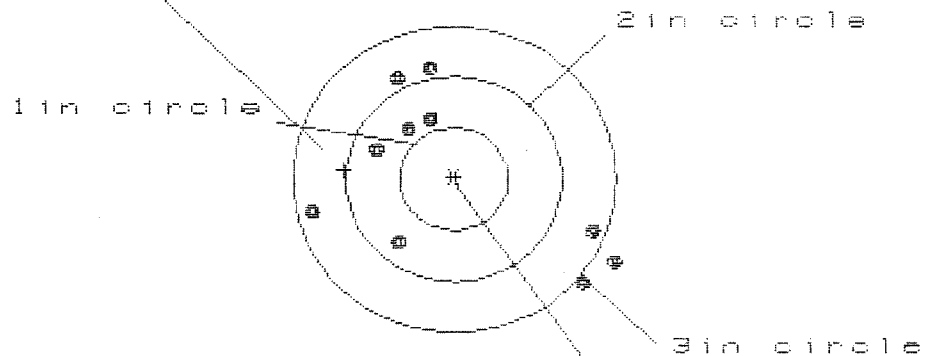

OF SHOTS- 10

IN CIR

1in = 0

2in = 4

3in = 8

HS= 2.711

VS= 2.161

GS= 2.758

CENTROID #


PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.438	1.406	1.568
MINIMUM X	:	-1.273	-1.113	-.951
MAXIMUM Y	:	1.112	1.017	.874
MINIMUM Y	:	-1.049	-1.144	-.863
CENTROID X	:	1.018	.858	.696
CENTROID Y	:	-.089	.006	.149
POA TO CENTROID in.	:	1.022	.858	.712
MIN RADIUS	:	.588	.417	.218
MEAN RADIUS	:	1.085	.962	.785
MAX RADIUS	:	1.674	1.730	1.729
HORIZONTAL SPREAD	:	2.711	2.519	2.519
VERTICAL SPREAD	:	2.161	2.161	1.737
EXTREME SPREAD	:	2.758	2.586	2.523
NUMBER IN ONE INCH CIRCLE	=		0	
NUMBER IN TWO INCH CIRCLE	=		4	
NUMBER IN THREE INCH CIRCLE	=		8	

21 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/08225449

CENTERFIRE PATTERNS # 3

POA

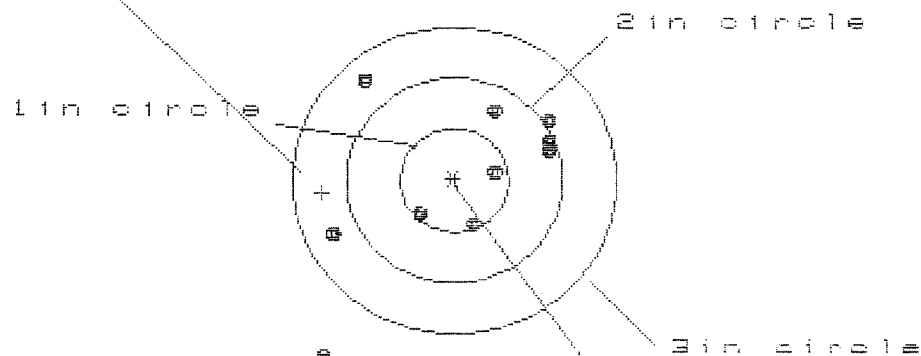

OF SHOTS- 10

IN CIR

1in = 3

2in = 7

3in = 9

HS= 2.068

VS= 2.655

GS= 3.011

CENTROID #

PATTERN #	3	3	3
SHOTS (BEST OF)	10	9	9
MAXIMUM X	.868	.736	.616
MINIMUM X	-1.192	-1.264	-1.384
MAXIMUM Y	.965	.778	.619
MINIMUM Y	-1.690	-.740	-.643
CENTROID X	1.224	1.356	1.476
CENTROID Y	.119	.306	.209
POA TO CENTROID in.	1.229	1.390	1.491
MIN RADIUS	.343	.212	.076
MEAN RADIUS	.948	.783	.686
MAX RADIUS	2.068	1.465	1.527
HORIZONTAL SPREAD	2.068	2.000	2.000
VERTICAL SPREAD	2.655	1.518	1.262
EXTREME SPREAD	3.011	2.245	2.245
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		7	
NUMBER IN THREE INCH CIRCLE =		9	

21 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C6225449

CENTERFIRE PATTERNS

4

POR

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS = 10

IN CIR

1in = 2

2in = 5

3in = 10

HS= 1.770

VS= 2.469

GS= 2.657


PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.992	.906	.921
MINIMUM X	:	-.778	-.500	-.485
MAXIMUM Y	:	1.127	1.232	1.080
MINIMUM Y	:	-1.342	-1.217	-1.292
CENTROID X	:	.610	.696	.681
CENTROID Y	:	.092	-.033	.119
POR TO CENTROID in.	:	.617	.697	.692
MIN RADIUS	:	.286	.403	.342
MEAN RADIUS	:	.943	.894	.840
MAX RADIUS	:	1.369	1.245	1.380
HORIZONTAL SPREAD	:	1.770	1.406	1.406
VERTICAL SPREAD	:	2.469	2.449	2.372
EXTREME SPREAD	:	2.657	2.462	2.462
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	

21 Apr 1989

FILE:/PATTERNING/CENTERFIRE_PATT/C8225449

CENTERFIRE PATTERNS # 5

FOR

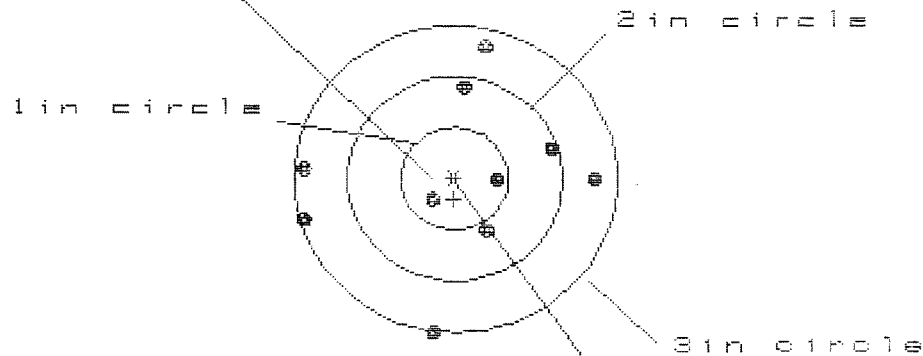

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 10

HS= 2.720

VS= 2.727

GS= 2.781

CENTROID #

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.384	1.277	1.097
MINIMUM X	:	-1.416	-1.443	-1.567
MAXIMUM Y	:	1.271	1.109	1.042
MINIMUM Y	:	-1.456	-.652	-.719
CENTROID X	:	.007	.034	.214
CENTROID Y	:	.202	.364	.431
FOR TO CENTROID in.	:	.203	.366	.481
MIN RADIUS	:	.302	.388	.298
MEAN RADIUS	:	.998	.942	.841
MAX RADIUS	:	1.476	1.539	1.570
HORIZONTAL SPREAD	:	2.720	2.720	2.664
VERTICAL SPREAD	:	2.727	1.761	1.761
EXTREME SPREAD	:	2.781	2.745	2.668
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		10	