

G6590137
Replace
G6285935

1

Repair Inquiry

Repair Number: RE00156051

Serial: G6590137 Model M24 SWS Center Fire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 12/1/2008 11:15:55 AM

Address Information

Customer:

Received From

Return To:

Received From

Name: ITT SYSTEMS SECURED WAREHOUSE

ITT SYSTEMS SECURED WAREHOUSE

Address 1: UPTON AVENUE

UPTON AVENUE

Address 2: BUILDING 490

PO Box:

BUILDING 490

PO Box:

City: FORT BENNING

FORT BENNING

State: GA

Zip Code: 31905

Country: US

State: GA

Zip Code: 31905

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NN

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	2
A008	With Swivel	1
A010	Hard Case A 2	1
A017	Scope Base	1
A026	Scope	1
A057	Fit and Rear Sgt Base	1

Repair Search

Refresh

Close

nagletj

12/2/2008

10:12 AM

CAPS

NUM

INS

SCRL

Serial
Number:

G6590137

Model: M24 SWS



RE00156051

M-24 INSPECTION CHECKLIST
 CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER 156051SERIAL NUMBER 66596137LOG-IN DATE 12-1-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	12-2-08	RSN
505	RE-BARREL	12-3-08	RSN
560	ASSEMBLE	12-3-08	RSN
600	PROOF	12-3-08	L.P.D.
605	CHECK HEADSPACE	12-3-08	L.P.D.
610	DIS-ASSEMBLE GUN	12-3-08	L.P.D.
612	MAGNAFLUX	12/14/08	(K)
510	DRILL AND TAP	12-11-08	SP
615	ROLLMARK CALIBER	12/15/08	RT
618	ROTO-BLAST		
620	APPLY COATINGS	12-22	—
625	FINAL ASSEMBLY	1-5-09	RSN
640	FUNCTION TEST AND	1-5-09	L.P.D.
650	TARGET	1-5-09	L.P.D.
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	1-5-09	RP
	A) HEADSPACE	1-6-09	L.P.D.
	B) TRIGGER PULL	1-6-09	L.P.D.
		243 248 259 249 240	1-6-09 L.N
680	F) SAFETY ON FORCE	5.0 5.0 5.0	1-6-09 L.P.D.
	G) SAFETY OFF FORCE	6.0 6.0 6.0	1-6-09 L.P.D.
	I) FIRING PIN INDENT	.022 .023 .023	1-6-09 L.P.D.
690	PACK	1/6/09	FM

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6590137._1
FILE DATE AND TIME: 01/06/2009 06:29


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.082
The Average Y Centroid of the Five Target Set:	-0.086
The Average Point of Impact of the Five Target Set:	0.119
The Average Mean Radius of the Five Target Set:	0.648
The Distance from POA to Centroid Target #1:	0.342
The Distance from Centroid Target #2 to Centroid Target #1:	0.458
The Distance from Centroid Target #3 to Centroid Target #1:	0.205
The Distance from Centroid Target #4 to Centroid Target #1:	0.349
The Distance from Centroid Target #5 to Centroid Target #1:	0.287

SERIAL NUMBER: G6590137. __1
 TARGET NUMBER: 1
 FILE DATE: 01/06/2009
 FILE TIME: 06:29

X CENTROID: -0.148
 Y CENTROID: -0.309
 POA TO CENTROID: 0.342
 HORZ SPREAD: 1.563
 VERT SPREAD: 1.696
 GROUP SPREAD: 1.563
 MIN RADIUS: 0.075
 MAX RADIUS: 0.983
 MEAN RADIUS: 0.670
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 10
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.419	0.589
2:	-0.388	0.375
3:	-0.188	-0.245
4:	0.351	-0.156
5:	0.200	-0.384
6:	-0.366	0.244
7:	0.505	-0.702
8:	0.372	-1.019
9:	-0.492	-1.107
10:	-1.058	-0.680

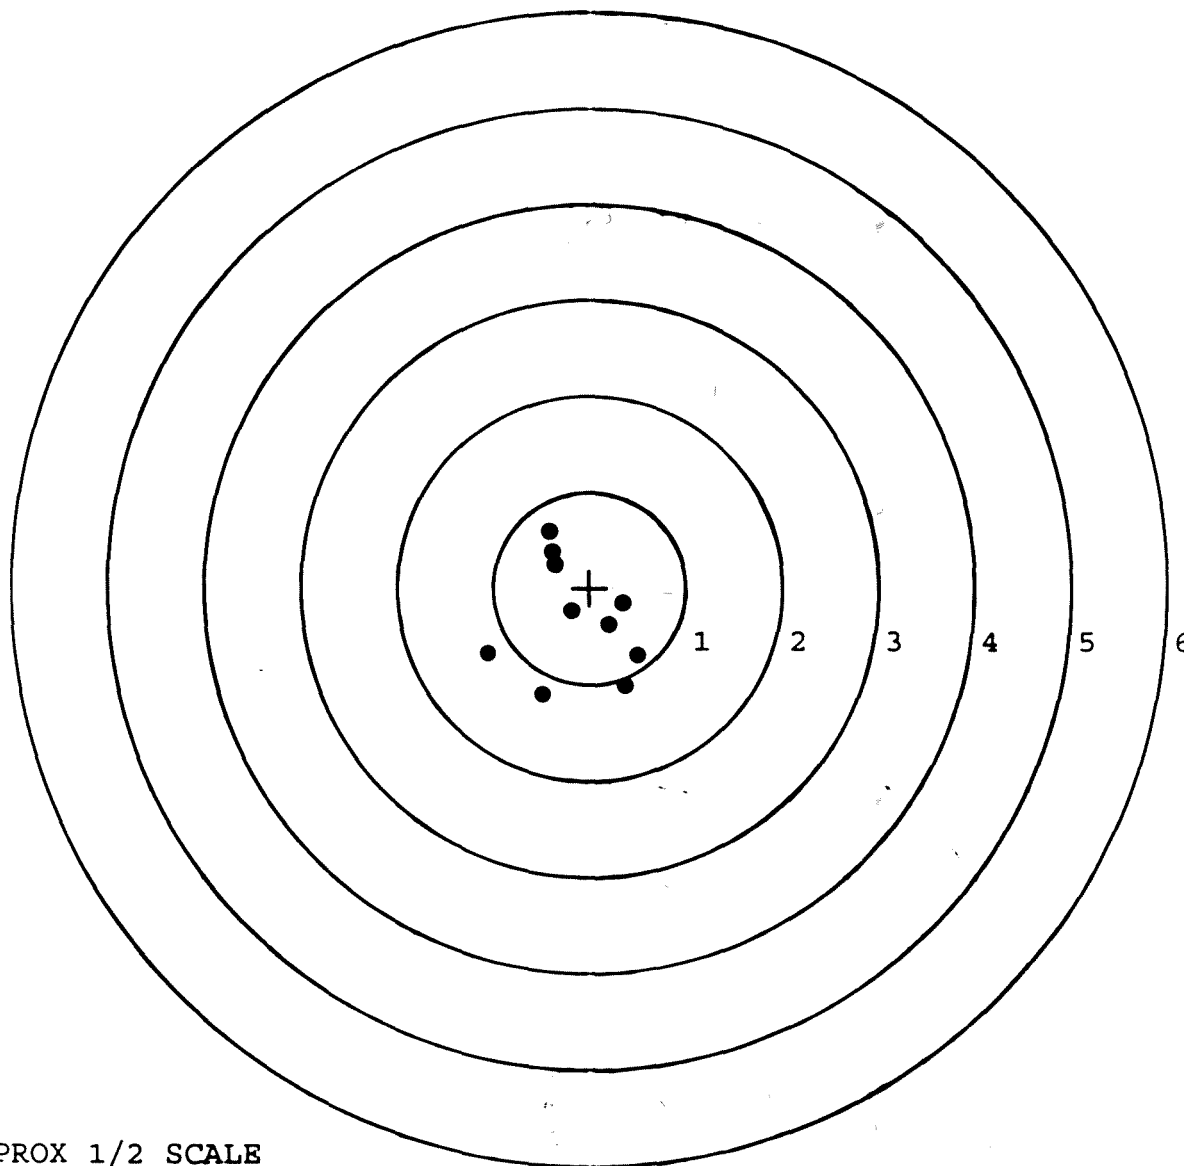


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __1
 TARGET NUMBER: 2
 FILE DATE: 01/06/2009
 FILE TIME: 06:29

X CENTROID: -0.281
 Y CENTROID: 0.130
 POA TO CENTROID: 0.309
 HORZ SPREAD: 1.827
 VERT SPREAD: 1.540
 GROUP SPREAD: 2.120
 MIN RADIUS: 0.103
 MAX RADIUS: 1.276
 MEAN RADIUS: 0.650
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.831	0.755
2:	-0.166	0.850
3:	-0.571	0.923
4:	-0.200	0.368
5:	-0.178	0.134
6:	-0.233	-0.115
7:	-0.104	-0.565
8:	-0.312	-0.617
9:	-0.878	-0.500
10:	-0.996	0.063

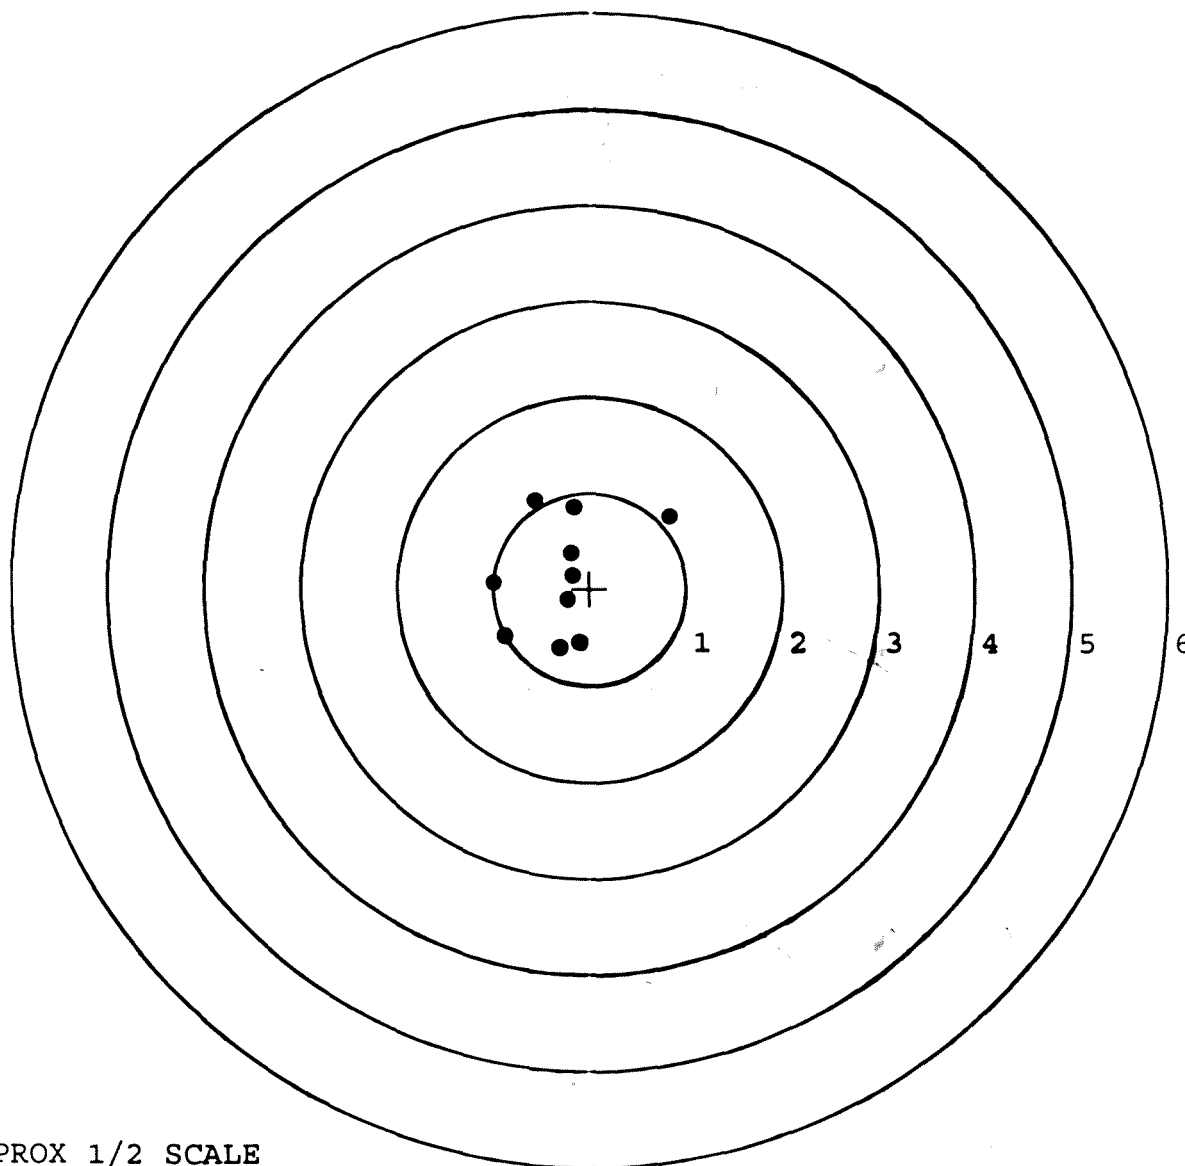


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __ 1
 TARGET NUMBER: 3
 FILE DATE: 01/06/2009
 FILE TIME: 06:29

X CENTROID: -0.091
 Y CENTROID: -0.112
 POA TO CENTROID: 0.144
 HORZ SPREAD: 1.506
 VERT SPREAD: 1.995
 GROUP SPREAD: 2.020
 MIN RADIUS: 0.019
 MAX RADIUS: 1.054
 MEAN RADIUS: 0.720
 # IN 1 IN DIAMETER: 1
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.006	-1.162
2:	-0.142	-0.800
3:	0.364	-0.787
4:	0.593	-0.095
5:	0.488	0.051
6:	-0.074	-0.104
7:	-0.700	-0.122
8:	-0.913	0.397
9:	-0.199	0.673
10:	-0.320	0.833

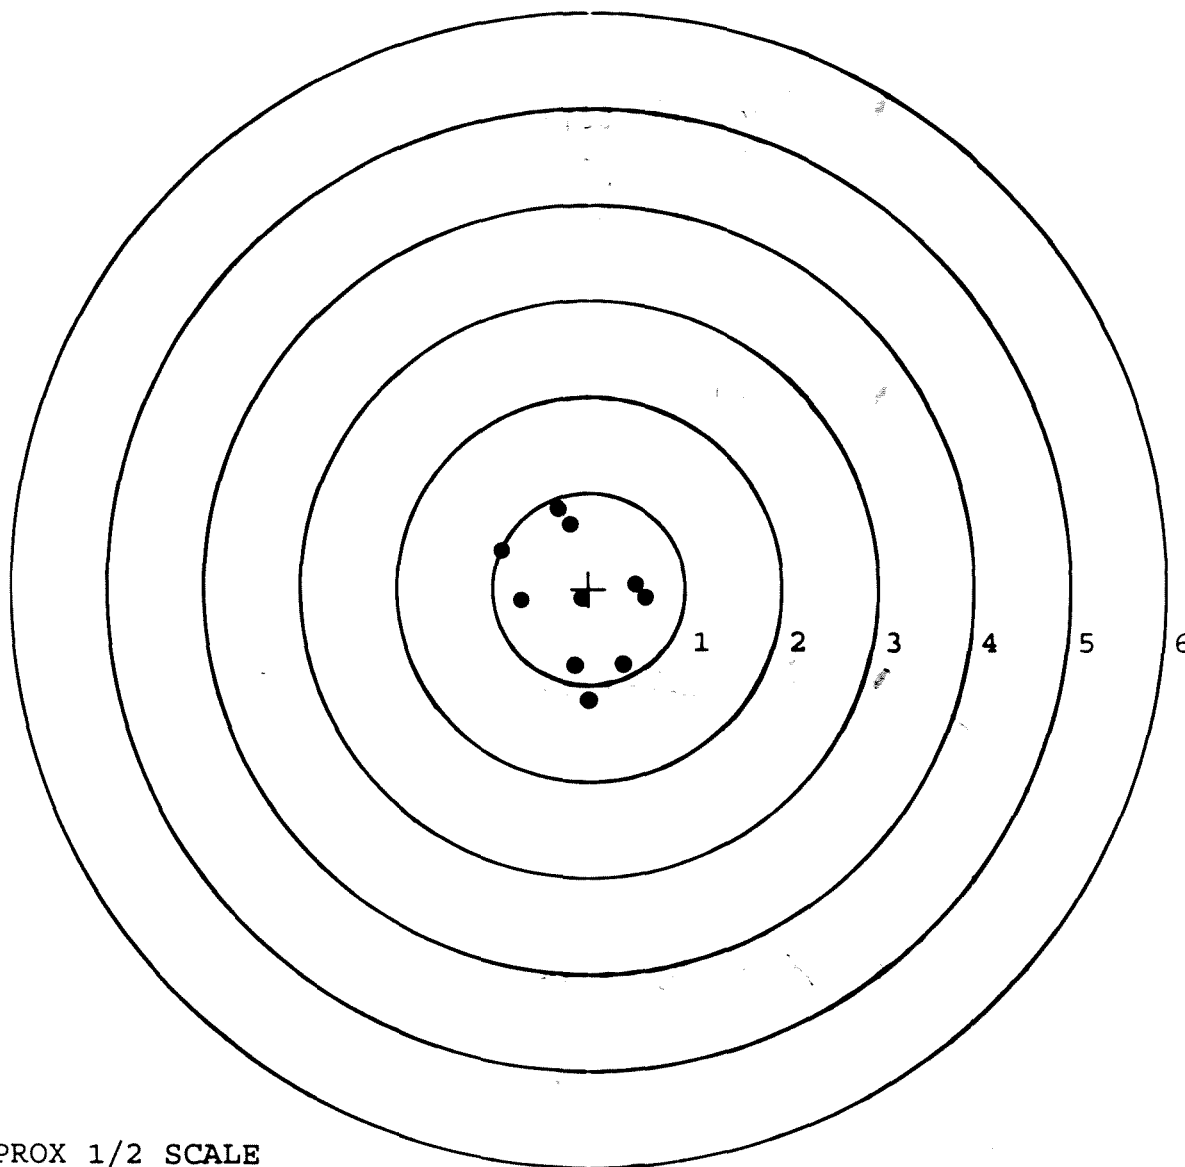


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __1
 TARGET NUMBER: 4
 FILE DATE: 01/06/2009
 FILE TIME: 06:29

X CENTROID: 0.036
 Y CENTROID: -0.012
 POA TO CENTROID: 0.038
 HORZ SPREAD: 2.050
 VERT SPREAD: 1.247
 GROUP SPREAD: 2.066
 MIN RADIUS: 0.278
 MAX RADIUS: 1.113
 MEAN RADIUS: 0.616
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	1.075	-0.411
2:	0.560	0.124
3:	0.296	0.235
4:	0.347	0.032
5:	0.199	-0.317
6:	-0.066	-0.271
7:	-0.259	-0.588
8:	-0.975	-0.156
9:	-0.528	0.659
10:	-0.291	0.570

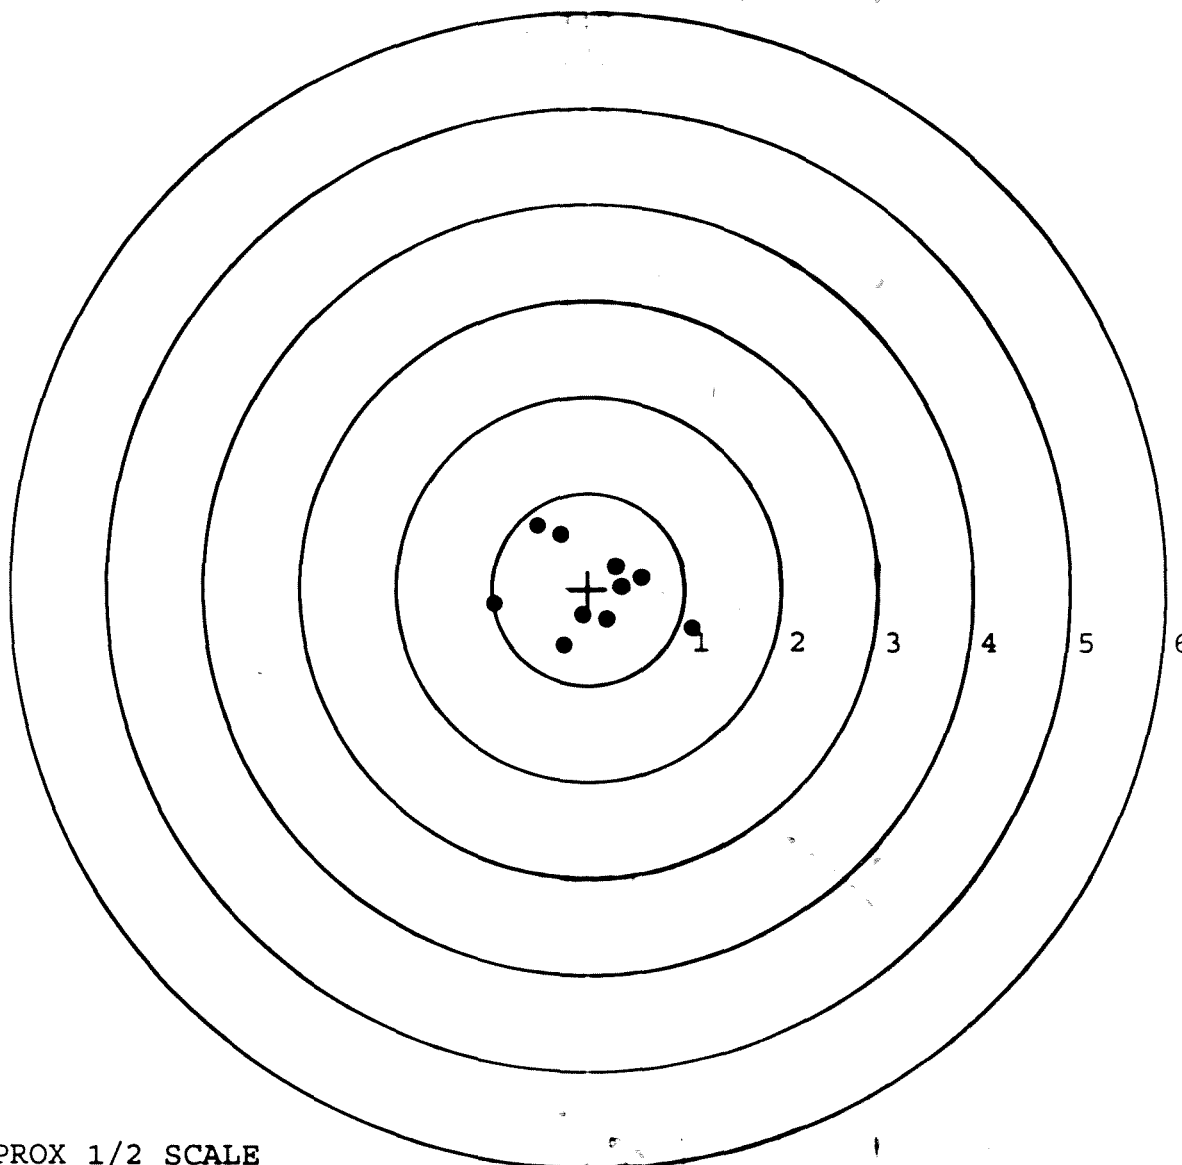


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __1
 TARGET NUMBER: 5
 FILE DATE: 01/06/2009
 FILE TIME: 06:29

X CENTROID: 0.073
 Y CENTROID: -0.126
 POA TO CENTROID: 0.145
 HORZ SPREAD: 1.820
 VERT SPREAD: 1.536
 GROUP SPREAD: 1.665
 MIN RADIUS: 0.196
 MAX RADIUS: 1.140
 MEAN RADIUS: 0.584
 # IN 1 IN DIAMETER: 6
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.282	-1.209
2:	1.089	-0.265
3:	0.224	0.326
4:	0.317	0.084
5:	0.507	-0.068
6:	0.319	-0.153
7:	0.134	-0.312
8:	-0.479	0.327
9:	-0.365	0.039
10:	-0.731	-0.024

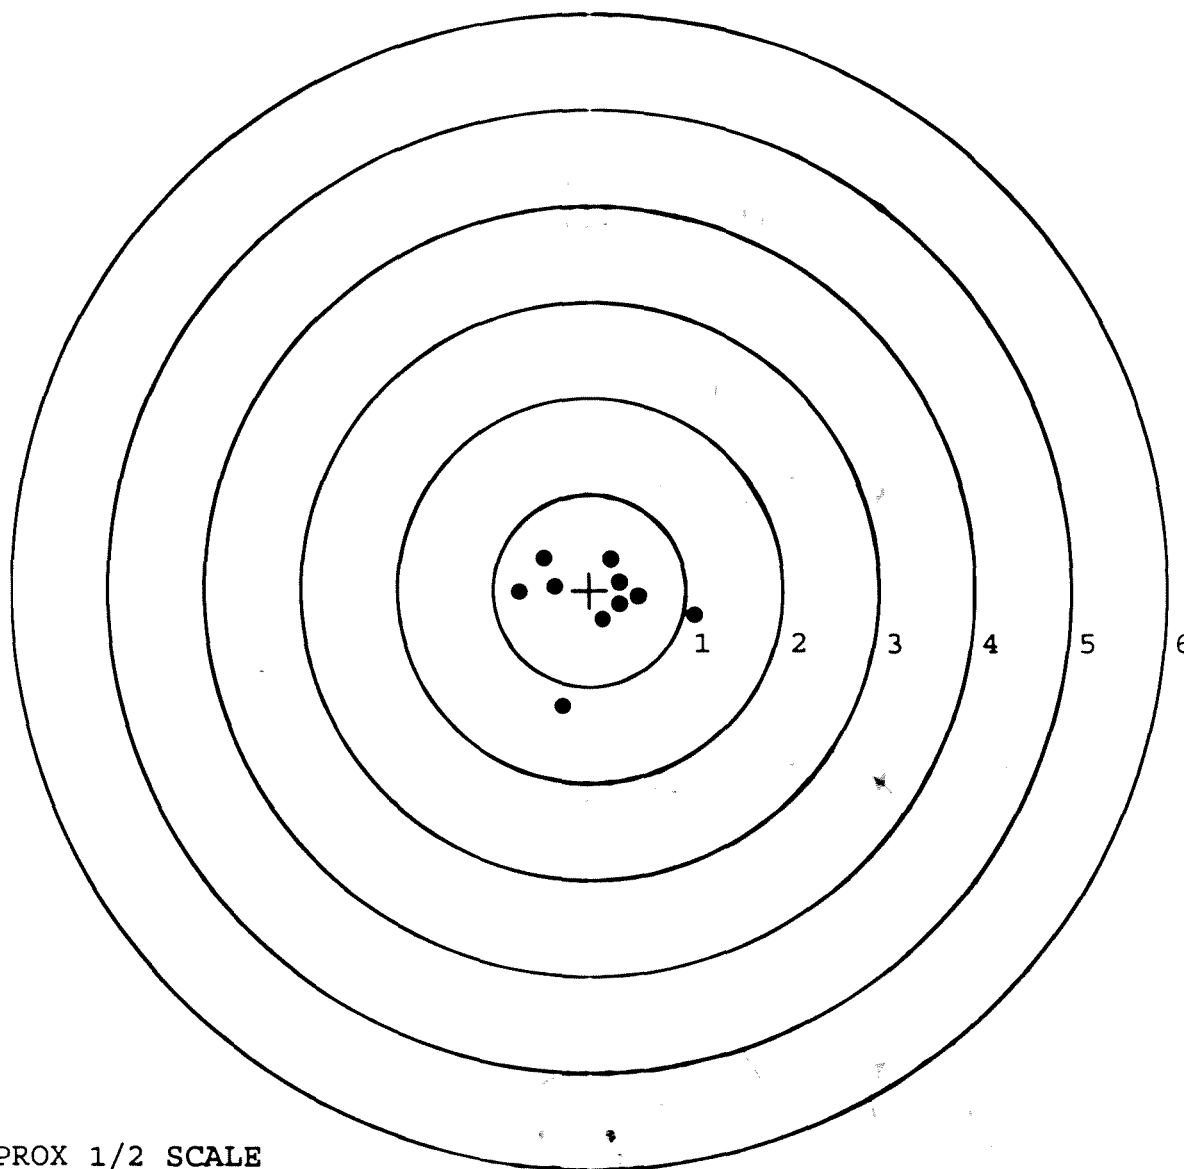

TARGET APPROX 1/2 SCALE

Repair Inquiry

Repair Number: RE00124040

Serial: G6285935 Model M24 SWS Center Fire

Repairman:

Verify Repair

Status:

New 1/22/2007 7:15:48 AM

Address Information

Customer:

Received From

Return To:

Received From

Name: TRANSPORTATION DIVISION DFEL

TRANSPORTATION DIVISION DFEL

Address 1: 6759 MITCHELL AVENUE

6759 MITCHELL AVENUE

Address 2: BLDG 1836

PO Box:

BLDG 1836

PO Box:

City: FORT BENNING

FORT BENNING

State: GA

Zip Code: 31905

Country: US

State: GA

Zip Code: 31905

Country: US

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone: NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A010	Hard Case	1
A017	Scope Base	3
A026	Scope	1
A045	Bi Pod	1

Repair Search

Refresh

Close

nagletj

1/22/2007

8:29 AM

CAPS

NUM

INS

SCRL



8:29 AM

Serial Number:

G6285935

Model: M24 SWS




RE00124040

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 12/21/06

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. ini. +/- .50 lbs.

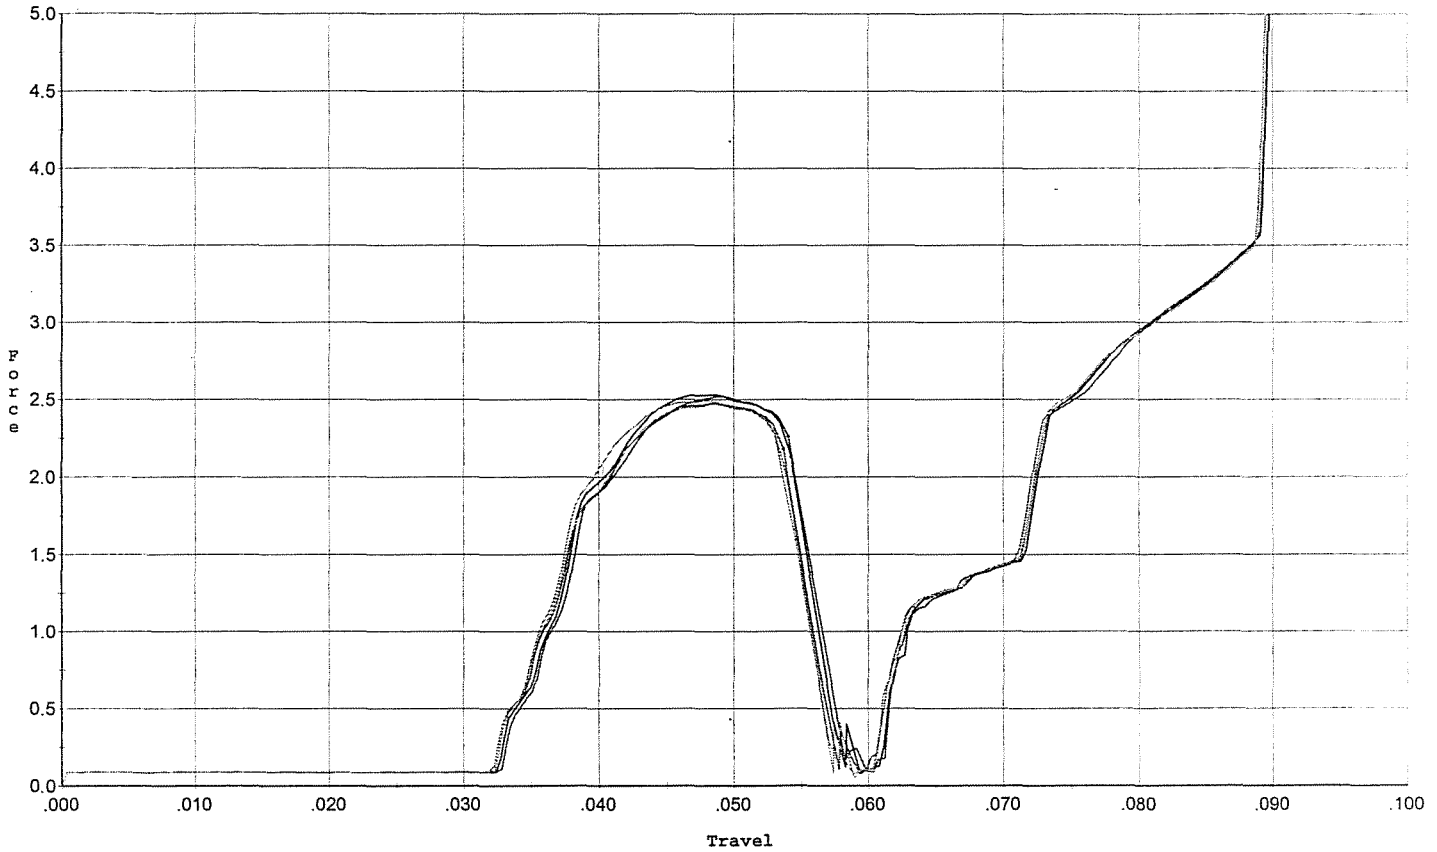


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.523	0.054	0.033	0.039	0.045		Set Trigger
2	2.532	0.054	0.033	0.039	0.046		Set Trigger
3	2.477	0.054	0.033	0.040	0.044		Set Trigger
4	2.468	0.054	0.033	0.040	0.045		Set Trigger
5	2.492	0.055	0.033	0.039	0.046		Set Trigger

Aug 2.49

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 12/21/06

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

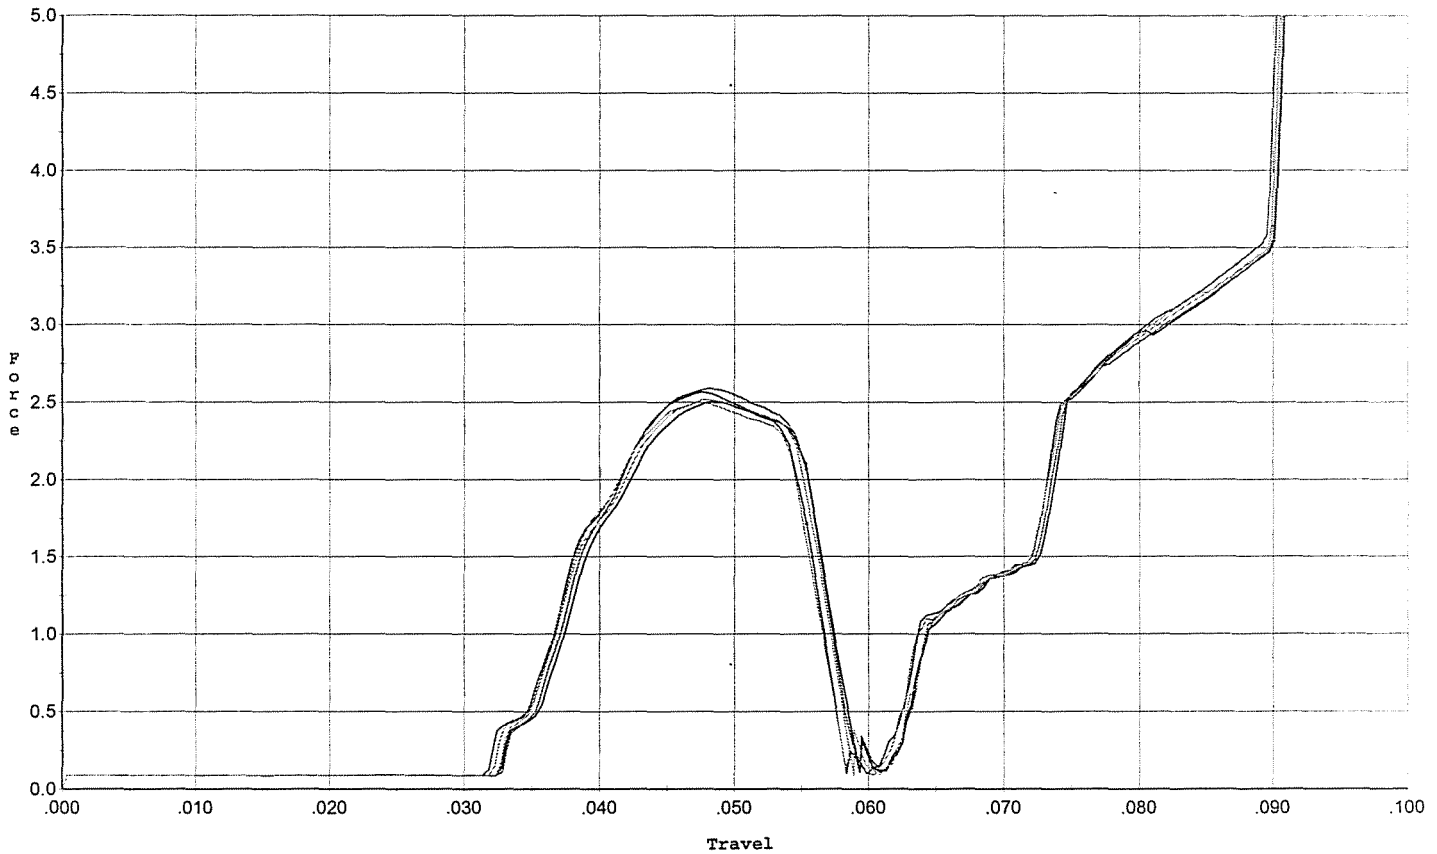


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.567	0.055	0.032	0.039	0.047		Set Trigger
2	2.503	0.055	0.033	0.040	0.045		Set Trigger
3	2.590	0.055	0.033	0.040	0.047		Set Trigger
4	2.518	0.056	0.032	0.039	0.047		Set Trigger
5	2.499	0.056	0.033	0.040	0.046		Set Trigger

Avg 2.53

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 12/21/06

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

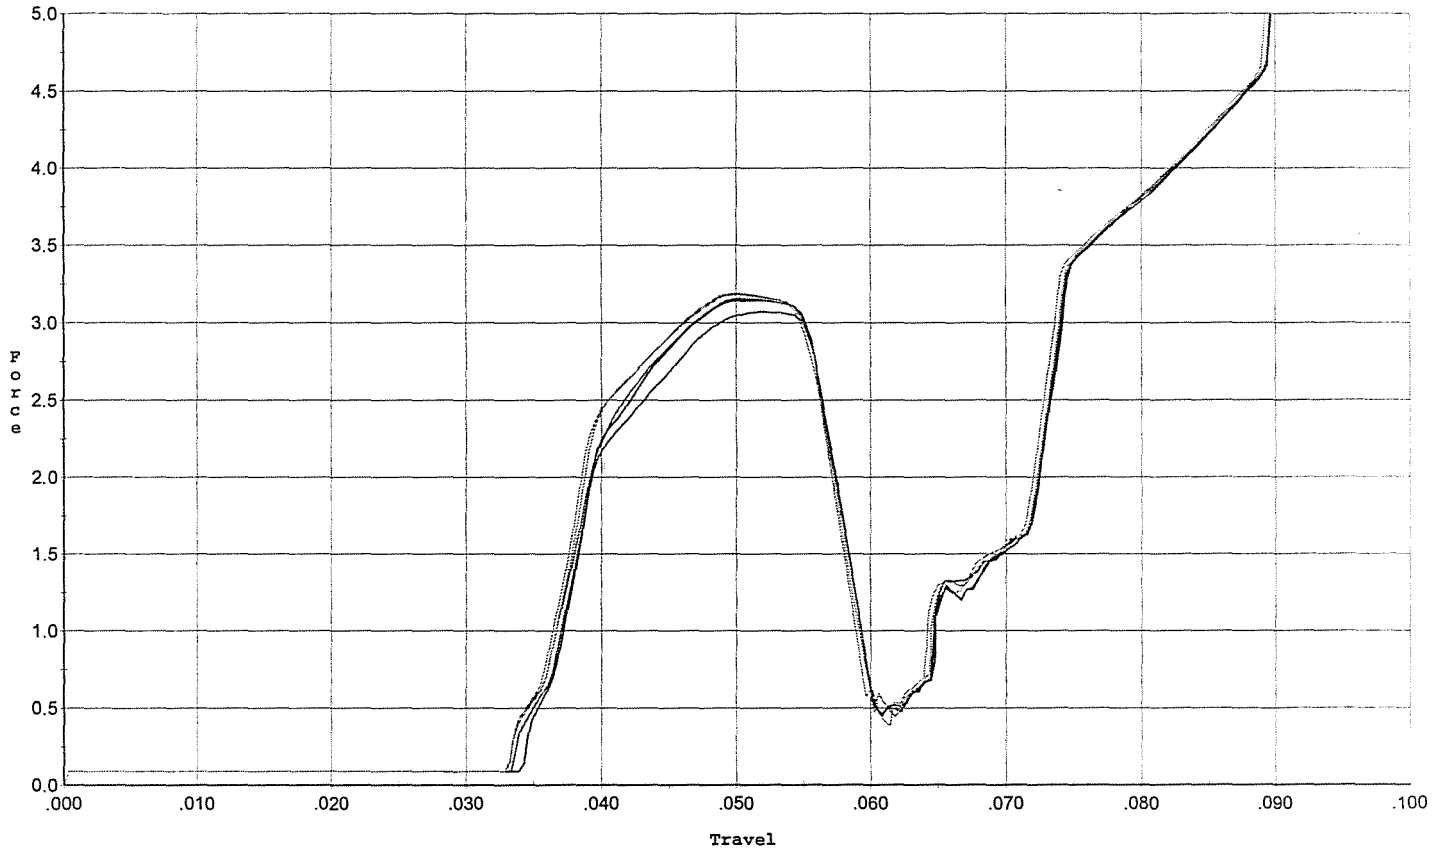


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.072	0.058	0.034	0.037	0.059		Set Trigger
2	3.145	0.058	0.035	0.037	0.060		Set Trigger
3	3.155	0.058	0.033	0.037	0.061		Set Trigger
4	3.182	0.056	0.033	0.037	0.059		Set Trigger
5	3.188	0.056	0.033	0.037	0.060		Set Trigger

Aug 3.14

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 12/21/06

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

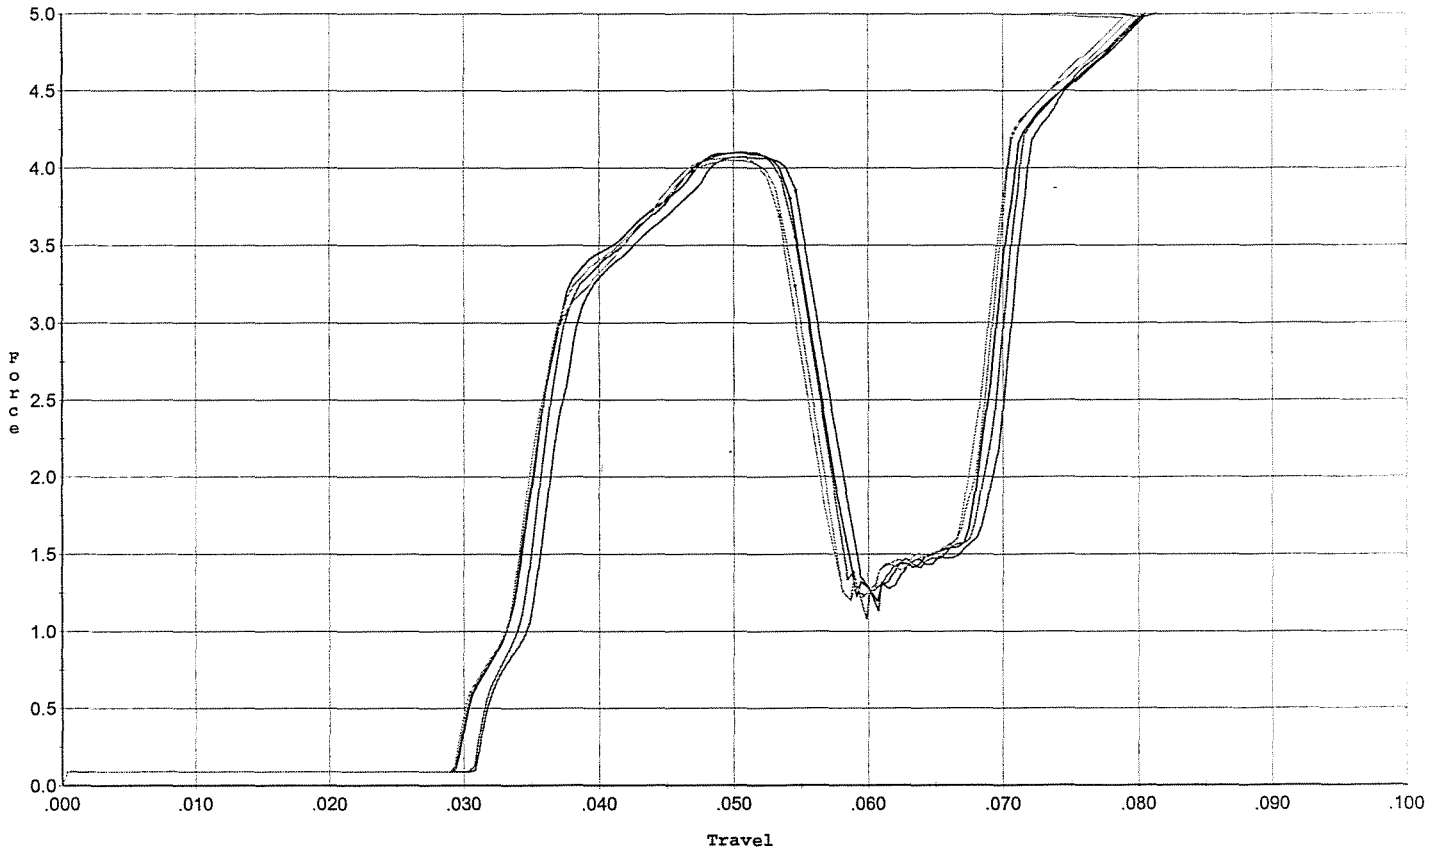


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.070	0.055	0.031	0.034	0.078		Set Trigger
2	4.098	0.054	0.030	0.034	0.081		Set Trigger
3	4.102	0.055	0.031	0.034	0.079		Set Trigger
4	4.050	0.055	0.030	0.034	0.080		Set Trigger
5	4.068	0.053	0.030	0.034	0.077		Set Trigger

Avg 4.07

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putsch 12/21/06

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

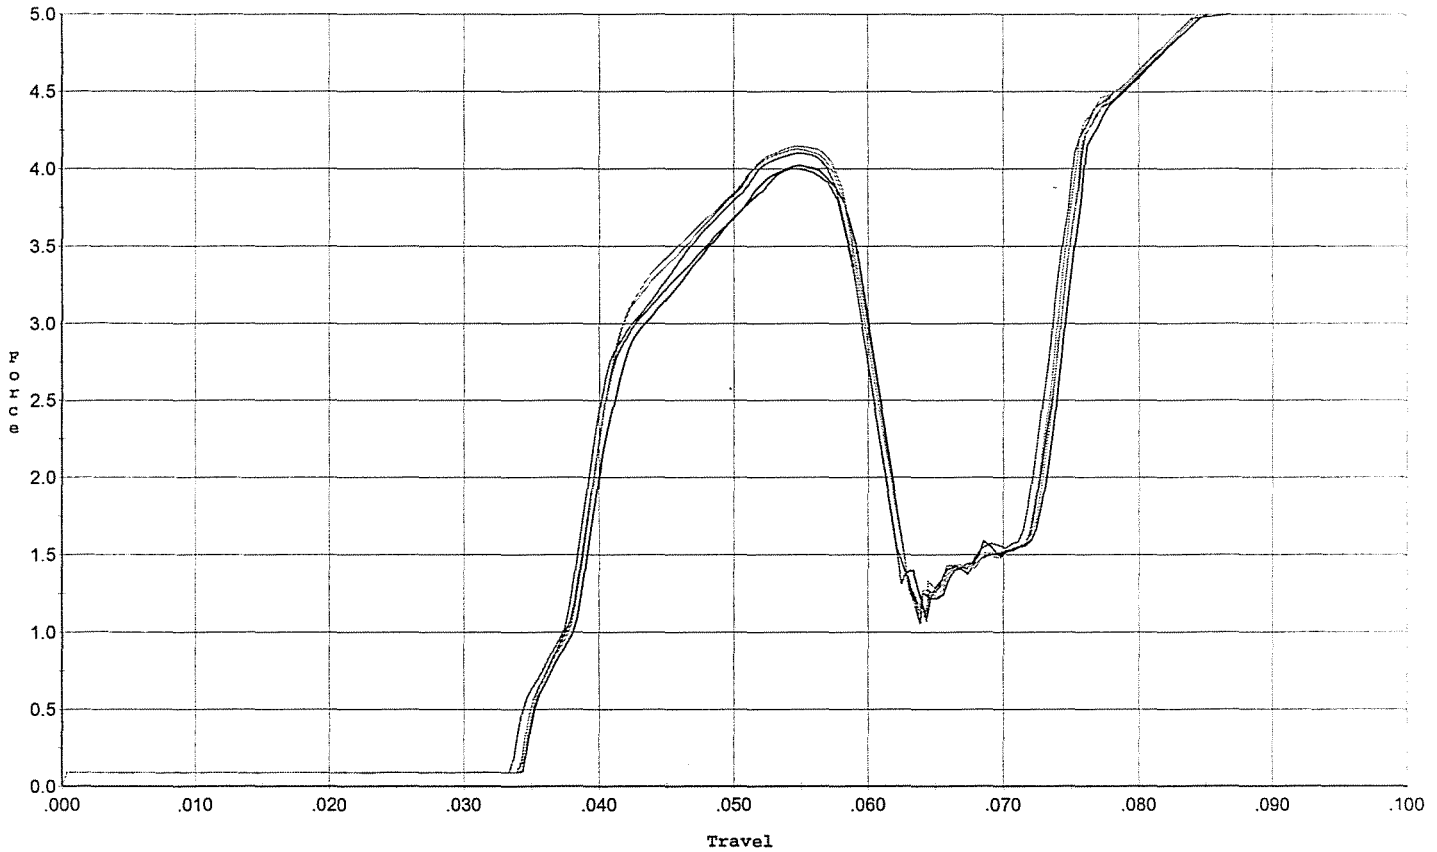


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.001	0.059	0.034	0.035	0.078		Set Trigger
2	4.023	0.059	0.035	0.035	0.078		Set Trigger
3	4.101	0.059	0.034	0.035	0.080		Set Trigger
4	4.128	0.058	0.034	0.035	0.080		Set Trigger
5	4.147	0.060	0.035	0.035	0.082		Set Trigger

4.08

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 12/21/06

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. ini.+/- .50 lbs.

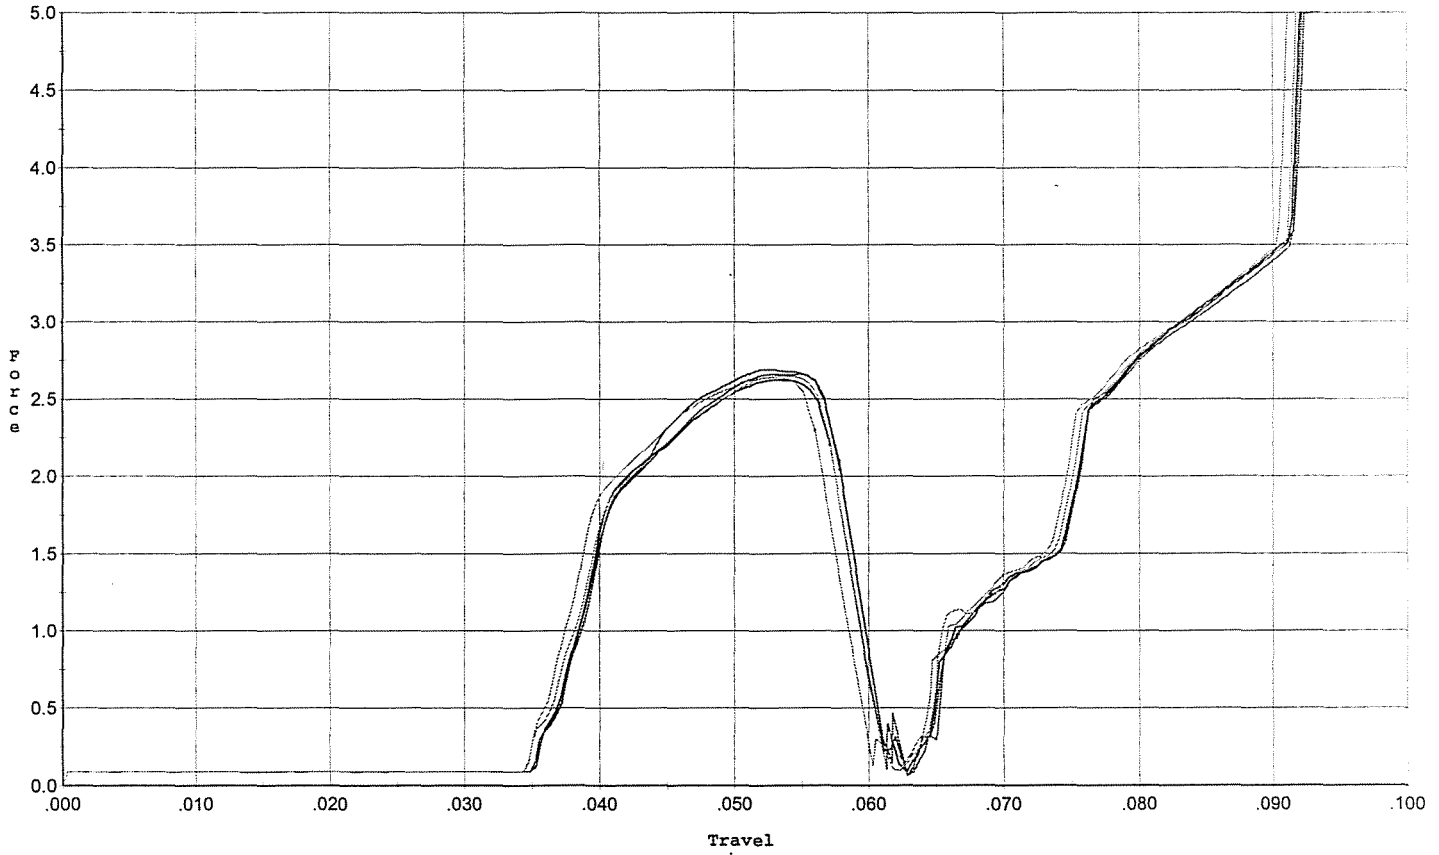


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.692	0.058	0.035	0.039	0.051		Set Trigger
2	2.625	0.057	0.036	0.039	0.049		Set Trigger
3	2.664	0.058	0.036	0.039	0.050		Set Trigger
4	2.650	0.057	0.035	0.039	0.049		Set Trigger
5	2.639	0.056	0.035	0.039	0.048		Set Trigger

Aug 2.65

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 12/21/06

Model: M/24
Serial No: Form #F005
Trigger: set to 4.0 lbs. +/- 1.0 lbs.

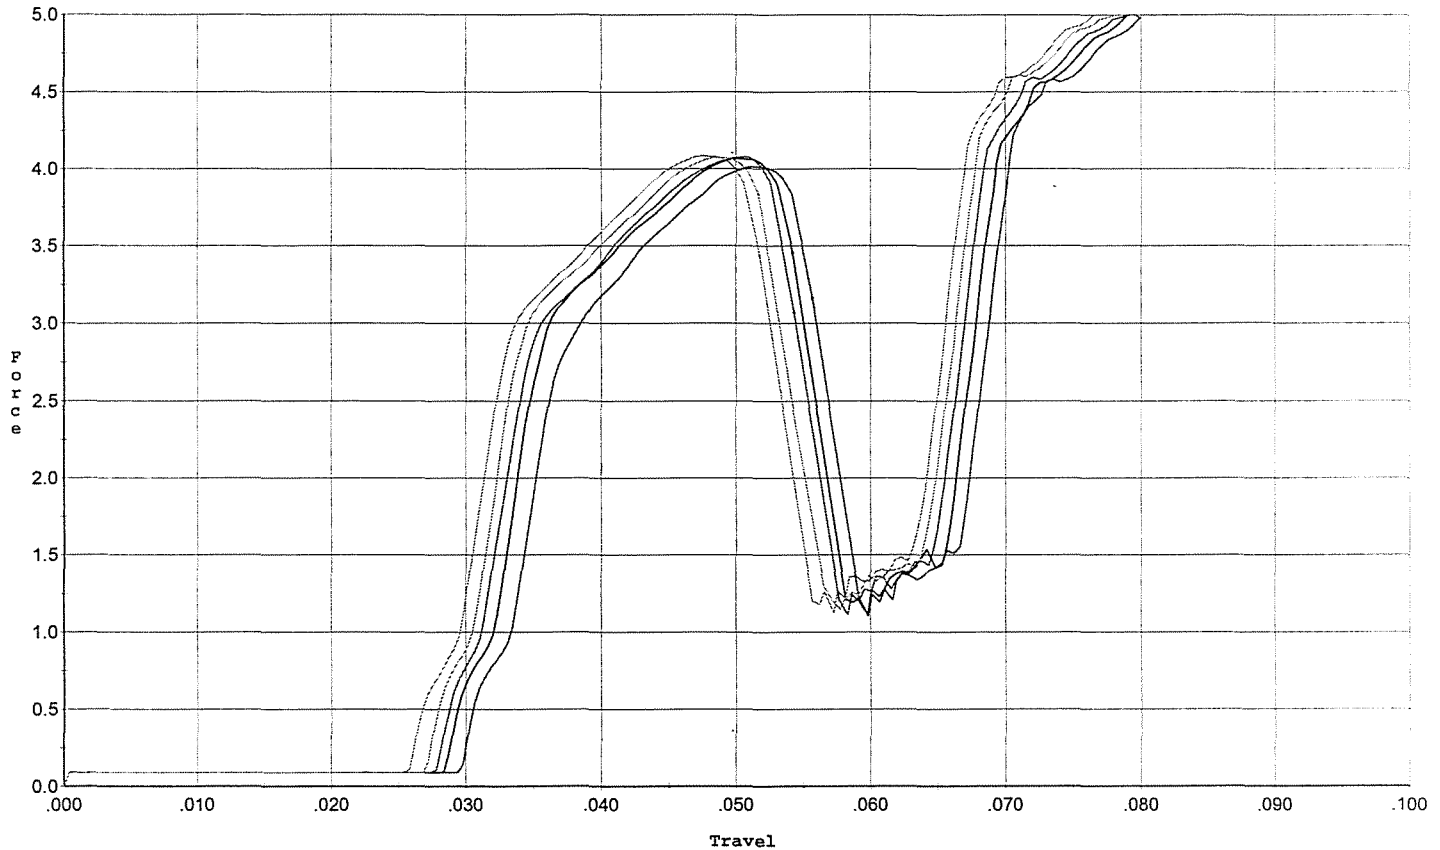

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.014	0.056	0.030	0.033	0.081		Set Trigger
2	4.067	0.054	0.029	0.033	0.082		Set Trigger
3	4.079	0.054	0.028	0.032	0.083		Set Trigger
4	4.075	0.052	0.027	0.032	0.079		Set Trigger
5	4.084	0.052	0.026	0.031	0.082		Set Trigger

Aug 4.06

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6590137.___0

FILE DATE AND TIME: 02/01/2007 23:27


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.197
The Average Y Centroid of the Five Target Set:	0.074
The Average Point of Impact of the Five Target Set:	0.210
The Average Mean Radius of the Five Target Set:	1.008
The Distance from POA to Centroid Target #1:	0.559
The Distance from Centroid Target #2 to Centroid Target #1:	0.768
The Distance from Centroid Target #3 to Centroid Target #1:	0.757
The Distance from Centroid Target #4 to Centroid Target #1:	0.697
The Distance from Centroid Target #5 to Centroid Target #1:	0.592

SERIAL NUMBER: G6590137.0
 TARGET NUMBER: 1
 FILE DATE: 02/01/2007
 FILE TIME: 23:27

X CENTROID: -0.402
 Y CENTROID: -0.388
 POA TO CENTROID: 0.559
 HORZ SPREAD: 3.548
 VERT SPREAD: 2.948
 GROUP SPREAD: 4.065
 MIN RADIUS: 0.291
 MAX RADIUS: 2.476
 MEAN RADIUS: 0.993
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 8

POINT#	X	Y
1:	-0.340	0.569
2:	-0.518	0.402
3:	-0.312	-0.112
4:	-0.605	-0.114
5:	0.470	0.379
6:	0.012	-0.514
7:	0.095	-0.839
8:	-0.611	-0.881
9:	-2.878	-0.395
10:	0.670	-2.379

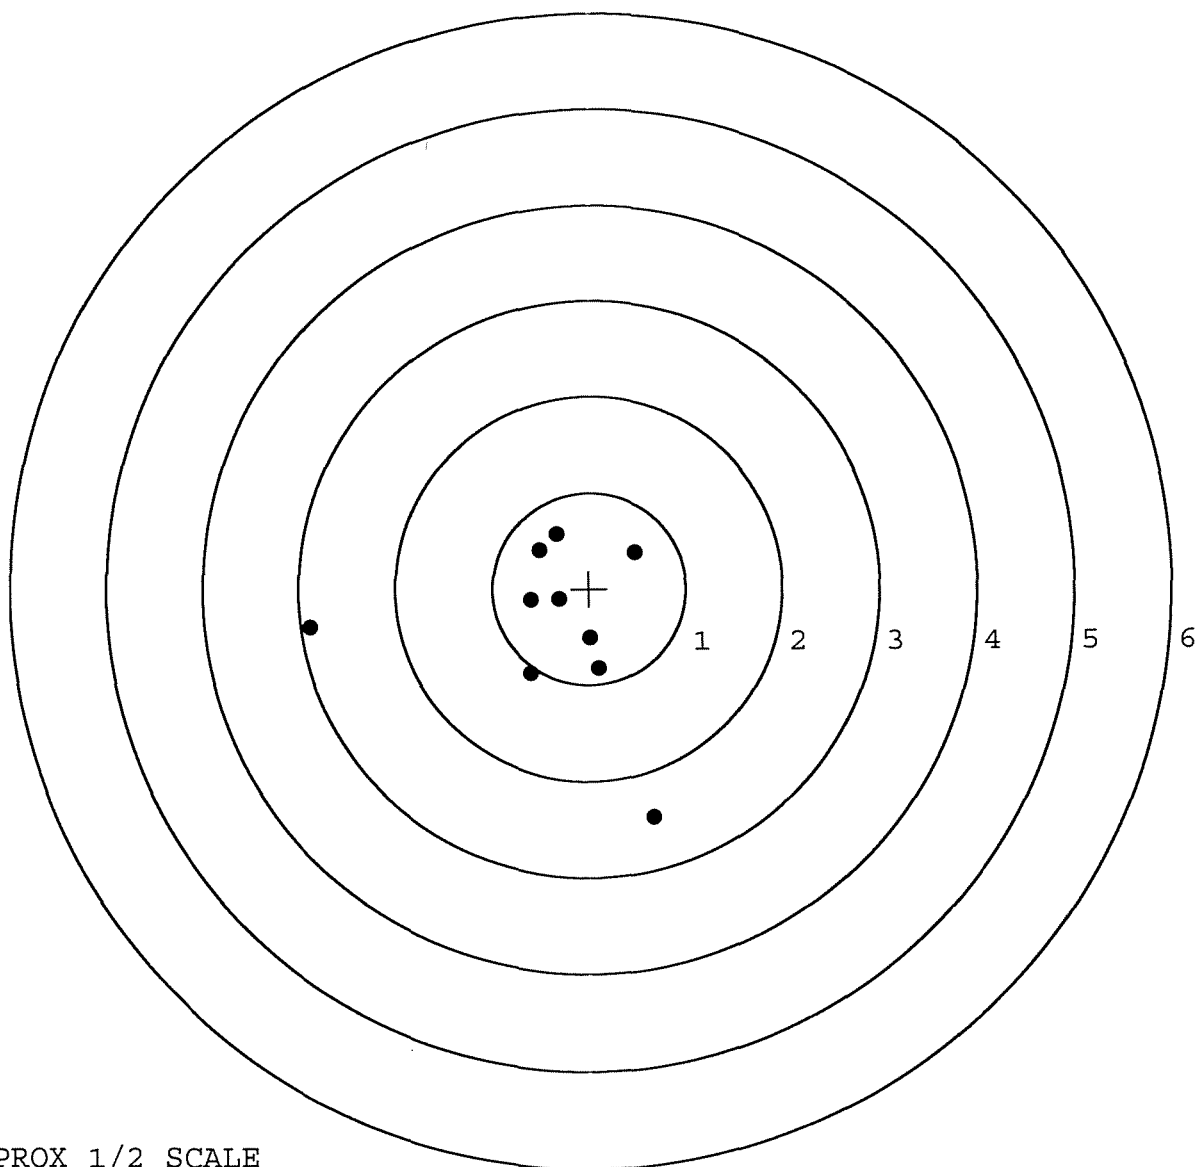

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. 0

TARGET NUMBER: 2

FILE DATE: 02/01/2007

FILE TIME: 23:27

X CENTROID: -0.581

Y CENTROID: 0.359

POA TO CENTROID: 0.683

HORZ SPREAD: 3.535

VERT SPREAD: 5.145

GROUP SPREAD: 5.720

MIN RADIUS: 0.197

MAX RADIUS: 2.973


MEAN RADIUS: 1.548

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 5

POINT#	X	Y
1:	-0.751	0.927
2:	-0.450	0.506
3:	-1.339	0.359
4:	0.125	0.465
5:	1.034	0.421
6:	0.466	-0.098
7:	0.040	-1.363
8:	-0.002	-2.557
9:	-2.435	2.338
10:	-2.501	2.588

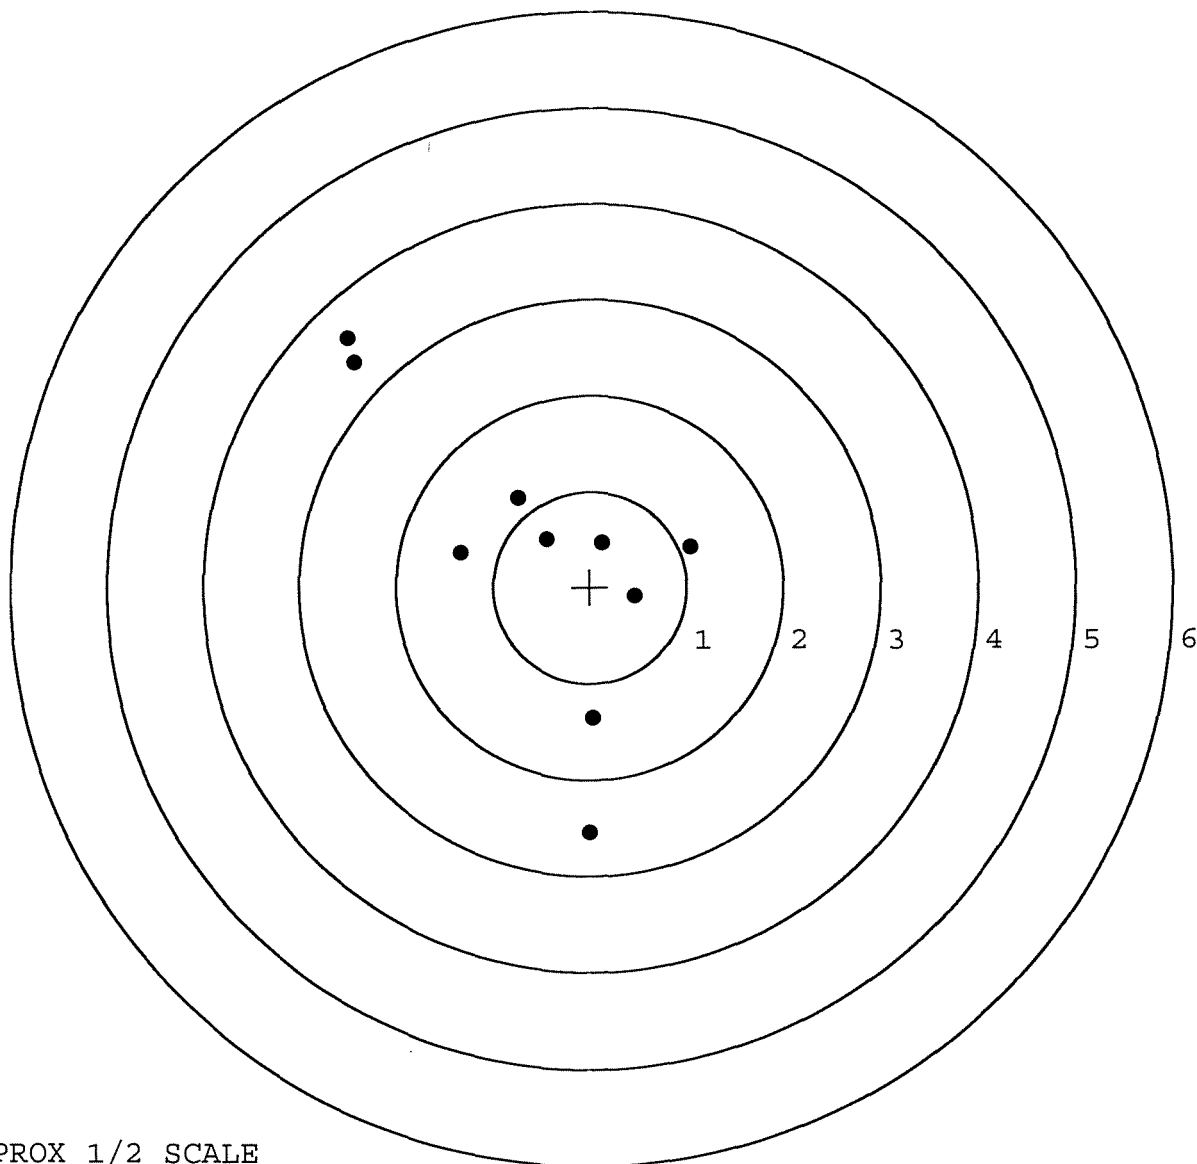


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __0
 TARGET NUMBER: 3
 FILE DATE: 02/01/2007
 FILE TIME: 23:27

X CENTROID: 0.056
 Y CENTROID: 0.214
 POA TO CENTROID: 0.221
 HORZ SPREAD: 2.170
 VERT SPREAD: 3.016
 GROUP SPREAD: 3.248
 MIN RADIUS: 0.200
 MAX RADIUS: 1.939
 MEAN RADIUS: 0.939
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 5
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.144	0.227
2:	-0.373	0.310
3:	0.163	0.506
4:	0.694	1.376
5:	0.960	1.098
6:	1.220	1.066
7:	-0.045	-0.436
8:	-0.457	-0.380
9:	-0.950	0.015
10:	-0.511	-1.640

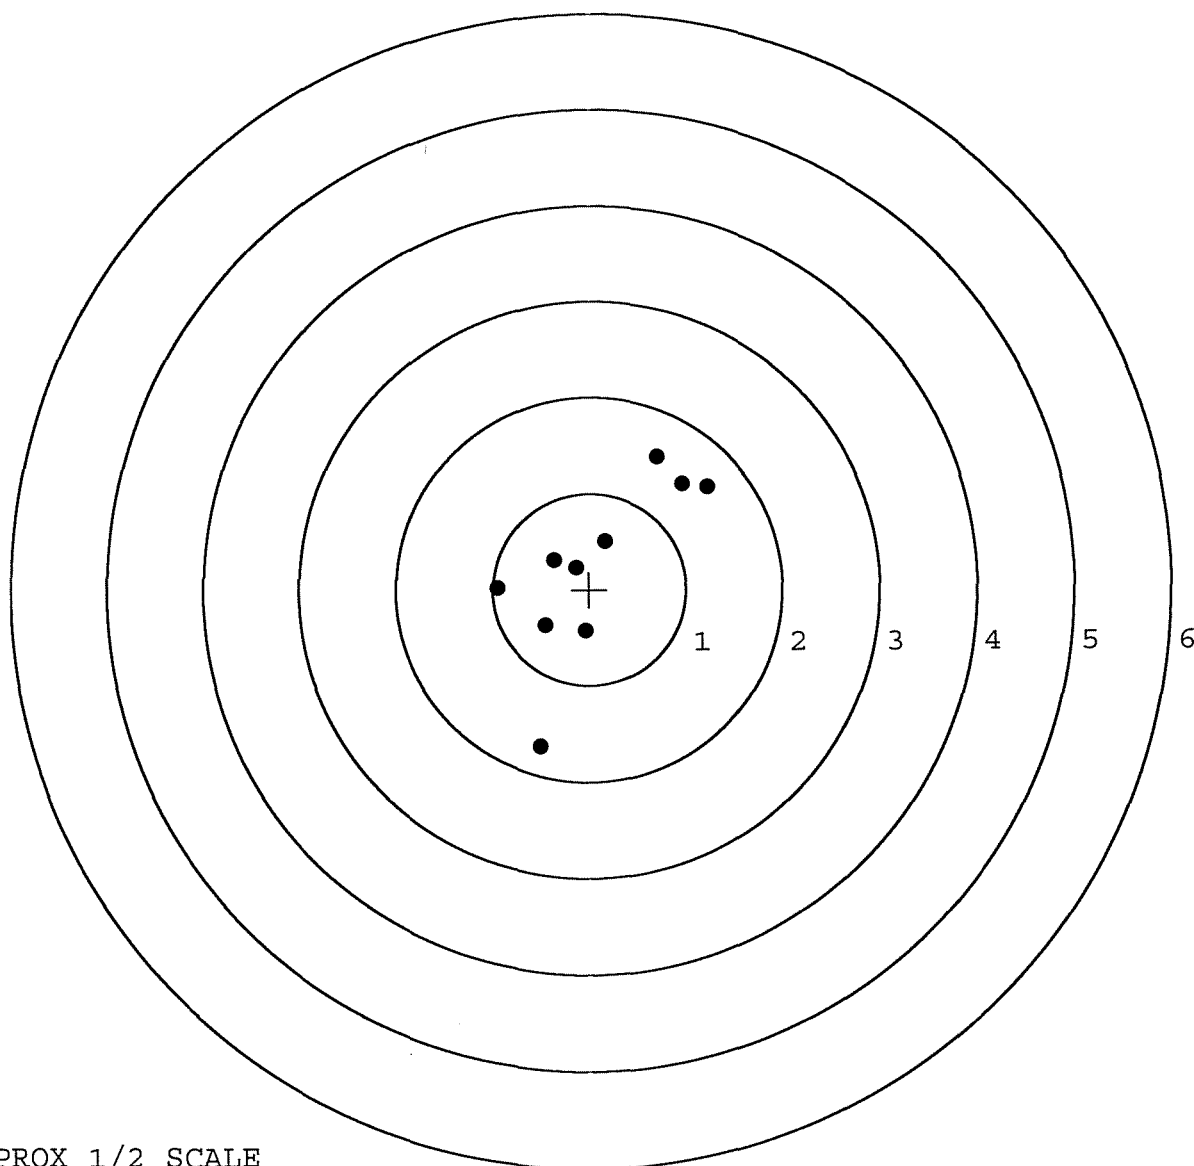

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. __ 0

TARGET NUMBER: 4

FILE DATE: 02/01/2007

FILE TIME: 23:27

X CENTROID: -0.164

Y CENTROID: 0.267

POA TO CENTROID: 0.313

HORZ SPREAD: 2.173

VERT SPREAD: 1.663

GROUP SPREAD: 2.220

MIN RADIUS: 0.235

MAX RADIUS: 1.495


MEAN RADIUS: 0.875

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 7

in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.388	0.336
2:	-0.745	0.565
3:	-0.685	0.790
4:	-0.975	0.034
5:	-1.061	-0.321
6:	-0.214	1.120
7:	0.012	1.150
8:	0.576	-0.006
9:	0.730	-0.484
10:	1.112	-0.513

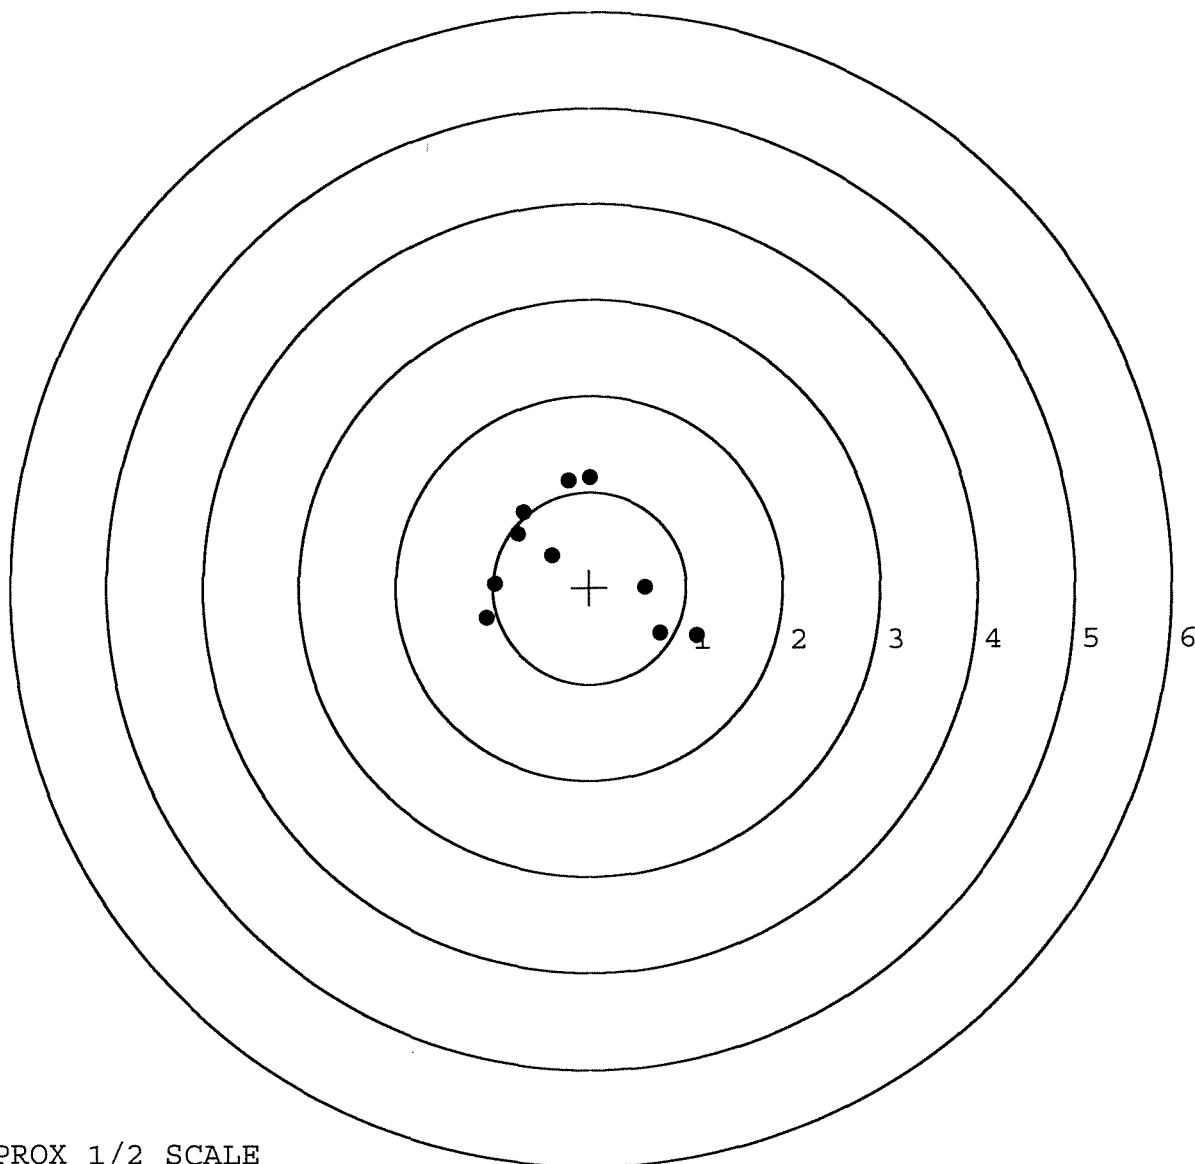


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590137. 0
 TARGET NUMBER: 5
 FILE DATE: 02/01/2007
 FILE TIME: 23:27

X CENTROID: 0.106
 Y CENTROID: -0.084
 POA TO CENTROID: 0.135
 HORZ SPREAD: 1.930
 VERT SPREAD: 1.946
 GROUP SPREAD: 2.741
 MIN RADIUS: 0.282
 MAX RADIUS: 1.676
 MEAN RADIUS: 0.684
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-0.393	0.260
2:	0.129	0.538
3:	1.332	1.058
4:	0.522	-0.112
5:	0.102	-0.642
6:	-0.598	-0.888
7:	-0.501	-0.338
8:	-0.299	-0.244
9:	0.400	-0.504
10:	0.362	0.033

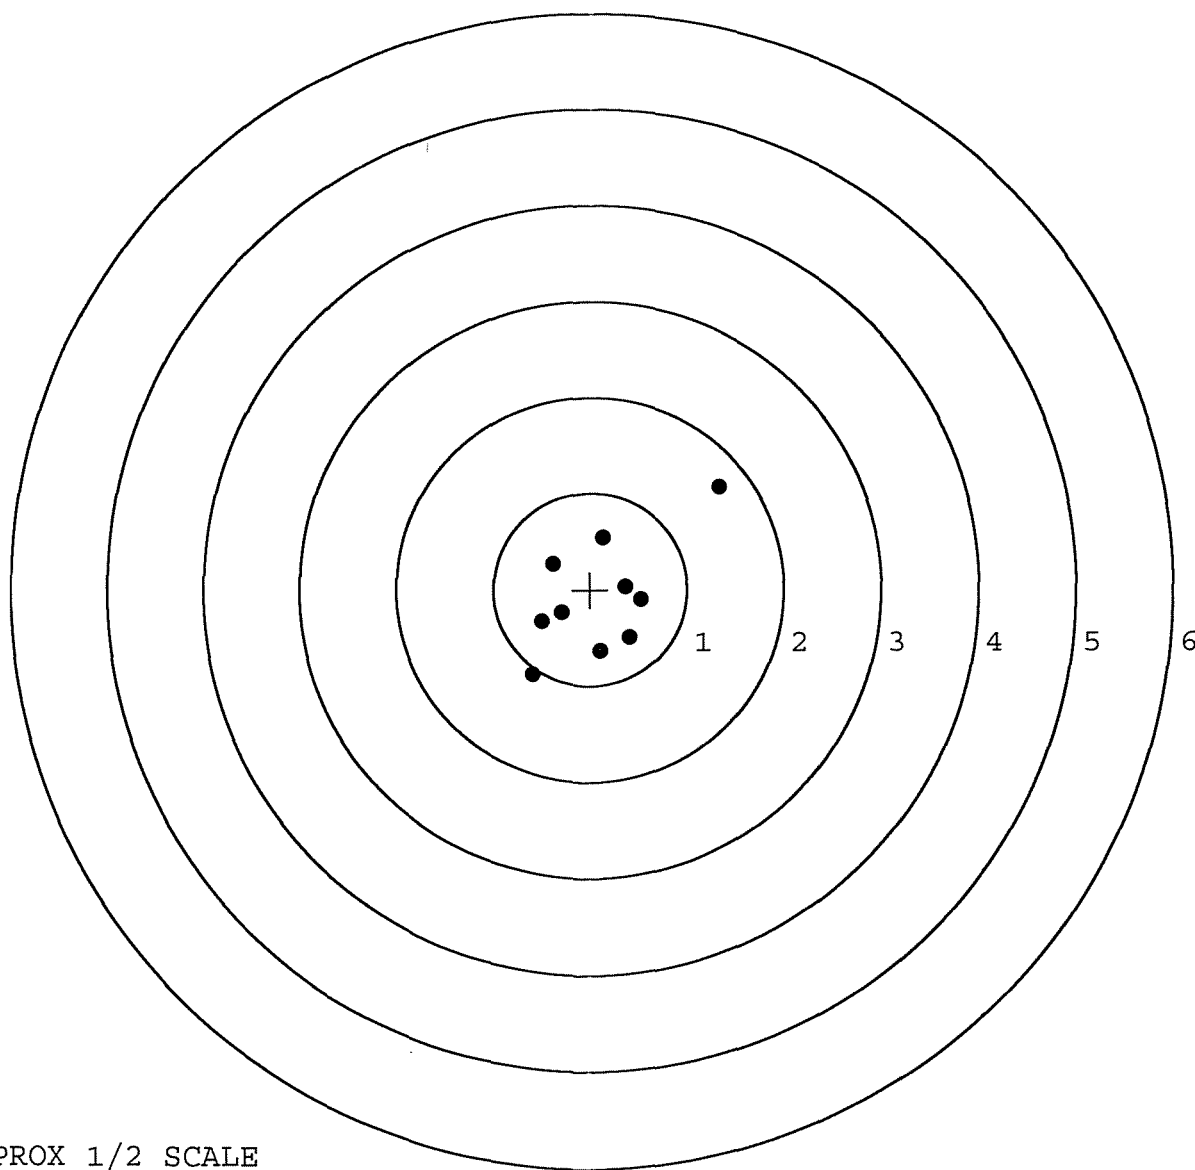

TARGET APPROX 1/2 SCALE

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER	124040			
SERIAL NUMBER	60285935 60590137 (New)			
LOG-IN DATE	1-22-07			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		1-22-07	RTZ
505	RE-BARREL		1-24-07	RTZ
420	ASSEMBLE		1-24-07	RTZ
440	PROOF	MAGNA-FLUX	1-25-07	TRW
460	CHECK HEADSPACE	INSPECTED	1-25-07	TRW
470	DIS-ASSEMBLE GUN	JAN 29 2007	1-25-07	RTZ
480	MAGNAFLUX	OPERATOR APD	1-29-07	APD
510	DRILL AND TAP		1-26-07	TRW
500	ROLLMARK CALIBER		1-29-07	CW
520	GOFF BLAST BBL / REC		1-29-07	LB
530 & 540	APPLY COATINGS		1-29-07	WJ
560	FINAL ASSEMBLY		1-31-07	RTZ
640	FUNCTION TEST AND	PASS FAIL	2/1/07	non
650	TARGET	PASS FAIL	2/10/07	non
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION		2-16-07	RTZ
	A) HEADSPACE	PASS FAIL	2-16-07	RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.80 2.76 2.78 2.80 2.79 2-9-07	FM
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	7.0 6.75 6.75 2-9-07	TRW
	G) SAFETY OFF FORCE	2 LBS MIN	2.75 2.75 2.5 2-9-07	TRW
	I) FIRING PIN INDENT	.020	.0245 .0245 .025 2-9-07	TRW
690	PACK		2-14-07	DA

F006 REV 5/2006

BARREL ASSEMBLY

BARREL_____
RECEIVER_____
FRONT SIGHT BASE_____
REAR SIGHT BASE_____
SCREWS_____
FINISH

STOCK ASSEMBLY

STOCK_____
SLING SWIVEL STUDS_____
BUTT PATE_____
LOCK NUTS_____
BARREL CLEARANCE_____
COLOR / FINISH

SCOPE ASSEMBLY

SCOPE_____
SCOPE RINGS_____
MOUNTING SCREWS_____
MOUNTING BASE_____
SCREWS_____
FINISH_____
CLARITY

SYSTEM CASE

SCOPE CASE_____
IRON SIGHTS_____
DEPLOYMENT KIT

TRIGGER ASSEMBLY

SAFETY OPERATION_____
RE-SET TO FACTORY
SPECS

COMMENTS: _____

F006 REV 5/2006

nagletj	11/17/2003	9:01 AM	CAPS	NUM	INS	SCRL
---------	------------	---------	------	-----	-----	------

~~06300604~~

6628593

Serial Number: C6498753

Model: 700



RE00073081

R & E NUMBER	073081		
SERIAL NUMBER	66498753 66498753 66285935		
LOG-IN DATE	11-17-03		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	12-16-03	RLW
560 A	RE-BARREL		
B	DRILL AND TAP		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	12-19-03	RLW
655	FINAL INSPECT	12-22-03	RTL
660	PACK	12/22/03	RA
		SHIP DATE	
	QAR INSPECTION DATE		

M/24 7.62 NATO (RIFLE ONLY)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

46 FORM 200348




ORDER NO. **25732**

BARREL LENGTH **24"**

CAPACITY **5**

G6285935



		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.	
M/24 7.62 NATO (RIFLE ONLY) BOLT ACTION CENTERFIRE RIFLE 24" BARREL 7.62 NATO		SERIAL NO. ^J G6285935	
Made in Ilion, NY Reg. U.S. Pat. & tm. Off. Marca Registrada Marque Deposee.		ORDER NO. 25732	
			26PX
5732 G6285935			

GUN SERIAL # G628 5935

OP #	OPERATION NAME	READINGS	DATE	INITIAL
575 & 580	ASSEMBLE ACTION AND STOCK		11-14-02	RL
600	PROOF		11-18-02	K
607	CHECK HEADSPACE	MAGNA - FLUX INSPECTED	11-18-02	K
610	DIS-ASSEMBLE GUN		11-19-02	RL
612	MAGNAFLUX BBL ACTION MAGNAFLUX BOLT	NOV 20 2002 OPERATING RL		
615	ROLLMARK CALIBER		11-22-02	SB
617	DRILL AND TAP SIGHT HOLES		11-22-02	TRW
620	APPLY COATINGS (BARREL ACTION)		12-5	TA
	(BOLT)		12-5	TA
625	FINAL ASSEMBLY			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		5-21-03	RW
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		5-21-03	RW
	C) INSPECT EJECTOR HOLE FOR CHAMFER		5-21-03	RW
	D) OIL FIRING PIN ASSEMBLY		5-21-03	RW
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		6-3-02	TRW

BARBER - M24 0165327									
625	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	8.75	8.5	8.0	6-2-03	TRW		
CONT.									
	G) SAFETY OFF FORCE	2 LBS MIN	2.25	2.75	2.75	6-2-03	TRW		
	H) TRIGGER PULL TEST AND RETAINABILITY					6-2-03	RL		
	I) FIRING PIN INDENT	.020 MIN	.0225	.023	.022	6-2-03	TRW		
	J) ASSEMBLE STOCK					5-21-03	RL		
	K) ASSEMBLE SWIVEL STUDS					6-25-03	RTL		
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					6-25-03	RL		
	M) IRON SIGHT ALIGNMENT					6-25-03	RTL		
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					6-25-03	RL		
640	GALLERY TEST AND TARGET		PASS		FAIL	5-22-03	TRW		
	MALFUNCTION		CORRECTION			5-22-03	TRW		
	MALFUNCTION		CORRECTION			5-22-03	TRW		
	MALFUNCTION		CORRECTION			5-22-03	TRW		
	MALFUNCTION		CORRECTION			5-22-03	TRW		
645	INSPECT FOR LIVE AMMO					5-22-03	TRW		
655	FINAL INSPECTION A) HEADSPACE					6-25-03	RTL		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.85	2.88	2.90	2.81	2.87	6-2-03	TRW
	C) FUNCTION					6-25-03	RL		
660	PACK					6-27-03	DA		

2.50# + .50#
3.00# + .75#
4.00# + 1.00#

DATE 12-6-02

TESTER TRW

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#	COMMENTS
PULL #1	2.64	2.45	2.39	MIN. SETTING,
PULL #2	2.56	2.42	2.51	NO AVG. OF 5
PULL #3	2.57	2.37	2.55	READINGS ACCEPT
PULL #4	2.65	2.41	2.51	ABLE LESS THAN
PULL #5	2.59	2.60	2.53	
TOTAL	13.01	12.25	12.49	
AVG.	2.60	2.45	2.49	

	3.00# INITIAL	3.00# AFTER 20 CYCLES	COMMENTS
PULL #1	3.16	3.05	
PULL #2	3.15	3.08	
PULL #3	3.11	3.07	
PULL #4	3.18	3.11	
PULL #5	3.18	3.16	
TOTAL	15.78	15.47	
AVG.	3.15	3.09	

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# & TARGET & ACCU
PULL #1	4.22	4.05		4.08
PULL #2	4.17	4.07		4.09
PULL #3	4.15	4.05		4.11
PULL #4	4.11	4.07		4.09
PULL #5	4.17	4.06		4.10
TOTAL	20.82	20.30		20.47
AVG.	4.16	4.06		4.09

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6285935.__0
FILE DATE AND TIME: 05/22/2003 06:14


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.097
The Average Y Centroid of the Five Target Set:	0.106
The Average Point of Impact of the Five Target Set:	0.143
The Average Mean Radius of the Five Target Set:	1.101
The Distance from POA to Centroid Target #1:	0.062
The Distance from Centroid Target #2 to Centroid Target #1:	0.416
The Distance from Centroid Target #3 to Centroid Target #1:	0.485
The Distance from Centroid Target #4 to Centroid Target #1:	0.329
The Distance from Centroid Target #5 to Centroid Target #1:	0.201

SERIAL NUMBER: G6285935. 0
 TARGET NUMBER: 1
 FILE DATE: 05/22/2003
 FILE TIME: 06:14

X CENTROID: 0.058
 Y CENTROID: -0.023
 POA TO CENTROID: 0.062
 HORZ SPREAD: 4.885
 VERT SPREAD: 2.365
 GROUP SPREAD: 4.904
 MIN RADIUS: 0.262
 MAX RADIUS: 2.602
 MEAN RADIUS: 1.259
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 3
 # in 3 IN DIAMETER: 8

POINT#	X	Y
1:	2.587	-0.635
2:	1.031	0.252
3:	0.294	-0.136
4:	0.673	-1.002
5:	-0.316	-0.096
6:	-0.678	0.623
7:	-0.928	-0.510
8:	-2.298	-1.067
9:	-0.302	1.046
10:	0.516	1.298

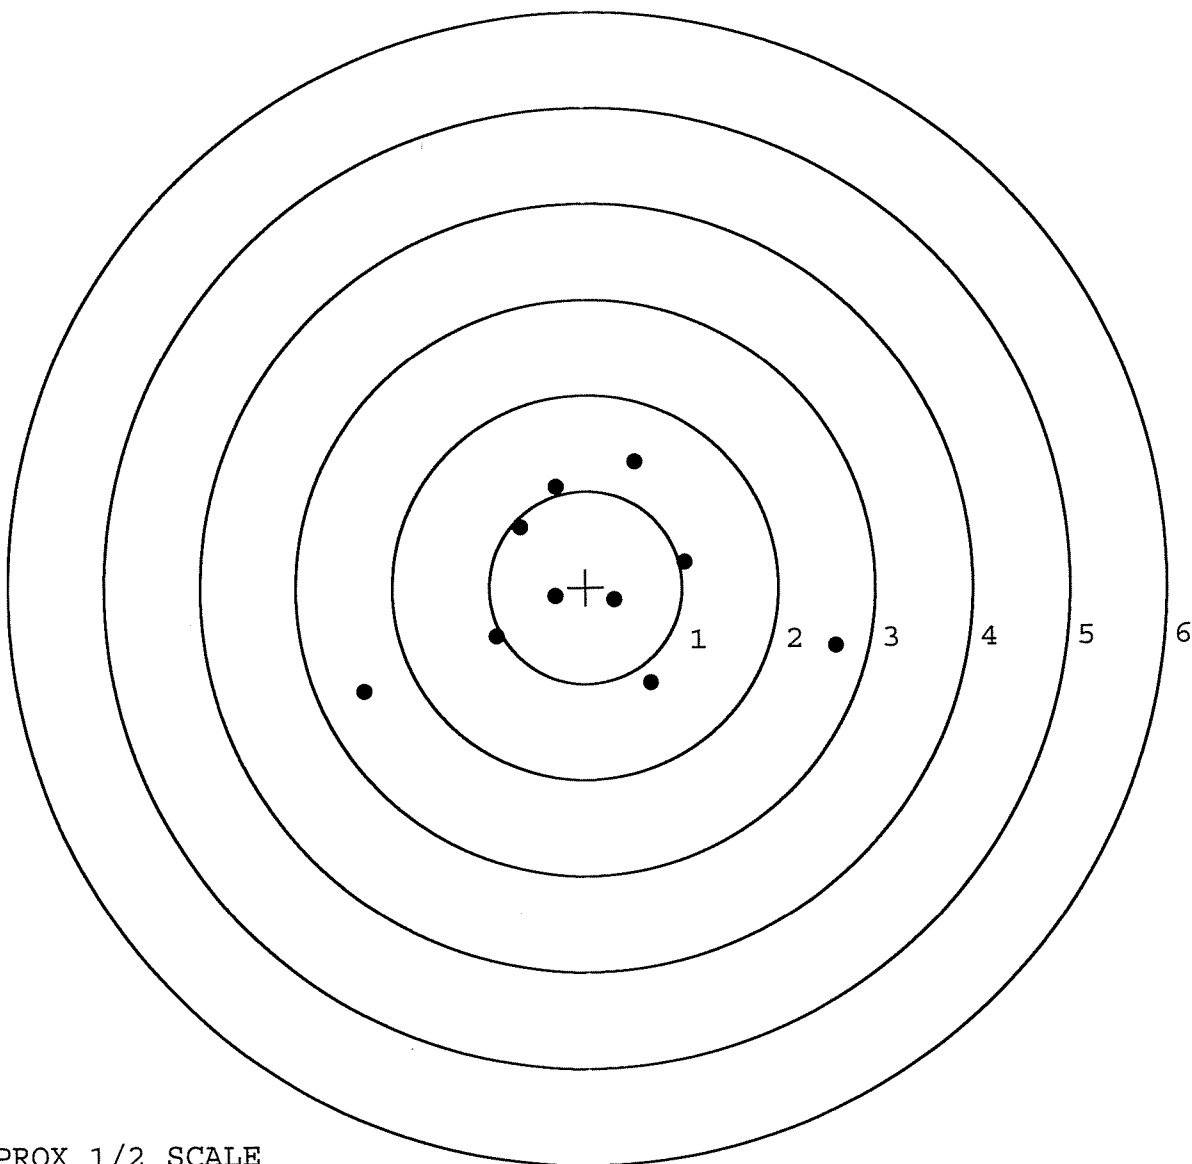


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6285935. __0
TARGET NUMBER: 2
FILE DATE: 05/22/2003
FILE TIME: 06:14

X CENTROID: -0.113
Y CENTROID: 0.357
POA TO CENTROID: 0.374
HORZ SPREAD: 2.318
VERT SPREAD: 2.329
GROUP SPREAD: 2.492
MIN RADIUS: 0.403
MAX RADIUS: 1.655
MEAN RADIUS: 1.003
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	1.325	0.843
2:	1.209	1.194
3:	-0.147	1.013
4:	-0.993	1.759
5:	0.257	0.198
6:	-0.747	0.272
7:	-0.861	-0.443
8:	-0.355	-0.287
9:	-0.500	-0.411
10:	-0.320	-0.570

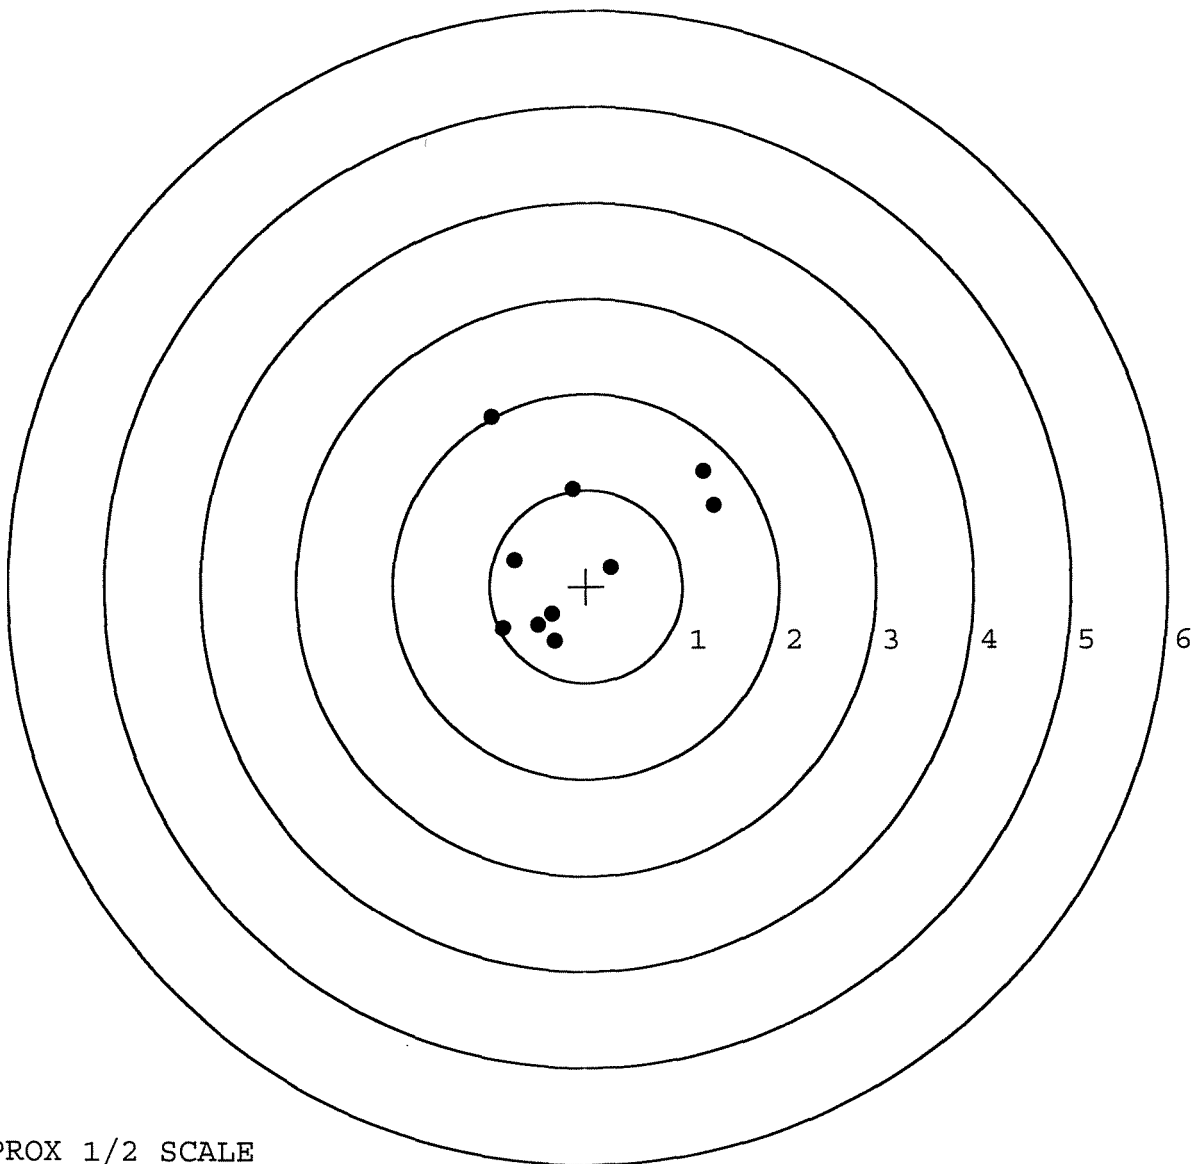

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6285935. __0

TARGET NUMBER: 3

FILE DATE: 05/22/2003

FILE TIME: 06:14

X CENTROID: -0.275

Y CENTROID: 0.329

POA TO CENTROID: 0.429

HORZ SPREAD: 2.158

VERT SPREAD: 3.543

GROUP SPREAD: 3.580

MIN RADIUS: 0.617

MAX RADIUS: 1.870


MEAN RADIUS: 1.185

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.980	-0.668
2:	0.821	0.078
3:	0.191	0.733
4:	-0.212	-0.571
5:	-0.840	-0.273
6:	-0.942	-1.350
7:	-1.178	0.504
8:	-0.891	1.220
9:	-0.256	1.426
10:	-0.426	2.193

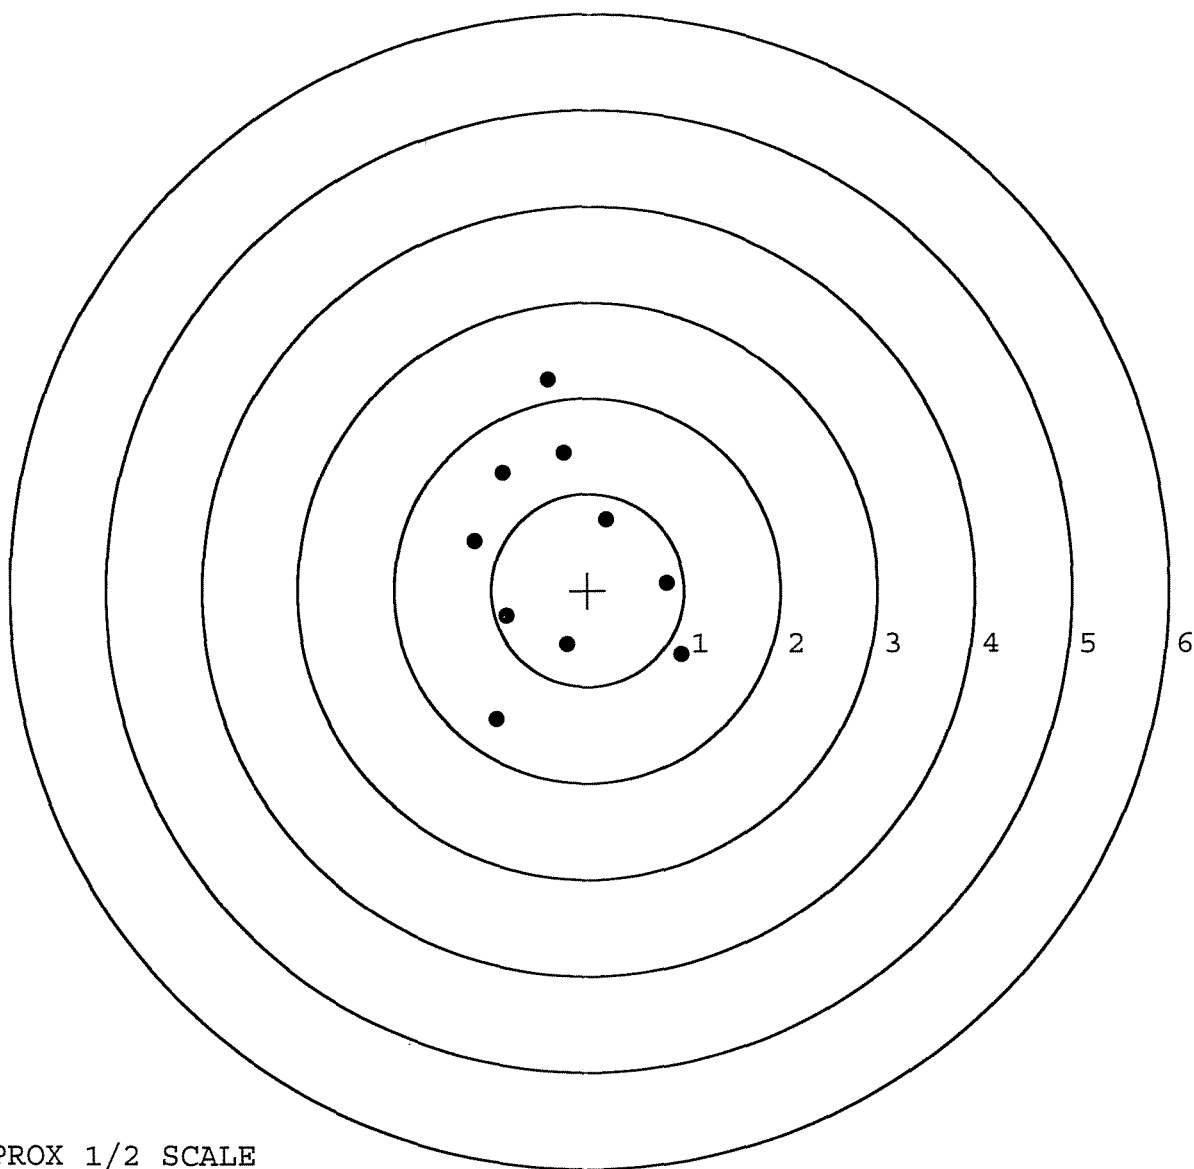

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6285935. 0

TARGET NUMBER: 4

FILE DATE: 05/22/2003

FILE TIME: 06:14

X CENTROID: -0.253

Y CENTROID: 0.085

POA TO CENTROID: 0.267

HORZ SPREAD: 3.905

VERT SPREAD: 1.345

GROUP SPREAD: 3.905

MIN RADIUS: 0.114

MAX RADIUS: 2.095


MEAN RADIUS: 1.054

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 6

POINT#	X	Y
1:	0.446	-0.617
2:	0.431	0.049
3:	-0.221	-0.024
4:	-0.357	0.207
5:	-0.764	0.179
6:	-0.715	0.520
7:	-2.346	0.184
8:	-1.923	-0.569
9:	1.559	0.192
10:	1.358	0.728

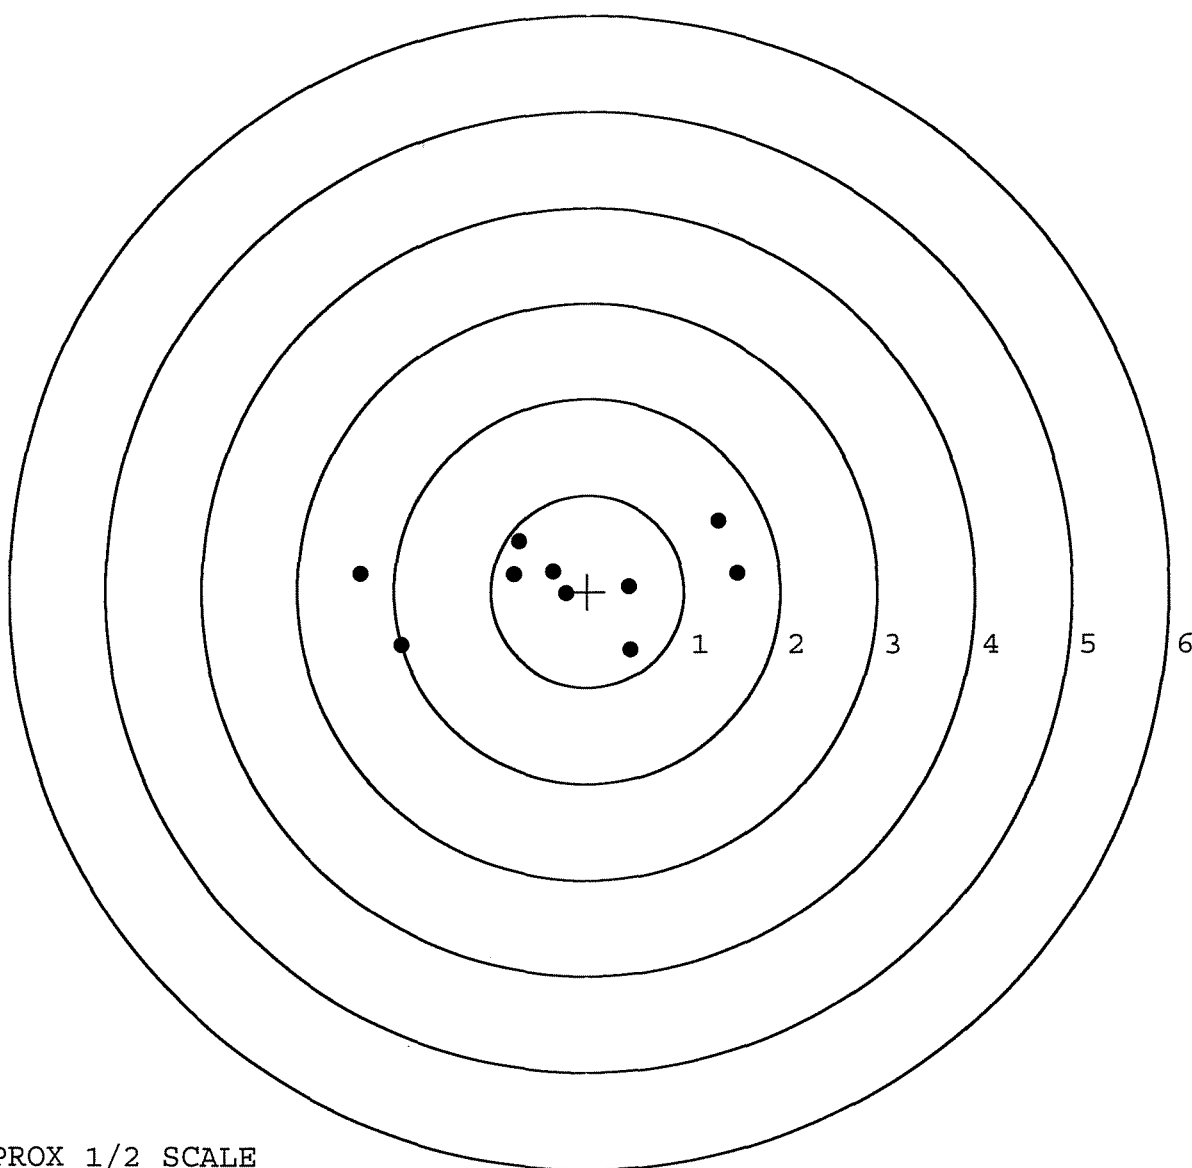

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6285935. __0

TARGET NUMBER: 5

FILE DATE: 05/22/2003

FILE TIME: 06:14

X CENTROID: 0.099

Y CENTROID: -0.219

POA TO CENTROID: 0.241

HORZ SPREAD: 2.528

VERT SPREAD: 2.899

GROUP SPREAD: 3.353

MIN RADIUS: 0.324

MAX RADIUS: 2.003


MEAN RADIUS: 1.005

IN 1 IN DIAMETER: 3

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	1.350	-1.784
2:	0.889	-0.759
3:	1.115	-0.095
4:	0.316	0.507
5:	0.184	1.115
6:	-0.333	-0.072
7:	-0.047	-0.509
8:	-0.209	-0.583
9:	-1.178	-0.527
10:	-1.093	0.512

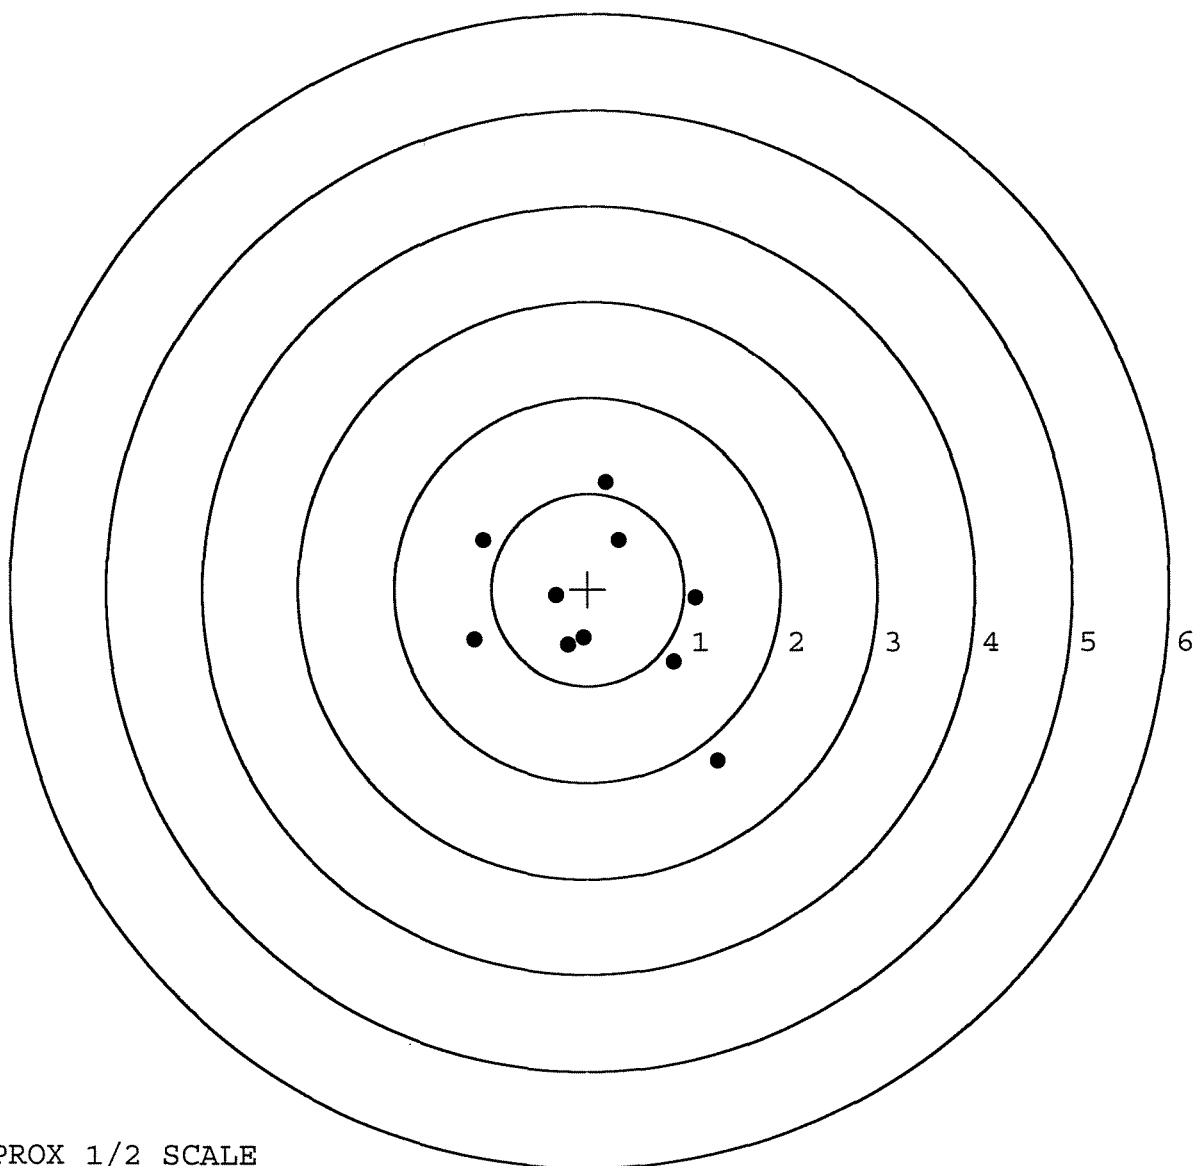

TARGET APPROX 1/2 SCALE

RECEIVING AND ESTIMATING REPORT

ORDER
R 99-20503

INITIAL
SWS

CUSTOMER ORDER NO.

COMMENTS
M/24
W/SCOPE, W/HARD CASE

DATE RECEIVED
10/18/99

DATE OPENED
10/20/99

DATE CODE

SERIAL NUMBER
C6498753

NEW SERIAL NUMBER

MODEL AND GRADE
700 7.62 NATO

ACCESSORIES
W/STUDS

W/SWIVELS

SCOPE BASE

Scope S/N 88-1297

FROM:

U S ARMY
CO D 2/29 INF REGT
BLDG 73
FT BENNING
GA 31905

SHIP TO:
Exchanged
U S ARMY
CO D 2/29 INF REGT
BLDG 73
FT BENNING
GA 31905

CUST NO: 187354 C.O.D.

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE ☐

PROM. DATE

ESTIMATED

VIA
UPS

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE
EXCISE
TAX
INSURANCE
UPS
PARCEL POST
TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

BBL 96003
Stock 96018
Scope Ring Assy (2) 96082
Bolt Assy 96005
Rear Sight Base 96016
Extractor 96816

REPAIRMAN
RW

PROOF
✓

CLEAN
✓

TEST
✓

TARGET
✓

PATTERN

GALLERY TESTER
RW

DATE

DATE

DATE

DATE

DATE

1-27-00

2-1-00

2-1-00

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6498753

9 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0776

THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2872

THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .297499

THE AMR FOR THIS RIFLE IS: 1.259

CENTROIDAL DISTANCES

0	TO	1	.136077
1	TO	2	.0730548
1	TO	3	.742079
1	TO	4	.66491
1	TO	5	.772089

+12 <----POA

3 4 5


PATTERN #: ☐ 1 ☐

POA TO CENTROID: .136
MIN RADIUS : .484
MEAN RADIUS : 1.284
MAX RADIUS : 2.685
CENTROID X : .066
CENTROID Y : .119

9 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6498753.1

CENTERFIRE PATTERN # 1

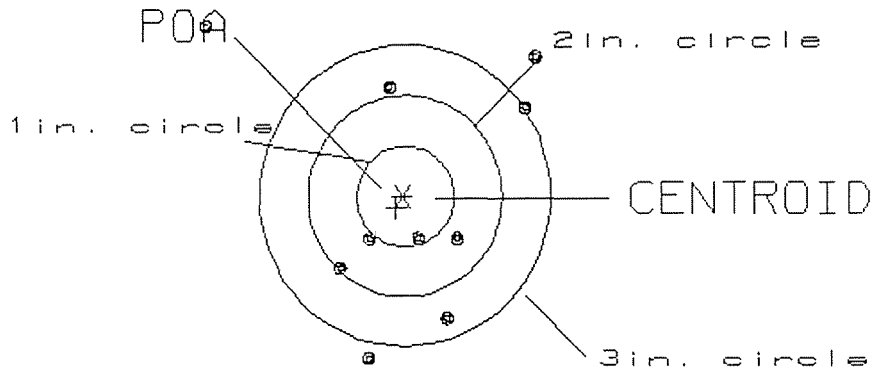

OF SHOTS= 10

IN CIRCLE

HS= 3.49
VS= 3.25
GS= 3.82

1
3
7

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .165

MIN RADIUS : .173

MEAN RADIUS : 1.134

MAX RADIUS : 2.113


CENTROID X : .135

CENTROID Y : .095

9 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6498753.1

CENTERFIRE PATTERN # 2

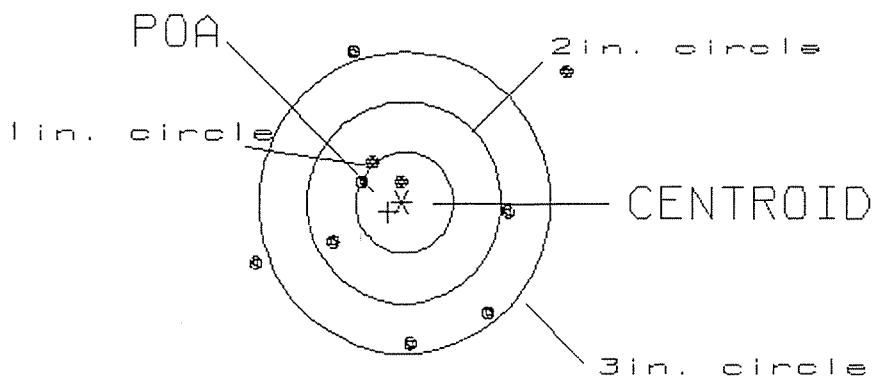

OF SHOTS= 10

IN CIRCLE

HS= 3.25

1

VS= 2.91

4

GS= 3.74

7

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .606

MIN RADIUS : .307

MEAN RADIUS : 1.222

MAX RADIUS : 2.475


CENTROID X : -.318

CENTROID Y : -.516

9 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6498753.1

CENTERFIRE PATTERN # 3

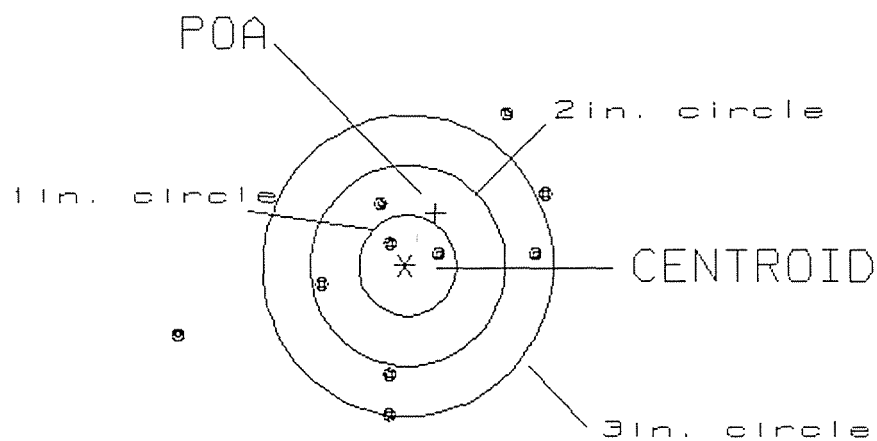

OF SHOTS= 10

IN CIRCLE

HS= 3.84

2

VS= 3.06

4

GS= 4.09

6


PATTERN #: 4

POA TO CENTROID: .559
MIN RADIUS : .188
MEAN RADIUS : 1.243
MAX RADIUS : 2.615
CENTROID X : .138
CENTROID Y : -.542

9 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6498753.1

CENTERFIRE PATTERN # 4

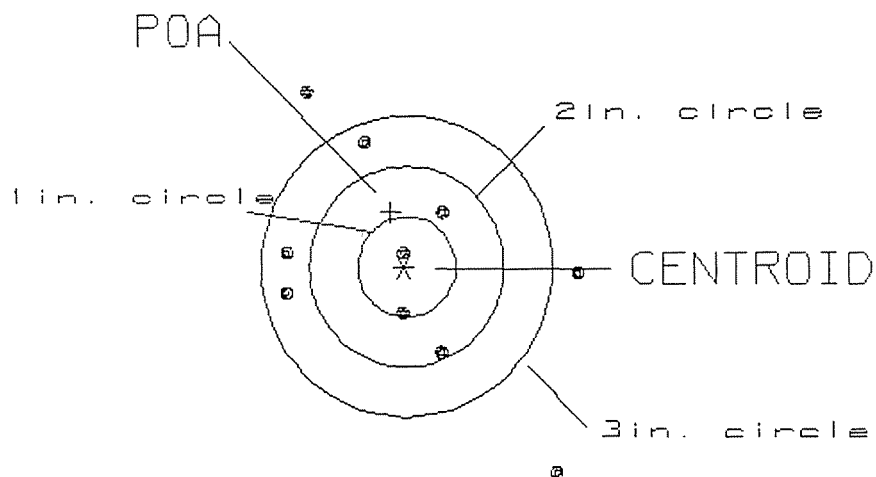

OF SHOTS= 10

IN CIRCLE

HS= 2.97

2

VS= 3.81

4

GS= 4.62

7

PATTERN #: 5

POA TO CENTROID: .696

MIN RADIUS : .623

MEAN RADIUS : 1.410

MAX RADIUS : 2.938


CENTROID X : .367

CENTROID Y : -.592

9 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/c6498753.1

CENTERFIRE PATTERN # 5

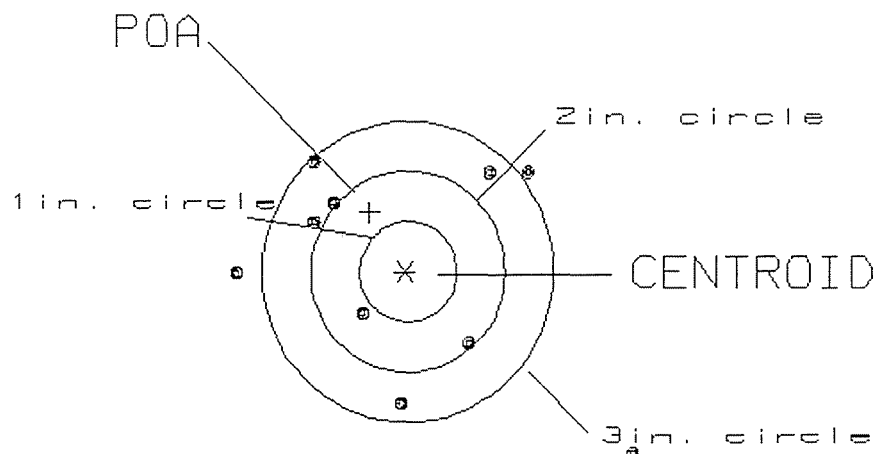

OF SHOTS= 10

IN CIRCLE

HS= 4.02

0

VS= 2.95

2

GS= 4.44

7

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO. C6498753

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	12-12-99	RW
605	CHECK HEADSPACE	12-12-99	RW
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	2-1-00	RW
655	FINAL INSPECT	2-8-00	RW
660	PACK		
QAR INSPECTION		SHIP DATE	

Final Inspection

Sn: C6498753

DATE REC'D: 10-18-99

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ SCREWS
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET
- ☐

Comments:

Remington®

MODEL 700™ H24

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat. & Tm. Off. Marca Registrada Marque Deposee.

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

REG. U.S. PAT. & T.M. OFF.

SERIAL NO.
C6498753

ORDER NO.
5716

Ø1



5716 C6498753

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6498753

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	4 12	90	RW
600	Proof	4 12	90	L
607	Check Headspace	4 12	90	A
610	Dis-assemble Gun	4 12	90	RW
612	Magnaflux Barrel Action	4-19-90		KCR
	Magnaflux Bolt	4-19-90		KCR
615	Rollmark Caliber	4-19-90		SL
617	Drill and Tap Sight Holes		4/23/90	WFB
618	Polish Barrel AB		4/24/90	WB
620	Apply Coatings (Barrel Action)		4/30/90	TJA
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		4/18/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		4/18/90	RW
	C) Inspect Ejector Hole for Chamfer		4/18/90	RW
	D) Oil Firing Pin Ass'y		4/18/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		5/7/90	SL

op. #	OP. NAME	READINGS					DATE	INIT
625 cont.	F) Safety On Force	4	4	4			5/8/90	SM
	G) Safety Off Force	3	3	3			5/8/90	SM
	H) Trigger Pull Test & Retainability						5/7/90	SM
	I) Firing Pin Indent	.021	.0215	.0215			5/8/90	SM
	J) Assemble Stock						5/10/90	RW
	K) Assemble Swivel Studs						5/16/90	WB
	L) Attach Front and Rear Sight Assemblies						5/10/90	RW
	M) Iron Sight Alignment						5/10/90	RW
	N) Detach Front & Rear Sights & place in numbered container						5/10/90	RW
	O) Attach Scope to Rifle						5/10/90	SM
	P) Detach & Attach Scope 20 Times						5/10/90	SM
640	Gallery Target & Test						5-11-90	AC
	A) Time						5-11-90	AC
	B) Malfunctions						5-11-90	AC
	C) Pierced Primers						5-11-90	AC
	D) Optical Clarity of Scope						5-11-90	AC
645	Inspect for Live Ammo						5-11-90	AC
655	Final Inspection						5/15/90	WB
	A) Headspace							
	B) Trigger Pull	2.59	2.63	2.65	2.69	2.68	5/15/90	WB
	C) Function						5/16/90	WB
660	Pack						6-20-90	D/H

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50#+.50#
3.00#+.75#
4.00#+1.00#

SERIAL NO. C6498753DATE 5/7/90TESTER JEL

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.49	2.45	2.40	2.59	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.50	2.48	2.35	2.63	
PULL #3	2.51	2.31	2.45	2.65	
PULL #4	2.44	2.34	2.46	2.69	
PULL #5	2.34	2.40	2.40	2.68	
TOTAL	12.28	11.98	12.06		
AVG.	2.456	2.396	2.412		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.48	3.41		
PULL #2	3.52	3.46		
PULL #3	3.50	3.29		
PULL #4	3.49	3.37		
PULL #5	3.49	3.35		
TOTAL	17.48	16.82		
AVG.	3.496	3.364		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.30	4.45		4.24
PULL #2	4.35	4.35		4.41
PULL #3	4.30	4.14		4.40
PULL #4	4.44	4.35		4.18
PULL #5	4.44	4.42		4.41
TOTAL	21.83	21.71		21.64
AVG.	4.366	4.342		4.328

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6348753
11 May 1990

CENTROIDAL DISTANCES

0 TO	1	.221382
1 TO	2	.245247
1 TO	3	.264613
1 TO	4	.178101
1 TO	5	.374012

$\frac{+13}{5}$ (----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .2566
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.058
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .263073
THE AMR FOR THIS RIFLE IS: .8474

11 May 1990

FILE:/PATTERNING/CENTERFIRE_PATT/C8348753

CENTERFIRE PATTERNS

1

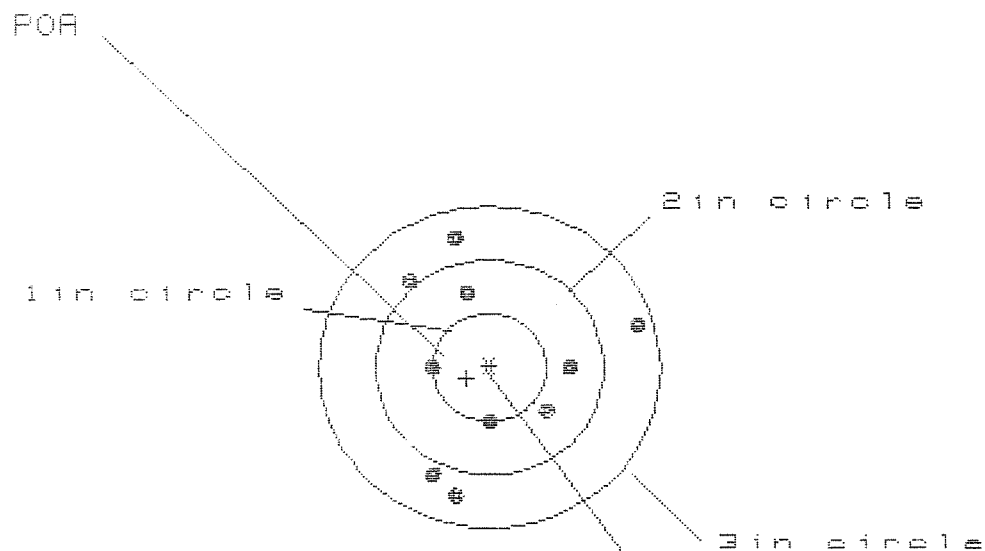

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 5

3 in = 10

HS= 1.977

VS= 2.471

GS= 2.471

CENTROID *

PATTERN #	1	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.301	.875	.852
MINIMUM X	-.676	-.532	-.555
MAXIMUM Y	1.248	1.288	.990
MINIMUM Y	-1.223	-1.183	-1.022
CENTROID X	.199	.055	.078
CENTROID Y	.097	.057	-.103
POA TO CENTROID in.	.221	.079	.129
MIN RADIUS	.531	.395	.368
MEAN RADIUS	.921	.864	.792
MAX RADIUS	1.348	1.301	1.135
HORIZONTAL SPREAD	1.977	1.407	1.407
VERTICAL SPREAD	2.471	2.471	2.013
EXTREME SPREAD	2.471	2.471	2.041
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	10		

11 May 1990

FILE:/PATTERNING/CENTERFIRE_PATT/Q8348753

CENTERFIRE PATTERNS

2

POR

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 7

3 in = 10

HS= 2.163

VS= 1.874


GS= 2.282

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.852	.706	.773
MINIMUM X	:	-1.311	-.914	-.847
MAXIMUM Y	:	.843	.843	.714
MINIMUM Y	:	-1.031	-1.031	-.774
CENTROID X	:	.188	.334	.267
CENTROID Y	:	-.148	-.148	-.019
POR TO CENTROID in.	:	.239	.365	.268
MIN RADIUS	:	.412	.460	.562
MEAN RADIUS	:	.896	.843	.801
MAX RADIUS	:	1.311	1.160	.976
HORIZONTAL SPREAD	:	2.163	1.620	1.620
VERTICAL SPREAD	:	1.874	1.874	1.488
EXTREME SPREAD	:	2.282	2.157	1.915
NUMBER IN ONE INCH CIRCLE	=		1	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

01 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06348753

CENTERFIRE PATTERNS # 3

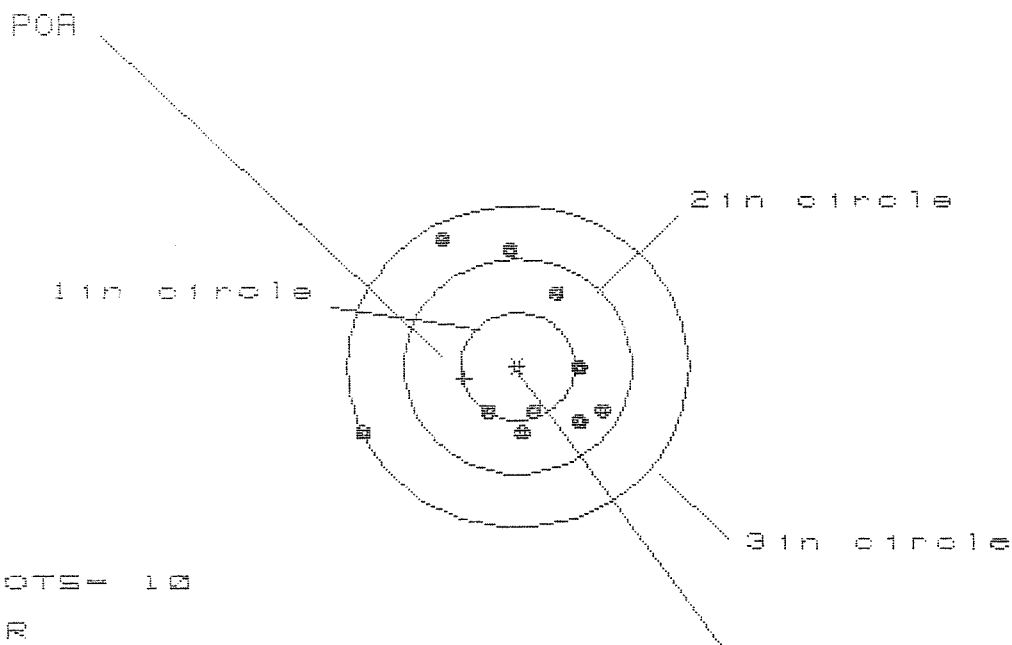

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HS= 2.066

VS= 1.824

GS= 2.133

CENTROID *

PATTERN #	3	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.707	.556	.455
MINIMUM X	-1.359	-.806	-.477
MAXIMUM Y	1.219	1.156	1.139
MINIMUM Y	-.605	-.668	-.523
CENTROID X	.463	.614	.715
CENTROID Y	.115	.178	.033
POA TO CENTROID in.	.477	.639	.715
MIN RADIUS	.459	.361	.266
MEAN RADIUS	.832	.742	.606
MAX RADIUS	1.473	1.409	1.175
HORIZONTAL SPREAD	2.066	1.362	.932
VERTICAL SPREAD	1.824	1.824	1.663
EXTREME SPREAD	2.133	2.133	1.705
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		


11 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/Q834B753

CENTERFIRE PATTERNS

4

POA

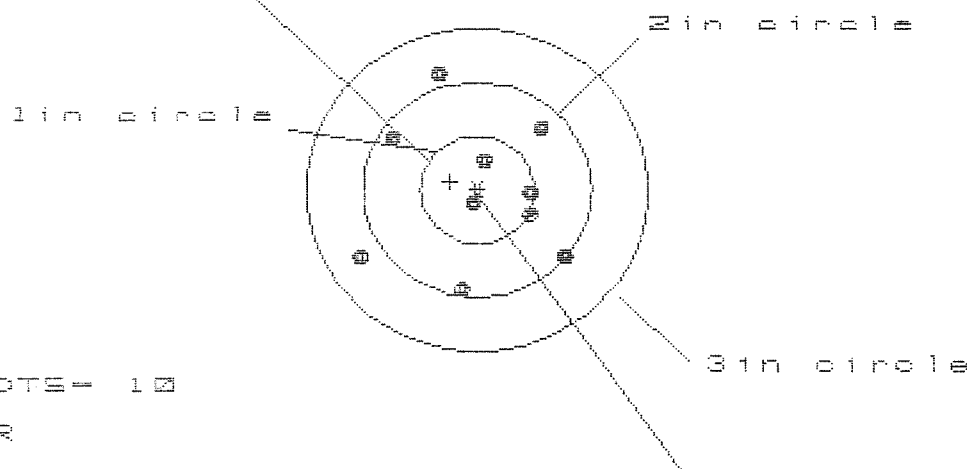

OF SHOTS= 10

IN CIR

1in = 3

2in = 7

3in = 10

HS= 1.879

VS= 2.013

GS= 2.058

CENTROID *

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.795	.675	.615
MINIMUM X	:	-1.084	-.896	-.956
MAXIMUM Y	:	1.075	1.010	.685
MINIMUM Y	:	-.938	-1.003	-.876
CENTROID X	:	.237	.357	.417
CENTROID Y	:	-.077	-.012	-.139
POA TO CENTROID in.	:	.249	.358	.439
MIN RADIUS	:	.113	.248	.266
MEAN RADIUS	:	.754	.685	.620
MAX RADIUS	:	1.232	1.116	1.104
HORIZONTAL SPREAD	:	1.879	1.571	1.571
VERTICAL SPREAD	:	2.013	2.013	1.561
EXTREME SPREAD	:	2.058	2.058	1.932
NUMBER IN ONE INCH CIRCLE	=		3	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		10	

11 May 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C634B753

CENTERFIRE PATTERNS

5

POA

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 6

3 in = 10

HSE = 1.925

VSE = 2.079

GSE = 2.322

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.946	1.018	.900
MINIMUM X	-.979	-.907	-.780
MAXIMUM Y	1.041	.925	.824
MINIMUM Y	-1.038	-.813	-.914
CENTROID X	.196	.124	-.003
CENTROID Y	-.277	-.161	-.060
POA TO CENTROID in.	.339	.203	.060
MIN RADIUS	.099	.154	.203
MEAN RADIUS	.834	.783	.703
MAX RADIUS	1.225	1.302	.984
HORIZONTAL SPREAD	1.925	1.925	1.680
VERTICAL SPREAD	2.079	1.738	1.738
EXTREME SPREAD	2.322	2.223	1.811
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		10	