

G 6590152
Replaces
E 6413458

Repair Inquiry																										
Repair Number: RE00124985		Serial: C6413458 Model M24 SWS Center Fire		Repairman:																						
Verify Repair				Status: New 2/7/2007 8:34:50 AM																						
Address Information																										
Customer:		☒ Received From		Return To: ☐ Received From																						
Name: POST ARMS ROOM		POST ARMS ROOM																								
Address 1: BLDG 330		BLDG 330																								
Address 2: 4851 CHILES AVE. PO Box:		4851 CHILES AVE. PO Box:																								
City: FT. CARSON		FT. CARSON																								
State: CO Zip Code: 80913 Country: US		State: CO Zip Code: 80913 Country: US																								
FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐																										
Contact / Condition		Problems	Estimate	History / Status	Shipping / Billing																					
Contact Information: Phone: NA Fax: Email: Comments:		Received Condition: Fair Condition Notes: CSR Notes:		Accessories Received <table border="1"> <thead> <tr> <th>Code</th> <th>Desc</th> <th>Qty</th> </tr> </thead> <tbody> <tr> <td>A006</td> <td>Sling Strap</td> <td>1</td> </tr> <tr> <td>A007</td> <td>With Stud</td> <td>3</td> </tr> <tr> <td>A017</td> <td>Scope Base</td> <td>1</td> </tr> <tr> <td>A026</td> <td>Scope</td> <td>1</td> </tr> <tr> <td>A045</td> <td>Bi Pod</td> <td>1</td> </tr> <tr> <td>A057</td> <td>Frt and Rear Sgt Base</td> <td>2</td> </tr> </tbody> </table>		Code	Desc	Qty	A006	Sling Strap	1	A007	With Stud	3	A017	Scope Base	1	A026	Scope	1	A045	Bi Pod	1	A057	Frt and Rear Sgt Base	2
Code	Desc	Qty																								
A006	Sling Strap	1																								
A007	With Stud	3																								
A017	Scope Base	1																								
A026	Scope	1																								
A045	Bi Pod	1																								
A057	Frt and Rear Sgt Base	2																								
Repair Search		Refresh		Close																						
nagletj		2/7/2007		10:22 AM																						
CAPS		NUM																								

G6590152 (New)

~~C6413458~~

Model: M24 SWS

RE00124985

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6590152.___0
FILE DATE AND TIME: 03/07/2007 14:08

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.068
The Average Y Centroid of the Five Target Set:	-0.171
The Average Point of Impact of the Five Target Set:	0.184
The Average Mean Radius of the Five Target Set:	0.987
The Distance from POA to Centroid Target #1:	0.251
The Distance from Centroid Target #2 to Centroid Target #1:	0.101
The Distance from Centroid Target #3 to Centroid Target #1:	0.284
The Distance from Centroid Target #4 to Centroid Target #1:	0.163
The Distance from Centroid Target #5 to Centroid Target #1:	0.430

SERIAL NUMBER: G6590152. __0

TARGET NUMBER: 1

FILE DATE: 03/07/2007

FILE TIME: 14:08

X CENTROID: 0.047

Y CENTROID: -0.246

POA TO CENTROID: 0.251

HORZ SPREAD: 3.366

VERT SPREAD: 2.482

GROUP SPREAD: 3.536

MIN RADIUS: 0.572

MAX RADIUS: 1.913


MEAN RADIUS: 1.230

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 4

in 3 IN DIAMETER: 6

POINT#	X	Y
1:	1.839	-0.250
2:	1.087	-1.629
3:	0.829	-0.439
4:	0.528	-0.556
5:	0.113	-0.829
6:	0.365	0.521
7:	-0.759	0.850
8:	-1.073	0.853
9:	-0.930	0.349
10:	-1.527	-1.334

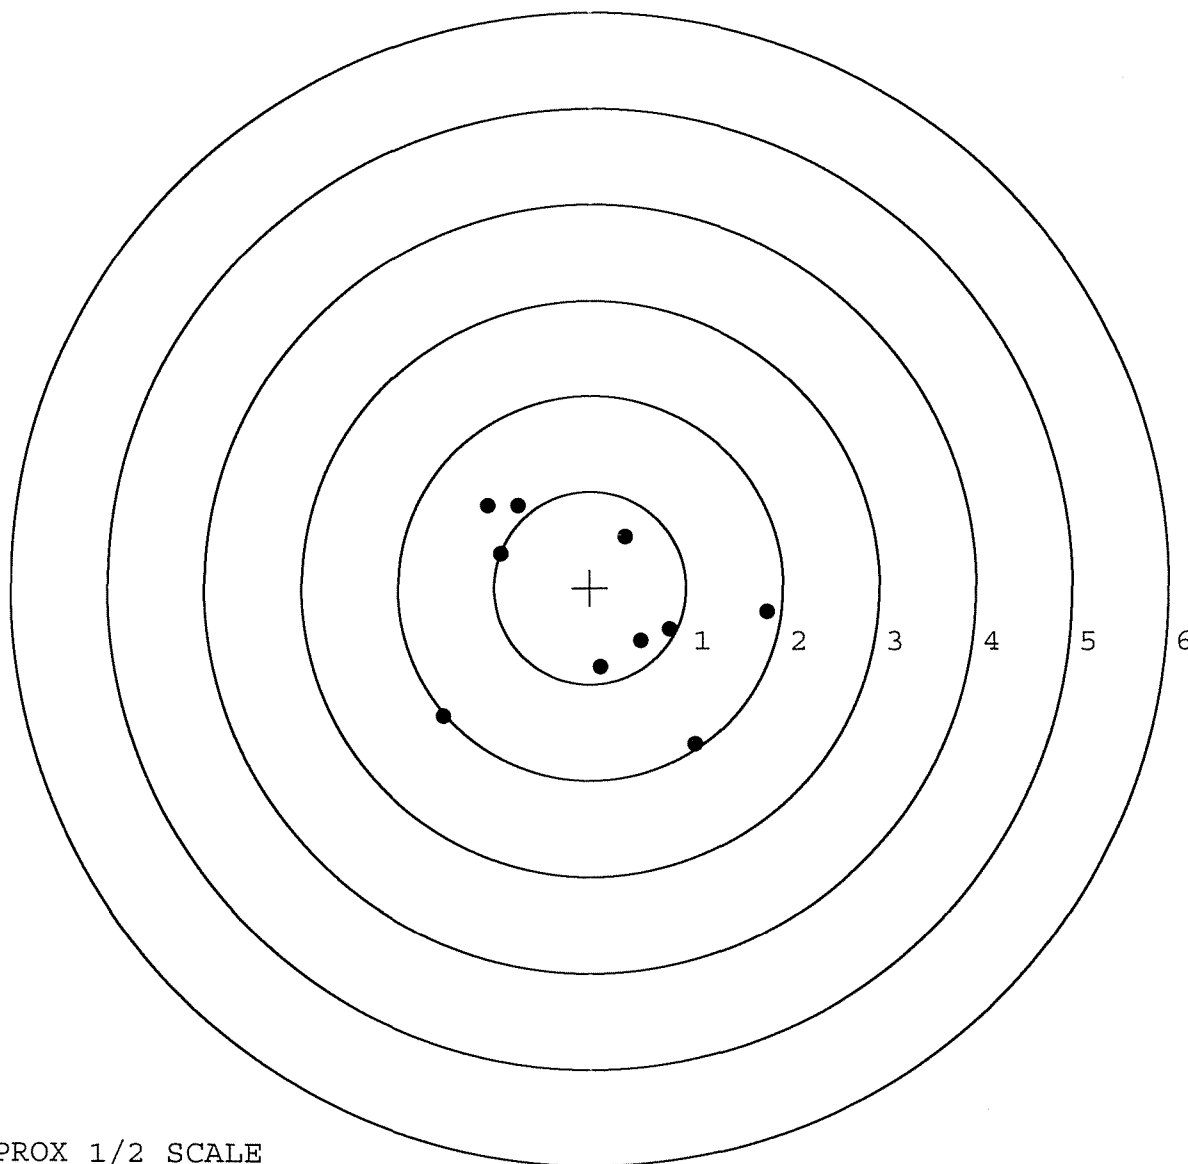

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0

TARGET NUMBER: 2

FILE DATE: 03/07/2007

FILE TIME: 14:08

X CENTROID: 0.000

Y CENTROID: -0.336

POA TO CENTROID: 0.336

HORZ SPREAD: 3.121

VERT SPREAD: 1.770

GROUP SPREAD: 3.564

MIN RADIUS: 0.298

MAX RADIUS: 1.795


MEAN RADIUS: 1.106

IN 1 IN DIAMETER: 2

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 6

POINT#	X	Y
1:	1.601	-1.101
2:	1.559	-0.606
3:	0.357	-1.130
4:	-0.259	-0.958
5:	-1.519	-1.026
6:	-0.446	-0.276
7:	-0.108	-0.058
8:	-0.111	0.535
9:	0.448	0.640
10:	-1.520	0.619

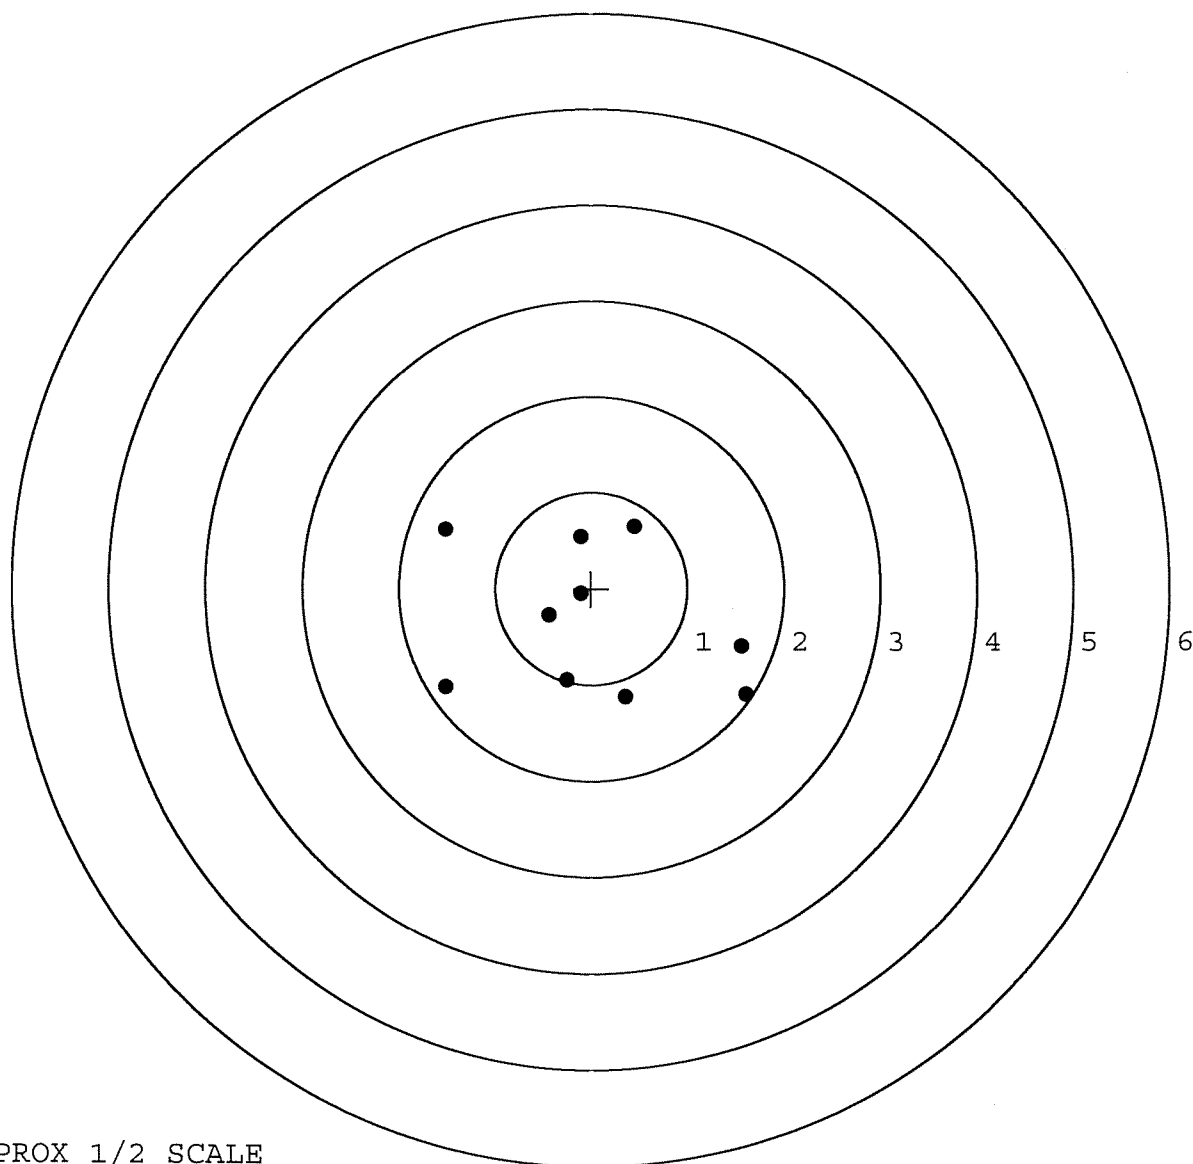


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. 0
 TARGET NUMBER: 3
 FILE DATE: 03/07/2007
 FILE TIME: 14:08

X CENTROID: -0.237
 Y CENTROID: -0.251
 POA TO CENTROID: 0.345
 HORZ SPREAD: 2.572
 VERT SPREAD: 2.490
 GROUP SPREAD: 2.714
 MIN RADIUS: 0.153
 MAX RADIUS: 1.702
 MEAN RADIUS: 0.929
 # IN 1 IN DIAMETER: 2
 # IN 2 IN DIAMETER: 6
 # in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.584	-1.741
2:	-1.747	-0.740
3:	-1.846	-0.533
4:	0.726	-0.071
5:	-0.340	0.749
6:	0.220	0.314
7:	0.291	0.036
8:	0.289	-0.404
9:	-0.163	0.095
10:	-0.385	-0.212

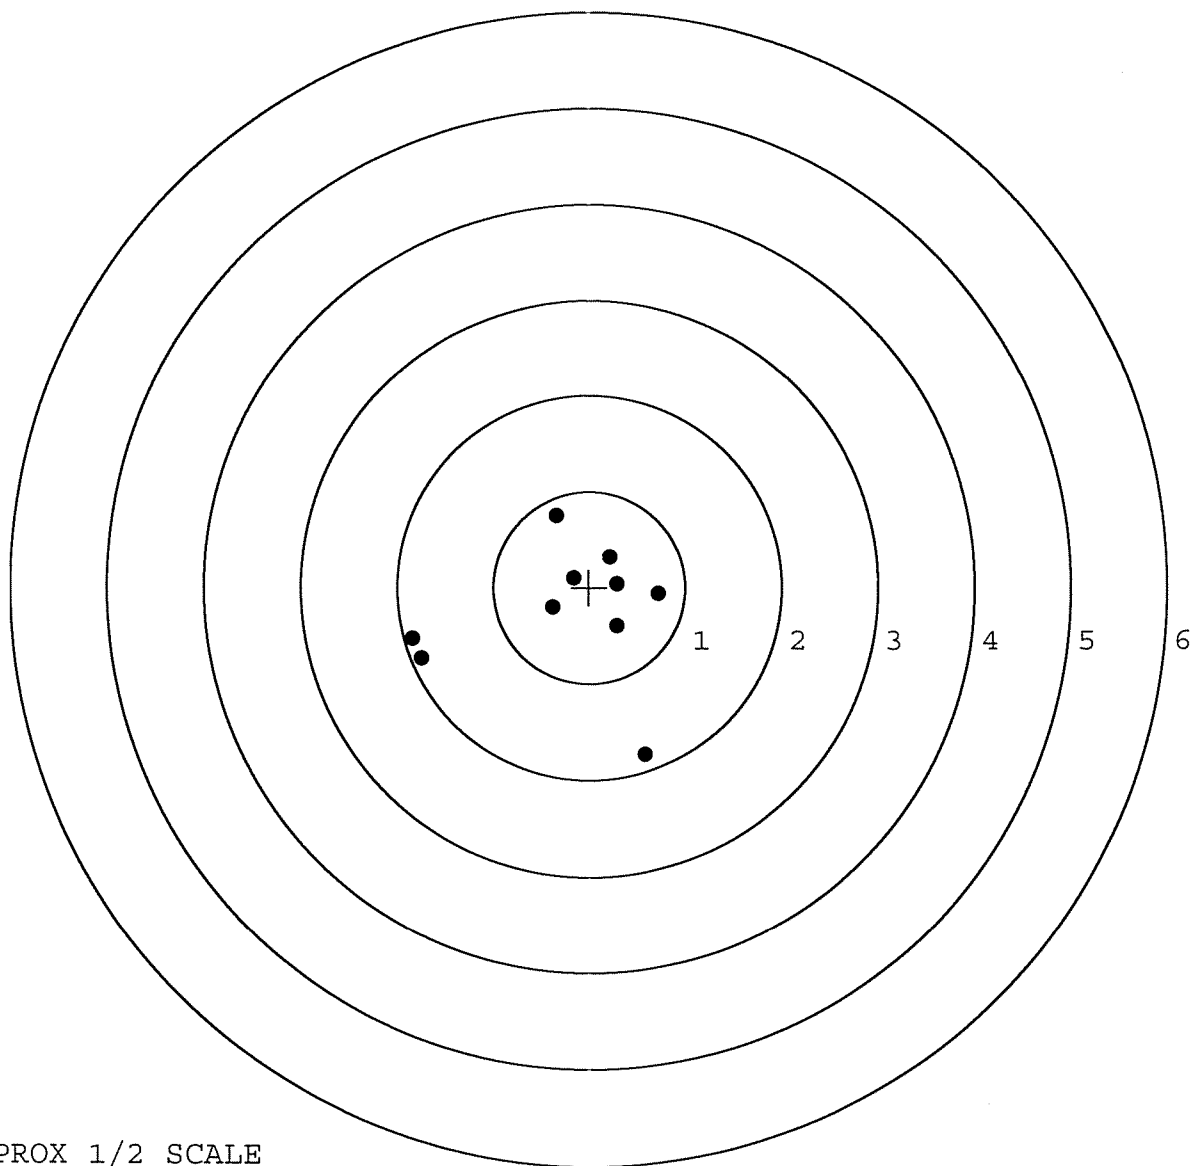


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. __ 0
 TARGET NUMBER: 4
 FILE DATE: 03/07/2007
 FILE TIME: 14:08

X CENTROID: -0.108
 Y CENTROID: -0.196
 POA TO CENTROID: 0.224
 HORZ SPREAD: 1.318
 VERT SPREAD: 1.943
 GROUP SPREAD: 2.308
 MIN RADIUS: 0.114
 MAX RADIUS: 1.356
 MEAN RADIUS: 0.627
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.390	-0.637
2:	0.290	-0.542
3:	-0.609	-1.006
4:	-0.682	-0.940
5:	0.636	0.937
6:	0.166	0.187
7:	-0.172	0.331
8:	-0.218	-0.168
9:	-0.523	-0.039
10:	-0.356	-0.086

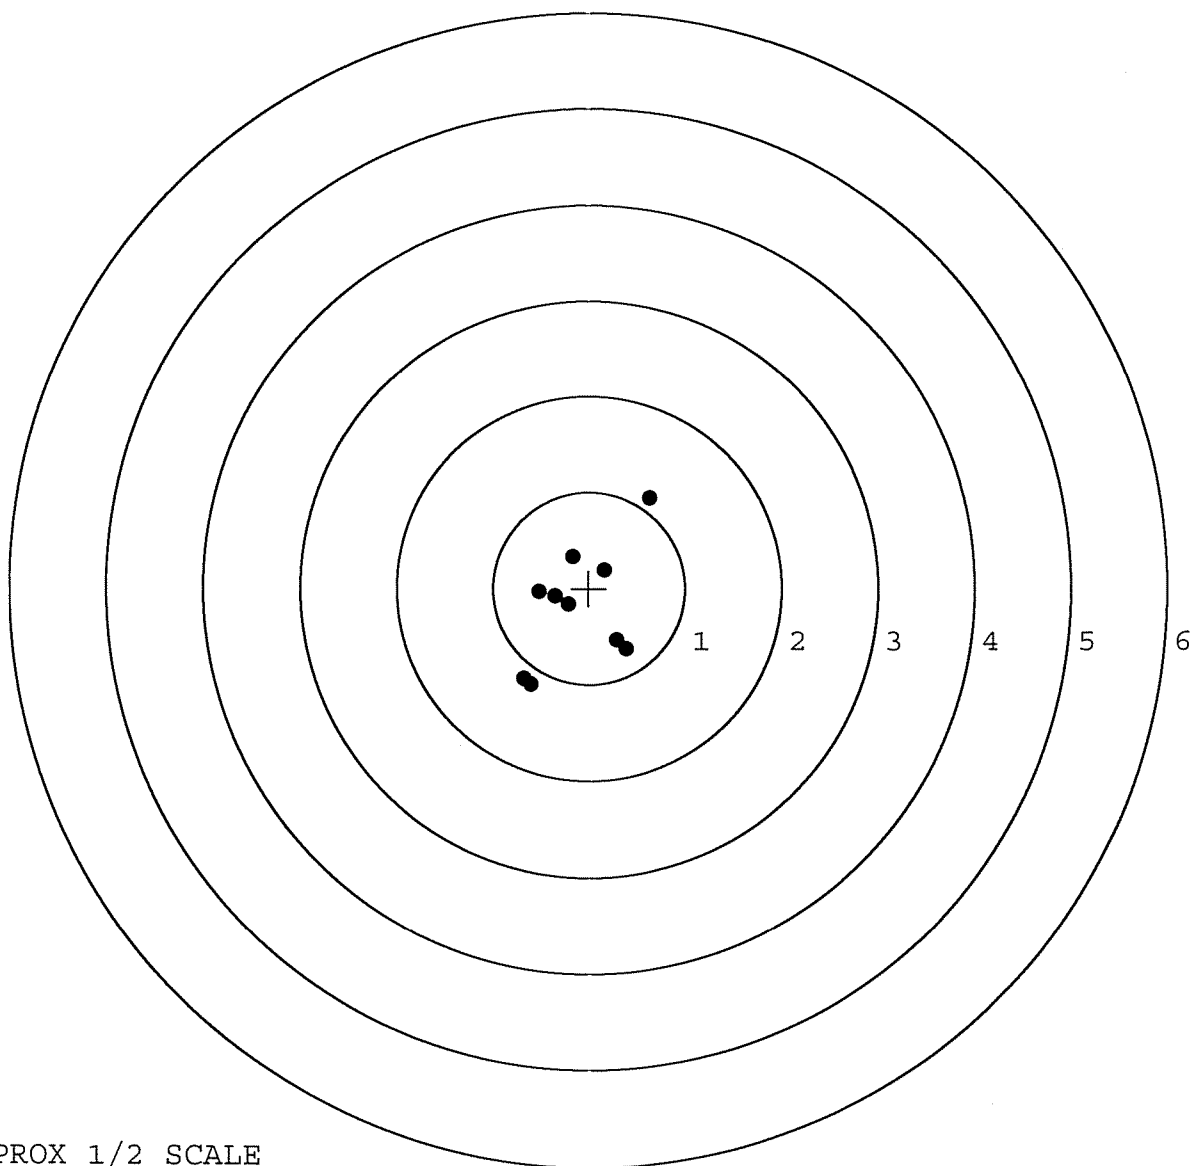

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590152. __0

TARGET NUMBER: 5

FILE DATE: 03/07/2007

FILE TIME: 14:08

X CENTROID: -0.043

Y CENTROID: 0.174

POA TO CENTROID: 0.180

HORZ SPREAD: 1.456

VERT SPREAD: 2.489

GROUP SPREAD: 2.828

MIN RADIUS: 0.570

MAX RADIUS: 1.548


MEAN RADIUS: 1.041

IN 1 IN DIAMETER: 0

IN 2 IN DIAMETER: 5

in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.701	-0.875
2:	0.392	-0.940
3:	0.468	-0.653
4:	-0.001	-0.781
5:	0.458	-0.097
6:	-0.556	-0.086
7:	-0.102	0.812
8:	-0.352	1.478
9:	-0.755	1.549
10:	-0.683	1.337

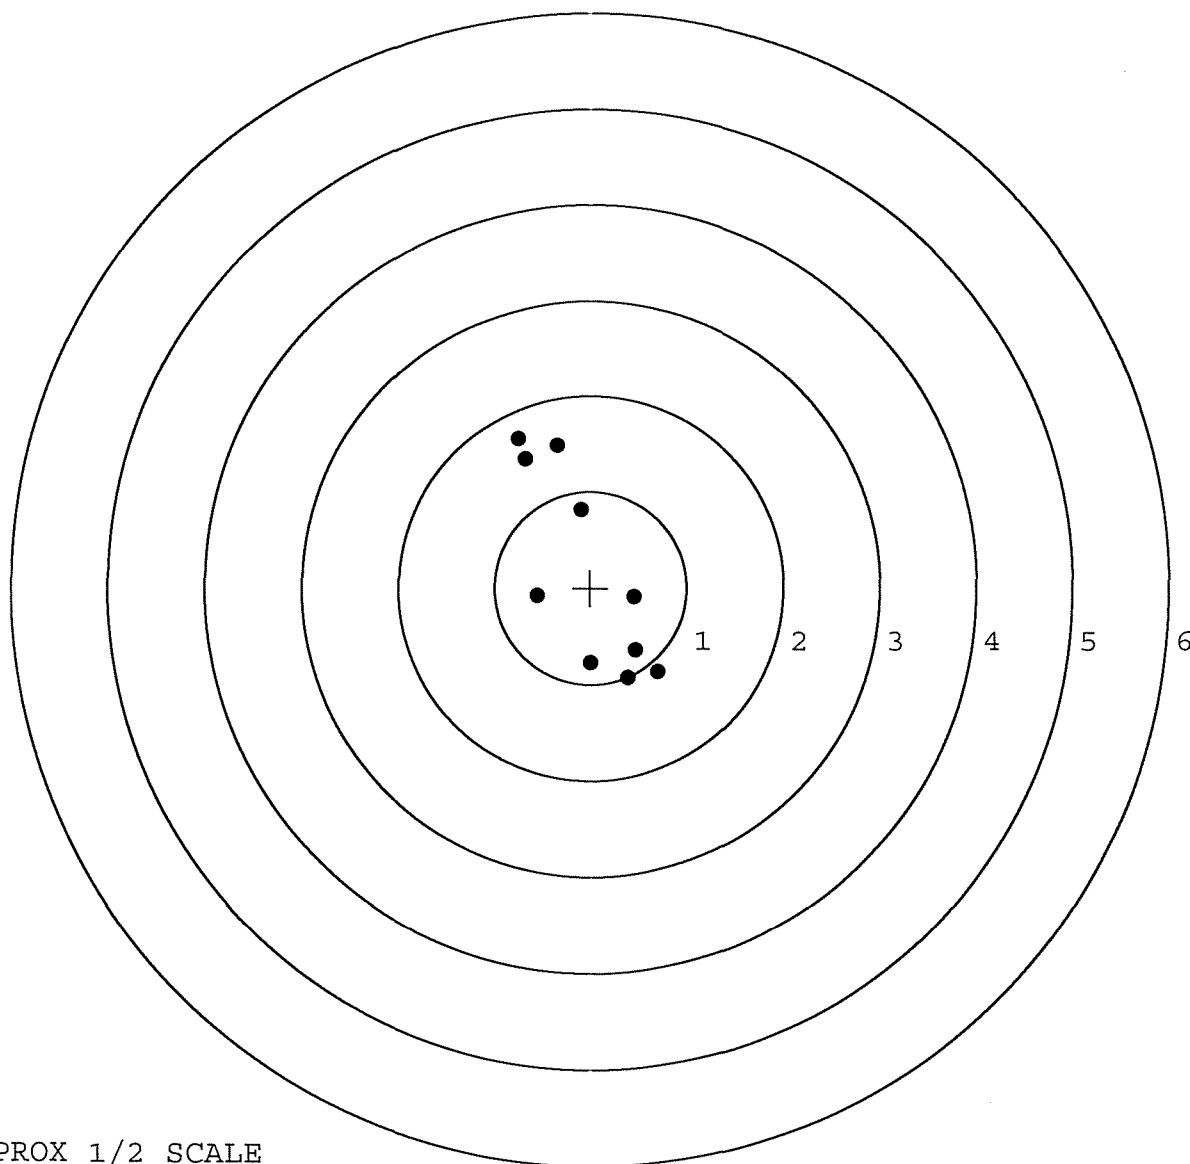


TARGET APPROX 1/2 SCALE

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 1/19/07

Model: M/24
 Serial No: Form #F005
 Trigger: 2.5 lbs. ini. +/- .50 lbs.

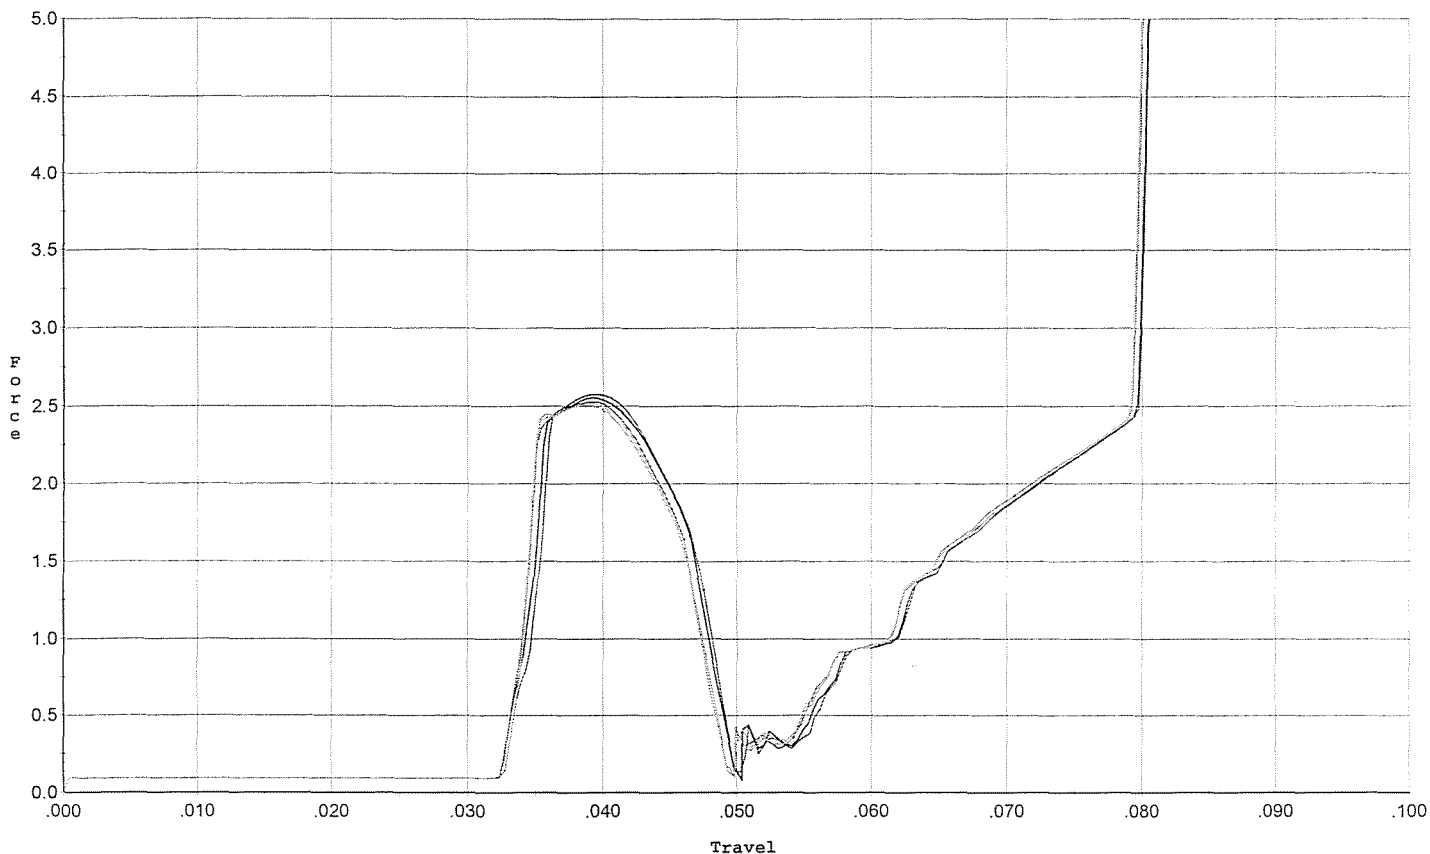


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.578	0.047	0.033	0.037	0.033		Set Trigger
2	2.555	0.046	0.033	0.037	0.032		Set Trigger
3	2.529	0.046	0.033	0.038	0.031		Set Trigger
4	2.518	0.048	0.033	0.037	0.032		Set Trigger
5	2.507	0.046	0.033	0.037	0.031		Set Trigger

AVG 2.53

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs. after 50 cycles +/- .50 lbs.

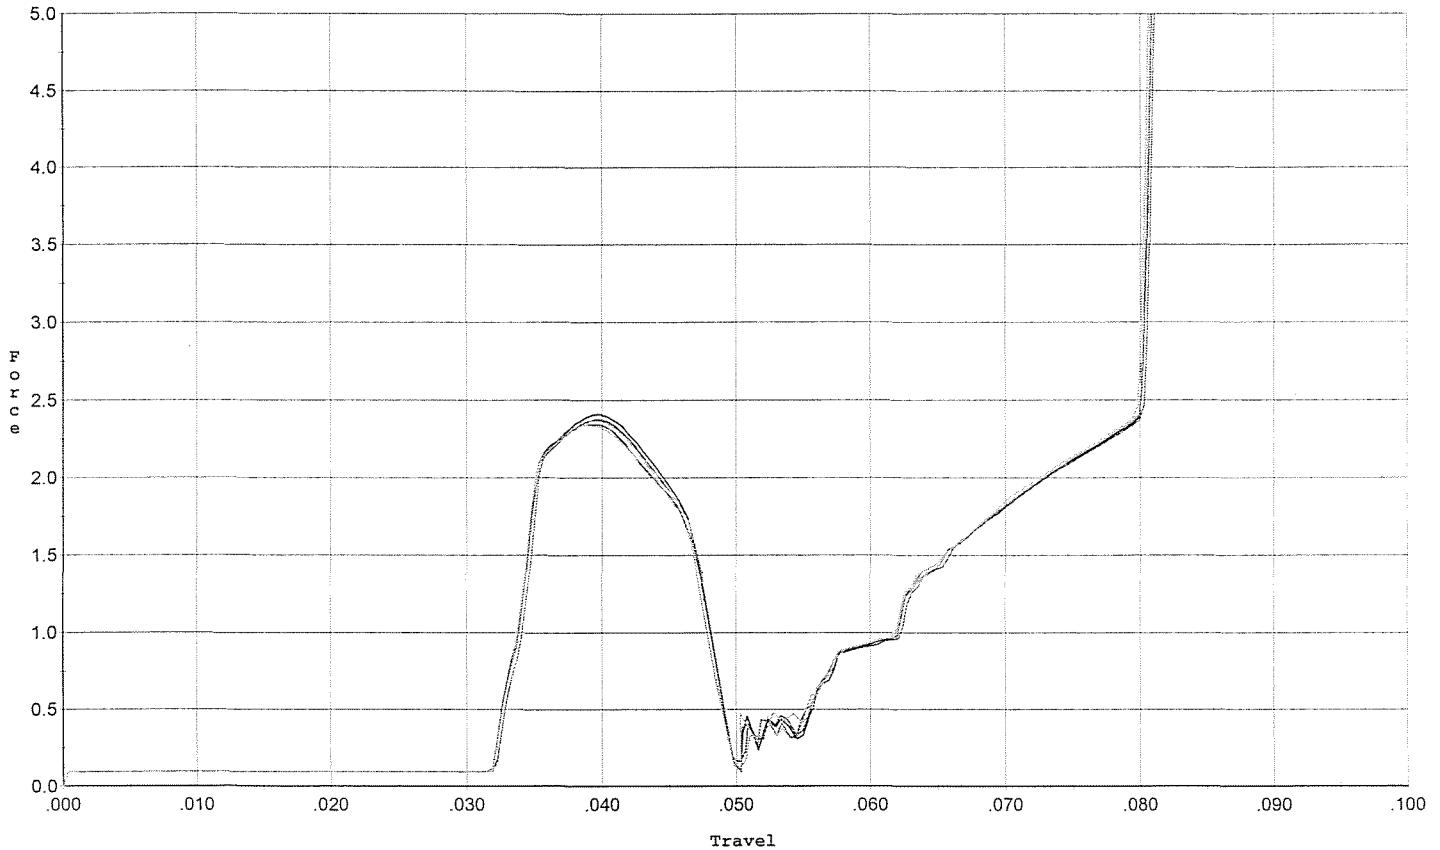


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.374	0.047	0.032	0.038	0.032		Set Trigger
2	2.411	0.048	0.032	0.037	0.033		Set Trigger
3	2.347	0.047	0.032	0.038	0.031		Set Trigger
4	2.344	0.047	0.032	0.038	0.031		Set Trigger
5	2.370	0.047	0.032	0.038	0.032		Set Trigger

AVG 2.36

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 1/19/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. ini. +/- .75 lbs.

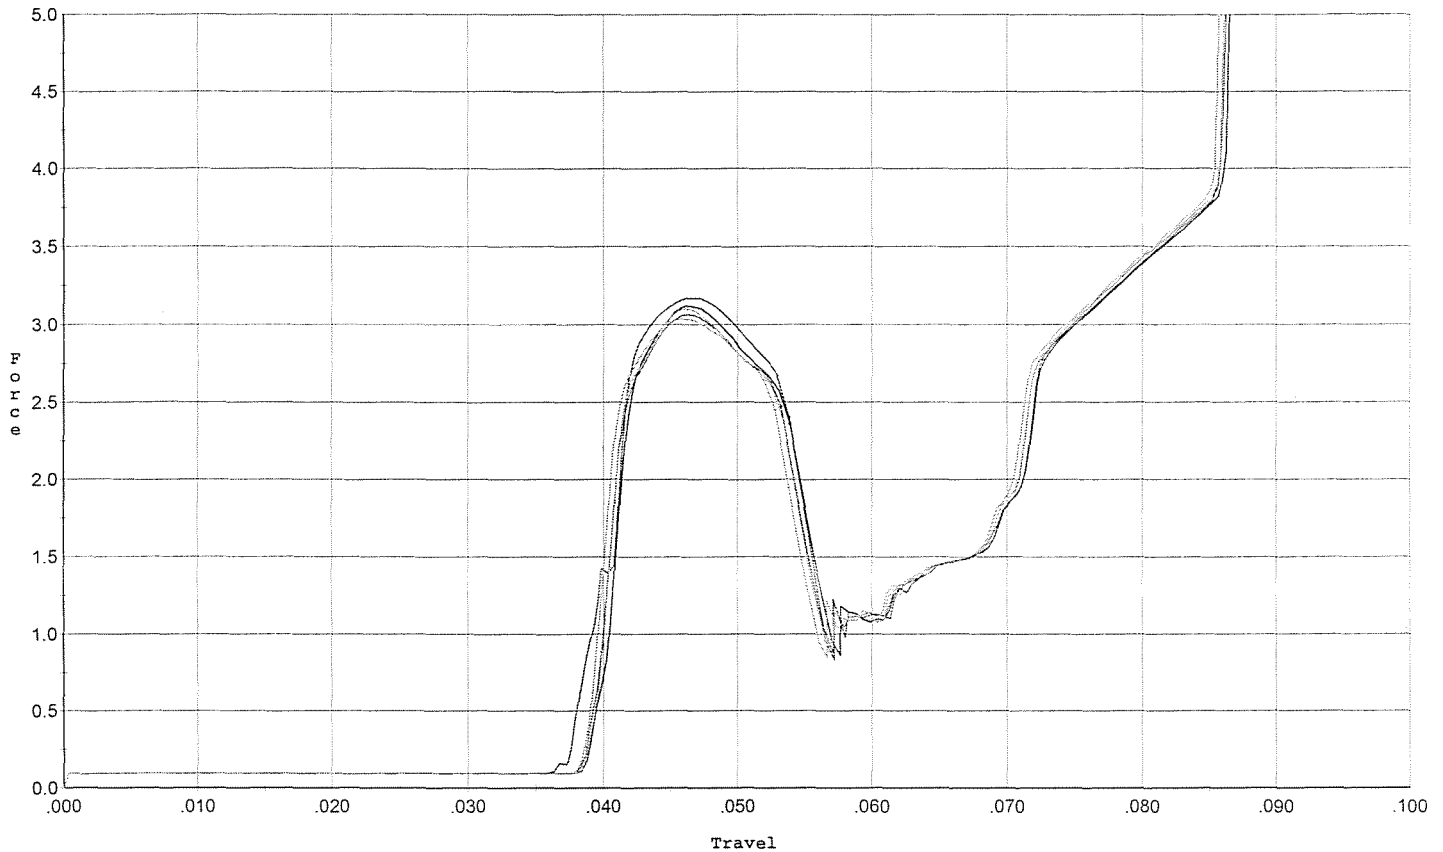


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.169	0.054	0.038	0.038	0.046		Set Trigger
2	3.120	0.054	0.039	0.038	0.044		Set Trigger
3	3.065	0.053	0.039	0.039	0.043		Set Trigger
4	3.101	0.053	0.039	0.039	0.043		Set Trigger
5	3.034	0.053	0.038	0.039	0.042		Set Trigger

Avg. 3.09

Trigger Profile [lbs,inch]

Profile: SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putch 1/19/07

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs. after 20 cycles +/- .75 lbs.

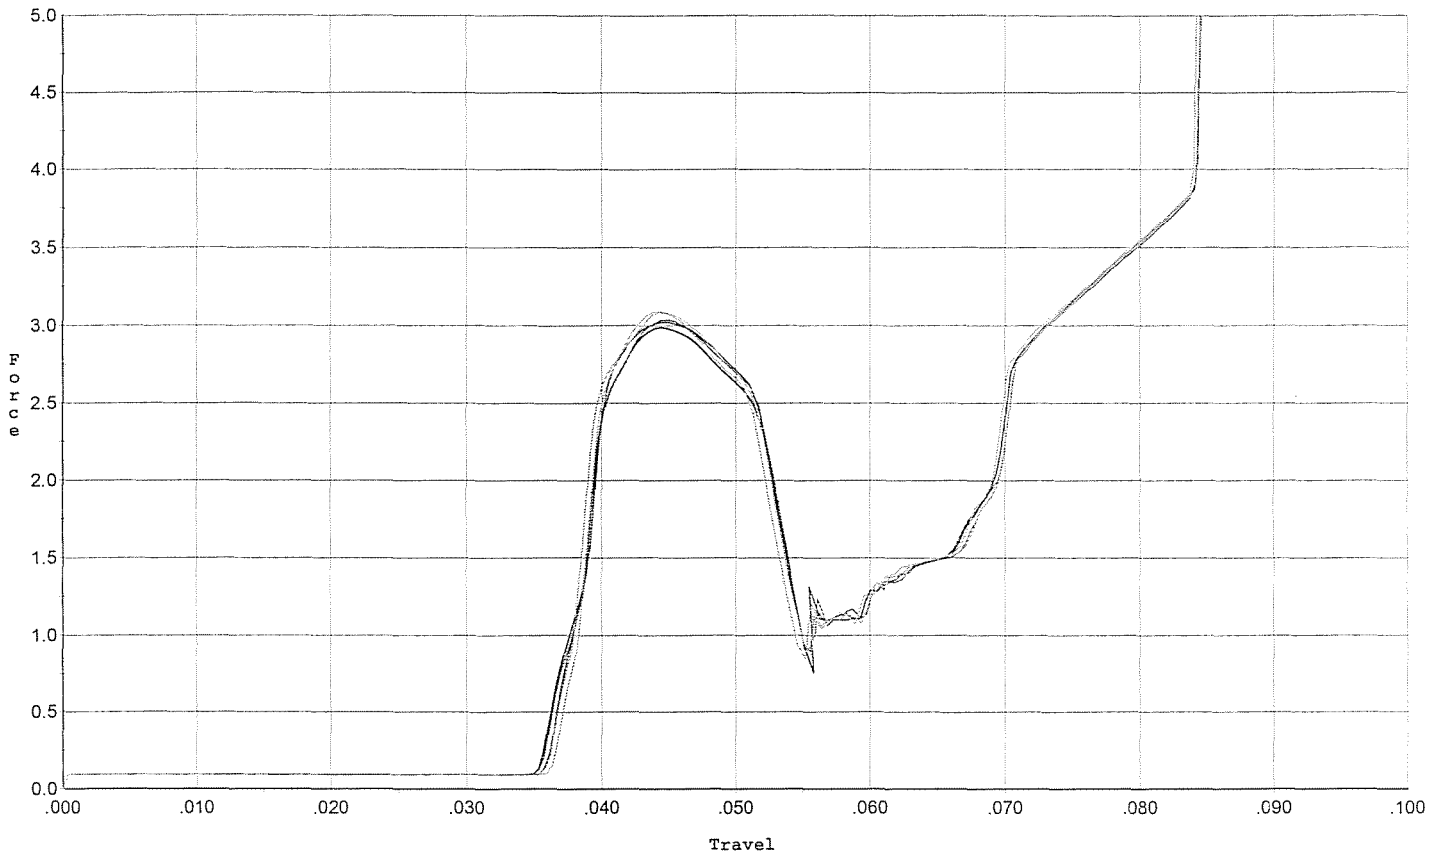


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.021	0.052	0.036	0.038	0.043		Set Trigger
2	2.989	0.052	0.036	0.037	0.043		Set Trigger
3	3.034	0.053	0.036	0.037	0.045		Set Trigger
4	3.090	0.052	0.037	0.037	0.044		Set Trigger
5	3.086	0.051	0.036	0.038	0.043		Set Trigger

Avg 3.04

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs. ini. +/- 1.0 lbs.

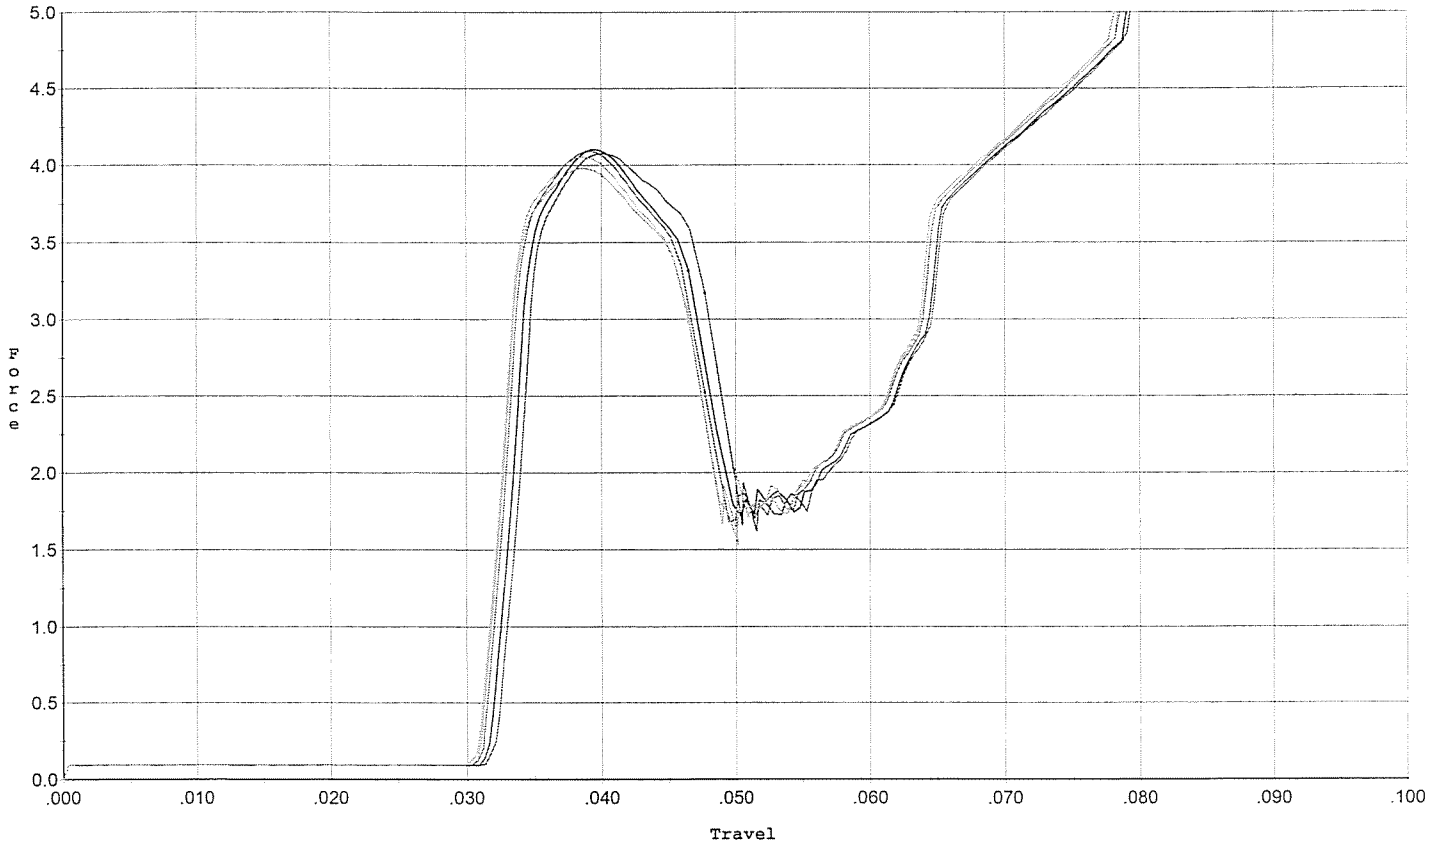


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.074	0.048	0.032	0.034	0.059		Set Trigger
2	4.102	0.046	0.032	0.034	0.056		Set Trigger
3	4.092	0.048	0.031	0.033	0.059		Set Trigger
4	4.052	0.046	0.031	0.033	0.058		Set Trigger
5	3.981	0.046	0.031	0.033	0.057		Set Trigger

AVG 4.06

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putsch 1/19/07

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs. after 20 cycles +/- 1.0 lbs.

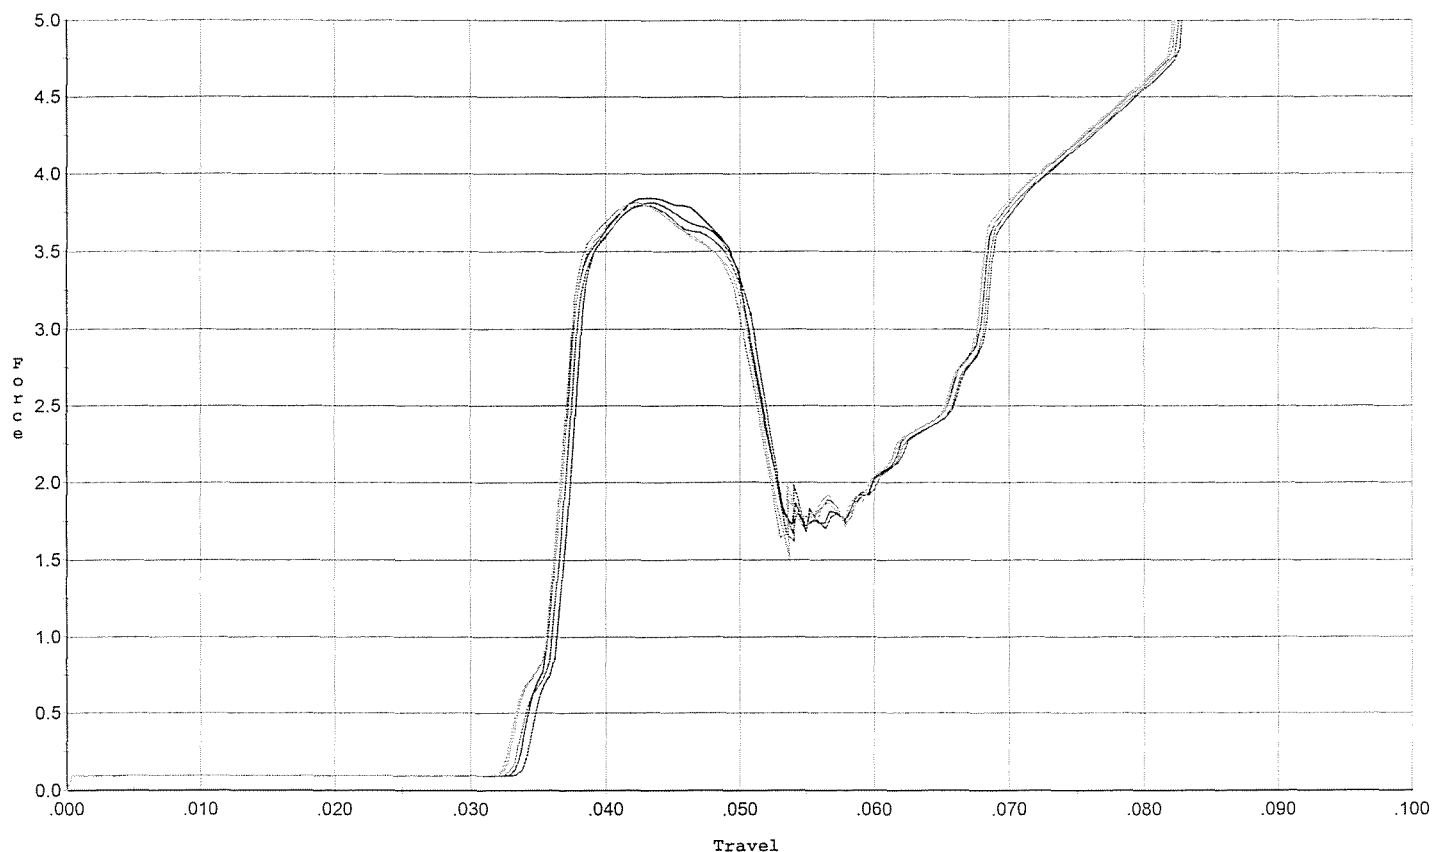


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.815	0.051	0.034	0.036	0.057		Set Trigger
2	3.845	0.050	0.034	0.036	0.057		Set Trigger
3	3.799	0.052	0.033	0.035	0.058		Set Trigger
4	3.799	0.050	0.033	0.036	0.057		Set Trigger
5	3.812	0.051	0.033	0.036	0.058		Set Trigger

Aug 3.81

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: R. Putsch 1/19/07

Model: M/24
 Serial No: Form #F005
 Trigger: reset to 2.5 lbs. +/- .50 lbs. for final test

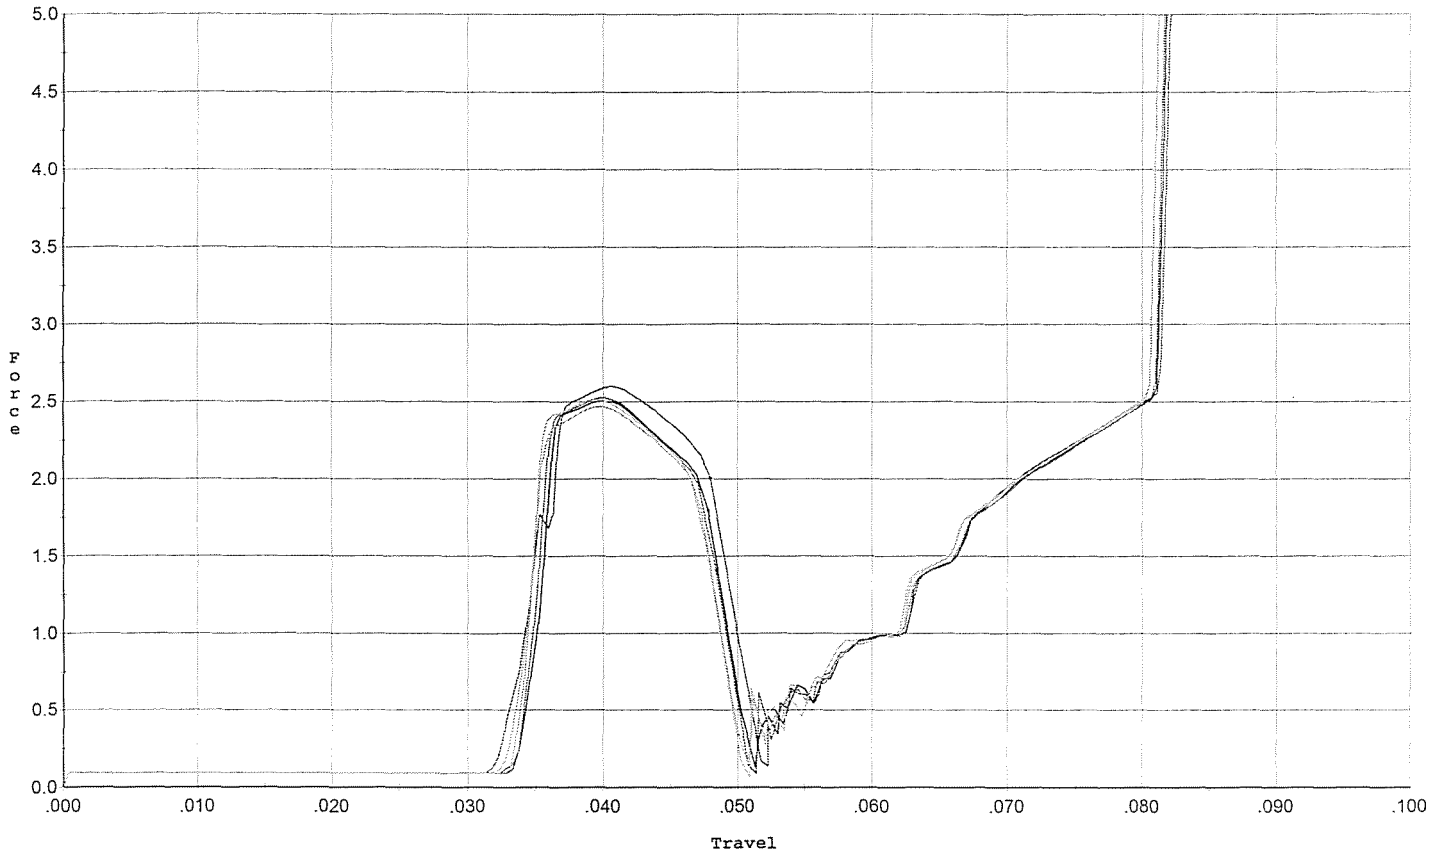


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.601	0.048	0.032	0.037	0.037		Set Trigger
2	2.503	0.048	0.034	0.037	0.034		Set Trigger
3	2.526	0.048	0.034	0.037	0.034		Set Trigger
4	2.514	0.048	0.033	0.037	0.034		Set Trigger
5	2.469	0.047	0.033	0.037	0.033		Set Trigger

AVG 2.52

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: R. Putch 1/19/07

Model: M/24
Serial No: Form #F005
Trigger: set to 4.0 lbs. +/- 1.0 lbs. for target & accuracy

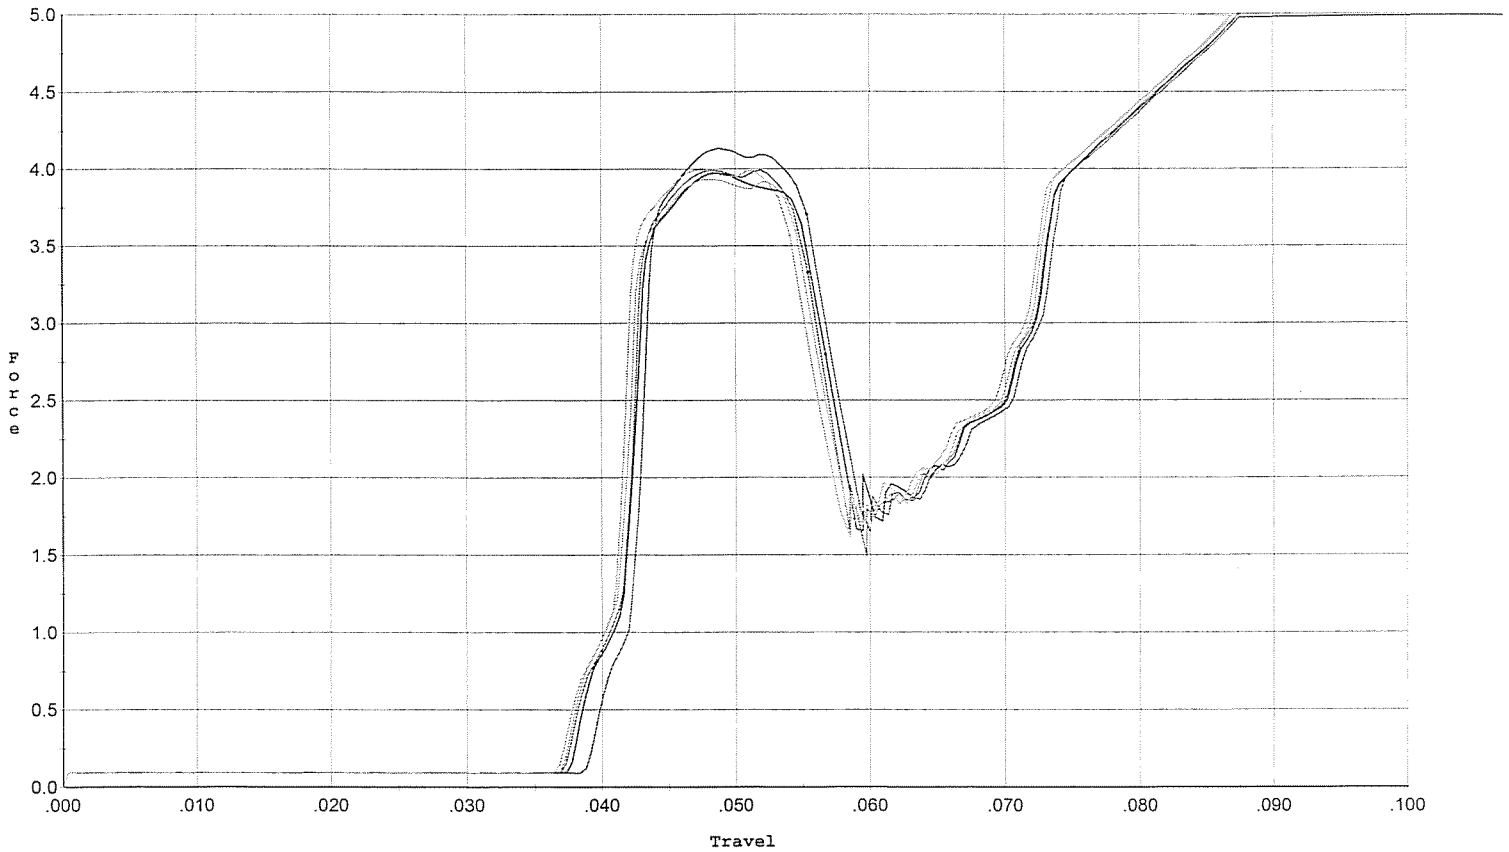

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.133	0.055	0.039	0.036	0.061		Set Trigger
2	3.973	0.057	0.038	0.036	0.063		Set Trigger
3	3.991	0.055	0.038	0.036	0.061		Set Trigger
4	3.934	0.055	0.037	0.037	0.060		Set Trigger
5	3.996	0.054	0.037	0.037	0.060		Set Trigger

Avg 4.00

R & E NUMBER	124985			
SERIAL NUMBER	66413458 66590152 (New)			
LOG-IN DATE	2-7-07			
OPERATION #	OPERATION NAME		DATE	INITIAL
500	DIS-ASSEMBLE GUN		2-13-07	RTZ
505	RE-BARREL		2-16-07	RTZ
560	ASSEMBLE		2-16-07	TRW
600	PROOF		2-16-07	Fm
605	CHECK HEADSPACE	INSPECTED	2-16-07	Fm
610	DIS-ASSEMBLE GUN	FEB 20 2007	2-16-07	RTZ
612	MAGNAFLUX	OPERATOR APD	2-20-07	APD
510	DRILL AND TAP		2-19-07	TRW
615	ROLLMARK CALIBER		2-19-07	CW
618	ROTO-BLAST		2-20-07	LB
620	APPLY COATINGS		2-20-07	WJ
625	FINAL ASSEMBLY		3-6-07	RTZ
640	FUNCTION TEST AND	PASS FAIL	3-6-07	APD
650	TARGET	PASS FAIL	3-6-07	APD
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
	MALFUNCTION	CORRECTION		
670	FINAL INSPECTION		3-9-07	RTZ
	A) HEADSPACE	PASS FAIL	3-9-07	RTZ
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	2.64 2.49 2.22 2.28 2.32 3-8-07	TRW
680	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	6.25 6.25 6.25 3-8-07	TRW
	G) SAFETY OFF FORCE	2 LBS MIN	3.0 3.0 2.75 3-8-07	TRW
	I) FIRING PIN INDENT	.020	.0235 .024 .0245 3-8-07	TRW
690	PACK		3-9-07	RTZ

Repair Inquiry

Repair Number: **RE00084162**Serial: E6413458 Model M24 SWS CenterFire
Caliber: 7.62 NATO

Repairman:

Verify Repair

Status:

Closed 8/24/2004 8:09:16 AM

Address Information

Customer:

☒ Received From

Return To:

☐ Received FromName: **TRANSPORTATION OFFICE****TRANSPORTATION OFFICE**Address 1: **BLDG 330****BLDG 330**Address 2: **4885 CHILES AVE**

P.O. Box:

4885 CHILES AVE

P.O. Box:

City: **FORT CARSON****FORT CARSON**State: **CO**Zip Code: **80913**Country: **US**State: **CO**Zip Code: **80913**Country: **US**

FFL:

Contact / Condition

Problems

Estimate

History / Status

Shipping / Billing

Contact Information

Phone:

Fax:

Email:

Comments:

Received Condition

Fair

Condition
Notes:CSR
Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	2
A010	Hard Case	1
A016	Scope Rings	2
A017	Scope Base	1
A026	Scope	1
A042	Adjustable Butt Pad	1

Repair Search

Refresh

Close

nagletj

8/24/2004

9:36 AM

CAPS

NUM

INS

SCRL

start

3

Arms Services

4

2

1

1

Serial Number: **E6413458**Model: **M24 SWS****RE00084162**

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413458.___0
FILE DATE AND TIME: 09/10/2004 06:09


THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.142
The Average Y Centroid of the Five Target Set:	-0.227
The Average Point of Impact of the Five Target Set:	0.268
The Average Mean Radius of the Five Target Set:	0.621
The Distance from POA to Centroid Target #1:	0.206
The Distance from Centroid Target #2 to Centroid Target #1:	0.067
The Distance from Centroid Target #3 to Centroid Target #1:	0.206
The Distance from Centroid Target #4 to Centroid Target #1:	0.625
The Distance from Centroid Target #5 to Centroid Target #1:	0.132

SERIAL NUMBER: E6413458. __0
 TARGET NUMBER: 1
 FILE DATE: 09/10/2004
 FILE TIME: 06:09

X CENTROID: -0.049
 Y CENTROID: -0.200
 POA TO CENTROID: 0.206
 HORZ SPREAD: 1.722
 VERT SPREAD: 1.884
 GROUP SPREAD: 2.103
 MIN RADIUS: 0.065
 MAX RADIUS: 1.403
 MEAN RADIUS: 0.692
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.776	-1.335
2:	0.182	-1.350
3:	-0.040	0.534
4:	-0.270	0.431
5:	-0.646	-0.055
6:	-0.946	-0.127
7:	-0.247	0.135
8:	0.525	-0.029
9:	0.221	0.057
10:	-0.049	-0.265

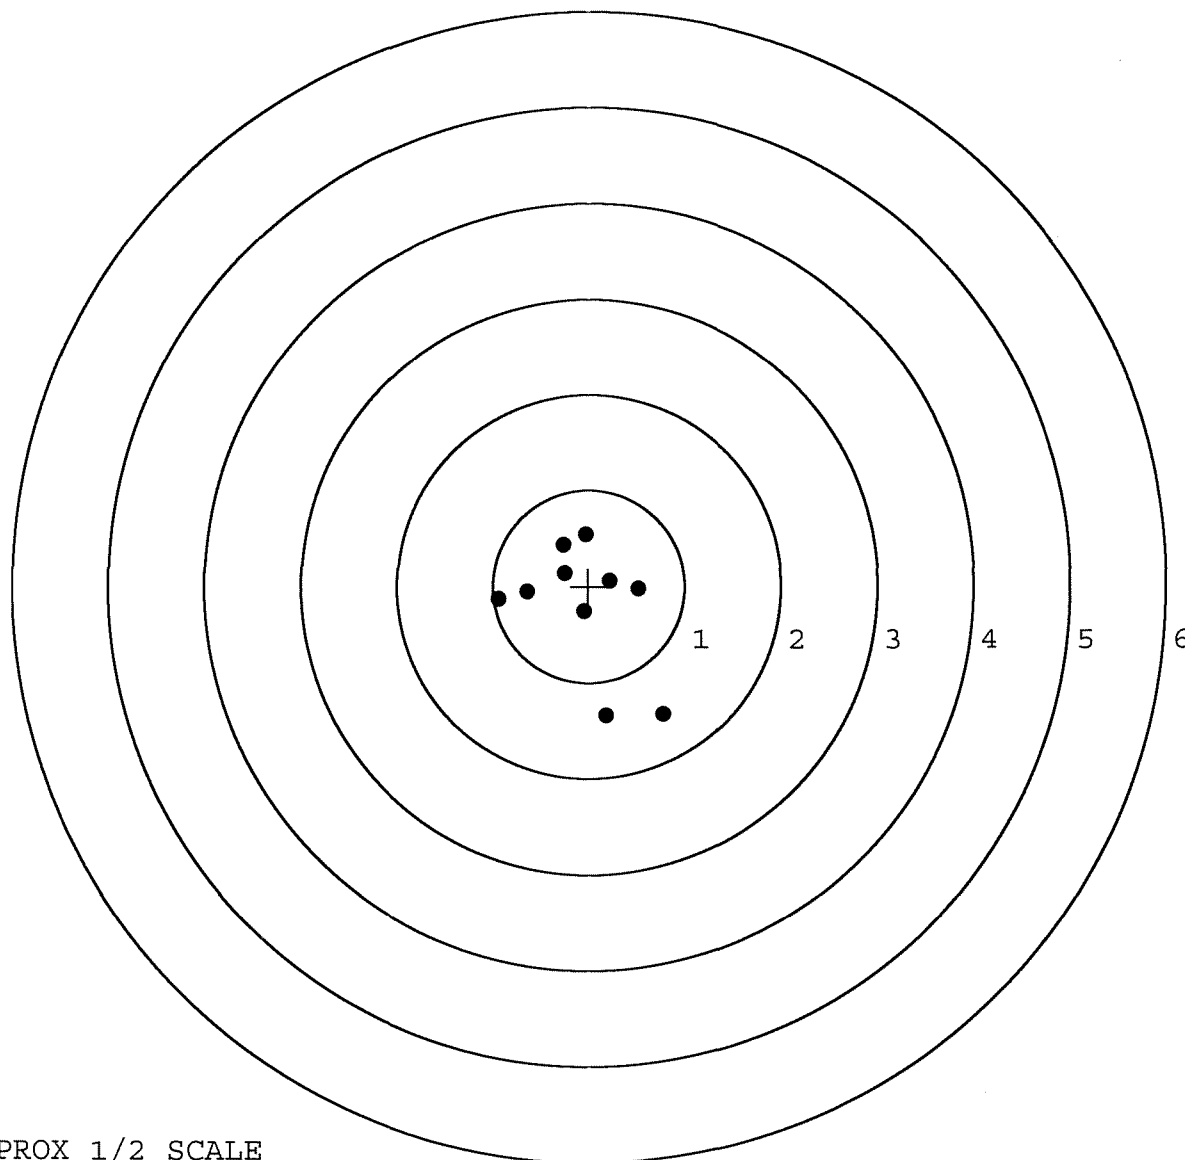


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. 0
 TARGET NUMBER: 2
 FILE DATE: 09/10/2004
 FILE TIME: 06:09

X CENTROID: -0.056
 Y CENTROID: -0.133
 POA TO CENTROID: 0.145
 HORZ SPREAD: 1.585
 VERT SPREAD: 1.743
 GROUP SPREAD: 1.706
 MIN RADIUS: 0.366
 MAX RADIUS: 1.023
 MEAN RADIUS: 0.650
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

POINT#	X	Y
1:	0.924	-0.425
2:	0.671	-0.123
3:	-0.327	-1.045
4:	-0.014	-0.497
5:	-0.260	-0.471
6:	-0.537	-0.331
7:	0.066	0.214
8:	-0.661	0.206
9:	-0.295	0.440
10:	-0.128	0.698

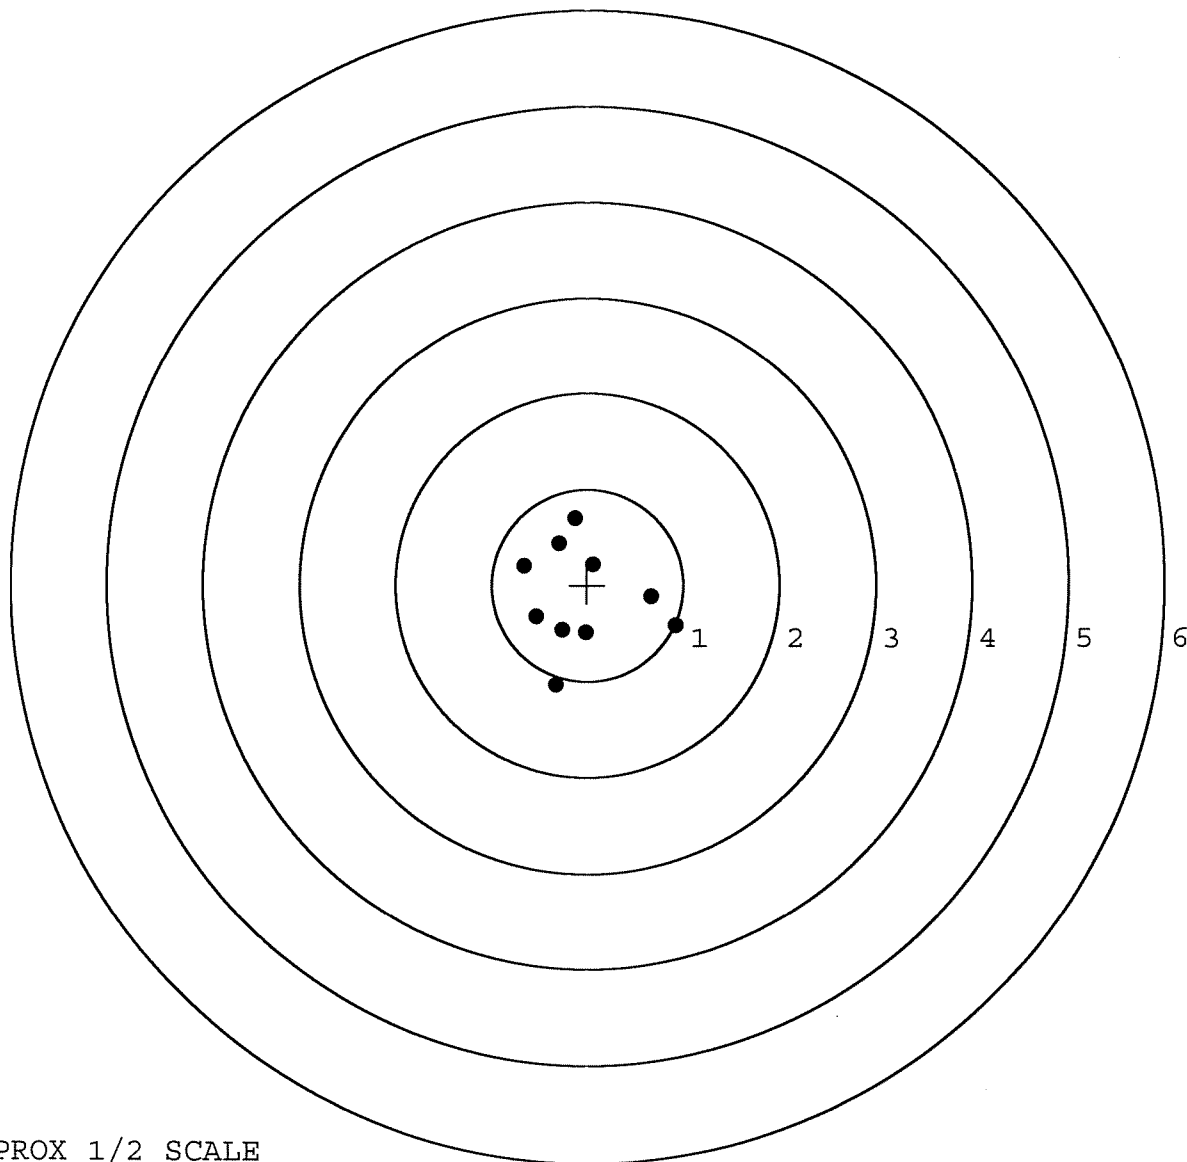


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. __0
 TARGET NUMBER: 3
 FILE DATE: 09/10/2004
 FILE TIME: 06:09

POINT#	X	Y
1:	0.337	-0.789
2:	0.671	-0.218
3:	0.117	-0.332
4:	-0.581	-0.415
5:	-0.265	0.065
6:	-0.540	0.017
7:	-1.224	0.117
8:	-0.180	0.599
9:	0.103	0.525
10:	0.367	0.361

X CENTROID: -0.120
 Y CENTROID: -0.007
 POA TO CENTROID: 0.120
 HORZ SPREAD: 1.895
 VERT SPREAD: 1.388
 GROUP SPREAD: 1.924
 MIN RADIUS: 0.162
 MAX RADIUS: 1.111
 MEAN RADIUS: 0.623
 # IN 1 IN DIAMETER: 3
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

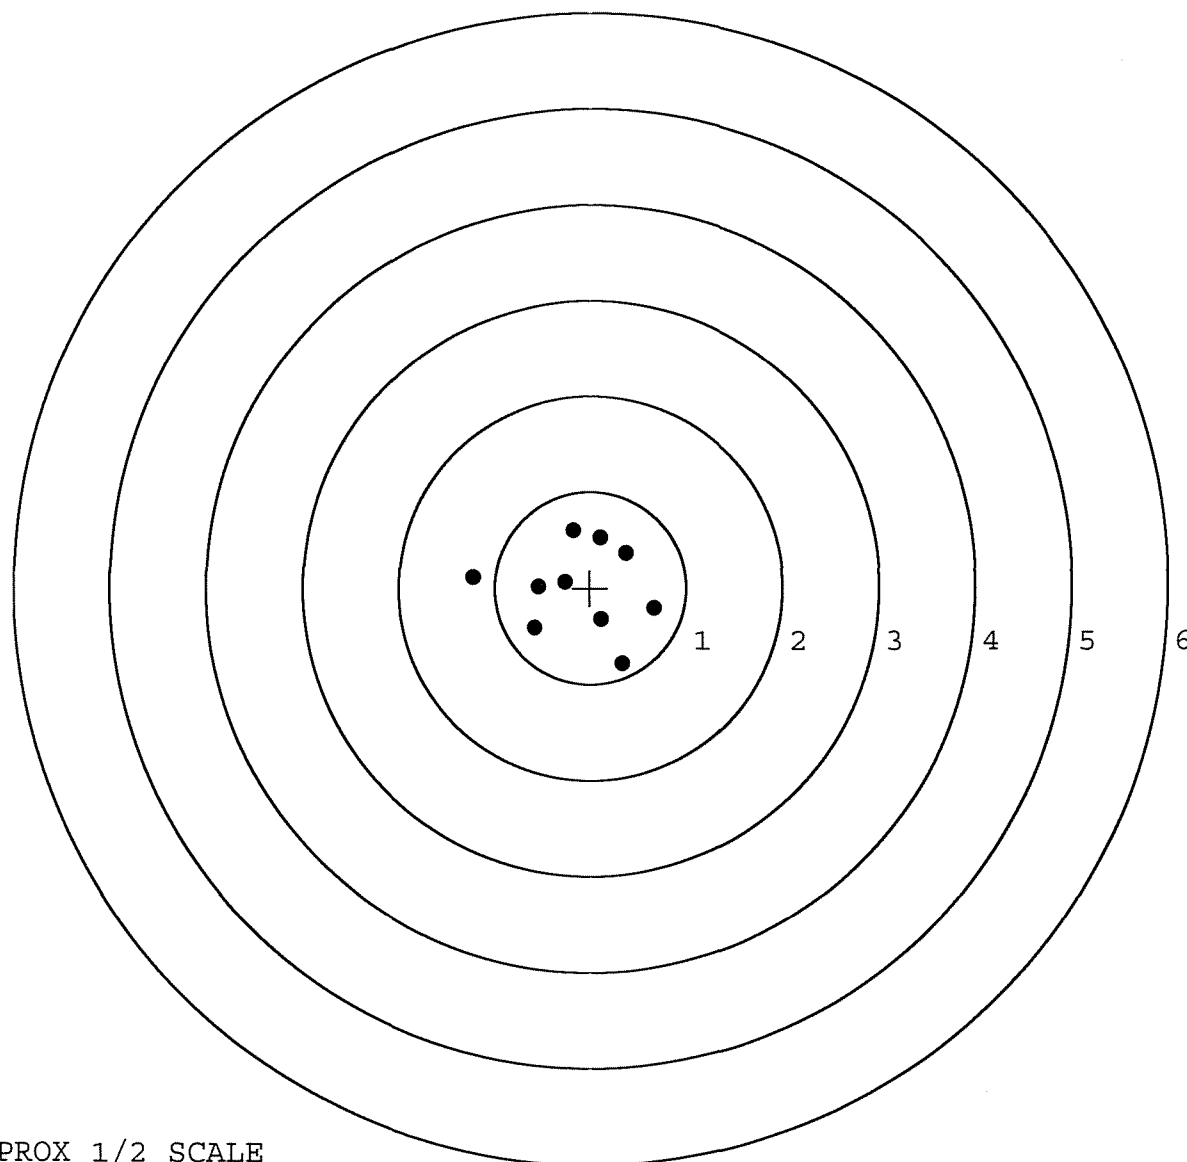

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. __0


TARGET NUMBER: 4

FILE DATE: 09/10/2004

FILE TIME: 06:09

X CENTROID: -0.399
Y CENTROID: -0.719
POA TO CENTROID: 0.822
HORZ SPREAD: 1.305
VERT SPREAD: 0.980
GROUP SPREAD: 1.340
MIN RADIUS: 0.072
MAX RADIUS: 0.685
MEAN RADIUS: 0.445
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.177	-0.658
2:	0.254	-0.927
3:	-0.054	-0.841
4:	-0.413	-0.361
5:	-0.725	-0.449
6:	-1.051	-0.622
7:	-0.927	-0.951
8:	-0.512	-0.980
9:	-0.338	-0.680

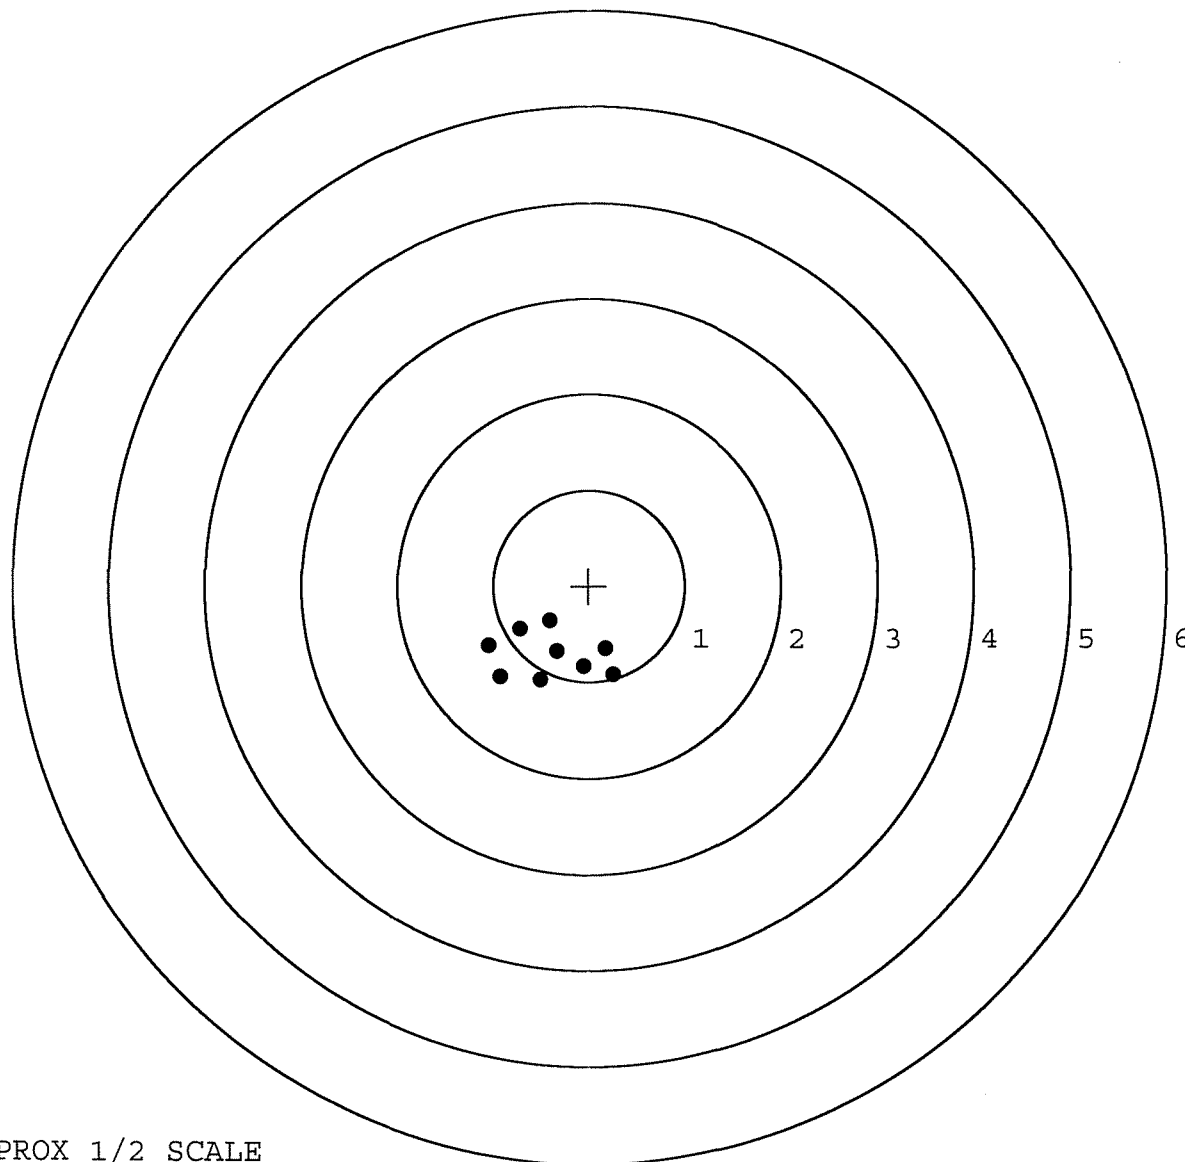


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: E6413458. __0
 TARGET NUMBER: 5
 FILE DATE: 09/10/2004
 FILE TIME: 06:09

X CENTROID: -0.088
 Y CENTROID: -0.074
 POA TO CENTROID: 0.115
 HORZ SPREAD: 1.914
 VERT SPREAD: 2.252
 GROUP SPREAD: 2.898
 MIN RADIUS: 0.174
 MAX RADIUS: 1.817
 MEAN RADIUS: 0.694
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 9

POINT#	X	Y
1:	-1.432	1.148
2:	-0.817	-0.126
3:	-0.434	-0.068
4:	-0.031	0.090
5:	0.320	0.166
6:	0.375	0.489
7:	0.482	-0.479
8:	0.218	-0.521
9:	0.045	-0.340
10:	0.392	-1.104

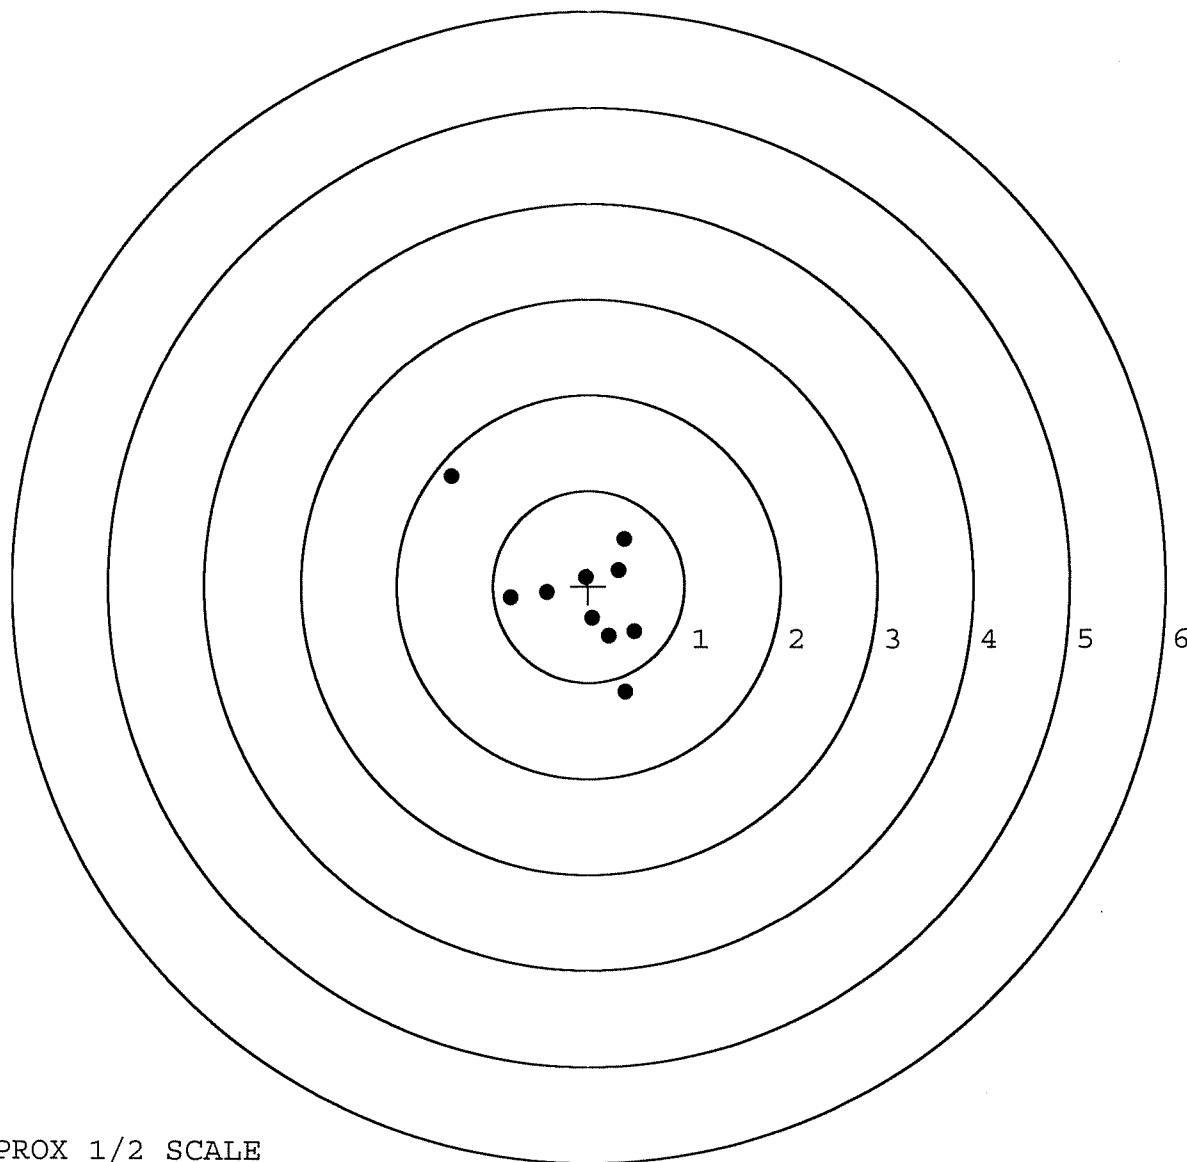

TARGET APPROX 1/2 SCALE

R & E NUMBER	84162		
SERIAL NUMBER	E6413458		
LOG-IN DATE	8-24-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-26-04	RTL
560 A	RE-BARREL	8-26-04	RTL
B	DRILL AND TAP	9-1-04	TRW
575	ASSEMBLE	8-26-04	RTL
600	PROOF	8-30-04	RTL
605	CHECK HEADSPACE	8-31-04	RTL
610	DIS-ASSEMBLE GUN	8-31-04	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	9/3/04	LB
618	ROTO-BLAST	9-3-04	LB
620	APPLY COATINGS	9/7/04	HP
625 A	FINAL ASSEMBLY	9-9-04	RLW
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	9-10-04	AC
655	FINAL INSPECT	9-13-04	RT
660	PACK	10-4-04	DA
		SHIP DATE	
	QAR INSPECTION DATE		

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00023597** Serial: **C6498871** Model: **700** Center Fire Caliber: **7.62 NATO M-24 (SW/S)** Repairman:
 Verify Repair Status: **New 2/26/01 11:35:51 AM**

Address Information

Customer ☒ Received From ☒ Return To: ☒ Received From ☒

Name: **COMMANDER** **COMMANDER**
 Address 1: **B CO 1/8 INF** **B CO 1/8 INF**
 Address 2: **ATTN: SUPPLY BLDG 2057** **ATTN: SUPPLY BLDG 2057** PO Box:
 City: **FT CARSON** **FT CARSON**
 State: **CO** Zip Code: **80913** Country: **US** State: **CO** Zip Code: **80913** Country: **US**

FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition **Problems** **Estimate** **History / Status** **Shipping / Billing**

Contact Information

Phone:
 Fax:
 Email:
 Comments:

Received Condition

Pool:
 Condition:
 Notes:
 CSR:
 Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A016	Scope Mounts	1
A017	Scope Base	1
A026	Scope	1

Repair Search **Refresh** **Close**

haglet 2/26/01 11:50 AM CAPS NUM INS SCRL

Start Inb Na ML RE Pa Ex My Ar NI 11:50 AM

Serial Number:

C6498871Model: **700****RE00023597****E6413458**

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6413458
11 Apr 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.0354
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2848
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .286992

THE AMR FOR THIS RIFLE IS: 1.159

CENTROIDAL DISTANCES

0	TO	1	.655369
1	TO	2	.762378
1	TO	3	.611465
1	TO	4	.15959
1	TO	5	.639212

²
3+ <----POA

¹
4

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .655

MIN RADIUS : .586

MEAN RADIUS : 1.384

MAX RADIUS : 2.901


CENTROID X : -.022

CENTROID Y : -.655

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 1

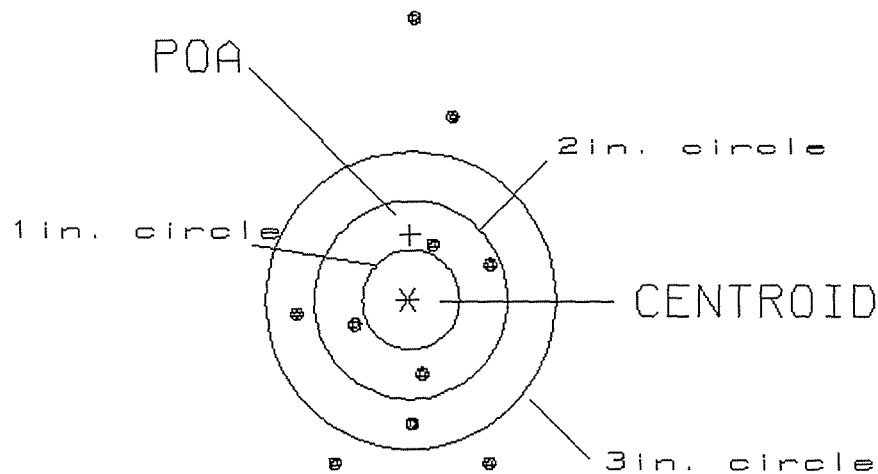

OF SHOTS= 10

IN CIRCLE

HS= 2.05

0

VS= 4.59

4

GS= 4.66

6


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .107
 MIN RADIUS : .110
 MEAN RADIUS : 1.019
 MAX RADIUS : 1.954
 CENTROID X : .002
 CENTROID Y : .107

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 2

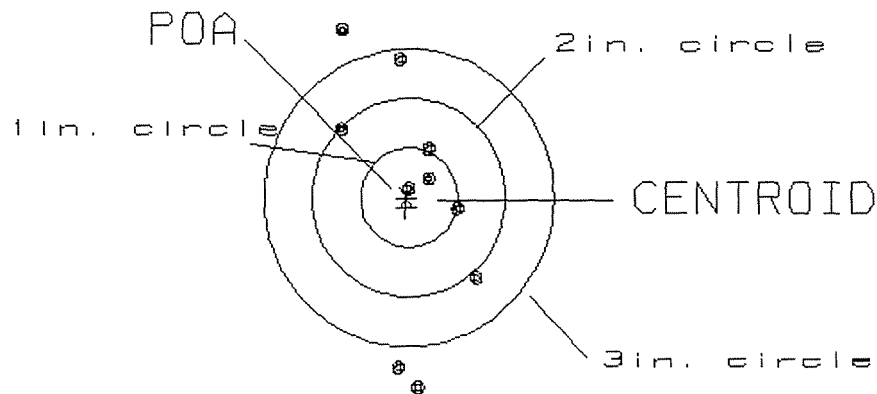

OF SHOTS= 10

IN CIRCLE

HS= 1.44

4

VS= 3.60

4

GS= 3.70


7

PATTERN #: ☐ 3 ☐
 POA TO CENTROID: .099
 MIN RADIUS : .066
 MEAN RADIUS : .988
 MAX RADIUS : 1.521
 CENTROID X : -.087
 CENTROID Y : -.047

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 3

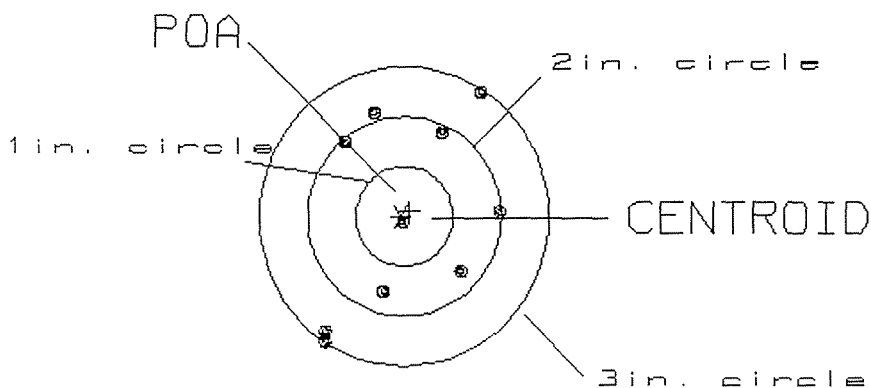

OF SHOTS= 10

IN CIRCLE

HS= 1.86

1

VS= 2.50

5

GS= 2.98

9

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .811

MIN RADIUS : .438

MEAN RADIUS : 1.386

MAX RADIUS : 2.922


CENTROID X : .016

CENTROID Y : -.810

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 4

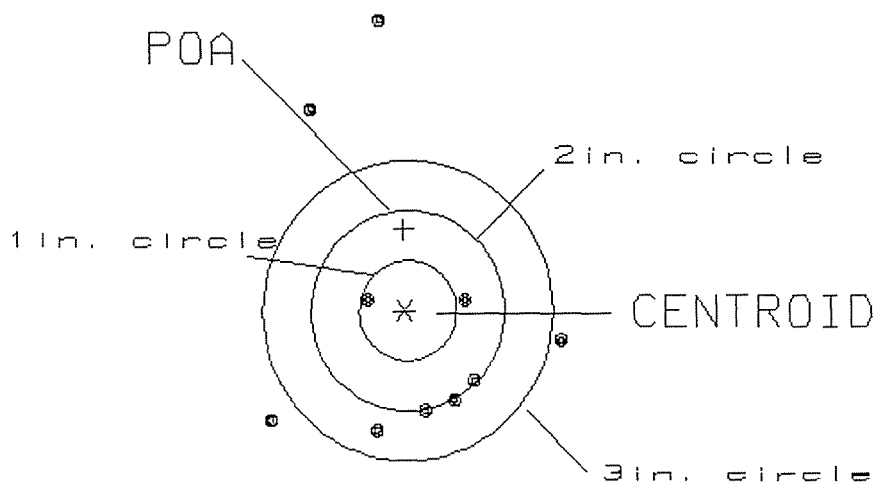

OF SHOTS= 10

IN CIRCLE

HS= 3.00

1

VS= 4.06

3

GS= 4.20

6

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .088

MIN RADIUS : .160

MEAN RADIUS : 1.016

MAX RADIUS : 2.358


CENTROID X : -.086

CENTROID Y : -.019

11 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458.1

CENTERFIRE PATTERN # 5

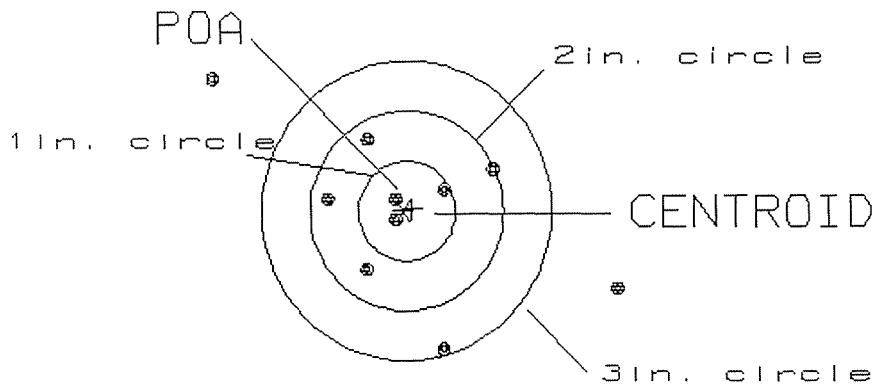

OF SHOTS= 10

IN CIRCLE

HS= 4.13

3

VS= 2.66

7

GS= 4.62

8

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # E6413458
10 Apr 2001

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0732
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0092
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0737759

THE AMR FOR THIS RIFLE IS: 1.38

CENTROIDAL DISTANCES

0 TO	1	.183505
1 TO	2	.0363456
1 TO	3	.353804
1 TO	4	.226179
1 TO	5	.160016

4 + 5
3 <----POA

PATTERN #: ☐ 1 ☐

POA TO CENTROID: .183

MIN RADIUS : .328

MEAN RADIUS : 1.570

MAX RADIUS : 2.720


CENTROID X : .157

CENTROID Y : .095

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG413458

CENTERFIRE PATTERN # 1

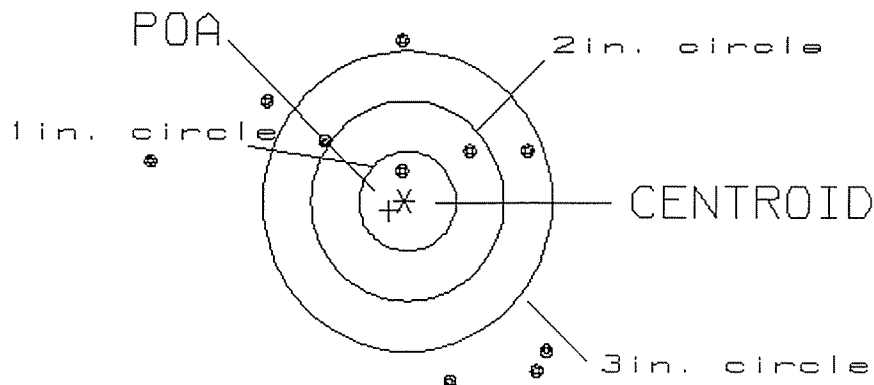

OF SHOTS= 10

IN CIRCLE

HS= 4.13

1

VS= 3.36

2

GS= 4.56

4


PATTERN #: ☐ 2 ☐

POA TO CENTROID: .217
 MIN RADIUS : .423
 MEAN RADIUS : 1.300
 MAX RADIUS : 2.535
 CENTROID X : .193
 CENTROID Y : .100

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 2

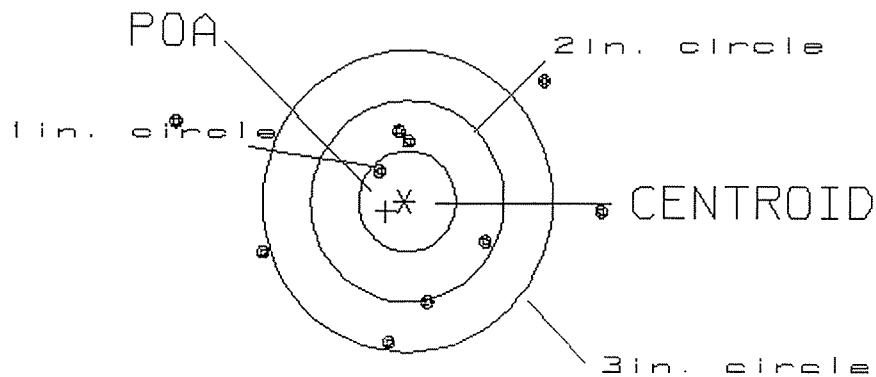

OF SHOTS= 10

IN CIRCLE

HS= 4.40

1

VS= 2.62

4

GS= 4.40

6

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .196

MIN RADIUS : .418

MEAN RADIUS : 1.390

MAX RADIUS : 2.033


CENTROID X : -.054

CENTROID Y : -.189

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 3

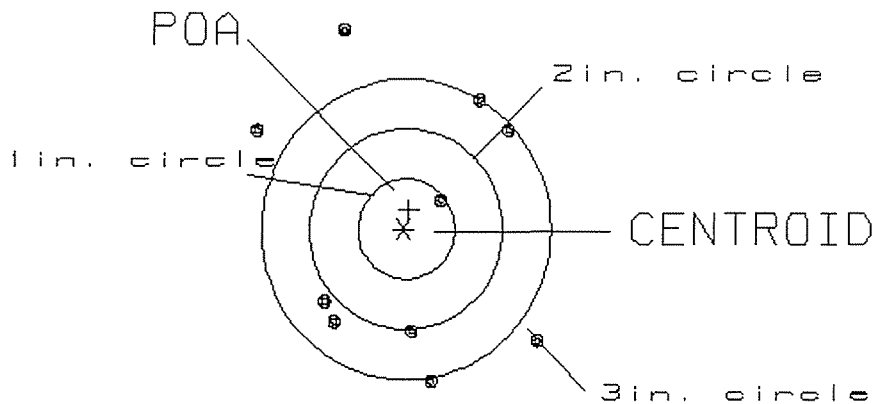

OF SHOTS= 10

IN CIRCLE

HS= 2.93

1

VS= 3.49

1

GS= 3.65

6

PATTERN #: ☐ 4 ☐

POA TO CENTROID: .124

MIN RADIUS : .375

MEAN RADIUS : 1.318

MAX RADIUS : 2.157


CENTROID X : -.069

CENTROID Y : .104

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EG413458

CENTERFIRE PATTERN # 4

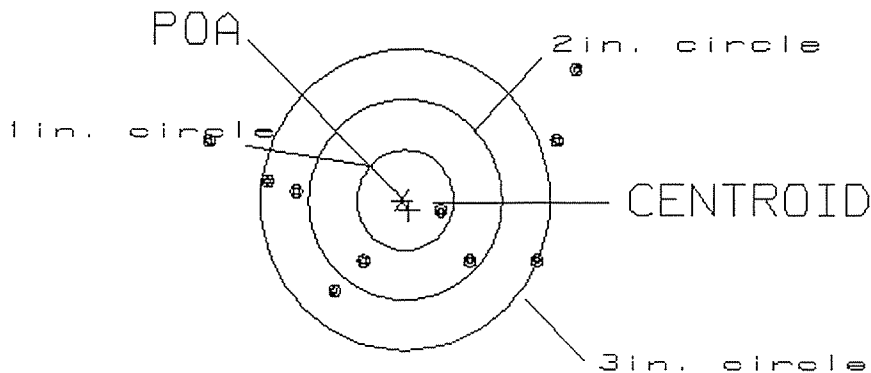

OF SHOTS= 10

IN CIRCLE

HS= 3.72

1

VS= 2.23

3

GS= 3.78

7

PATTERN #: ☐ 5 ☐

POA TO CENTROID: .153

MIN RADIUS : .836

MEAN RADIUS : 1.323

MAX RADIUS : 2.061


CENTROID X : .139

CENTROID Y : -.064

10 Apr 2001

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/E6413458

CENTERFIRE PATTERN # 5

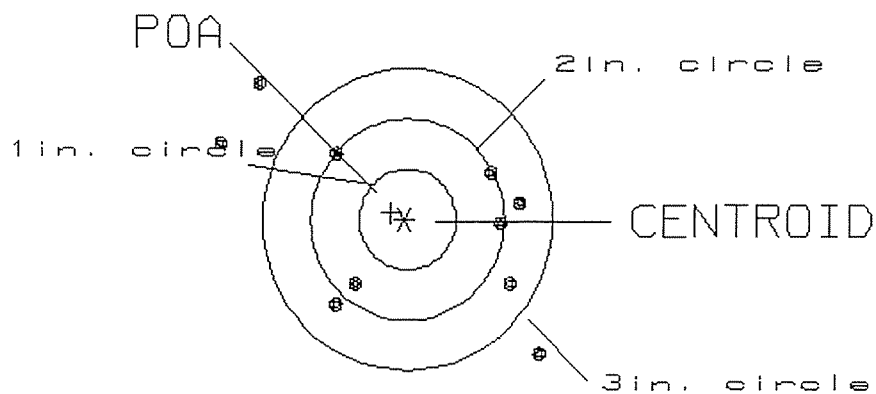

OF SHOTS= 10

IN CIRCLE

HS= 3.25

0

VS= 2.66

3

GS= 3.96

7

Remington

VERY IMPORTANT:
Instruction Book
enclosed to assure
safe use of this
firearm.

MODEL 700TM M24**SERIAL NO.**

C6498871

ORDER NO.**5716**

MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.

01



5716 C6498871

UPC

0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6498871

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock	5 17	90	RW
600	Proof	5 17	90	RW
607	Check Headspace	5 17	90	RW
610	Dis-assemble Gun	5 17	90	RW
612	Magnaflux Barrel Action		5/22/90	KCR
	Magnaflux Bolt		5/22/90	KCR
615	Rollmark Caliber		5/22/90	GS
617	Drill and Tap Sight Holes		5/23/90	FB
618	Polish Barrel RB		5/24/90	WLB
620	Apply Coatings (Barrel Action)		6/4/90	TA
	Apply Coating (Bolt)		6/4/90	TA
625	Final Assembly A) Clean inside of Bolt Assembly		6/4/90	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		6/4/90	RW
	C) Inspect Ejector Hole for Chamfer		6/4/90	RW
	D) Oil Firing Pin Ass'y		6/4/90	RW
	E) Adjust Trigger Pull to Min Setting and Stake		6/7/90	W

op. #	OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force	4	4	4	6/7/90	WB
	G) Safety Off Force	2 1/2	2 1/2	2 1/2	6/7/90	WB
	H) Trigger Pull Test & Retainability				6/7/90	JM
	I) Firing Pin Indent	.0230	.0225	.0225	6/7/90	WB
	J) Assemble Stock				6/11/90	RW
	K) Assemble Swivel Studs				6/14/90	JM
	L) Attach Front and Rear Sight Assemblies				6/11/90	RW
	M) Iron Sight Alignment				6/11/90	RW
	N) Detach Front & Rear Sights & place in numbered container				6/11/90	RW
	O) Attach Scope to Rifle				6/11/90	JM
	P) Detach & Attach Scope 20 Times				6/11/90	JM
640	Gallery Target & Test				6-12-90	A
	A) Time				"	A
	B) Malfunctions				"	A
	C) Pierced Primers				"	A
	D) Optical Clarity of Scope				"	A
645	Inspect for Live Ammo				6-12-90	A
655	Final Inspection					
	A) Headspace				6/14/90	JM
	B) Trigger Pull	2.34	2.32	2.32	6/13/90	JM
	C) Function				6/14/90	JM
660	Pack				6-20-90	DA

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6408871DATE 6-7-90TESTER JM

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.32	2.12	2.30	2.34	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.30	2.20	2.41	2.32	
PULL #3	2.19	2.41	2.35	2.32	
PULL #4	2.21	2.29	2.31	2.34	
PULL #5	2.26	2.31	2.30	2.31	
TOTAL	11.28	11.33	11.67		
AVG.	2.256	2.266	2.334		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.42	3.45		
PULL #2	3.11	3.27		
PULL #3	3.45	3.49		
PULL #4	3.53	3.50		
PULL #5	3.45	3.47		
TOTAL	16.96	17.18		
AVG.	3.392	3.436		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.11	4.41		4.26
PULL #2	4.46	4.42		4.36
PULL #3	4.49	4.45		4.38
PULL #4	4.50	4.33		4.23
PULL #5	4.33	4.30		4.48
TOTAL	21.89	21.91		21.71
AVG.	4.378	4.382		4.342

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6498871
13 Jun 1990

CENTROIDAL DISTANCES

0 TO	1	.485148
1 TO	2	.172905
1 TO	3	.265611
1 TO	4	.353386
1 TO	5	.386804

$\bar{x} +$ <----POB
45


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.409
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.1604
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .439828
THE AMR FOR THIS RIFLE IS: .7582

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/CS498871

CENTERFIRE PATTERNS

1

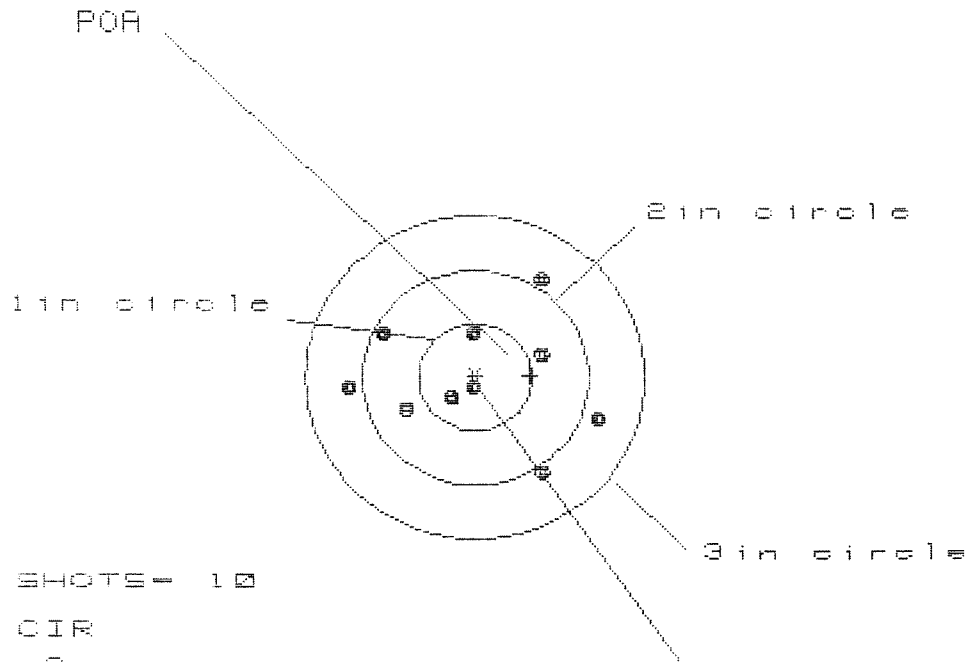

OF SHOTS = 10

IN CIR

1in = 3

2in = 6

3in = 10

HS = 2.191

VS = 1.883

GS = 2.213

CENTROID *


PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.105	.757	.769
MINIMUM X	-1.086	-.963	-.868
MAXIMUM Y	.958	.914	.793
MINIMUM Y	-.925	-.969	-.481
CENTROID X	-.485	-.608	-.703
CENTROID Y	-.012	.032	.153
POA TO CENTROID in.	.485	.609	.719
MIN RADIUS	.114	.196	.323
MEAN RADIUS	.756	.699	.637
MAX RADIUS	1.174	1.230	1.095
HORIZONTAL SPREAD	2.191	1.720	1.637
VERTICAL SPREAD	1.883	1.883	1.274
EXTREME SPREAD	2.213	1.960	1.931
NUMBER IN ONE INCH CIRCLE =	3		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/C6498871

CENTERFIRE PATTERNS

2

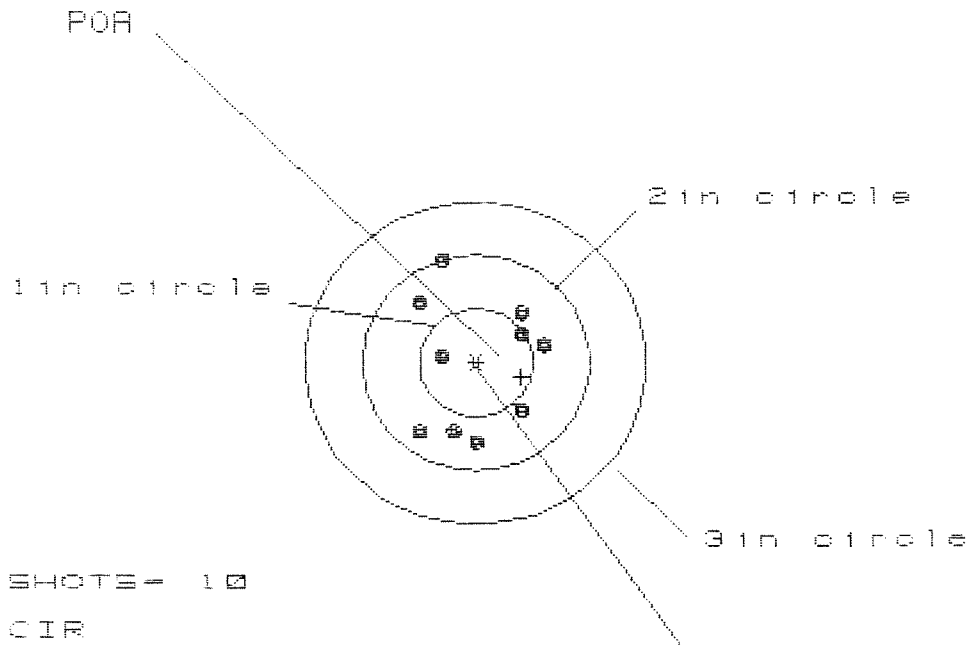

OF SHOTS = 10

IN CIR

1in = 2

2in = 9

3in = 10

HS = 1.090

VS = 1.690

GS = 1.724


CENTROID *

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.585	.549	.481
MINIMUM X	:	-.505	-.541	-.594
MAXIMUM Y	:	.954	.712	.640
MINIMUM Y	:	-.736	-.630	-.702
CENTROID X	:	-.399	-.363	-.295
CENTROID Y	:	.138	.032	.104
POA TO CENTROID in.	:	.422	.364	.313
MIN RADIUS	:	.310	.382	.393
MEAN RADIUS	:	.662	.614	.580
MAX RADIUS	:	1.009	.885	.873
HORIZONTAL SPREAD	:	1.090	1.090	1.075
VERTICAL SPREAD	:	1.690	1.342	1.342
EXTREME SPREAD	:	1.724	1.495	1.432
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		9	
NUMBER IN THREE INCH CIRCLE	=		10	

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06498871

CENTERFIRE PATTERNS # 3

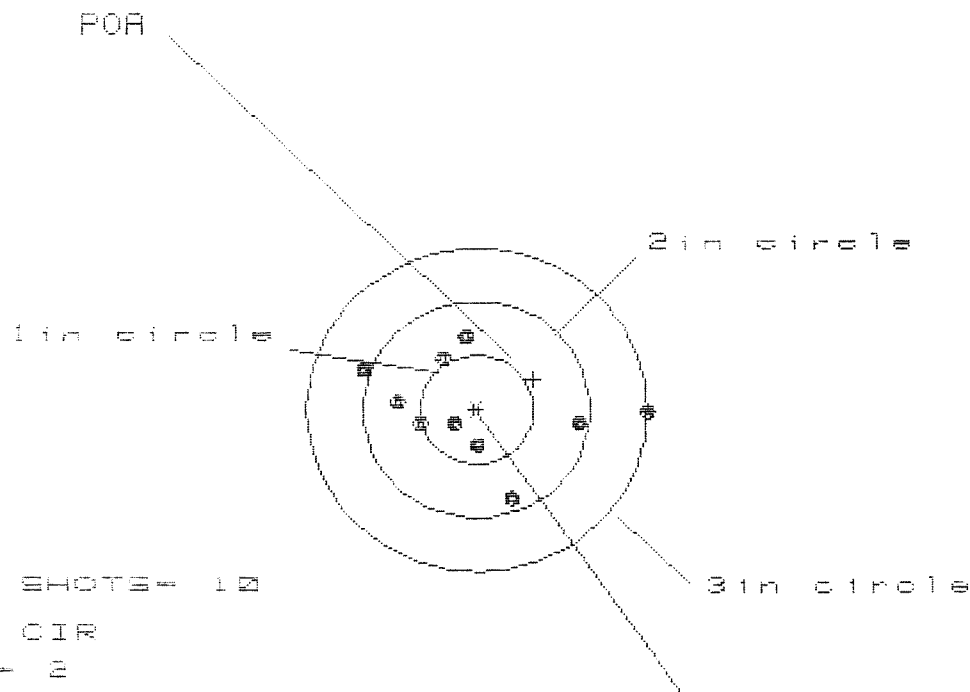

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 8

3 in = 9

HS= 2.474

VS= 1.442

GS= 2.497

CENTROID #


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.526	1.047	.950
MINIMUM X	:	-.949	-.779	-.665
MAXIMUM Y	:	.657	.657	.699
MINIMUM Y	:	-.785	-.785	-.743
CENTROID X	:	-.503	-.672	-.575
CENTROID Y	:	-.277	-.277	-.319
POR TO CENTROID in.	:	.574	.727	.657
MIN RADIUS	:	.226	.172	.150
MEAN RADIUS	:	.722	.598	.567
MAX RADIUS	:	1.526	1.059	.956
HORIZONTAL SPREAD	:	2.474	1.826	1.615
VERTICAL SPREAD	:	1.442	1.442	1.442
EXTREME SPREAD	:	2.497	1.891	1.634
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		8	
NUMBER IN THREE INCH CIRCLE	=		9	

13 Jun 1998

FILE:/PATTERNING/CENTERFIRE_PATT/06498871

CENTERFIRE PATTERNS

4

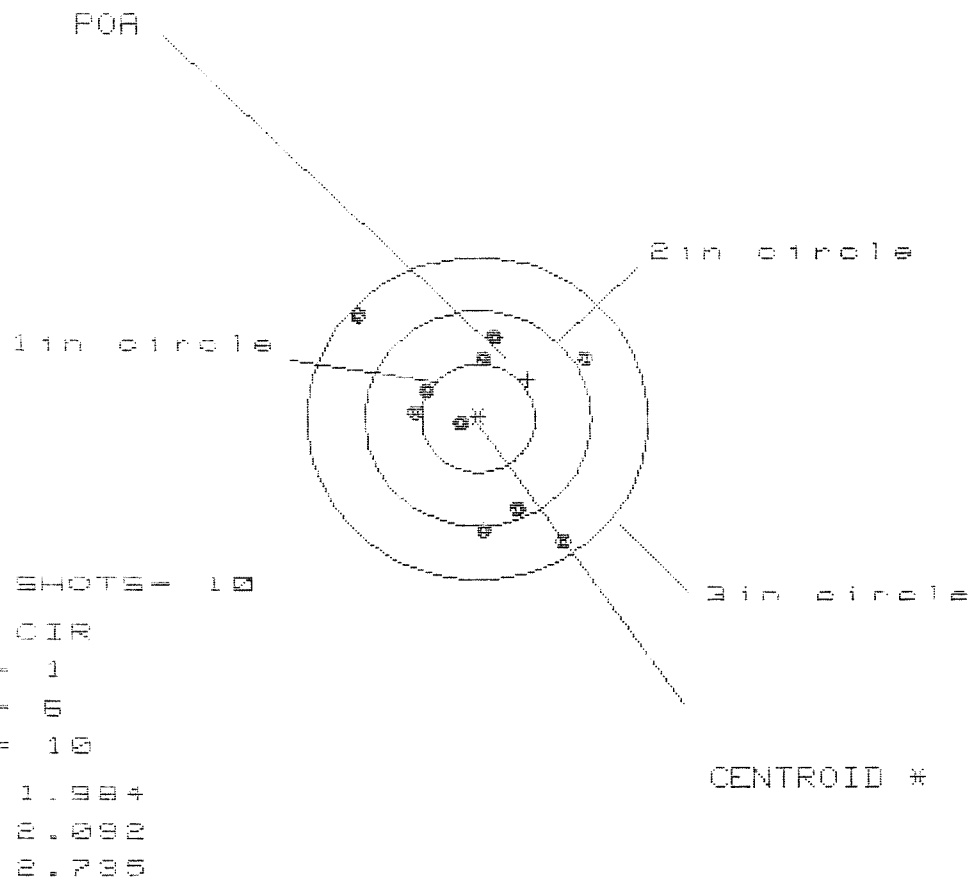


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.975	1.058	.942
MINIMUM X	-1.009	-.926	-.616
MAXIMUM Y	.917	.787	.706
MINIMUM Y	-1.175	-1.194	-1.096
CENTROID X	-.444	-.527	-.411
CENTROID Y	-.363	-.233	-.331
POA TO CENTROID in.	.573	.576	.528
MIN RADIUS	.179	.221	.223
MEAN RADIUS	.846	.758	.716
MAX RADIUS	1.395	1.215	1.096
HORIZONTAL SPREAD	1.984	1.984	1.558
VERTICAL SPREAD	2.092	1.981	1.802
EXTREME SPREAD	2.735	2.234	1.870
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	6		
NUMBER IN THREE INCH CIRCLE =	10		

13 Jun 1990

FILE:/PATTERNING/CENTERFIRE_PATT/08496871

CENTERFIRE PATTERNS

5

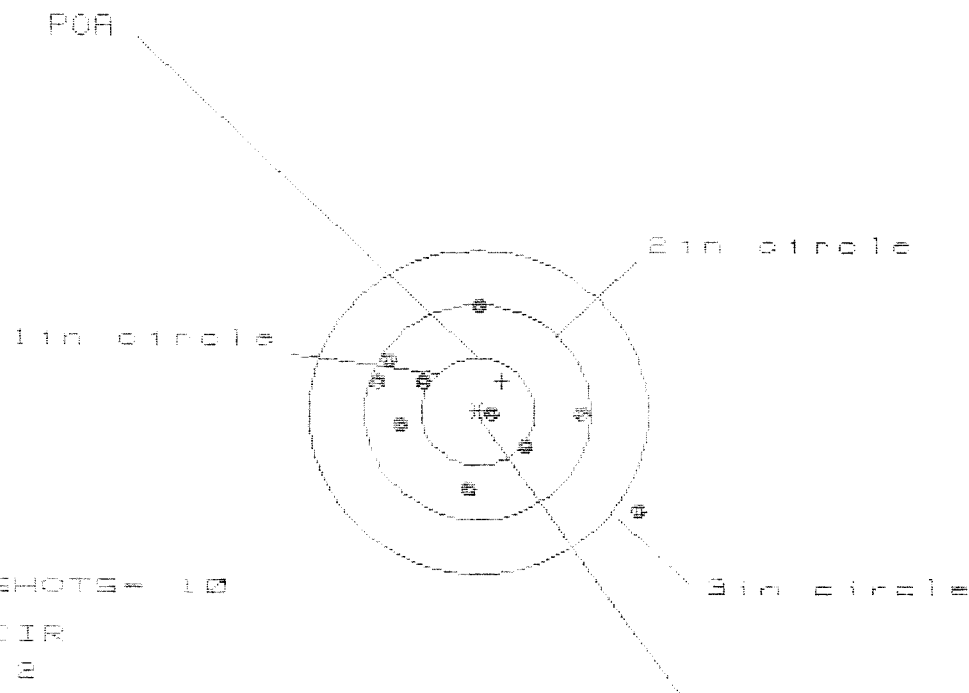

OF SHOTS= 10

IN CIR

1in = 2

2in = 8

3in = 9

HS= 2.311

VS= 1.930

GS= 2.627

CENTROID #

PATTERN #	5		
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.444	1.065	1.093
MINIMUM X	-0.867	-0.706	-0.678
MAXIMUM Y	1.032	.933	.516
MINIMUM Y	-0.898	-0.789	-0.673
CENTROID X	-0.214	-0.375	-0.403
CENTROID Y	-0.288	-0.189	-0.305
POA TO CENTROID in.	.359	.419	.505
MIN RADIUS	.104	.288	.292
MEAN RADIUS	.805	.693	.649
MAX RADIUS	1.700	1.073	1.093
HORIZONTAL SPREAD	2.311	1.771	1.771
VERTICAL SPREAD	1.930	1.722	1.189
EXTREME SPREAD	2.627	1.793	1.793
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		8	
NUMBER IN THREE INCH CIRCLE =		9	

CONTRACT # DAAA21-87-C-0086

New Stock

GUN SERIAL # C6498871

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock			
600	Proof			
607	Check Headspace			
610	Dis-assemble Gun			
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly			
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head			
	C) Inspect Ejector Hole for Chamfer			
	D) Oil Firing Pin Ass'y			
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	OP. NAME	READINGS	DATE	INIT
625 cont.	F) Safety On Force			
	G) Safety Off Force			
	H) Trigger Pull Test & Retainability			
	I) Firing Pin Indent			
	J) Assemble Stock		1/12/95	RW
	K) Assemble Swivel Studs			
	L) Attach Front and Rear Sight Assemblies			
	M) Iron Sight Alignment			
	N) Detach Front & Rear Sights & place in numbered container			
	O) Attach Scope to Rifle			
	P) Detach & Attach Scope 20 Times			
640	Gallery Target & Test		1/13/95	RW
	A) Time			
	B) Malfunctions			
	C) Pierced Primers			
	D) Optical Clarity of Scope			
645	Inspect for Live Ammo		1/13/95	RW
655	Final Inspection			
	A) Headspace		1/13/95	RW
	B) Trigger Pull			
	C) Function		1/13/95	RW
660	Pack			

Final Inspection

Sn: C6498871

DATE REC'D:

DATE RET'D:

AUDITOR: RW

Item:

Barrel Assy.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

Scope Assy.

☒ Scope☒ Scope Rings☒ Mounting Screws☒ Mounting Base☒ Screws☒ Finish☒ Looseness☒ CLARITY

Misc.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

Stock Assy.

☒ Stock☒ Sling Swivel Studs☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

Systems Case

☐ Scope Case☐ Iron SIGHTS☐ Deployment Kit

Trigger

☒ SAFETY OPERATION☒ SET

Comments:

DOC IDENT	RI FROM	M S	STOCK NUMBER	QUANTITY	DOCUMENT NUMBER	SUPPLEMENTARY ADDRESS	SIGNAL	FUND	DISTRIBUTION	PROJECT	PRIORITY	REQ'D DEL DATE	ADVISE	RI	UNIT PRICE
A5ABXN			1005012402136	00001	W51HU84049AAL9	CMAH2WMGA				MR213018			BXNMF		5145
SHIPPED FROM			CMAH2W			CMAH2W			MR2			TOTAL PRICE			
SUP AND SERV DIV DOL			REMINGTON ARMS CO INC.			PPL			MATCAT MJ			DOLLARS			
FORT CARSON CO 80913			14 HOFELER AVE						RECEIVED 4354			5145.			
A			ILION NY 13357			C			D			E			
WAREHOUSE LOCATION		TYPE OF CARGO	UNIT PACK	UNIT WEIGHT	UNIT CUBE	UFC	NMFC	FREIGHT RATE	DOCS	MAT COND	QUANTITY	SHELF	STD 43		
ARMSROOM		AE000		.00.000				LTL	4	TIME	F00001	LIFE	TTD 43		
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		ITEM NOMENCLATURE		SENSITIVE ITEM		MAJOR ITEM							
RECEIVED 4301		50X18X12		RIFLE, SNIP 7.62											
SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE							
4363		CASE		58.0											
PACKED BY AND DATE		NO OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION							
4AU633001/001		1		6.25											
REMARKS		INSPECTION REQUIRED		W800UD-3138-3000											
SIGNATURE REQUIRED		SERIAL NO. C6498871/SCOPE:890865		CC SIMS LABEL REQ											
FIRST DESTINATION ADDRESS		DATE SHIPPED		PKG REF											
11		12		14 BLADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)		15 RECEIVER'S DOCUMENT NUMBER									
13 TRANSPORTATION CHARGEABLE TO						TCN W51HU8 4049 AAL9 XXX									

DD FORM 1348-1A, SEP 87 (BLUE) Jun 86 edition may be used. FORM APPROVED. OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DD PROT. SERV. CAT. II

1		2		3		4		5		6		7		8		9		10		11		12		13		14		15		16		17		18		19		20		21		22		23		24		25		26		27		28		29		30		31		32		33		34		35		36		37		38		39		40		41		42		43		44		45		46		47		48		49		50		51		52		53		54		55		56		57		58		59		60		61		62		63		64		65		66		67		68		69		70		71		72		73		74		75		76		77		78		79		80	
DOC IDENT		RI FROM		M & S		STOCK NUMBER		FSC		NIN		ADD		QUANTITY		DOCUMENT NUMBER		REQUISITIONER		DATE		SERIAL		SUPPLEMENTARY ADDRESS		SIGNAL		DISTRIBUTION		PROJECT		PRIORITY		REQ'D DEL DATE		ADVISE		RI		UNIT PRICE		DOLLARS		CTS																																																																																																																			
ASAP KN						1005012402130								00001		51HU84049AAL9		CHAN2		MR2		MATCAT MJ		PPL		RECEIVED 4354																		5145.00																																																																																																																			
SHIPPED FROM		SHIP TO		MARK FOR		PROJECT		TOTAL PRICE		DOLLARS		CTS		WAREHOUSE LOCATION		TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CODE		NMFC		FREIGHT RATE		DOCUMENT DATE		MAT COND		QUANTITY		SHELF		STD 4300		TTD 4365		SKD 355																																																																																																																							
GUP AND SERV DIV DOL		FORT CARSON CO 80913		REMINGTON ARMS CO INC.		14 HOFLEA AVE		ILLION NY 13357																																																																																																																																																							
ARMSROOM		AL000																																																																																																																																																													
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		ITEM NOMENCLATURE		SENSITIVE ITEM		MAJOR ITEM		SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE																																																																																																																																													
4301				RIFLE, SNIP 7.62						4301		2		3		7		8																																																																																																																																													
PACKED BY AND DATE		NO OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION		440063001/001		1		6		9		10																																																																																																																																													
REMARKS		INSPECTION REQUIRED		W800UD-3138-3000		SERIAL NO. C6498871/SCOPE:890865				AA		SIGNATURE REQUIRED		CC		DATE SHIPPED		FF																																																																																																																																													
FIRST DESTINATION ADDRESS		DATE SHIPPED		PKG REF						11		12		13		14		15																																																																																																																																													
TRANSPORTATION CHARGEABLE TO		B/LADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)		RECEIVER'S DOCUMENT NUMBER		ICN 451HU8 4049 AAL9 XXX																																																																																																																																																									

DD FORM 1348-1A, SEP 87 (BLUE)

Jun 86 edition may be used

FORM APPROVED OMB NO. 0704-0188

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DD PROT SERV. CAT. II

2135

B

SCOPE # 890865

Met. Cott
Sh. Blum

UND. DATE 93120
A JPD DATE 93120

Sh. Blum
Met. Cott

R JPD DATE 93120
A JPD DATE 93120

CC / F IAW
AR 725-50.

AG 29-B 1.0 H/R

WAKBDD

DATE: 13 MAY 93

MEMORANDUM FOR RECORD

SUBJECT: Damage Statement

1. Item Damaged: 1005-01-240-2136 Nomenclature: M24 SNIPER RIFLE
SER# C6498871 NSN SCOPE# 890865 Price: _____

2. Description of loss/damage/destruction: STOCK IS CRACKED BELOW THE SAFETY.

3. Damaged item was removed from: ARMSROOM
Type of Vehicle _____

Bumper Number: N/A Driver: N/A NCOIC: N/A

4. Cause of damage was: Unknown/Fair Wear and Tear/Negligence.

5. Explanation of damage: THE SOLDIER WAS ON A FOOTMARCH DURING SNIPER TRAINING WHEN HE TRIPPED AND DROPPED THE WEAPON.

6. I have reviewed the circumstances surrounding the damage to the above equipment and find: ...

RWB

- a. ☒ No evidence of negligence or willful misconduct.
b. ☐ Evidence of negligence and willful misconduct. See exhibit:

- (1) Cash Collection Voucher
(2) Statement of Charges
(3) Report of Survey

Robert W. Borders

ROBERT W. BORDERS
CPT, IN
Commanding

An investigation has been conducted on the equipment identified above IAW AR 735-AS. I concur ~~with~~ with the findings. The equipment is released for repair.

Clifford H. Dickman

CLIFFORD H. DICKMAN
LTC, IN
Commanding

DEPARTMENT OF THE ARMY
DELTA COMPANY, 1ST BATTALION (MECHANIZED) 8TH INFANTRY
FORT CARSON COLORADO, 80913-5000

WAKBDO

18 MAY 1993


MEMORANDUM FOR RECORD

SUBJECT: Missing parts statement.

1. The following component was lost during past Field Training Exercise within this unit;

7.62mm, M24 Sniper Weapon System serial no., C6498871.

<u>Missing Item</u>	<u>QTY</u>	<u>NSN</u>	<u>PRICE</u>	<u>TOTAL PRICE</u>
SLING, SMALL ARMS	1 ea.	1005-00-714-1245	\$ 7.88	\$ 7.88



ROBERT W. BORDERS
CPT, IN
Commanding

FIRE		STARTS		30 April 93 Tec Insp	
APPLICABLE REFERENCE					
TM NUMBER 9-1005-306-10		TM DATE June 89			
COLUMN a — Enter TM item number.		COLUMN d — Show corrective action for deficiency or shortcoming listed in Column c.			
COLUMN b — Enter the applicable condition status symbol.		COLUMN e — Individual ascertaining completed corrective action initial in this column.			
COLUMN c — Enter deficiencies and shortcomings.					
STATUS SYMBOLS					
"X"—Indicates a deficiency in the equipment that places it in an inoperable status. CIRCLED "X"—Indicates a deficiency, however, the equipment may be operated under specific limitations as directed by higher authority or as prescribed locally, until corrective action can be accomplished. HORIZONTAL DASH ("—")—Indicates that a required inspection, component replacement, maintenance operation check, or test flight is due but has not been accomplished, or an overdue MWO has not been accomplished.			DIAGONAL ("/)—Indicates a materiel defect other than a deficiency which must be corrected to increase efficiency or to make the item completely serviceable. LAST NAME INITIAL IN BLACK, BLUE-BLACK INK, OR PENCIL—Indicates that a completely satisfactory condition exists. FOR AIRCRAFT—Status symbols will be recorded in red.		
ALL INSPECTIONS AND EQUIPMENT CONDITIONS RECORDED ON THIS FORM HAVE BEEN DETERMINED IN ACCORDANCE WITH DIAGNOSTIC PROCEDURES AND STANDARDS IN THE TM CITED HEREON.					
8a. SIGNATURE (Person(s) performing inspection)		8b. TIME		9a. SIGNATURE (Maintenance Supervisor)	
SGT FESER Steven B Rtd by Small Arms Repair Shop					
10. MANHOURS REQUIRED					
TM ITEM NO. a	STATUS b	DEFICIENCIES AND SHORTCOMINGS c	CORRECTIVE ACTION d	INITIAL WHEN CORRECTED e	
	X	STOCK Broken has a small piece missing on Right side of safety			
	X	Stock has hair-line crack across Top of Thumb Groove			
		IAW AR 725-50 This Equipment is classified Condition Code "F" unserv. Repairable			
		Rtd by SGT Small Arms Repair Shop			

[illegible]

1. TRANSPORTATION COMPANY TENDERED TO UNIVERSAL TRANSPORT		2. SCAC UTSE	3. DATE B/L PREPARED 950105	4. ROUTE ORDER/RELEASE NUMBER
5. DESTINATION (Name, address and ZIP code) ILION, NY 13357		6. SPLC (Dest.) 172856000	8. ORIGIN (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CARSON, CO 80913-5025	
TP: 1 RDD: 9 JAN 95		7. SPLC (Orig.) 746693250		
9. CONSIGNEE (Name, address and ZIP code of installation) RECEIVING/REMINGTON ARMS CO INC 14 HOEPLER AVE ILION, NY 13357		10. GBLOC (Cons.) 1001 /701	11. SHIPPER (Name, address and ZIP code) TRANSPORTATION OFFICER FORT CARSON, CO 80913-5025	
12. APPROPRIATION CHARGEABLE SEE BLOCK 15 OR 16 BELOW		13. BILL CHARGES TO (Dept./agency, bureau/office mailing address and ZIP code) TRANSPORTATION OPERATIONS US ARMY FINANCE & ACCTG CTR INDIANAPOLIS, IN 46249		
14. VIA (Route shipment when advantageous to the Government)		AGENCY LOC CODE		
15. MARKS AND ANNOTATIONS FUNDS: 97X4930 AC4G 65 SH2870 2219 S11173 AQ15 REF: W8000D 3130-3000				

16. PACKAGES		17. HM	18. DESCRIPTION OF ARTICLES (Use carrier's classification or tariff description if possible; otherwise use a clear nontechnical description)	19. WEIGHT* (Pounds only)	FOR USE OF BILLING CARRIER ONLY		
NO.	KIND				Services	Rate	Charges
1	CS		CLASSIFICATION ITEM NO. 999912 PAK W51HUB 4049-AAL9 CU: 6.25 105--"USE OF SIGNATURE AND TALLY RECORD REQUESTED. DD FORM 1907 FURNISHED TO CARRIER." "SECOND DAY SERVICE"	30			EST 38 94 30 00 68 94
					TOTAL CHARGES		

20. TARIFF/SPECIAL RATE AUTHORITY HTSE14518		21. PICKUP SERV. FURNISHED ☒ YES VEHICLE FULLY LOADED ☐ YES		SHIPPER'S INITIALS LLH	22. CARRIER WAY/FREIGHT BILL NO. AND DATE	
23. STOP THIS SHIPMENT AT		24. FURNISH INFORMATION ON CAR/TRUCKLOAD/CONTAINER SHIPMENTS				
		INITIALS & NO.	SEAL NUMBERS	LENGTH/CUBE	MARKED CAPACITY	DATE FURNISHED
				ORDERED	FURNISHED	
FOR:		APPLIED BY:				
25. CARRIER'S PICKUP DATE (Year, month, & day) 95/01/03		26a. SIGNATURE OF AGENT		26b. PER EDLO	B/L NUMBER D- 2886678	
27. MODE RR	28. ESTIMATE 609	29. NO. OF CLS/TLS	30. TYPE RATE	31. PSC	32. REASON Received by the transportation company named above, subject to conditions named on the reverse hereof, the property hereinafter described, in apparent good order and condition (contents and value unknown), to be forwarded to destination by the said company and connecting lines, there to be delivered in like good order and condition to said consignee.	

FOR USE OF ISSUING OFFICE				MEMORANDUM COPY—CONSIGNEE	
33a. ISSUING OFFICE (Name and complete address) TRANSPORTATION DIVISION, FREIGHT MOVEMENTS BR ATTN: APZC-DL-TD, SLDC 847 FORT CARSON, CO 80913-5025					
33c. ISSUING OFFICER THOMAS E. WRIGHT, JR.					
33d. CONTRACT/PURCHASE ORDER NO. OR OTHER AUTHORITY 1050105					
33f. FOB POINT NAMED IN CONTRACT				34d. DELIVERED THIS CONSIGNMENT COMPLETE & IN APPARENT GOOD ORDER EXCEPT AS MAY BE INDICATED ☐ SHORTAGE ☐ DAMAGED	

*Show also cubic measurements for shipments via air, truck or water carrier in cases where required.

1103-321

STANDARD FORM 1103-B (Rev. 4-85)
PRESCRIBED BY GSA, FPMR (41 CFR) 101-41.3

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER

BARBER, M24 M2400165783

INSTRUCTIONS TO CONSIGNEE

1. The consignee, upon receipt of the shipment, shall sign the carrier's delivery receipt or freight bill, as well as the consignee's copy thereof with the carrier's copy of the bill of lading. The consignee shall make certain that the Government bill of lading number is shown on the delivery carrier's documents and on the consignee's copy. If the number is not shown, the consignee shall write it on said documents. If the number is not known, the consignee shall report for the shipment and add the number to his copy when it becomes available.

2. If the consignee discovers an apparent loss or damage or other discrepancy in the quantity or condition of property while such property is in process of being unloaded from carrier's equipment, he shall note such loss, damage or other discrepancy on the delivery carrier's documents and on the consignee's copy of those documents. Both the consignee and the carrier shall sign the documents. If the number is not known, the consignee shall report for the shipment and add the number to his copy when it becomes available.

3. Should the consignee not discover the loss, damage, or discrepancy until after delivery of the shipment and receipt therefor, he shall, as soon as such loss, etc., is known, notify the nearest office of the last delivering carrier and extend privilege of examining the shipment. This information is to be conveyed by telephone if the office is located within the vicinity, with written confirmation, including the name and title of the contacted carrier representative, sent to the carrier and copy of the confirmation made a part of the official record.

4. The consignee shall forward an appropriate loss or damage report to the administrative office as soon as possible but no later than 30 days after receipt of the shipment or discovery of the loss or damage. In case of non-delivery of an entire shipment, the consignee shall file a written report of all the facts with the administrative office as soon as possible but no later than 30 days after date of anticipated delivery. In case of detection of an entire shipment, the consignee shall immediately file a written report of all the facts with the administrative office responsible for payment of the charges.

5. The consignee shall make every effort to resolve overages or shortages within 400 working days after their detection. Upon detection of such overages or shortages, the consignee must notify the delivering carrier of its age so that the carrier may investigate the matter. When overages or shortages are resolved after a loss and damage report has been filed, the consignee shall immediately notify the administrative office responsible for payment of the charges.

6. Where accessory or special services are shown as ordered but have not been furnished, the consignee must immediately notify the administrative office responsible for payment of the charges.

IMPORTANT - Issuing office is to send this copy to consignee immediately after surrender of original to initial carrier.

NOTICE

Contractors will return unused or canceled bills of lading to the Government office from which received.

SPECIAL SERVICES ORDERED

REMARKS AND VIOLATIONS

IS THIS SHIPMENT CANCELLED?

IS THIS SHIPMENT CANCELLED?

1. NAME OF CONTRACTOR	2. NAME OF SHIPPER	3. NAME OF CARRIER
4. ADDRESS OF CONTRACTOR	5. ADDRESS OF SHIPPER	6. ADDRESS OF CARRIER
7. PHONE NUMBER OF CONTRACTOR	8. PHONE NUMBER OF SHIPPER	9. PHONE NUMBER OF CARRIER
10. DATE OF RECEIPT	11. DATE OF DELIVERY	12. DATE OF CANCELLATION
13. NAME OF AGENT	14. NAME OF AGENT	15. NAME OF AGENT
16. NAME OF AGENT	17. NAME OF AGENT	18. NAME OF AGENT
19. NAME OF AGENT	20. NAME OF AGENT	21. NAME OF AGENT
22. NAME OF AGENT	23. NAME OF AGENT	24. NAME OF AGENT
25. NAME OF AGENT	26. NAME OF AGENT	27. NAME OF AGENT
28. NAME OF AGENT	29. NAME OF AGENT	30. NAME OF AGENT
31. NAME OF AGENT	32. NAME OF AGENT	33. NAME OF AGENT
34. NAME OF AGENT	35. NAME OF AGENT	36. NAME OF AGENT
37. NAME OF AGENT	38. NAME OF AGENT	39. NAME OF AGENT
40. NAME OF AGENT	41. NAME OF AGENT	42. NAME OF AGENT
43. NAME OF AGENT	44. NAME OF AGENT	45. NAME OF AGENT
46. NAME OF AGENT	47. NAME OF AGENT	48. NAME OF AGENT
49. NAME OF AGENT	50. NAME OF AGENT	51. NAME OF AGENT
52. NAME OF AGENT	53. NAME OF AGENT	54. NAME OF AGENT
55. NAME OF AGENT	56. NAME OF AGENT	57. NAME OF AGENT
58. NAME OF AGENT	59. NAME OF AGENT	60. NAME OF AGENT
61. NAME OF AGENT	62. NAME OF AGENT	63. NAME OF AGENT
64. NAME OF AGENT	65. NAME OF AGENT	66. NAME OF AGENT
67. NAME OF AGENT	68. NAME OF AGENT	69. NAME OF AGENT
70. NAME OF AGENT	71. NAME OF AGENT	72. NAME OF AGENT
73. NAME OF AGENT	74. NAME OF AGENT	75. NAME OF AGENT
76. NAME OF AGENT	77. NAME OF AGENT	78. NAME OF AGENT
79. NAME OF AGENT	80. NAME OF AGENT	81. NAME OF AGENT
82. NAME OF AGENT	83. NAME OF AGENT	84. NAME OF AGENT
85. NAME OF AGENT	86. NAME OF AGENT	87. NAME OF AGENT
88. NAME OF AGENT	89. NAME OF AGENT	90. NAME OF AGENT
91. NAME OF AGENT	92. NAME OF AGENT	93. NAME OF AGENT
94. NAME OF AGENT	95. NAME OF AGENT	96. NAME OF AGENT
97. NAME OF AGENT	98. NAME OF AGENT	99. NAME OF AGENT
100. NAME OF AGENT	101. NAME OF AGENT	102. NAME OF AGENT

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80																																					
DOC IDENT		RI FROM		STOCK NUMBER		ADD		QUANTITY		DOCUMENT NUMBER		REQUISITIONER		DATE		SERIAL		SUPPLEMENTARY ADDRESS		SIGNAL		FUND		DISTRIBUTION		PROJECT		PRIORITY		REQ'D DEL DATE		ADVISE		RI		UNIT PRICE	
A5ABXN				1005012402136				00001		W51HU84049AAL9		CMAH2WMGA		MR213018		BXNMF																		5145.00			
SHIPPED FROM		CMAH2W		REMINGTON ARMS CO. INC.		14 HOEFLER AVE		ILION NY 13357		CMAH2W		PROJECT MR2		MATCAT MJ		PPL		RECEIVED 4354																5145.00			
WAREHOUSE LOCATION		TYPE OF CARGO		UNIT PACK		UNIT WEIGHT		UNIT CUBE		UFC		NMFC		FREIGHT RATE		4		8354		MAT COND		QUANTITY		SHELF		STD 4360		TTD 4365		SKD 359							
ARMSROOM		AE000				.00.000								LTL				TIME		F00001		LIFE															
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)		FREIGHT CLASSIFICATION NOMENCLATURE		ITEM NOMENCLATURE		SENSITIVE ITEM		MAJOR ITEM																													
RECEIVED		50X18X12		RIFLE, SNIP 7.62																																	
SELECTED BY AND DATE		TYPE OF CONTAINER(S)		TOTAL WEIGHT		RECEIVED BY AND DATE		INSPECTED BY AND DATE																													
4363		CASE		58.0																																	
PACKED BY AND DATE		NO OF CONTAINER(S)		TOTAL CUBE		WAREHOUSED BY AND DATE		WAREHOUSE LOCATION																													
4AU633001/001		1		6.25																																	
REMARKS		INSPECTION REQUIRED		W800UD-3138-3000		SERIAL NO. C6498871/SCOPE:890865		SIMS LABEL REQ																													
AA		SIGNATURE REQUIRED																																			
FIRST DESTINATION ADDRESS		DATE SHIPPED		PKG REF																																	
11		12		13		14		15																													
13 TRANSPORTATION CHARGEABLE TO		14 BLADING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)		15 RECEIVER'S DOCUMENT NUMBER		TCN W51HU8 4049 AAL9 XXX																															

DD FORM 1348-1A, SEP 87 (BLUE) Jun 86 edition may be used. FORM APPROVED. OMB NO. 0704-0188 DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

DD PROT. SERV. CAT. II