

G6590154

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)
BOLT ACTION CENTERFIRE RIFLE
24" BARREL 7.62 NATO

- INSTRUCTION BOOK 3518

DD FORM

proof of purchase



0

owner registration sticker



0


ORDER NO. **25716**

BARREL LENGTH **24"**

CAPACITY **6**

G6590154

UPC




0

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

UPC




0 47700 25716 7

ORDER 25716

M/24 7.62 NATO S.W.S. (COMPLETE SYSTEM)

UPC



0 47700 25716 7

SERIAL NO.



66590154

INSPECTION CHECKLIST-NEW GUNS

GUN SERIAL # G6590154

OP #	OPERATION NAME	READINGS	DATE	INITIAL
410	SERIALIZE BOLT HANDLE		8-24-06	RTZ
420	ASSEMBLE ACTION		8-24-06	RTZ
430	ASSEMBLE TO STOCK		8-24-06	BD
440	PROOF		8-24-06	TRW
460	CHECK HEADSPACE	MAGNA-FLUX INSPECTED	8-24-06	TRW
470	DIS-ASSEMBLE ACTION	SEP 01 2006		
480	MAGNAFLUX BBL ACTION	OPERATOR <i>und</i>	9/1/06	<i>und</i>
490	MAGNAFLUX BOLT			
500	ROLLMARK CALIBER		9-1-06	CW
510	DRILL AND TAP SIGHT HOLES		9-1-06	TRW
520	GOFF BLAST BBL / REC		9-5-06	LB
530 & 540	APPLY COATINGS (BARREL ACTION)			
	(BOLT)		9/8/06	<i>CB</i>
560	RE-ASSEMBLE ACTION			
	A) CLEAN INSIDE OF BOLT ASSEMBLY		9-11-06	BLG
	B) INSPECT REAR FIRING PIN HOLE FOR CHAMFER IN BOLT HEAD		9-11-06	BLG
	C) INSPECT EJECTOR HOLE FOR CHAMFER		9-11-06	BLG
	D) OIL FIRING PIN ASSEMBLY		9-13-06	BLG
	E) ADJUST TRIGGER PULL TO MIN. SETTING AND STAKE 2.50 LBS +/- .5 LBS		10/11/06	<i>und</i>

F004 REV 5/2006

OP #	BARBER NAME	5763	READINGS			DATE	INITIAL		
560	F) SAFETY ON FORCE	2 LBS MIN 10 LBS MAX	<u>7.0</u>	<u>7.0</u>	<u>7.0</u>	9-14-06	DA		
CONT.									
	G) SAFETY OFF FORCE	2 LBS MIN	<u>4.0</u>	<u>4.0</u>	<u>4.0</u>	9-14-06	DA		
	H) TRIGGER PULL TEST AND RETAINABILITY					10/11/06	nm		
	I) FIRING PIN INDENT	.020 MIN	<u>.024</u>	<u>.023</u>	<u>.023</u>	9-14-06	DA		
	J) ASSEMBLE STOCK					9-13-06	BLG		
	K) ASSEMBLE SWIVEL STUDS					10/11/06	nm		
	L) ATTACH FRONT AND REAR SIGHT ASSY'S					9-13-06	BLG		
	M) IRON SIGHT ALIGNMENT					9-13-06	BLG		
	N) DETACH FRONT AND REAR SIGHTS AND PLACE IN NUMBERED CONTAINER					9-13-06	BLG		
640 &	FUNCTION TEST AND		PASS	FAIL					
650	TARGET		PASS	FAIL		9-13-06	TRW		
	MALFUNCTION		N/A						
	MALFUNCTION								
	MALFUNCTION								
	MALFUNCTION								
660	INSPECT FOR LIVE AMMO					9-13-06	BD		
670	FINAL INSPECTION A) HEADSPACE					10/11/06	nm		
	B) TRIGGER PULL	+/- .5 LBS MIN 2.50 LBS MAX 4.0 LBS	<u>2.42</u>	<u>2.46</u>	<u>2.56</u>	<u>2.33</u>	<u>2.48</u>	9-14-06	DA
	C) FUNCTION					10/11/06	nm		
690	PACK					11/7/06	DA		

F004 REV 5/2006

**AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS**

2.50 LBS (plus or minus 0.50 LBS)

3.00 LBS (plus or minus 0.75 LBS)

4.00 LBS (plus or minus 1.00 LBS)

 DATE 9-9-06

 TESTER MTM

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS	COMMENTS
PULL #1	2.41	2.83	2.60	
PULL #2	2.62	2.76	2.36	
PULL #3	2.35	2.60	2.64	
PULL #4	2.58	2.79	2.39	
PULL #5	2.73	2.79	2.46	
TOTAL	12.69	13.77	12.45	
AVERAGE	2.54	2.75	2.49	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES	COMMENTS
PULL #1	2.93	2.90	
PULL #2	2.80	3.17	
PULL #3	3.03	3.26	
PULL #4	2.93	3.17	
PULL #5	2.97	2.58	
TOTAL	14.66	15.08	
AVERAGE	2.93	3.02	

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.22	4.06		4.21
PULL #2	4.24	4.31		4.29
PULL #3	4.17	4.28		4.01
PULL #4	4.14	3.89		4.13
PULL #5	4.05	3.63		4.26
TOTAL	20.82	20.17		20.90
AVERAGE	4.16	4.03		4.18

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6590154.__0

FILE DATE AND TIME: 09/14/2006 01:47

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	-0.040
The Average Y Centroid of the Five Target Set:	-0.130
The Average Point of Impact of the Five Target Set:	0.136
The Average Mean Radius of the Five Target Set:	0.705
The Distance from POA to Centroid Target #1:	0.175
The Distance from Centroid Target #2 to Centroid Target #1:	0.342
The Distance from Centroid Target #3 to Centroid Target #1:	0.398
The Distance from Centroid Target #4 to Centroid Target #1:	0.458
The Distance from Centroid Target #5 to Centroid Target #1:	0.376

BARBER - M24 0165766

SERIAL NUMBER: G6590154. __0

TARGET NUMBER: 1

FILE DATE: 09/14/2006

FILE TIME: 01:47

POINT#	X	Y
1:	-0.910	1.843
2:	0.417	1.593
3:	0.625	1.042
4:	0.345	0.075
5:	0.403	-0.216
6:	0.454	-0.420
7:	0.483	-0.713
8:	-0.027	-0.780
9:	-0.514	-0.675
10:	-0.720	-0.094

X CENTROID: 0.056

Y CENTROID: 0.166

POA TO CENTROID: 0.175

HORZ SPREAD: 1.535

VERT SPREAD: 2.623

GROUP SPREAD: 2.911

MIN RADIUS: 0.303


MAX RADIUS: 1.936

MEAN RADIUS: 0.974

IN 1 IN DIAMETER: 1

IN 2 IN DIAMETER: 6

in 3 IN DIAMETER: 9

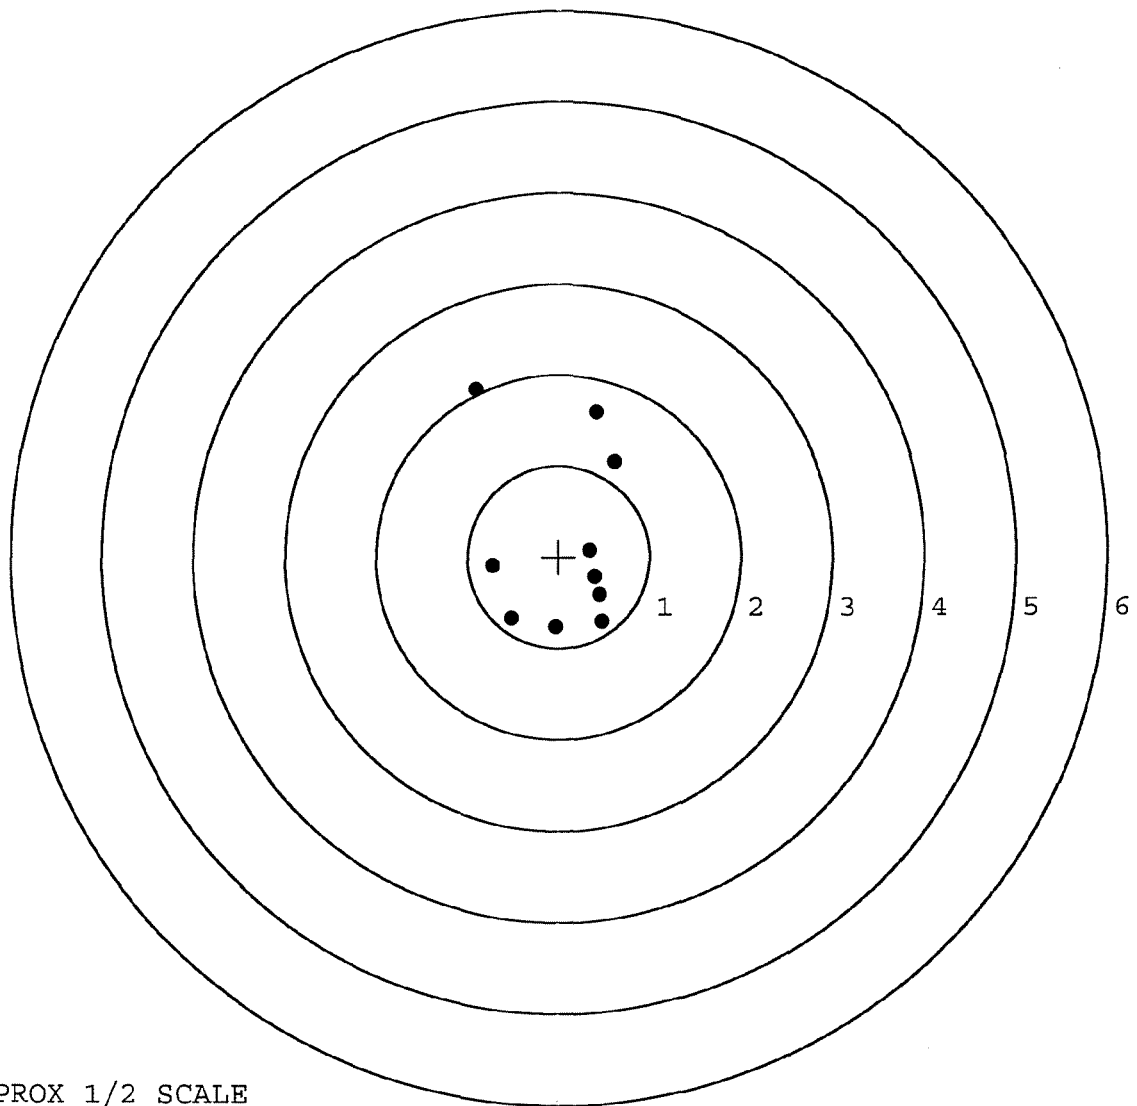


TARGET APPROX 1/2 SCALE

BARBER - M24 0165767

SERIAL NUMBER: G6590154. __0
 TARGET NUMBER: 2
 FILE DATE: 09/14/2006
 FILE TIME: 01:47

POINT#	X	Y
1:	-0.408	0.844
2:	0.467	0.269
3:	0.341	0.014
4:	0.055	-0.329
5:	-0.710	-0.077
6:	-0.368	-0.165
7:	-0.174	-0.871
8:	-0.030	-1.348
9:	0.139	-0.148
10:	0.362	0.164

X CENTROID: -0.033
 Y CENTROID: -0.165
 POA TO CENTROID: 0.168
 HORZ SPREAD: 1.177
 VERT SPREAD: 2.192
 GROUP SPREAD: 2.224
 MIN RADIUS: 0.172
 MAX RADIUS: 1.183
 MEAN RADIUS: 0.595
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

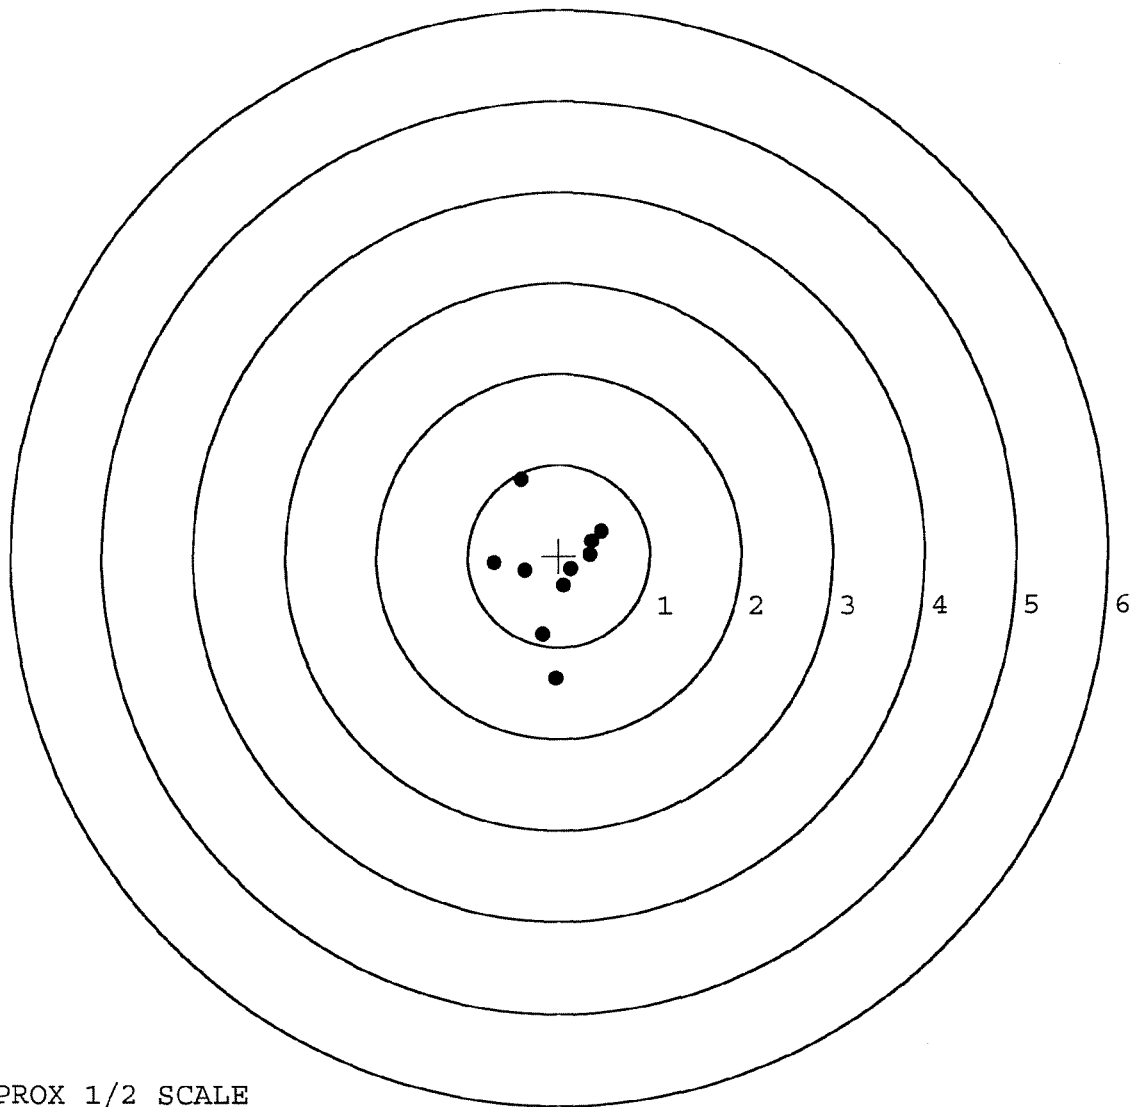

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590154. __0

TARGET NUMBER: 3

FILE DATE: 09/14/2006

FILE TIME: 01:47

POINT#	X	Y
1:	-0.575	1.214
2:	-0.029	0.431
3:	0.471	-1.121
4:	-0.363	-0.813
5:	-0.445	-0.431
6:	-0.148	-0.297
7:	0.086	-0.347
8:	0.272	-0.543
9:	0.284	-0.266
10:	0.349	-0.094

X CENTROID: -0.010

Y CENTROID: -0.227

POA TO CENTROID: 0.227

HORZ SPREAD: 1.046

VERT SPREAD: 2.335

GROUP SPREAD: 2.559

MIN RADIUS: 0.154


MAX RADIUS: 1.548

MEAN RADIUS: 0.580

IN 1 IN DIAMETER: 6

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 9

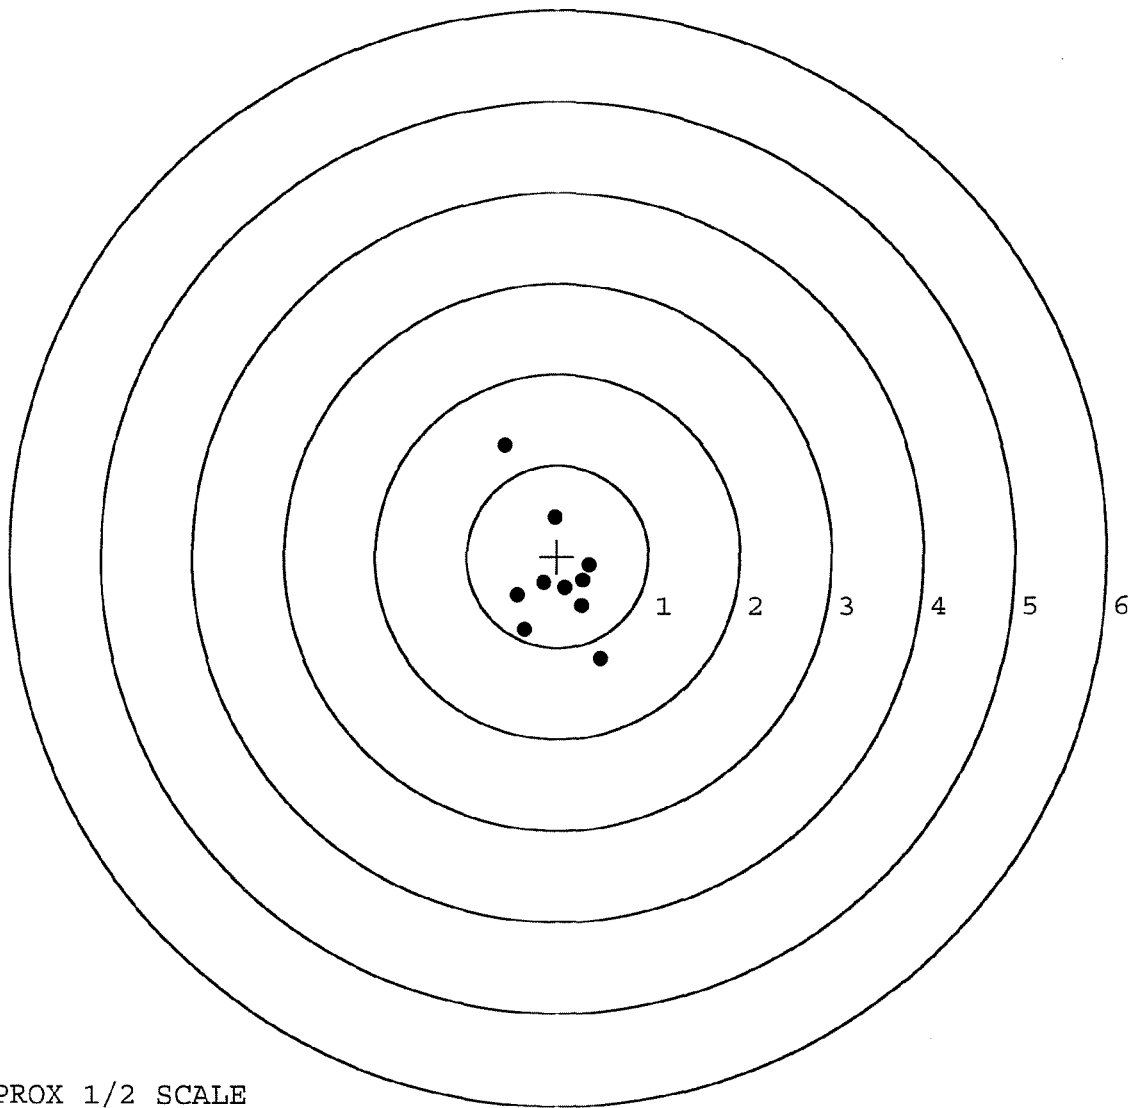

TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590154. __0

TARGET NUMBER: 4

FILE DATE: 09/14/2006

FILE TIME: 01:47

POINT#	X	Y
1:	-0.534	0.725
2:	-0.333	0.319
3:	-1.044	-0.682
4:	-0.670	-0.655
5:	-0.611	-0.423
6:	-0.310	-0.436
7:	-0.102	-0.541
8:	0.276	-0.182
9:	0.839	0.185
10:	0.662	-0.565

X CENTROID: -0.183

Y CENTROID: -0.226

POA TO CENTROID: 0.290

HORZ SPREAD: 1.883

VERT SPREAD: 1.407

GROUP SPREAD: 2.073

MIN RADIUS: 0.246


MAX RADIUS: 1.101

MEAN RADIUS: 0.672

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

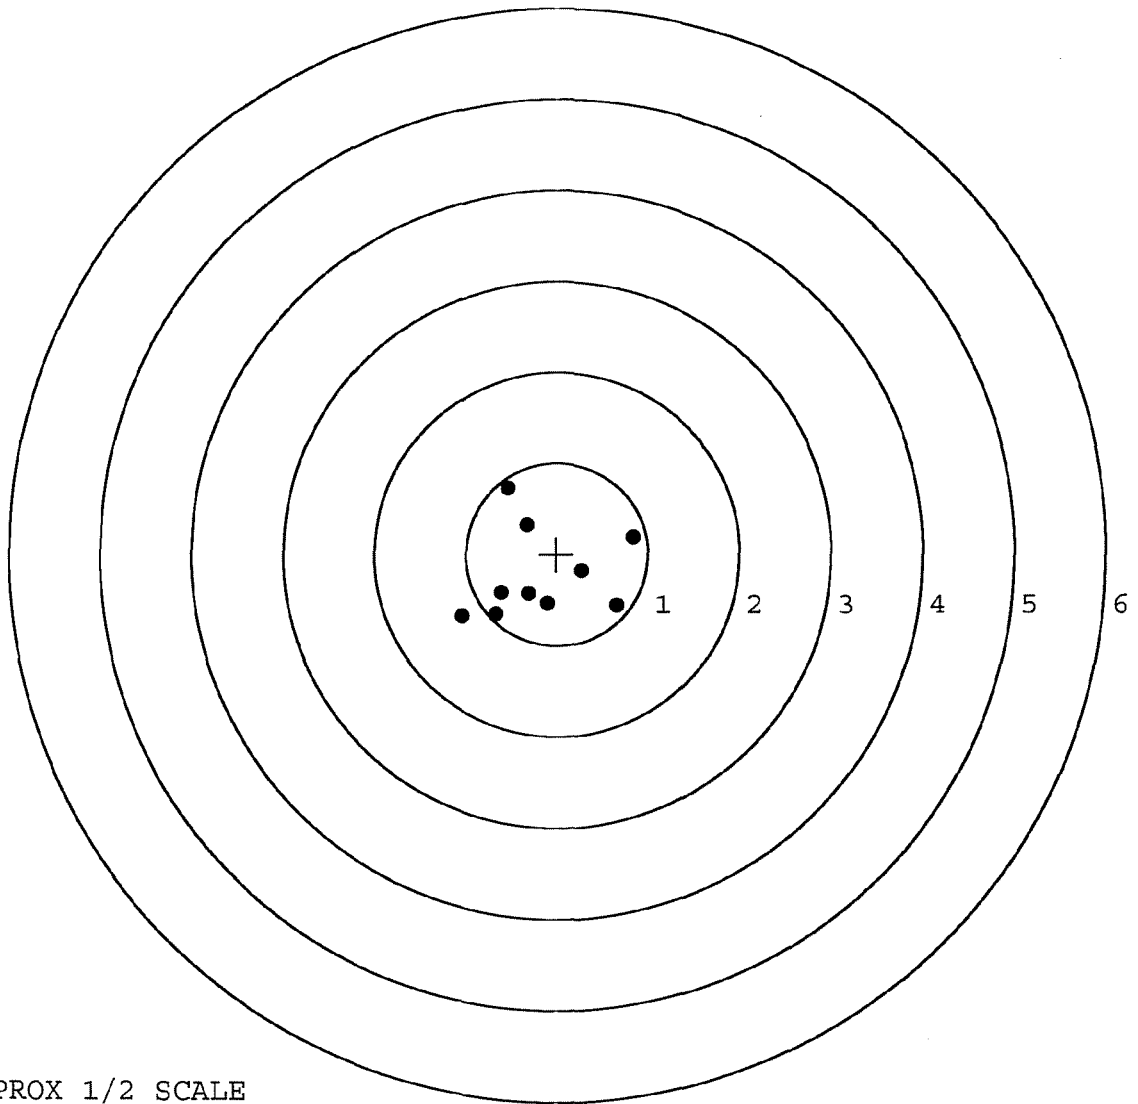


TARGET APPROX 1/2 SCALE

SERIAL NUMBER: G6590154. __0
 TARGET NUMBER: 5
 FILE DATE: 09/14/2006
 FILE TIME: 01:47

POINT#	X	Y
1:	1.084	0.150
2:	0.631	-0.762
3:	0.528	-1.419
4:	-0.053	-0.447
5:	-0.358	-0.372
6:	-0.352	-0.096
7:	-0.318	0.170
8:	-0.365	0.281
9:	-0.065	0.465
10:	-1.016	0.020

X CENTROID: -0.028
 Y CENTROID: -0.201
 POA TO CENTROID: 0.203
 HORZ SPREAD: 2.100
 VERT SPREAD: 1.884
 GROUP SPREAD: 2.111
 MIN RADIUS: 0.247
 MAX RADIUS: 1.339
 MEAN RADIUS: 0.707
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 7
 # in 3 IN DIAMETER: 10

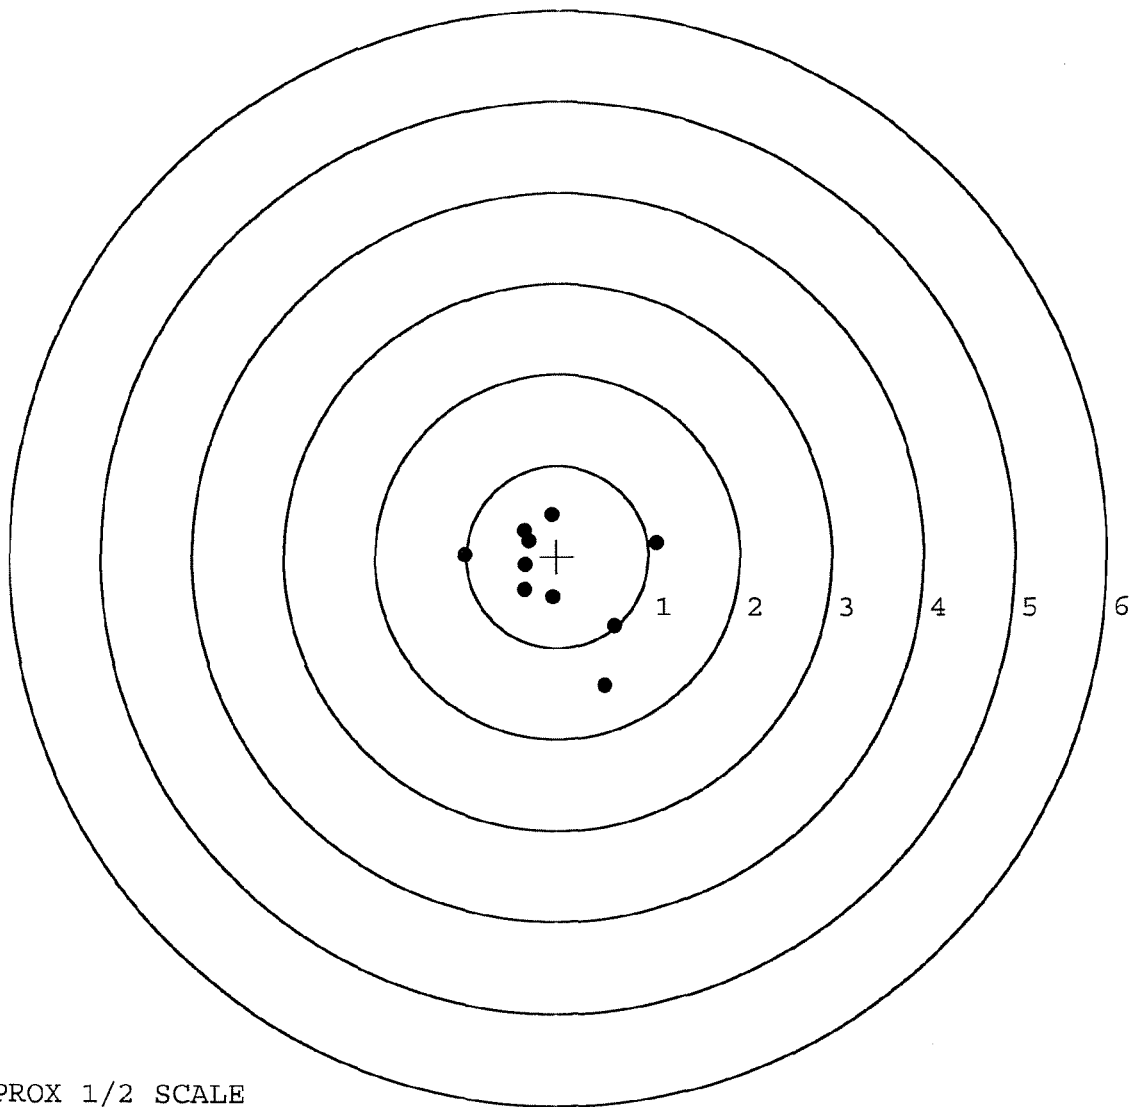

TARGET APPROX 1/2 SCALE