

G6695435
Replaces
C6225283

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00147684** Serial: C6225283 Model M24 SWS Center Fire Repairman: _____
Verify Repair _____ Caliber: 7.62 NATO Status: Closed 7/17/2008 6:22:16 AM

Address Information

Customer: ☒ Received From Return To: ☐ Received From
Name: **PBO 1/75 RANGER REGIMENT** **PBO 1/75 RANGER REGIMENT**
Address 1: **ATTN: WD1 CURTIS B MATHIS** **ATTN: WD1 CURTIS B MATHIS**
Address 2: **1036 LIBERATOR RD** PO Box: _____ **1036 LIBERATOR RD** PO Box: _____
City: **HUNTER AAF** **HUNTER AAF**
State: **GA** Zip Code: **31409** Country: **US** State: **GA** Zip Code: **31409** Country: **US**
FFL: _____

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: **NN**
Fax: _____
Email: _____
Comments: _____

Received Condition

Condition: **Fair**
Notes: _____
CSR Notes: _____

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A057	Fit and Rear Sgt Base	1
D000	MARS RAIL	1

Repair Search | **Refresh** | **Close**

naglelj 7/17/2008 8:10 AM CAPS NUM INS SCRL

start 10 Micr... Excite Mail... 8 Micros... Arms Ser... Part Sear... 8:10 AM

G6695435

Reset

Number: **C6225283**Model: **M24 SWS****RE00147684**

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-C-0149

R & E NUMBER

147684

SERIAL NUMBER

C6225283

G6695435 (Nim)

LOG-IN DATE

7-17-08

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	9-29-08	RJZ
505	RE-BARREL	9-30-08	RJZ
560	ASSEMBLE	9-30-08	RJZ
600	PROOF	10-2-08	RJZ
605	CHECK HEADSPACE	10-2-08	RJZ
610	DIS-ASSEMBLE GUN	10-2-08	RJZ
612	MAGNAFLUX	10/8/08	RJZ
510	DRILL AND TAP	10-6-08	JP
615	ROLLMARK CALIBER	10/8/08	RT
618	ROTO-BLAST		
620	APPLY COATINGS	10-11	
625	FINAL ASSEMBLY	10-13-08	RJZ
640	FUNCTION TEST AND	10-14-08	TC
650	TARGET	10-14-08	TC
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	10-14-08	RJZ
	A) HEADSPACE	10-22-08	RJZ
	B) TRIGGER PULL	10-22-08	RJZ
		10-17-08	TC
680	F) SAFETY ON FORCE	10-22-08	RJZ
	G) SAFETY OFF FORCE	10-22-08	RJZ
	I) FIRING PIN INDENT	10-22-08	RJZ
690	PACK	10/13/08	FM

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6695435.__0

FILE DATE AND TIME: 10/15/2008 06:17

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	-0.169
The Average Y Centroid of the Five Target Set:	-0.204
The Average Point of Impact of the Five Target Set:	0.265
The Average Mean Radius of the Five Target Set:	0.673
The Distance from POA to Centroid Target #1:	0.286
The Distance from Centroid Target #2 to Centroid Target #1:	0.673
The Distance from Centroid Target #3 to Centroid Target #1:	0.222
The Distance from Centroid Target #4 to Centroid Target #1:	0.110
The Distance from Centroid Target #5 to Centroid Target #1:	0.185

BARBER - M24 0179091

SERIAL NUMBER: G6695435. __0
TARGET NUMBER: 1
FILE DATE: 10/15/2008
FILE TIME: 06:17

POINT#	X	Y
1:	0.524	1.059
2:	-0.432	0.788
3:	-0.688	0.292
4:	-0.482	0.152
5:	0.443	-0.012
6:	-0.407	-0.153
7:	-0.379	-0.345
8:	-0.334	-0.628
9:	-0.784	-0.846
10:	-0.145	-1.285

X CENTROID: -0.268
Y CENTROID: -0.098
POA TO CENTROID: 0.286
HORZ SPREAD: 1.308
VERT SPREAD: 2.344
GROUP SPREAD: 2.438
MIN RADIUS: 0.149
MAX RADIUS: 1.402
MEAN RADIUS: 0.698
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

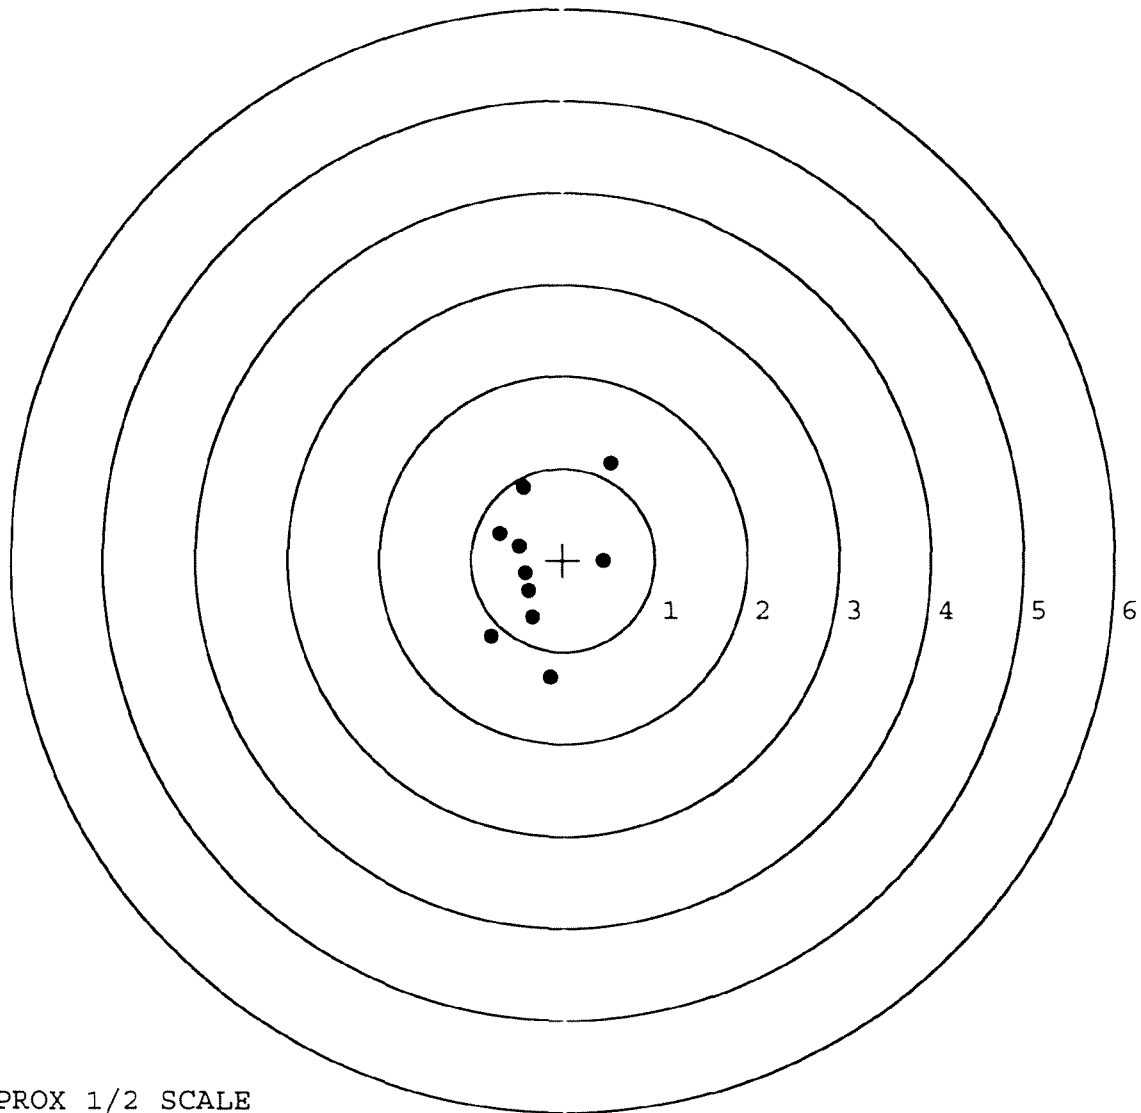


TARGET APPROX 1/2 SCALE

BARBER - M24 0179092

SERIAL NUMBER: G6695435. __ 0
 TARGET NUMBER: 2
 FILE DATE: 10/15/2008
 FILE TIME: 06:17

POINT#	X	Y
1:	1.008	0.175
2:	-1.187	0.195
3:	-0.551	-0.729
4:	0.040	-0.578
5:	-0.015	-0.704
6:	-0.019	-0.943
7:	0.105	-1.142
8:	0.838	-0.910
9:	-0.524	-1.541
10:	-0.702	-1.322

X CENTROID: -0.101
 Y CENTROID: -0.750
 POA TO CENTROID: 0.757
 HORZ SPREAD: 2.195
 VERT SPREAD: 1.736
 GROUP SPREAD: 2.300
 MIN RADIUS: 0.097
 MAX RADIUS: 1.444
 MEAN RADIUS: 0.699
 # IN 1 IN DIAMETER: 5
 # IN 2 IN DIAMETER: 8
 # in 3 IN DIAMETER: 10

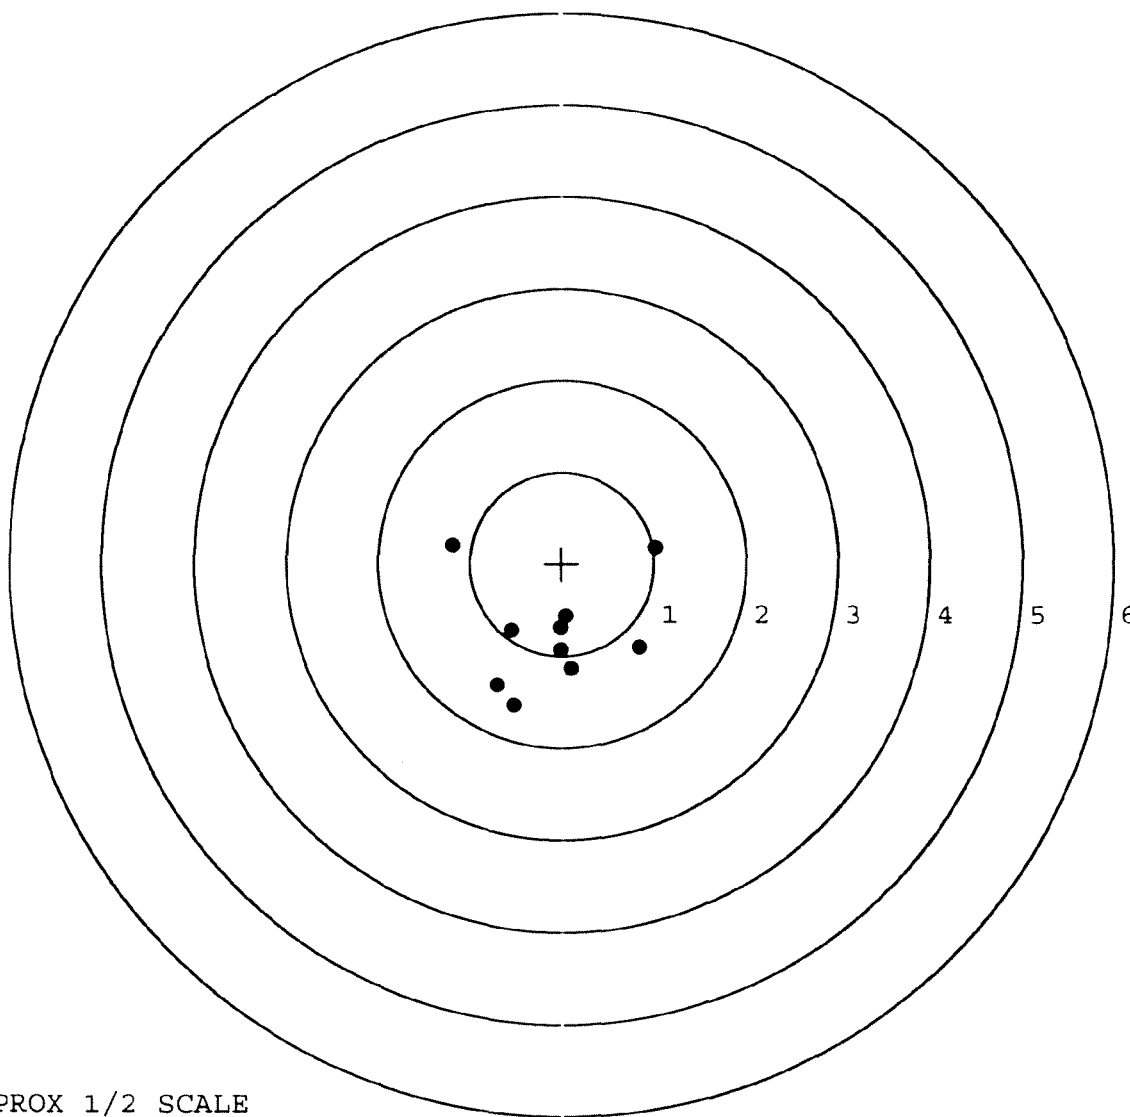

TARGET APPROX 1/2 SCALE

BARBER - M24 0179093

SERIAL NUMBER: G6695435. __0

TARGET NUMBER: 3

FILE DATE: 10/15/2008

FILE TIME: 06:17

POINT#	X	Y
1:	0.677	0.837
2:	0.329	0.238
3:	0.135	0.447
4:	-0.347	0.627
5:	-0.163	0.399
6:	0.910	-0.298
7:	-0.090	-0.393
8:	-0.802	-0.328
9:	-0.833	-0.453
10:	-0.768	-0.670

X CENTROID: -0.095

Y CENTROID: 0.041

POA TO CENTROID: 0.103

HORZ SPREAD: 1.743

VERT SPREAD: 1.507

GROUP SPREAD: 2.088

MIN RADIUS: 0.365


MAX RADIUS: 1.109

MEAN RADIUS: 0.720

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 8

in 3 IN DIAMETER: 10

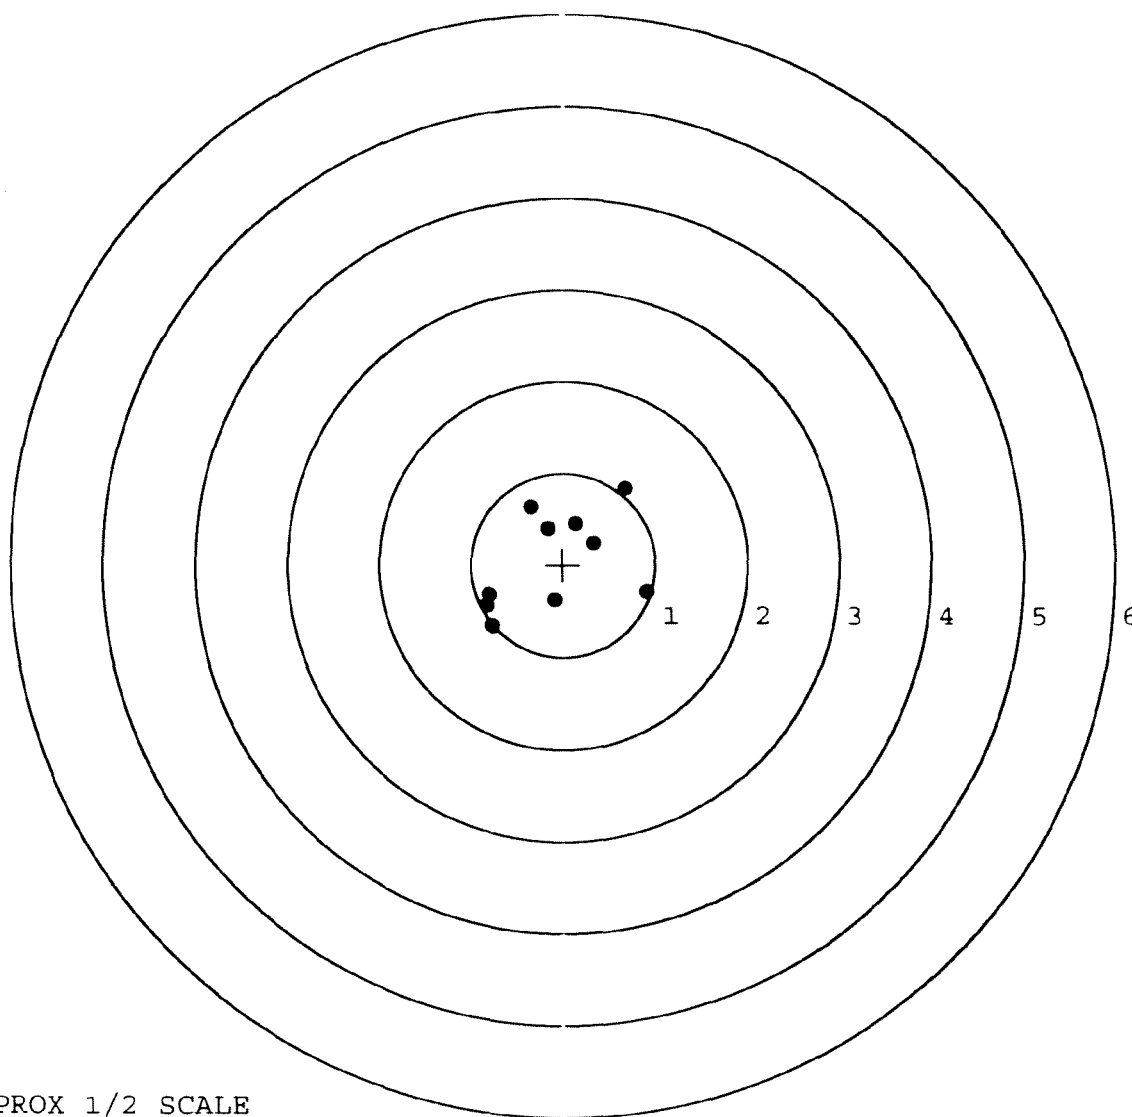

TARGET APPROX 1/2 SCALE

BARBER - M24 0179094

SERIAL NUMBER: G6695435. __0

TARGET NUMBER: 4

FILE DATE: 10/15/2008

FILE TIME: 06:17

POINT#	X	Y
1:	0.547	0.324
2:	0.132	0.562
3:	-0.347	0.091
4:	-0.551	0.165
5:	-0.672	0.356
6:	-0.868	0.108
7:	-0.716	-0.020
8:	-0.541	-0.595
9:	0.081	-0.256
10:	0.437	-0.630

X CENTROID: -0.250

Y CENTROID: 0.010

POA TO CENTROID: 0.250

HORZ SPREAD: 1.415

VERT SPREAD: 1.192

GROUP SPREAD: 1.499

MIN RADIUS: 0.126


MAX RADIUS: 0.939

MEAN RADIUS: 0.567

IN 1 IN DIAMETER: 4

IN 2 IN DIAMETER: 10

in 3 IN DIAMETER: 10

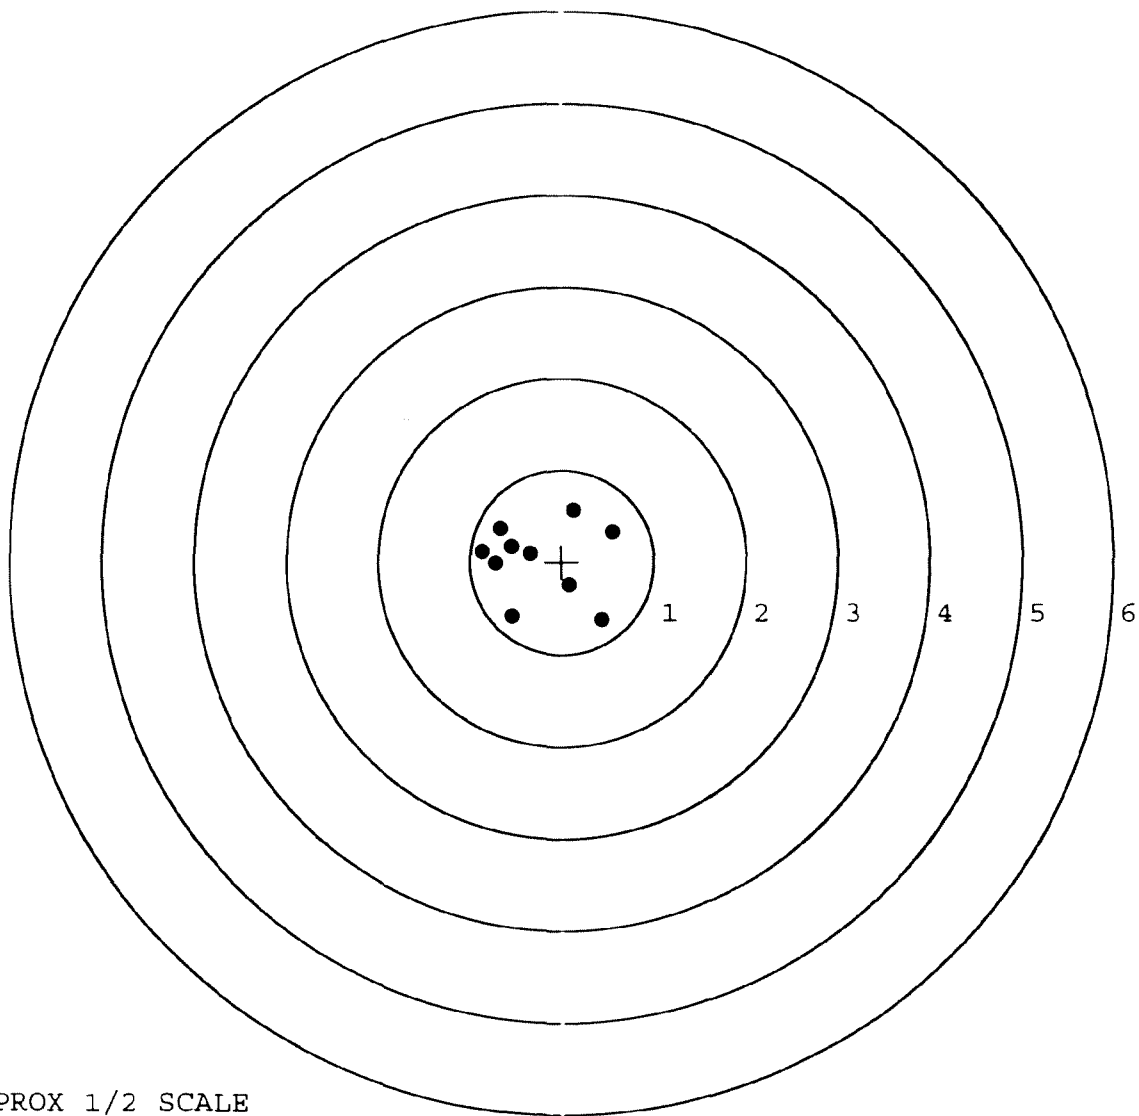


TARGET APPROX 1/2 SCALE

BARBER - M24 0179095

SERIAL NUMBER: G6695435. __0
 TARGET NUMBER: 5
 FILE DATE: 10/15/2008
 FILE TIME: 06:17

POINT#	X	Y
1:	0.558	0.497
2:	0.117	0.635
3:	-0.182	0.535
4:	-0.067	0.253
5:	-0.482	0.015
6:	-0.075	-0.400
7:	-0.229	-0.550
8:	0.039	-1.028
9:	-0.390	-1.065
10:	-0.617	-1.125

X CENTROID: -0.133
 Y CENTROID: -0.223
 POA TO CENTROID: 0.260
 HORZ SPREAD: 1.175
 VERT SPREAD: 1.760
 GROUP SPREAD: 2.003
 MIN RADIUS: 0.186
 MAX RADIUS: 1.023
 MEAN RADIUS: 0.681
 # IN 1 IN DIAMETER: 4
 # IN 2 IN DIAMETER: 9
 # in 3 IN DIAMETER: 10

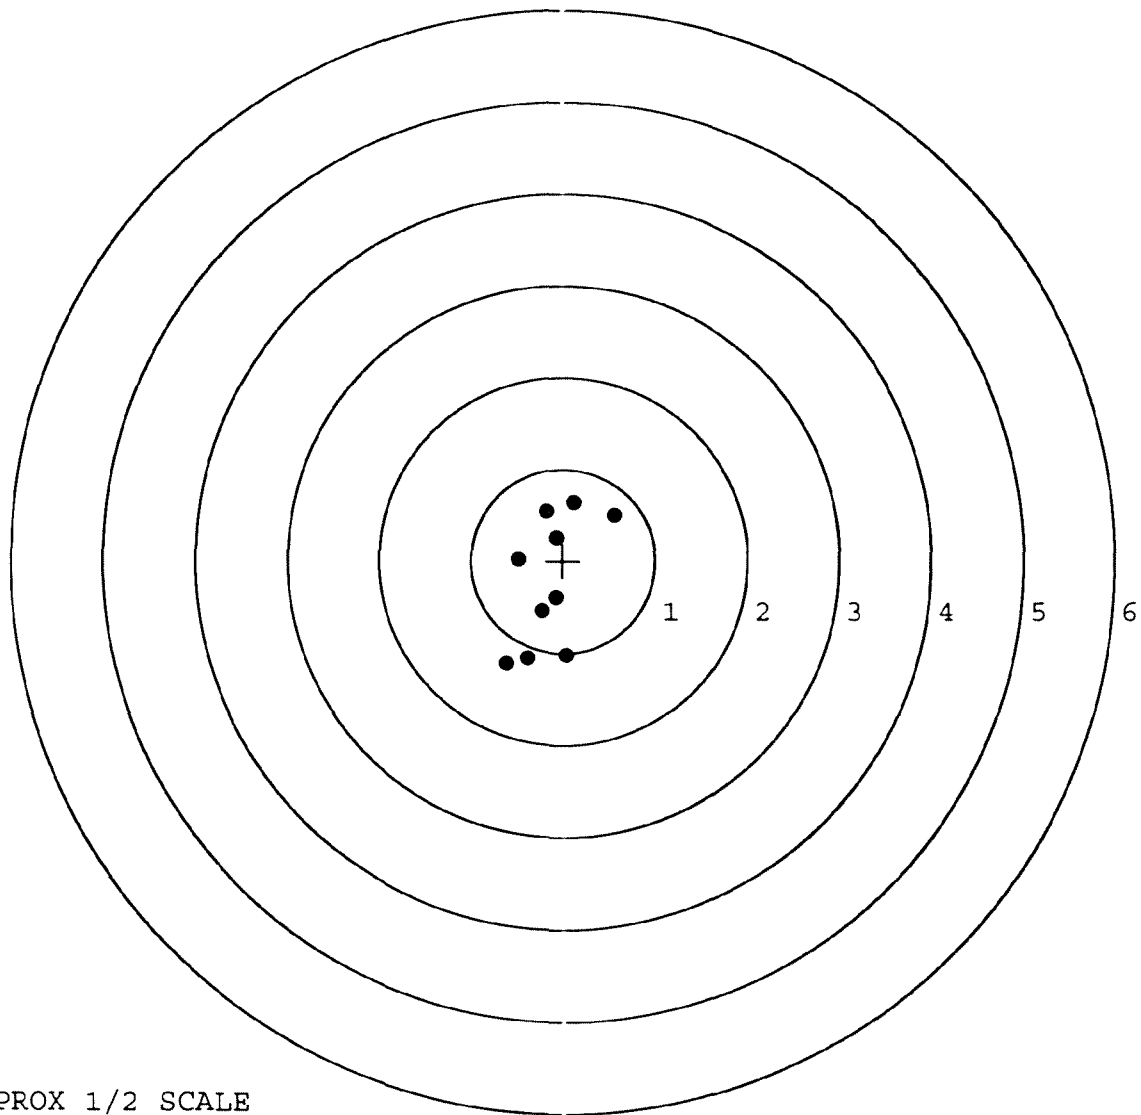

TARGET APPROX 1/2 SCALE

INTERCHANGEABILITY

M-24

CONTRACT # DAAA21-87-C-0086

GUN SERIAL # C6225283

OP.#	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and stock	8	9/88	FB
600	Proof	9	7/88	RW
607	Check Headspace	9	7/88	RW
610	Dis-assemble gun	9	7/88	RW
612	Magnaflux Barrel Action		9-14-88	pfl.
	Magnaflux Bolt		9-14-88	pfl.
615	Rollmark Caliber		10/12	WC
617	Drill & Tap Sight Holes		10/12	FB
618	Polish Barrel		10/70	WT
620	Apply Coatings (Barrel Action)		10-31-88	TJA
	Apply Coatings (Bolt)		10-31-88	TJA
625	Final Assembly A) Clean inside of Bolt Assembly		11/4/88	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		11/4/88	RW
	C) Inspect Ejector Hole for Chamfer		11/4/88	RW

OVER

OP. #		READINGS	DATE	INITIAL
625	D) Oil Firing Pin Ass'y		11/4/88	RW
cont.	E) Adjust Trigger Pull to Min. Setting and Stake		7/10/88	JL
	F) Safety on Force	5 : 5 : 5	8/10/88	JS
	G) Safety off Force	3 : 3 : 3	8/10/88	JS
	H) Trigger Pull Test & Retainability		7/10/88	JL
	I) Firing Pin Indent	.021 : .021 : .021	8/10/88	JS
	J) Assemble Stock		11/10/88	RW
	K) Attach Front & Rear Sight Assemblies		11/10/88	RW
	L) Iron Sight Alignment		11/10/88	RW
	M) Detach Front & Rear Sights & place in numbered container		11/10/88	RW
	N) Attach Scope to Rifle		11/15/88	WB
	O) Detach & Attach Scope 20 times		11/15/88	WB
640	Gallery Target & Test	53R 65L	11/17/88	AC
	A) Optical Clarity of Scope		11/17/88	JV
645	Inspect for Live Ammo		11/17/88	JV
655	Final Inspection			
	A) Headspace		30/10/88	JS
	B) Trigger Pull	2.66 : 2.58 : 2.60	2.56 : 2.61	JS
	C) Function		30/10/88	JS
	D) Assemble Swivel Studs		30/10/88	JS
660	Pack		12/10/88	RW

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. 06225283

DATE 11-7-88

TESTER G.S. + J.R.

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.58	2.43	2.75	2.66	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.41	2.43	2.71	2.58	
PULL #3	2.44	2.42	2.69	2.60	
PULL #4	2.44	2.41	2.70	2.56	
PULL #5	2.41	2.49	2.71	2.61	
TOTAL	12.28	12.18	13.56	13.01	
AVG.	2.456	2.436	2.712	2.602	

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.23	3.29		
PULL #2	3.27	3.14		
PULL #3	3.31	3.34		
PULL #4	3.34	3.37		
PULL #5	3.31	3.39		
TOTAL	16.46	16.53		
AVG.	3.292	3.306		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.09	4.07		4.33
PULL #2	4.06	4.12		4.36
PULL #3	4.12	4.09		4.24
PULL #4	3.94	4.10		4.41
PULL #5	4.05	4.16		4.44
TOTAL	20.26	20.54		4.392
AVG.	4.052	4.108		4.392

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225283

CENTROIDAL DISTANCES

0 TO	1	1.0587
1 TO	2	.364552
1 TO	3	.560109
1 TO	4	.338817
1 TO	5	.184068

$\begin{matrix} 25 \\ 34 \\ 4 \end{matrix}$
 + ---- POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .6196
 THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .6692
 THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .911994

THE AMR FOR THIS RIFLE IS: 1.01

28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225283

CENTERFIRE PATTERNS # 1

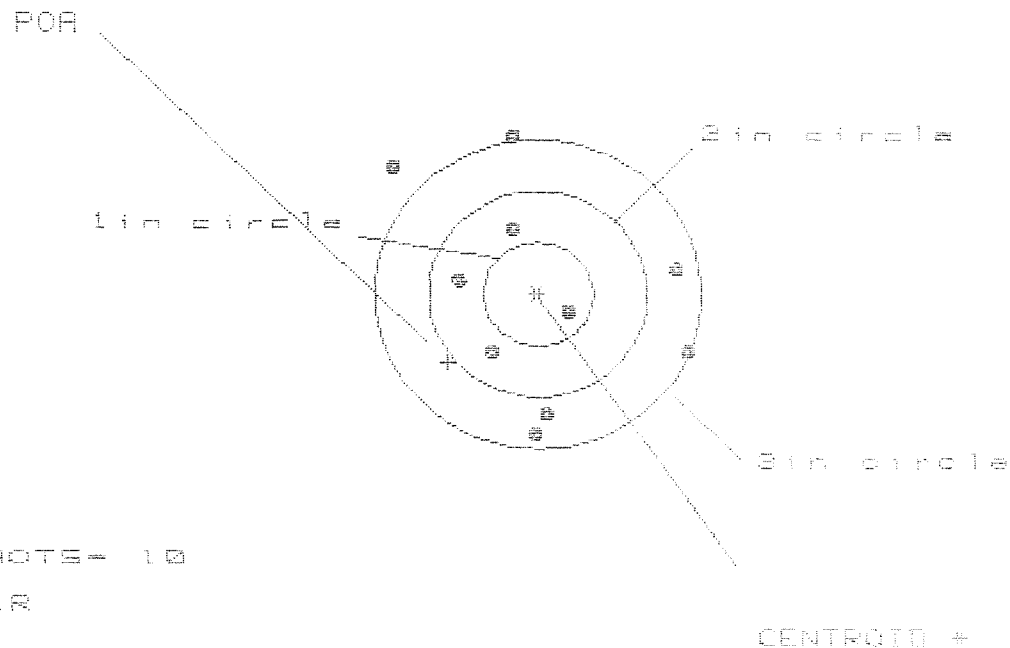

OF SHOTS= 10

IN CIR

1 in = 1

2 in = 4

3 in = 8

HSE= 2.746

VSE= 2.842


ESE= 3.235

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.390	1.239	1.198
MINIMUM X	-1.356	-0.897	-0.938
MAXIMUM Y	1.501	1.633	0.946
MINIMUM Y	-1.341	-1.209	-1.004
CENTROID X	.827	.978	1.019
CENTROID Y	.661	.529	.324
POA TO CENTROID in.	1.059	1.111	1.070
MIN RADIUS	.292	.093	.168
MEAN RADIUS	1.095	.993	.899
MAX RADIUS	1.806	1.667	1.211
HORIZONTAL SPREAD	2.746	2.136	2.136
VERTICAL SPREAD	2.842	2.842	1.950
EXTREME SPREAD	3.235	2.845	2.242
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	8		

28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/C8225283

CENTERFIRE PATTERNS # 2

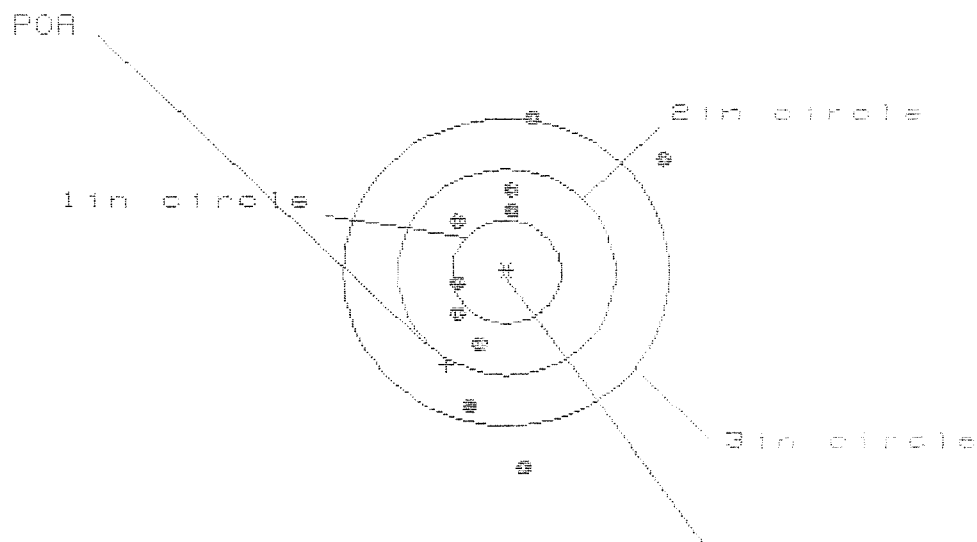

OF SHOTS - 10

IN CIR

1in = 1

2in = 6

3in = 7

IS = 1.812

VS = 3.457


GS = 3.457

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.438	1.449	.415
MINIMUM X	-.482	-.463	-.282
MAXIMUM Y	1.538	1.325	1.434
MINIMUM Y	-1.919	-1.476	-1.367
CENTROID X	.550	.531	.350
CENTROID Y	.898	1.111	1.002
POR TO CENTROID in.	1.053	1.232	1.062
MIN RADIUS	.489	.357	.358
MEAN RADIUS	1.052	.925	.802
MAX RADIUS	1.926	1.691	1.492
HORIZONTAL SPREAD	1.912	1.912	.637
VERTICAL SPREAD	3.457	2.801	2.801
EXTREME SPREAD	3.457	2.939	2.855
NUMBER IN ONE INCH CIRCLE =		1	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		7	

25 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08220263

CENTERFIRE PATTERNS # 3

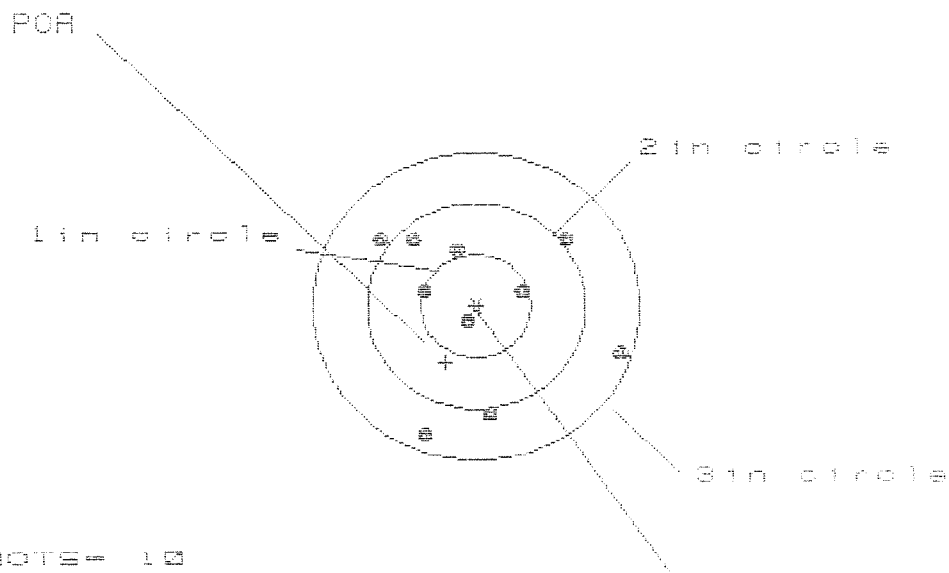

OF SHOTS= 10

IN CIR

1 in = 2

2 in = 5

3 in = 10

HS= 2.247

VS= 1.901

GS= 2.523

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.330	1.002	.955
MINIMUM X	-.917	-.769	-.816
MAXIMUM Y	.696	.646	.409
MINIMUM Y	-1.205	-1.255	-1.227
CENTROID X	.278	.130	.176
CENTROID Y	.550	.600	.757
POR TO CENTROID in.	.616	.614	.777
MIN RADIUS	.213	.248	.321
MEAN RADIUS	.853	.773	.687
MAX RADIUS	1.404	1.308	1.247
HORIZONTAL SPREAD	2.247	1.771	1.771
VERTICAL SPREAD	1.901	1.901	1.716
EXTREME SPREAD	2.523	2.290	2.007
NUMBER IN ONE INCH CIRCLE =		2	
NUMBER IN TWO INCH CIRCLE =		5	
NUMBER IN THREE INCH CIRCLE =		10	

26 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225283

CENTERFIRE PATTERNS

4

FOR

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS = 10

IN CIR

1 in = 1

2 in = 5

3 in = 9

HS = 1.878

VS = 2.731

GS = 3.068

PATTERN #	:	4
SHOTS (BEST OF)	:	10
MAXIMUM X	:	.886
MINIMUM X	:	-.992
MAXIMUM Y	:	1.715
MINIMUM Y	:	-1.016
CENTROID X	:	.621
CENTROID Y	:	.392
FOR TO CENTROID in.	:	.735
MIN RADIUS	:	.415
MEAN RADIUS	:	.974
MAX RADIUS	:	1.950
HORIZONTAL SPREAD	:	1.878
VERTICAL SPREAD	:	2.731
EXTREME SPREAD	:	3.068
NUMBER IN ONE INCH CIRCLE	=	1
NUMBER IN TWO INCH CIRCLE	=	5
NUMBER IN THREE INCH CIRCLE	=	9

28 Nov 1988

FILE:/PATTERNING/CENTERFIRE_PATT/082252B3

CENTERFIRE PATTERNS

5

POR

1 in circle

2 in circle

3 in circle

CENTROID *

OF SHOTS = 10

IN CIR

1 in = 0

2 in = 4

3 in = 8

HSE = 2.385

VSE = 3.029

GSE = 3.247

PATTERN #	1	5	9	8
SHOTS (BEST OF)	10	9	9	8
MAXIMUM X	1.194	1.255	1.255	1.184
MINIMUM X	-1.191	-1.130	-1.130	-1.201
MAXIMUM Y	1.407	1.227	1.227	1.351
MINIMUM Y	-1.622	-1.196	-1.196	-1.043
CENTROID X	.822	.761	.761	.832
CENTROID Y	.845	1.025	1.025	.872
POR TO CENTROID in.	1.179	1.277	1.277	1.205
MIN RADIUS	.519	.385	.385	.490
MEAN RADIUS	1.078	.992	.992	.940
MAX RADIUS	1.711	1.351	1.351	1.352
HORIZONTAL SPREAD	2.385	2.385	2.385	2.385
VERTICAL SPREAD	3.029	2.423	2.423	2.394
EXTREME SPREAD	3.247	2.462	2.462	2.399
NUMBER IN ONE INCH CIRCLE =		0		
NUMBER IN TWO INCH CIRCLE =		4		
NUMBER IN THREE INCH CIRCLE =		8		

INTERCHANGEABILITY

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225283

CENTROIDAL DISTANCES

0 TO	1	.367793
1 TO	2	.291055
1 TO	3	.161301
1 TO	4	.286588
1 TO	5	.0325269

7.53 <----POB


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .3824
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: -.2196
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .373724
THE AMR FOR THIS RIFLE IS: 1.019

INTERCHANGEABILITY

13 Dec 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06265263.1

CENTERFIRE PATTERNS # 1

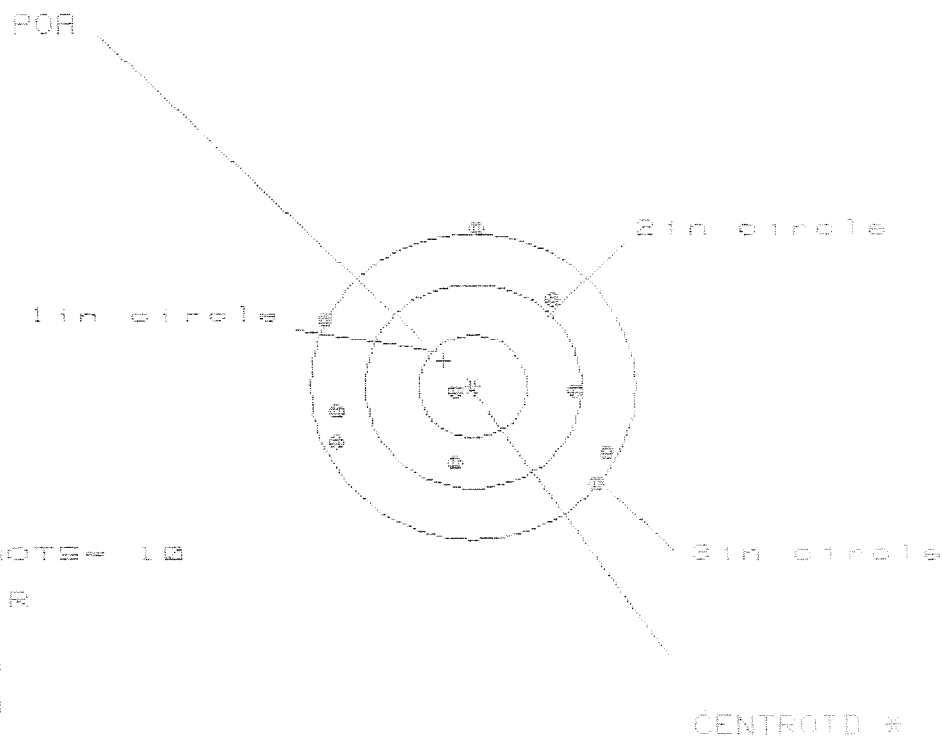

OF SHOTS = 10

IN CIR

1in = 1

2in = 3

3in = 8

HS = 2.546

VS = 2.558

GS = 2.964

CENTROID *

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.227	1.233	1.381
MINIMUM X	-1.319	-1.313	-1.165
MAXIMUM Y	1.682	1.845	.948
MINIMUM Y	-.956	-.778	-.623
CENTROID X	.266	.260	.112
CENTROID Y	-.254	-.432	-.335
POA TO CENTROID in.	.368	.584	.353
MIN RADIUS	.155	.189	.030
MEAN RADIUS	1.152	1.086	1.021
MAX RADIUS	1.603	1.350	1.485
HORIZONTAL SPREAD	2.546	2.546	2.546
VERTICAL SPREAD	2.558	1.923	1.571
EXTREME SPREAD	2.964	2.964	2.847
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	3		
NUMBER IN THREE INCH CIRCLE =	8		

INTERCHANGEABILITY


13 Dec 1988

FILE:/PATTERNING/CENTERFIRE_PATT/06225283.1

CENTERFIRE PATTERNS

2

POR

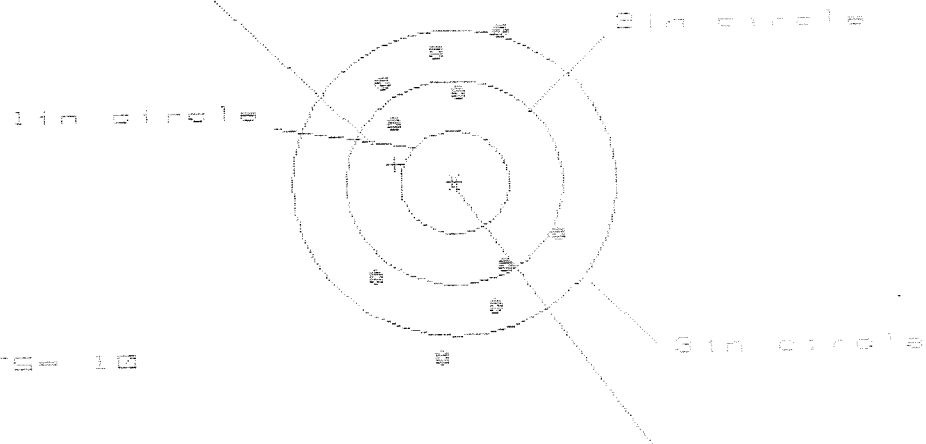

OF SHOTS = 10

IN CIR

1 in = 8

2 in = 1

3 in = 0

HS = 1.716

VS = 3.169

ES = 3.235

CENTROID #

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.993	.974	1.032
MINIMUM X	-.724	-.742	-.684
MAXIMUM Y	1.474	1.285	1.244
MINIMUM Y	-1.695	-1.448	-1.287
CENTROID X	.549	.568	.510
CENTROID Y	-.186	.003	-.158
POR TO CENTROID in.	.580	.568	.534
MIN RADIUS	.835	.720	.788
MEAN RADIUS	1.206	1.126	1.097
MAX RADIUS	1.793	1.496	1.358
HORIZONTAL SPREAD	1.716	1.716	1.716
VERTICAL SPREAD	3.169	2.733	2.531
EXTREME SPREAD	3.235	2.734	2.595
NUMBER IN ONE INCH CIRCLE =	8	3	2
NUMBER IN TWO INCH CIRCLE =	1	6	6
NUMBER IN THREE INCH CIRCLE =	1	0	0

INTERCHANGEABILITY

13 Dec 1988

FILE:/PATTERNING/CENTERFIRE_PATT/08225203.1

CENTERFIRE PATTERNS # 3

POB

1 in circle

2 in circle

3 in circle

CENTROID #

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 7

3 in = 10

HW = 1.751

VS = 2.153

GS = 2.201

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.673	.554	.577
MINIMUM X	-1.077	-.298	-.275
MAXIMUM Y	1.040	1.107	.976
MINIMUM Y	-1.113	-1.046	-.863
CENTROID X	.423	.543	.520
CENTROID Y	-.291	-.353	-.227
POB TO CENTROID in.	.514	.651	.568
MIN RADIUS	.205	.235	.320
MEAN RADIUS	.711	.644	.596
MAX RADIUS	1.234	1.107	.977
HORIZONTAL SPREAD	1.751	.852	.852
VERTICAL SPREAD	2.153	2.153	1.836
EXTREME SPREAD	2.201	2.160	1.845
NUMBER IN ONE INCH CIRCLE	=	3	
NUMBER IN TWO INCH CIRCLE	=	7	
NUMBER IN THREE INCH CIRCLE	=	10	

INTERCHANGEABILITY


18 Dec 1998

FILE:/PATTERNING/CENTERFIRE_PATT/062252B3.1

CENTERFIRE PATTERNS

4

POR

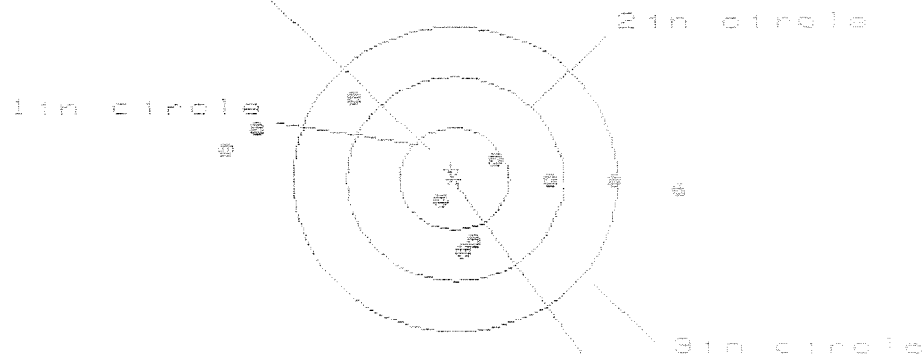

OF SHOTS - 10

IN CIR

1in = 2

2in = 5

3in = 6

HS= 4.2000

VS= 1.464

GS= 4.227

CENTROID #

PATTERN #	:	4		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	2.098	1.865	1.517
MINIMUM X	:	-2.102	-2.032	-1.849
MAXIMUM Y	:	.747	.785	.772
MINIMUM Y	:	-.717	-.679	-.692
CENTROID X	:	.031	.264	.031
CENTROID Y	:	-.096	-.128	-.115
POR TO CENTROID in.	:	.095	.294	.119
MIN RADIUS	:	.242	.244	.224
MEAN RADIUS	:	1.171	1.031	.931
MAX RADIUS	:	2.129	2.151	1.923
HORIZONTAL SPREAD	:	4.200	3.947	3.366
VERTICAL SPREAD	:	1.464	1.464	1.464
EXTREME SPREAD	:	4.227	3.999	3.410
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		5	
NUMBER IN THREE INCH CIRCLE	=		6	


INTERCHANGEABILITY

13 Dec 1986

FILE:/PATTERNING/CENTERFIRE_PATT/062252B9.1

CENTERFIRE PATTERNS # 5

FOR

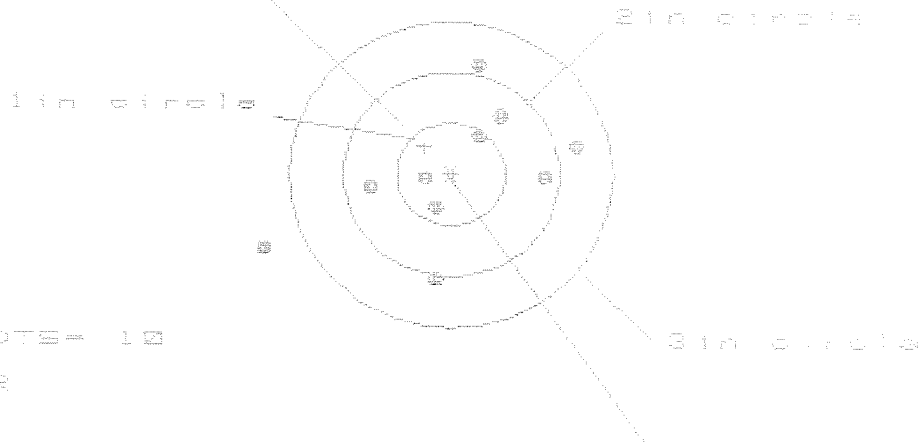

OF SHOTS= 10

IN CIR

1 in = 3

2 in = 6

3 in = 9

H= 2.873

V= 2.053

GS= 3.037

CENTROID #

PATTERN #	1	5	9
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.177	.989	.770
MINIMUM X	-1.696	-.933	-.809
MAXIMUM Y	1.040	.958	.978
MINIMUM Y	-1.013	-1.095	-1.075
CENTROID X	.243	.431	.307
CENTROID Y	-.277	-.195	-.215
FOR TO CENTROID in.	.368	.473	.375
MIN RADIUS	.233	.275	.307
MEAN RADIUS	.853	.729	.685
MAX RADIUS	1.850	1.152	1.100
HORIZONTAL SPREAD	2.873	1.922	1.579
VERTICAL SPREAD	2.053	2.053	2.053
EXTREME SPREAD	3.037	2.094	2.094
NUMBER IN ONE INCH CIRCLE =		3	
NUMBER IN TWO INCH CIRCLE =		6	
NUMBER IN THREE INCH CIRCLE =		9	

RECEIVING AND RETURN REPORT

COMMENTS

ORDER
R 95-13671

W/DEPLOYMENT KIT

Scope # 1290

INITIAL
JJM

CUSTOMER ORDER NO.

DATE RECEIVED 04/27/95	DATE OPENED 04/27/95	DATE CODE DI 9-88	SERIAL NUMBER C6225283	NEW SERIAL NUMBER	MODEL AND GRADE 700 7.62 NATO
ACCESSORIES SCOPE BASE HARD CASE					

FROM:

CDR 1/75TH RGR REGT
ATTN PBO CW2 HUMES
HAAF

GA 31409

SHIP TO:

CDR 1/75TH RGR REGT
ATTN PBO CW2 HUMES
HAAF

GA
31409

CUST NO: 119494 C.O.D.L

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.	New	B4 Barrel		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

Barrel Shot out

PARTS

COMMENTS

96003 - Barrel
96117 - Bi-pod ASSY.
96076 - Soft Rifle Carrying Case

Repowder Coat - Trigger
Guard ASSY, Front & Rear
Sight Bases.
ReZinc - Scope Base, Rings,
& Swivel Studs

REPAIRMAN RW	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
GALLERY TESTER RW	DATE 4/28/95	DATE 5/9/95	DATE 5/11/95	DATE 5/11/95	DATE

OFFICE COPY

RD6925 REV. 1/94

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 M2400179150

BARBER - M24 0179112										QUANTITY										DOCUMENT NUMBER										SUPPLEMENTARY ADDRESS										UNIT PRICE																																																																					
STOCK NUMBER										REQUISITIONER										DATE										SERIAL										ADDRESS										UNIT PRICE																																																											
FIEAWAK1005-01-240-2136										EA 00001 W336KF 5068-0001 W33NWN																																								\$5145.00																																																											
SHIPPED FROM CDR, 1/25TH RGR. Regt. ATTN: PBO, CW2 Humes HAAF, GA. 31409										SHIP TO Remington Arms Company ATTN: FABRICATED PRODUCTS DEPT INC 14 HOEFLE AVE Hion, New York, 13357-1816										MARK FOR										PROJECT										TOTAL PRICE DOLLARS CTS.																																																																					
WAREHOUSE LOCATION										TYPE OF CARGO										UNIT WEIGHT										UNIT CUBE										UFC										NMFC										FREIGHT RATE										DOCUMENT DATE										MAT COND										QUANTITY																			
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)										FREIGHT CLASSIFICATION NOMENCLATURE										ITEM NOMENCLATURE																																																																																									
T										U										V										W										X										Y										Z																																																	
SELECTED BY AND DATE										TYPE OF CONTAINER(S)										TOTAL WEIGHT										RECEIVED BY AND DATE										INSPECTED BY AND DATE																																																																					
PACKED BY AND DATE										NO. OF CONTAINER(S)										TOTAL CUBE										WAREHOUSED BY AND DATE										WAREHOUSE LOCATION																																																																					
REMARKS										UNSERVICABLE TURN-IN PLEASE SIGN AND RETURN ONE COPY																																																																																																			
FIRST DESTINATION ADDRESS										DATE SHIPPED																																																																																																			
13 TRANSPORTATION CHARGEABLE TO										14 BILLING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)										15 RECEIVER'S DOCUMENT NUMBER																																																																																									

DD Form 1348-1, SEP 87

Jun 86 edition may be used.

FORM APPROVED. OMB NO. 0704-0168

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

BARBER - M24 0179112										QUANTITY										DOCUMENT NUMBER										SUPPLEMENTARY ADDRESS										UNIT PRICE																																																																					
STOCK NUMBER										REQUISITIONER										DATE										SERIAL										ADDRESS										UNIT PRICE																																																											
AOEAWAK1005-01-240-2136										EA 00001 5068-0001 0002 W33NWN																																								\$5145.00																																																											
SHIPPED FROM Remington Arms Co. ATTN: FABRICATED PRODUCTS Dept. 14 HOEFLE AVE. Hion, N.Y. 13357-1816										SHIP TO CDR, 1/25TH RGR. Regt. ATTN: PBO, CW2 Humes HUNTER AAF, GA. 31409										MARK FOR										PROJECT										TOTAL PRICE DOLLARS CTS.																																																																					
WAREHOUSE LOCATION										TYPE OF CARGO										UNIT WEIGHT										UNIT CUBE										UFC										NMFC										FREIGHT RATE										DOCUMENT DATE										MAT COND										QUANTITY																			
SUBSTITUTE DATA (ITEM ORIGINALLY REQUESTED)										FREIGHT CLASSIFICATION NOMENCLATURE										ITEM NOMENCLATURE																																																																																									
T										U										V										W										X										Y										Z																																																	
SELECTED BY AND DATE										TYPE OF CONTAINER(S)										TOTAL WEIGHT										RECEIVED BY AND DATE										INSPECTED BY AND DATE																																																																					
PACKED BY AND DATE										NO. OF CONTAINER(S)										TOTAL CUBE										WAREHOUSED BY AND DATE										WAREHOUSE LOCATION																																																																					
REMARKS										7.62mm M-24 Rifle																																																																																																			
FIRST DESTINATION ADDRESS										DATE SHIPPED																																																																																																			
13 TRANSPORTATION CHARGEABLE TO										14 BILLING, AWB, OR RECEIVER'S SIGNATURE (AND DATE)										15 RECEIVER'S DOCUMENT NUMBER																																																																																									

DD Form 1348-1, SEP 87

Jun 86 edition may be used.

FORM APPROVED. OMB NO. 0704-0168

DOD SINGLE LINE ITEM RELEASE/RECEIPT DOCUMENT

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 ~~0179112~~ 79151

[illegible]

CONTRACT # DAAA21-87-C-0086

New Barrel

GUN SERIAL # C6225283

OP. #	OP. NAME	READINGS	DATE	INITIAL
575 & 580	Assemble Action and Stock		4/28/95	RW
600	Proof		4/28/95	RW
607	Check Headspace		4/28/95	RW
610	Dis-assemble Gun		4/28/95	RW
612	Magnaflux Barrel Action			
	Magnaflux Bolt			
615	Rollmark Caliber			
617	Drill and Tap Sight Holes			
618	Polish Barrel			
620	Apply Coatings (Barrel Action)			
	Apply Coating (Bolt)			
625	Final Assembly A) Clean inside of Bolt Assembly		5/9/95	RW
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		5/9/95	RW
	C) Inspect Ejector Hole for Chamfer		5/9/95	RW
	D) Oil Firing Pin Ass'y		5/9/95	RW
	E) Adjust Trigger Pull to Min Setting and Stake			

op. #	BARBER - M24 0179115 OP. NAME	READINGS			DATE	INIT
625 cont.	F) Safety On Force					
	G) Safety Off Force					
	H) Trigger Pull Test & Retainability					
	I) Firing Pin Indent					
	J) Assemble Stock					
	K) Assemble Swivel Studs					
	L) Attach Front and Rear Sight Assemblies					
	M) Iron Sight Alignment					
	N) Detach Front & Rear Sights & place in numbered container					
	O) Attach Scope to Rifle					
	P) Detach & Attach Scope 20 Times					
640	Gallery Target & Test				5/11/95	Rw
	A) Time					
	B) Malfunctions					
	C) Pierced Primers					
	D) Optical Clarity of Scope					
645	Inspect for Live Ammo				5/11/95	Rw
655	Final Inspection					
	A) Headspace				5/12/95	Lee
	B) Trigger Pull					
	C) Function				5/12/95	Rw
660	Pack					

Final Inspection

Sn: C6225283

DATE REC'D: 4/27/95

DATE RET'D:

AUDITOR: *RM*

Item:

BARREL ASSY.

☒ BARREL☒ RECEIVER☒ FRONT SIGHT BLOCK☒ REAR SIGHT BLOCK☒ SCREWS☒ FINISH

SCOPE ASSY.

☒ SCOPE☒ SCOPE RINGS☒ MOUNTING SCREWS☒ MOUNTING BASE☒ SCREWS☒ FINISH☒ LOOSENESS☒ CLARITY

MISC.

☐ DD-250☐ BAR CODE☐ PACKAGING

Item:

STOCK ASSY.

☒ STOCK☒ SLING SWIVEL STUDS☒ ADJUSTABLE BUTT PLATE☒ LOCK NUTS☒ BARREL CLEARANCE☒ COLOR/FINISH

SYSTEMS CASE

☒ SCOPE CASE☒ IRON SIGHTS☐ DEPLOYMENT KIT

TRIGGER

☒ SAFETY OPERATION☒ SET

Comments: _____

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6225283
22 May 1995

CENTROIDAL DISTANCES

0 TO	1	.432634
1 TO	2	.24965
1 TO	3	.747992
1 TO	4	.0798812
1 TO	5	.473865

$\frac{\sum x_i}{n}$ <----POA


THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: -.1042
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .1006
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .144838

THE AMR FOR THIS RIFLE IS: .9934

22 May 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225283

CENTERFIRE PATTERNS # 1

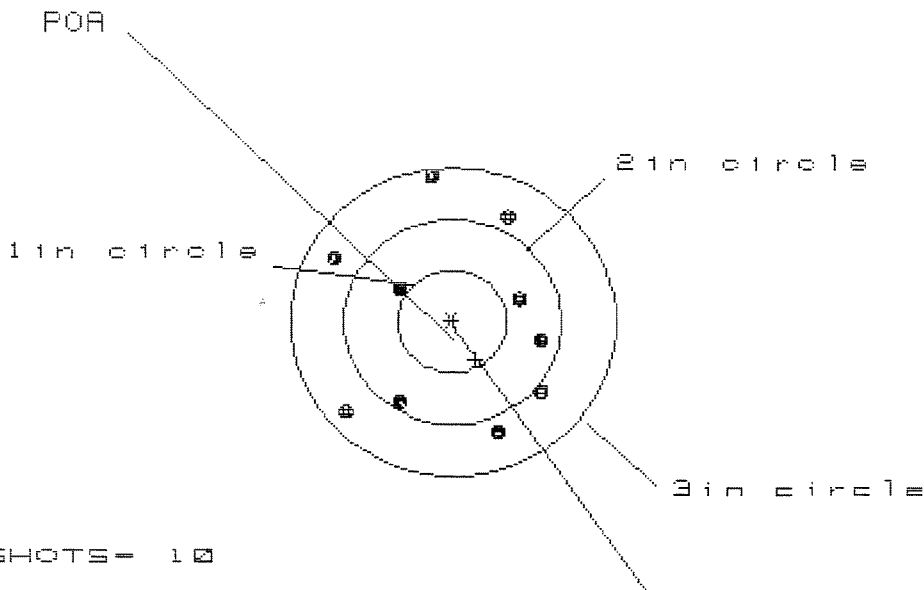

OF SHOTS= 10

IN CIR

1 in = 0

2 in = 4

3 in = 10

HS= 1.931

VS= 2.460


GS= 2.542

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.850	.827	.696
MINIMUM X	-1.081	-1.104	-1.235
MAXIMUM Y	1.412	1.205	1.112
MINIMUM Y	-1.048	-.891	-.984
CENTROID X	-.214	-.191	-.060
CENTROID Y	.376	.219	.312
POA TO CENTROID in.	.432	.290	.318
MIN RADIUS	.613	.721	.565
MEAN RADIUS	1.046	.992	.937
MAX RADIUS	1.427	1.343	1.406
HORIZONTAL SPREAD	1.931	1.931	1.931
VERTICAL SPREAD	2.460	2.096	2.096
EXTREME SPREAD	2.542	2.474	2.332
NUMBER IN ONE INCH CIRCLE =	0		
NUMBER IN TWO INCH CIRCLE =	4		
NUMBER IN THREE INCH CIRCLE =	10		

22 May 1995

FILE:/PATTERNING/CENTERFIRE_PATT/06225283

CENTERFIRE PATTERNS # 2

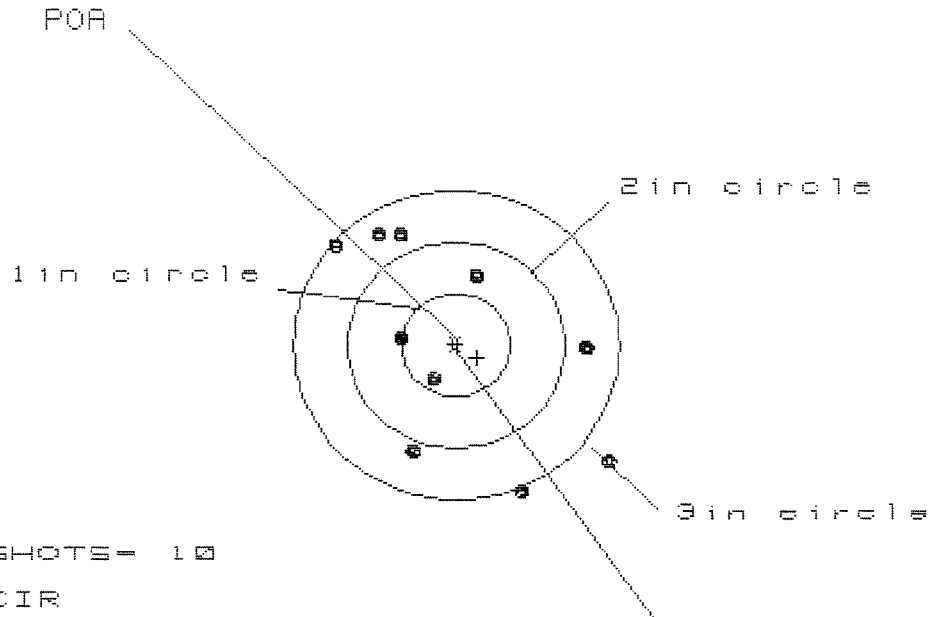

OF SHOTS= 10

IN CIR

1in = 2

2in = 3

3in = 8

HS= 2.512

VS= 2.534


GS= 3.298

PATTERN #	:	2		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.396	1.398	1.487
MINIMUM X	:	-1.116	-.961	-.872
MAXIMUM Y	:	1.081	.955	.758
MINIMUM Y	:	-1.453	-1.579	-1.364
CENTROID X	:	-.196	-.351	-.440
CENTROID Y	:	.127	.253	.450
POA TO CENTROID in.	:	.233	.433	.630
MIN RADIUS	:	.375	.314	.308
MEAN RADIUS	:	1.121	1.011	.893
MAX RADIUS	:	1.800	1.732	1.520
HORIZONTAL SPREAD	:	2.512	2.359	2.359
VERTICAL SPREAD	:	2.534	2.534	2.122
EXTREME SPREAD	:	3.298	2.969	2.559
NUMBER IN ONE INCH CIRCLE	=		2	
NUMBER IN TWO INCH CIRCLE	=		3	
NUMBER IN THREE INCH CIRCLE	=		8	

22 May 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C6225283

CENTERFIRE PATTERNS # 3

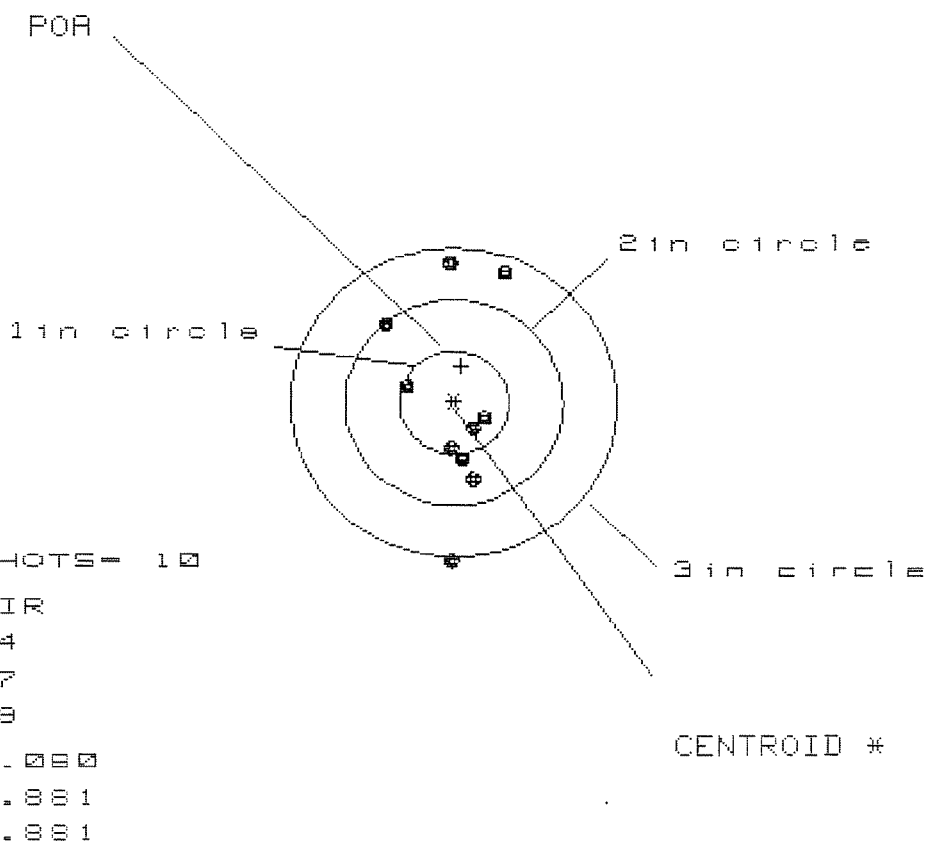


PATTERN #	:	3		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	.483	.485	.483
MINIMUM X	:	-.597	-.595	-.597
MAXIMUM Y	:	1.381	1.214	1.273
MINIMUM Y	:	-1.500	-.867	-.715
CENTROID X	:	-.070	-.072	-.070
CENTROID Y	:	-.358	-.191	-.343
POA TO CENTROID in.	:	.365	.205	.350
MIN RADIUS	:	.289	.391	.295
MEAN RADIUS	:	.794	.747	.637
MAX RADIUS	:	1.500	1.222	1.362
HORIZONTAL SPREAD	:	1.080	1.080	1.080
VERTICAL SPREAD	:	2.881	2.081	1.988
EXTREME SPREAD	:	2.881	2.089	2.014
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		7	
NUMBER IN THREE INCH CIRCLE	=		9	

22 May 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C3225283

CENTERFIRE PATTERNS # 4

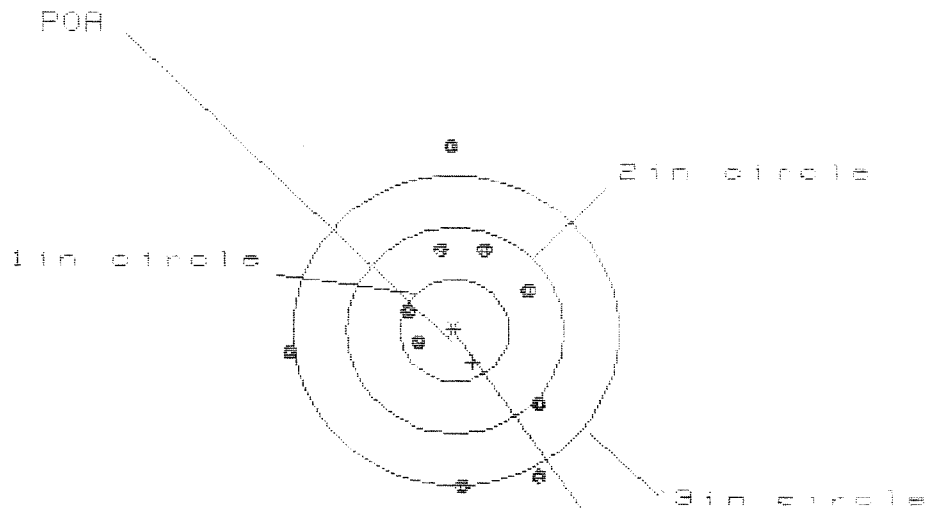

OF SHOTS = 10

IN CIR

1 in = 2

2 in = 5

3 in = 6

HS = 2.318

VS = 3.295

CS = 3.295

CENTROID #


PATTERN #	4	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.765	.764	.833
MINIMUM X	-1.553	-1.554	-1.459
MAXIMUM Y	1.766	.998	.845
MINIMUM Y	-1.529	-1.333	-1.486
CENTROID X	-.169	-.168	-.263
CENTROID Y	.310	.114	.267
POA TO CENTROID in.	.353	.203	.375
MIN RADIUS	.384	.401	.285
MEAN RADIUS	1.073	1.011	.914
MAX RADIUS	1.766	1.554	1.492
HORIZONTAL SPREAD	2.318	2.318	2.292
VERTICAL SPREAD	3.295	2.331	2.331
EXTREME SPREAD	3.295	2.612	2.347
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	5		
NUMBER IN THREE INCH CIRCLE =	6		

22 May 1995

FILE:/PATTERNING/CENTERFIRE_PATT/C6225283

CENTERFIRE PATTERNS # 5

POA

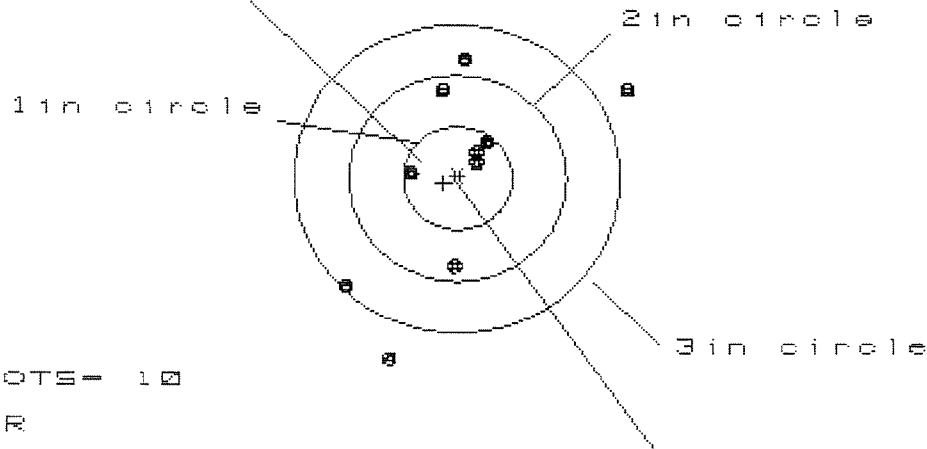

OF SHOTS- 10

IN CIR

1in = 4

2in = 6

3in = 8

HS= 2.586

VS= 2.855

GS= 3.347

PATTERN #	:	5		
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.573	1.506	.386
MINIMUM X	:	-1.013	-1.080	-.891
MAXIMUM Y	:	1.141	.951	1.031
MINIMUM Y	:	-1.714	-1.253	-1.173
CENTROID X	:	.128	.195	.006
CENTROID Y	:	.048	.238	.158
POA TO CENTROID in.	:	.137	.308	.158
MIN RADIUS	:	.201	.073	.255
MEAN RADIUS	:	.933	.776	.702
MAX RADIUS	:	1.815	1.654	1.473
HORIZONTAL SPREAD	:	2.586	2.586	1.277
VERTICAL SPREAD	:	2.855	2.204	2.204
EXTREME SPREAD	:	3.347	3.207	2.453
NUMBER IN ONE INCH CIRCLE	=		4	
NUMBER IN TWO INCH CIRCLE	=		6	
NUMBER IN THREE INCH CIRCLE	=		8	

BARBER - M24 0179123

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # C6225283
27 Oct 1998

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: $-.032$
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: $.2284$
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: $.230631$

THE AMR FOR THIS RIFLE IS: 1.064

CENTROIDAL DISTANCES

0 TO	1	.229855
1 TO	2	.164985
1 TO	3	.182964
1 TO	4	.101592
1 TO	5	.191094


5 4 2
3 <----POA

PATTERN #: ☐ 1 ☐
 POA TO CENTROID: .229
 MIN RADIUS : .751
 MEAN RADIUS : 1.294
 MAX RADIUS : 1.803
 CENTROID X : -.005
 CENTROID Y : .229

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225283

CENTERFIRE PATTERN # 1

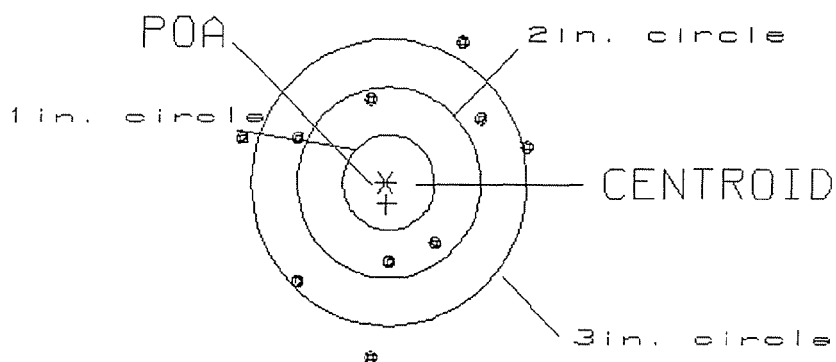

OF SHOTS= 10

IN CIRCLE

HS= 3.10

0

VS= 3.26

3

GS= 3.40

6

BARBER - M24 0179125

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 2 ☐

POA TO CENTROID: .342

MIN RADIUS : .044

MEAN RADIUS : 1.443


MAX RADIUS : 2.530

CENTROID X : .137

CENTROID Y : .313

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225283

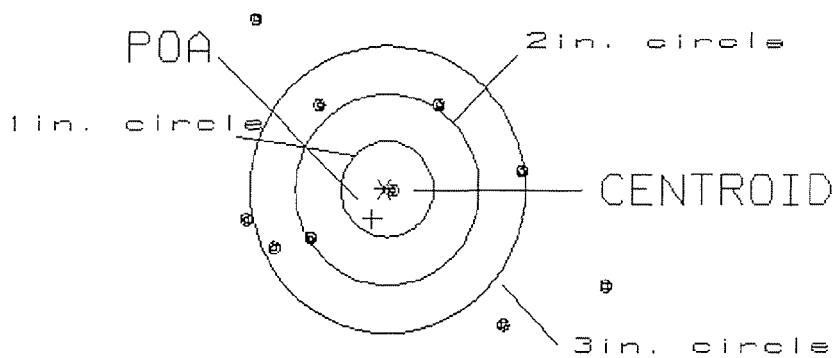CENTERFIRE PATTERN # 2

OF SHOTS= 10

IN CIRCLE

HS= 3.85

1

US= 3.22

1

GS= 4.66


6

PATTERN #: C 3 C
 POA TO CENTROID: .077
 MIN RADIUS : .203
 MEAN RADIUS : .712
 MAX RADIUS : 1.253
 CENTROID X : -.055
 CENTROID Y : .053

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225283

CENTERFIRE PATTERN # 3

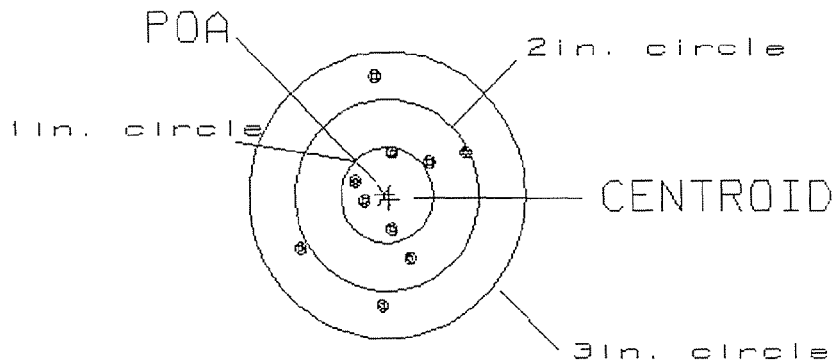

OF SHOTS= 10

IN CIRCLE

HS= 1.83
 VS= 2.44
 GS= 2.44


4
 7
 10

PATTERN #: ☐ 4 ☐
 POA TO CENTROID: .326
 MIN RADIUS : .156
 MEAN RADIUS : .839
 MAX RADIUS : 2.006
 CENTROID X : -.041
 CENTROID Y : .324

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225283

CENTERFIRE PATTERN # 4

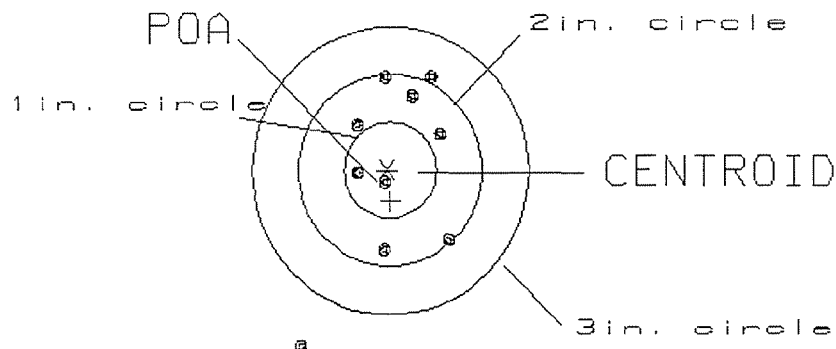

OF SHOTS= 10

IN CIRCLE

HS= 1.56

2

VS= 2.77

6

GS= 3.09


9

PATTERN #: 5
 POA TO CENTROID: .297
 MIN RADIUS : .182
 MEAN RADIUS : 1.031
 MAX RADIUS : 1.907
 CENTROID X : -.196
 CENTROID Y : .223

27 Oct 1998

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/C6225283

CENTERFIRE PATTERN # 5

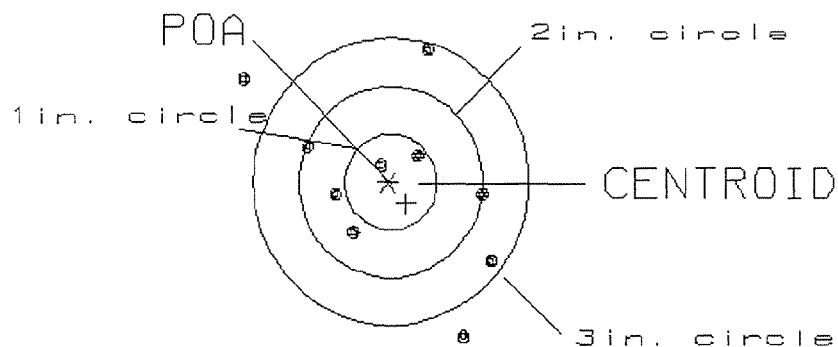

OF SHOTS= 10

IN CIRCLE

HS= 2.64
 VS= 3.03
 GS= 3.63

2
 6
 2

BARBER - M24 0179129

ORDER

98-18183

W/BI-FOD

545

Scope # 1290

ACCESSORIES	HARD CASE	SCOPE BASE
-------------	-----------	------------

FROM:

SHIP TO:

CDR 1/75TH RGR REGT BLDG 1036
ATTN PBO CM3 HUMES
43 LIBERATOR RD SUITE 102
HUNTER AAF GA 31409

CDR 1/75TH RGR REGT BLDG 1036
ATTN PBO CW3 HUMES
43 LIBERATOR RD SUITE 102
HUNTER AAF GA
31409

CUST NO:119494 C.O.D

ACCOUNT NUMBER

ACCOUNT NUMBER N/C

WRITE

FROM. DATE

ESTIMATED

VIA

UPS

GUN CONDITION

☐ NEW
☐ LIGHTLY WORN
☐ WORN
☐ VERY WORN
☐ UNREPAIRABLE
☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

JPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
------------------	------	----------	--------	----------	-----	---------

CYCLE	A1	B1			
TRIGGER GROUP		B2		E1	F1
BOLT ASSY.		B3		E2	F2
BARREL ASSY.		B4	D1	E3	F3
REC. ASSY.		B5	D2	E4	F4
WOOD			C1	D3	E5
METAL			C2		

MAIN FAULT

PARTS

COMMENTS

REPAIRMAN <i>Rw</i>	PROOF <i>✓</i>	CLEAN <i>c</i>	TEST <i>✓</i>	TARGET <i>c</i>	PATTERN
GALLERY TESTER <i>Rw</i>	DATE	DATE	DATE <i>11</i>	DATE	DATE

OFFICE COPY

FD-302 (REV. 7/97)

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0179129 **M2400179168**

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG

BARBER - M24 0179130 **M2400179169**

[illegible]

HAND RECEIPT/ANNEX NUMBER For use of this form, see DA PAM 710-2-1. The proponent agency is ODCSLOG.		FROM: HHC 1/75TH RANGER REGT.		TO: PBO 1/75TH RANGER REGT.		HAND RECEIPT NUMBER	
FOR ANNEX/CR ONLY	END ITEM STOCK NUMBER 1005-01-240-2136	END ITEM DESCRIPTION 7.62mm M24 SNIPER WEAPON SYSTEM	PUBLICATION NUMBER TM 9-1005-306-10		PUBLICATION DATE JUNE 1989		QUANTITY 6
STOCK NUMBER a.		ITEM DESCRIPTION b.	* c.	SEC d.	UI e.	QTY AUTH f.	g. QUANTITY A B C D E F
1005012602662		SYSTEM CASE		U	EA	1	6 1
1005012602663		FOAM, TOP		U	EA	1	6 1
1005012602664		FOAM, BOTTOM		U	EA	1	6 1
1005012622818		SOFT RIFLE CARRYING CASE		U	EA	1	0 0
1005007141245		SLING, SMALL ARMS		U	EA	1	0 0
1005012602665		BIPOD(OPTIONAL)		U	EA	1	6 1
1005012602647		DEPLOYMENT CASE		U	EA	1	0 0
1005012602666		DAY OPTIC SIGHT CASE		U	EA	1	0 0
NSN		DEPLYMENT KIT		U	KT	1	0 0
NSN		FRONT SIGHT		U	EA	1	0 0
NSN		REAR SIGHT		U	EA	1	0 0
NSN		DAY OPTIC SIGHT SN # 881268, 881280, 881284, 881290, 881202, 881294		U	EA	1	6 1
1001012402136		RIFLE SN # C6225098, C6225114, C6225164, C6225283, C6225368, C6225260		U	EA	1	6 1
							1
							1
							1

* WHEN USED AS A:
 HAND RECEIPT, enter Hand Receipt Annex Number
 HAND RECEIPT FOR QUARTERS FURNITURE, enter Condition Codes
 HAND RECEIPT ANNEX/COMPONENTS RECEIPT, enter Accounting Requirements Code (ARC).