

6669 5400
Replaces
66360860

G 6360860
Replace
E 6413559

INSPECTION CHECKLIST - REPAIRS

CONTRACT #: W52H09-07-C-0207

ISSUED 10/1/2007

R & E NUMBER 164617SERIAL NUMBER 6669 5400LOG-IN DATE 3-16-09

OPERATION #	OPERATION NAME	DATE	INITIAL
500	DIS-ASSEMBLE GUN	3-18-09	RTZ
505	RE-BARREL	3-18-09	RTZ
420	ASSEMBLE	3-18-09	RTZ
440	PROOF	3-19-09	TK
460	CHECK HEADSPACE	3-19-09	TK
470	DIS-ASSEMBLE GUN	3-19-09	RTZ
480	MAGNAFLUX	3-19-09	RTZ
510	DRILL AND TAP	3-19-09	JP
500	ROLLMARK CALIBER	3-24-09	RT
520	GOFF BLAST BBL / REC	3-24	BT
530 & 540	APPLY COATINGS	3-31	
560	FINAL ASSEMBLY	4-2-09	RTZ
640	FUNCTION TEST AND	4-2-09	RP
650	TARGET	4-2-09	RP
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
	MALFUNCTION	CORRECTION	
670	FINAL INSPECTION	4-2-09	JP
	A) HEADSPACE	4-7-09	RP
	B) TRIGGER PULL	4-7-09	RP
680	F) SAFETY ON FORCE	8.0	8.0
	G) SAFETY OFF FORCE	4.0	4.0
	I) FIRING PIN INDENT	.022	.021
690	PACK	4-7-09	RP

F006 REV 1/2009


DA FORM 2407-E

BARBER - M24 0479912 179951

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 3/17/2009

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs ini +/- .50 lb

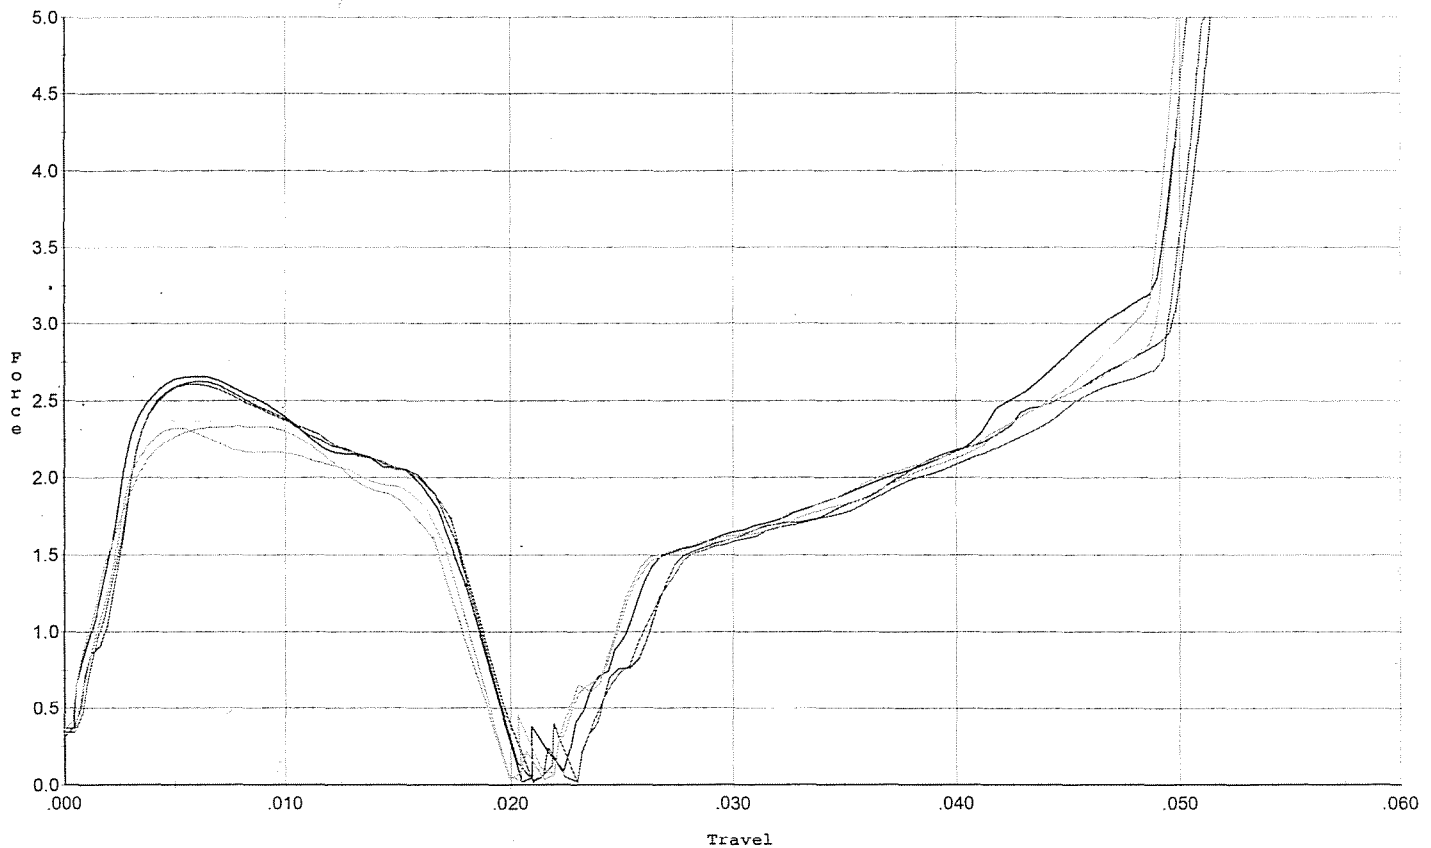


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.625	0.018	0.00	0.038	0.034		Set Trigger
2	2.657	0.018	0.00	0.037	0.036		Set Trigger
3	2.606	0.017	0.00	0.038	0.034		Set Trigger
4	2.326	0.017	0.00	0.037	0.031		Set Trigger
5	2.336	0.017	0.00	0.037	0.030		Set Trigger

A-2-10

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 3/17/2009

Model: M/24
Serial No: Form #F005
Trigger: 2.5 lbs after 50 cycles+/- .50 lb

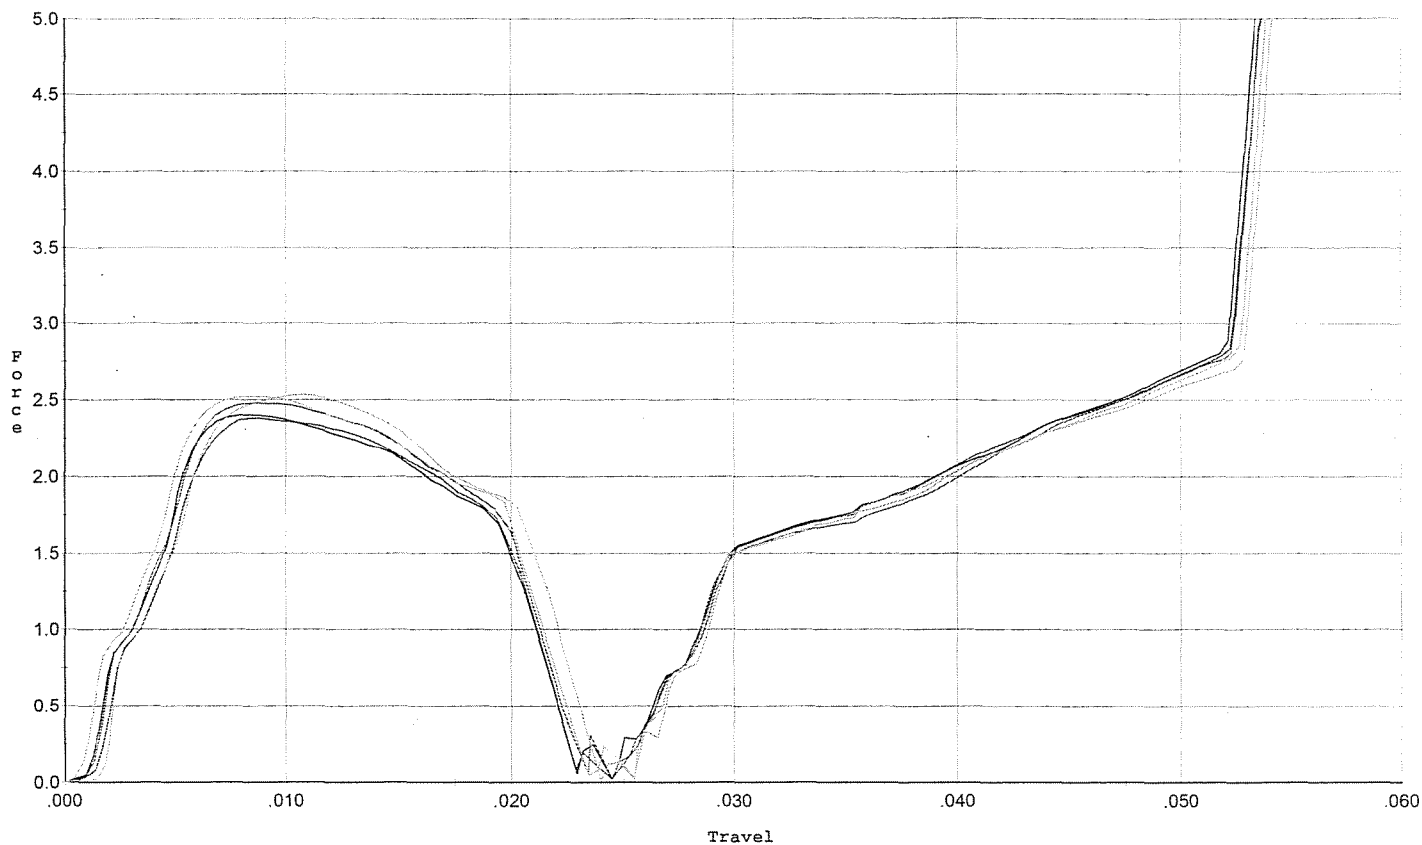


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.381	0.020	0.00	0.038	0.034		Set Trigger
2	2.404	0.021	0.00	0.038	0.035		Set Trigger
3	2.479	0.020	0.00	0.038	0.035		Set Trigger
4	2.522	0.020	0.00	0.039	0.036		Set Trigger
5	2.535	0.022	0.00	0.038	0.038		Set Trigger

A-2.46

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 3/17/2009

Model: M/24
 Serial No: Form #F005
 Trigger: 3.0 lbs ini +/- .75 lb

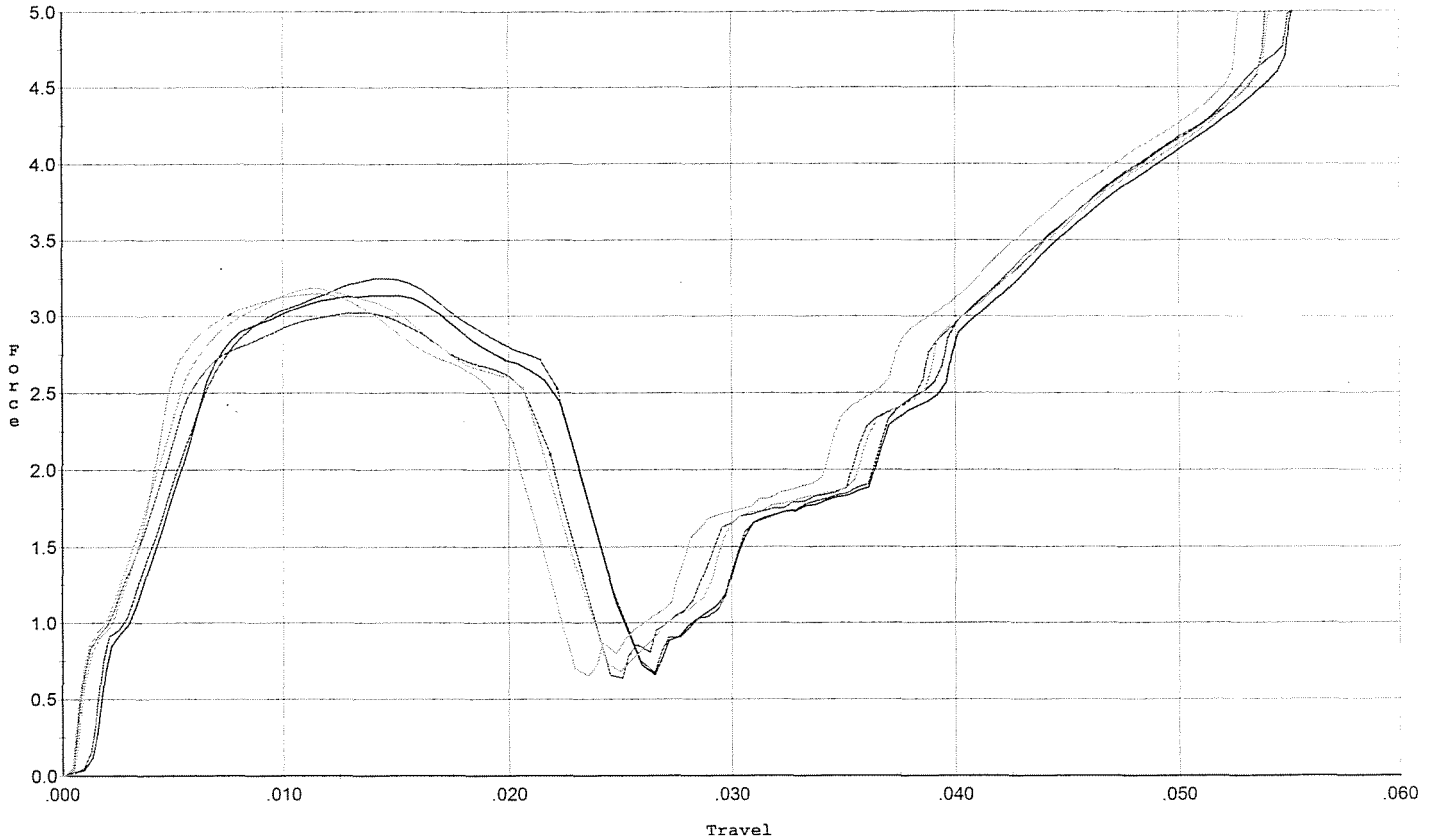


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.250	0.022	0.00	0.036	0.051		Set Trigger
2	3.139	0.022	0.00	0.036	0.050		Set Trigger
3	3.024	0.022	0.00	0.036	0.049		Set Trigger
4	3.185	0.021	0.00	0.036	0.048		Set Trigger
5	3.153	0.020	0.00	0.035	0.046		Set Trigger

A-3.15

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 3/17/2009

Model: M/24
Serial No: Form #F005
Trigger: 3.0 lbs after 20 cycles+/- .75 lb

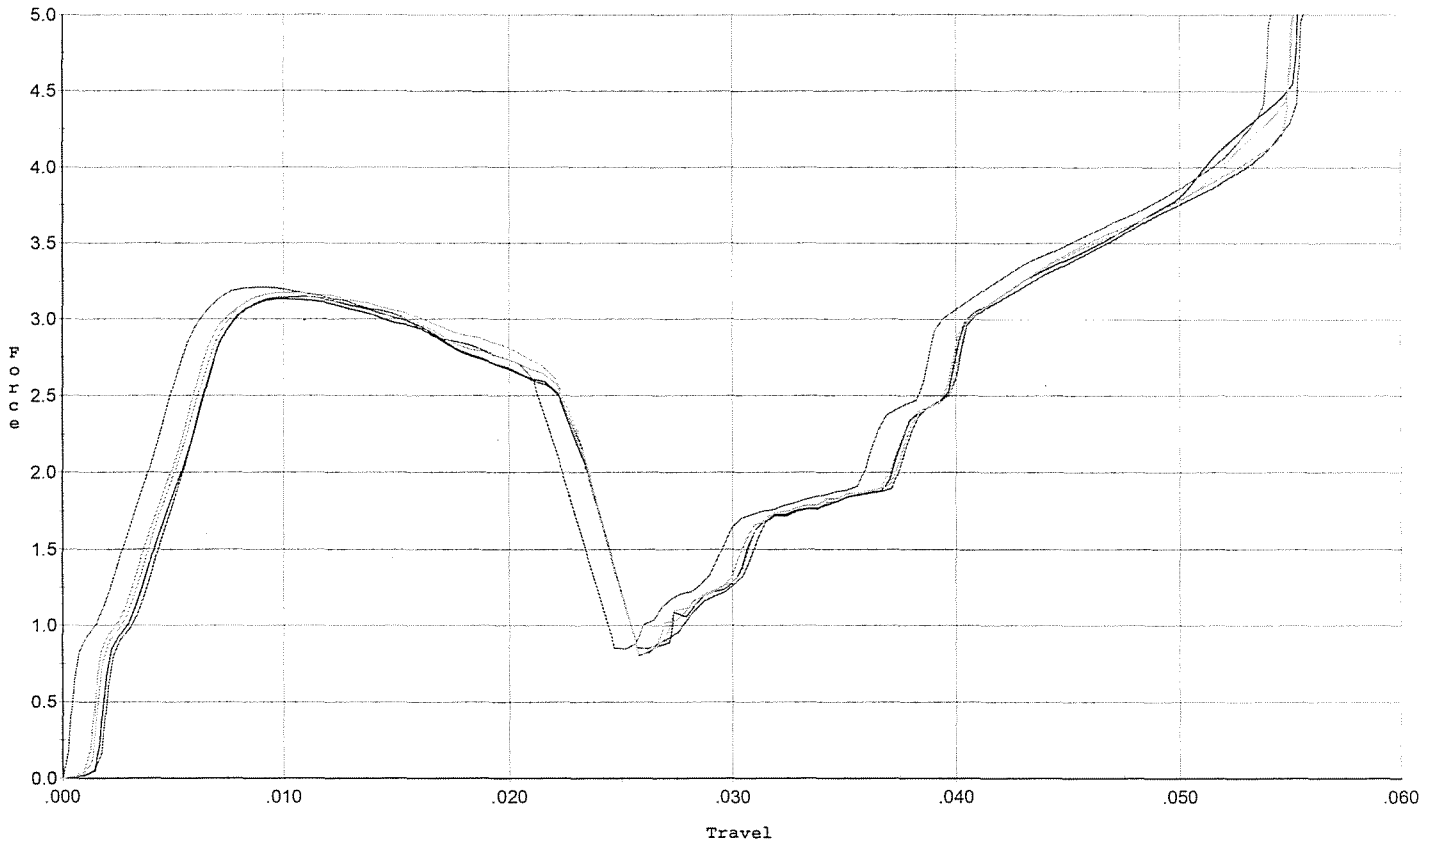


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	3.150	0.023	0.00	0.036	0.052		Set Trigger
2	3.136	0.023	0.00	0.036	0.052		Set Trigger
3	3.213	0.023	0.00	0.036	0.055		Set Trigger
4	3.176	0.023	0.00	0.036	0.053		Set Trigger
5	3.179	0.023	0.00	0.036	0.054		Set Trigger

A-3.17

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 3/17/2009

Model: M/24
Serial No: Form #F005
Trigger: 4.0 lbs ini +/- 1.0 lb

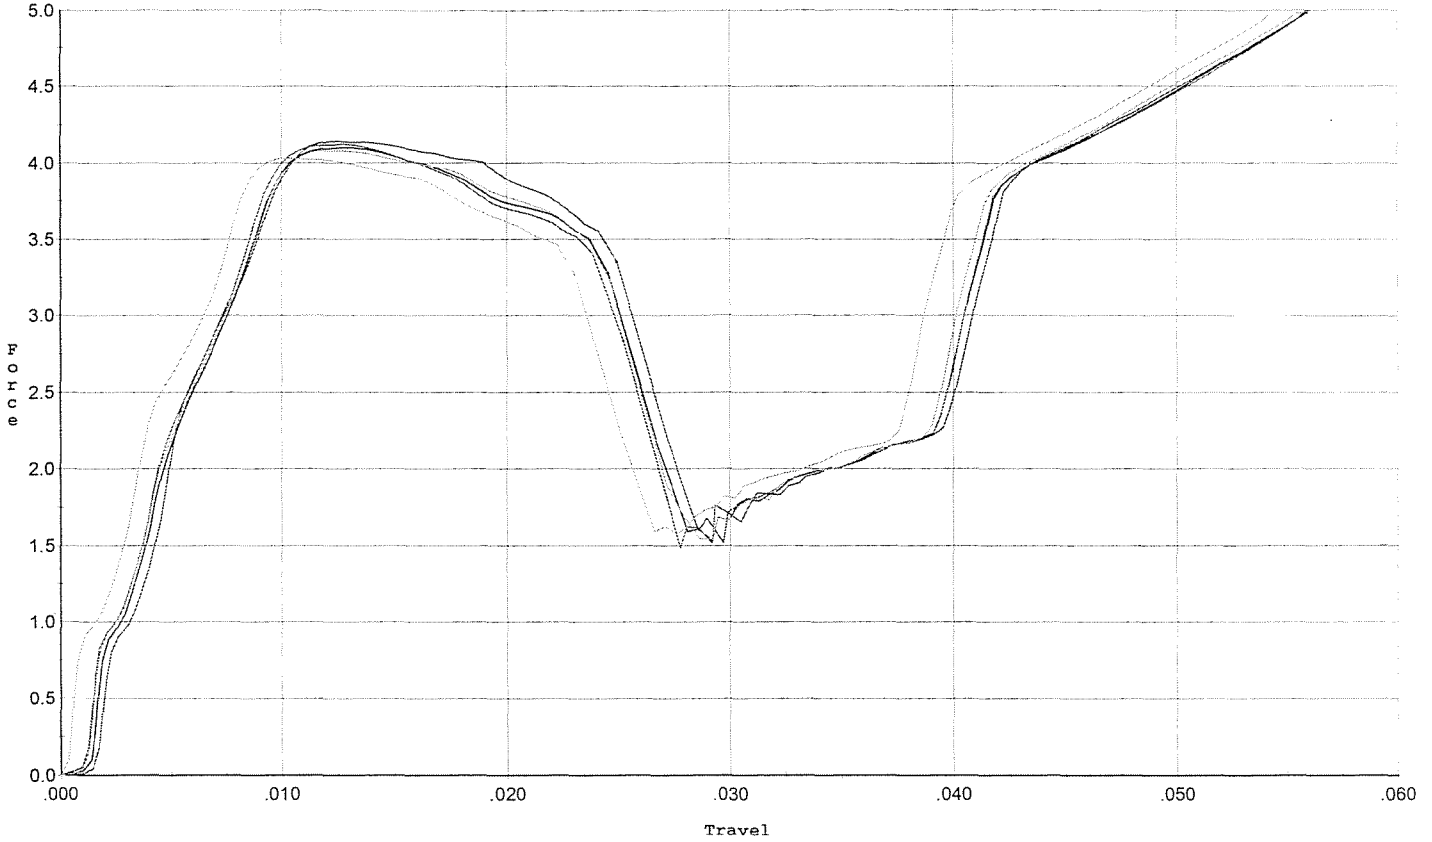


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.142	0.025	0.00	0.033	0.072		Set Trigger
2	4.101	0.025	0.00	0.033	0.070		Set Trigger
3	4.124	0.025	0.00	0.033	0.073		Set Trigger
4	4.031	0.023	0.00	0.033	0.068		Set Trigger
5	4.082	0.025	0.00	0.033	0.071		Set Trigger

A-4.09

Trigger Profile [lbs,inch]

Profile SWS
 GunType: Rifle
 Make: Remington
 Note: C Schults 3/17/2009

Model: M/24
 Serial No: Form #F005
 Trigger: 4.0 lbs after 20 cycles +/- 1.0 lb

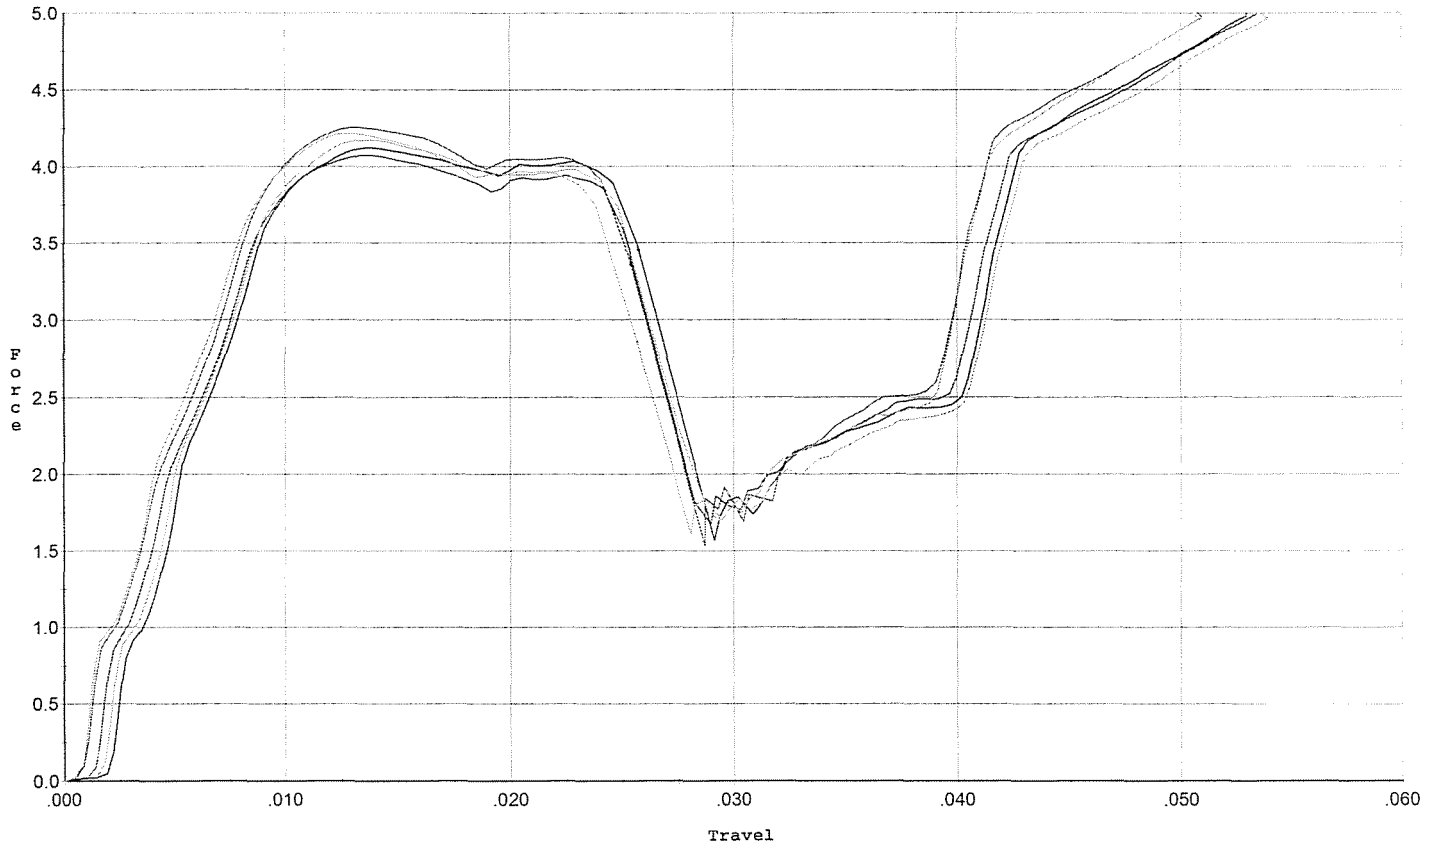


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.074	0.025	0.00	0.032	0.073		Set Trigger
2	4.124	0.026	0.002	0.032	0.075		Set Trigger
3	4.259	0.025	0.00	0.032	0.078		Set Trigger
4	4.173	0.025	0.002	0.033	0.073		Set Trigger
5	4.217	0.026	0.00	0.032	0.078		Set Trigger

19.4.16

Trigger Profile [lbs,inch]

Profile	SWS	Model:	M/24
GunType:	Rifle	Serial No:	Form #F005
Make:	Remington	Trigger:	reset to 2.5 lbs +/- .50 lb for final test
Note:	C Schults 3/17/2009		

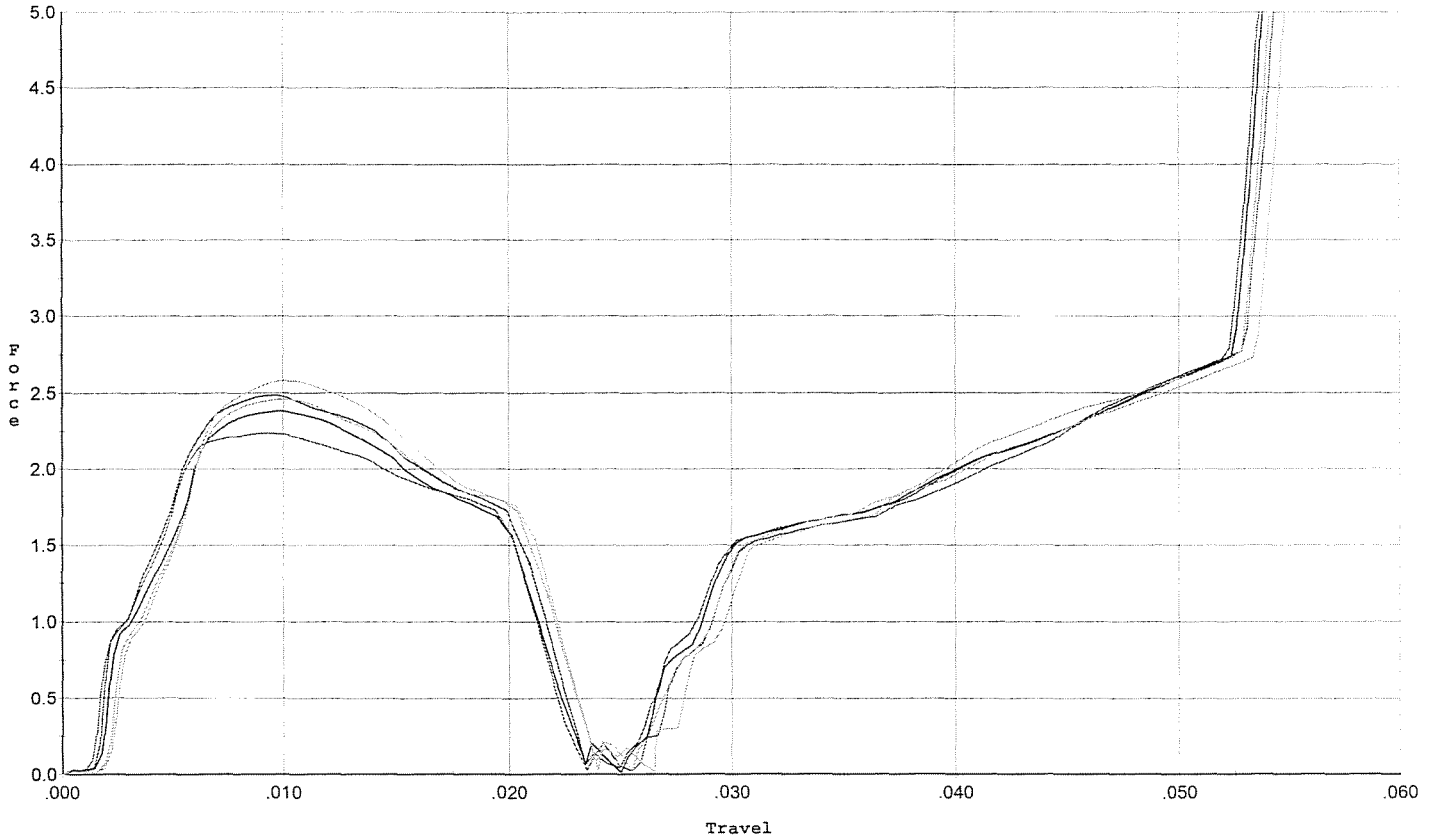


#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	2.488	0.021	0.00	0.038	0.036		Set Trigger
2	2.385	0.020	0.00	0.038	0.033		Set Trigger
3	2.239	0.020	0.00	0.039	0.033		Set Trigger
4	2.582	0.021	0.002	0.038	0.037		Set Trigger
5	2.461	0.022	0.002	0.038	0.036		Set Trigger

A-2-43

Trigger Profile [lbs,inch]

Profile SWS
GunType: Rifle
Make: Remington
Note: C Schults 3/17/2009

Model: M/24
Serial No: Form #F005
Trigger: set to 4.0 lbs +/- 1.0 lb for target & accuracy

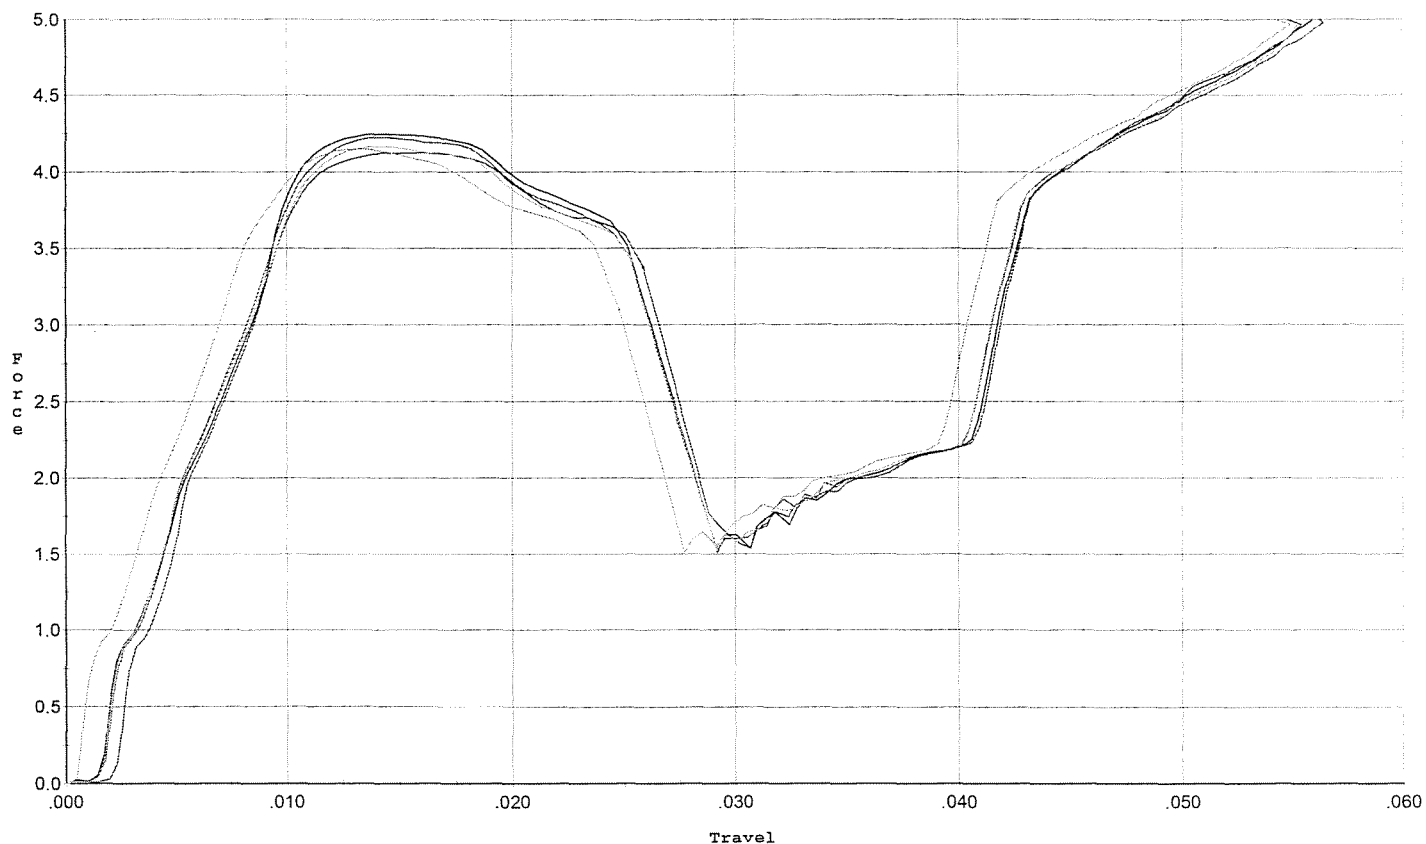

#	Peak Force	Travel To Actuate	Initial Take-up	Overtravel	Energy To Actuate	Lock Time	Action Type
1	4.125	0.026	0.002	0.033	0.073		Set Trigger
2	4.247	0.027	0.00	0.033	0.079		Set Trigger
3	4.225	0.025	0.00	0.033	0.073		Set Trigger
4	4.168	0.025	0.00	0.033	0.072		Set Trigger
5	4.150	0.025	0.00	0.033	0.074		Set Trigger

A. 4.18

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6695400.___0
FILE DATE AND TIME: 04/04/2009 06:40

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.010
The Average Y Centroid of the Five Target Set:	0.079
The Average Point of Impact of the Five Target Set:	0.080
The Average Mean Radius of the Five Target Set:	0.726
The Distance from POA to Centroid Target #1:	0.097
The Distance from Centroid Target #2 to Centroid Target #1:	0.238
The Distance from Centroid Target #3 to Centroid Target #1:	0.214
The Distance from Centroid Target #4 to Centroid Target #1:	0.086
The Distance from Centroid Target #5 to Centroid Target #1:	0.192


BARBER - M24 0179922

SERIAL NUMBER: G6695400. __0
TARGET NUMBER: 1
FILE DATE: 04/04/2009
FILE TIME: 06:40

X CENTROID: -0.077
Y CENTROID: 0.058
POA TO CENTROID: 0.097
HORZ SPREAD: 1.989
VERT SPREAD: 2.042
GROUP SPREAD: 2.042
MIN RADIUS: 0.271
MAX RADIUS: 1.195
MEAN RADIUS: 0.778

IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.649	0.643
2:	-0.881	0.623
3:	-0.739	-0.161
4:	-0.445	-0.694
5:	0.032	-1.132
6:	1.108	0.173
7:	0.537	-0.084
8:	0.181	-0.024
9:	0.066	0.328
10:	0.019	0.910

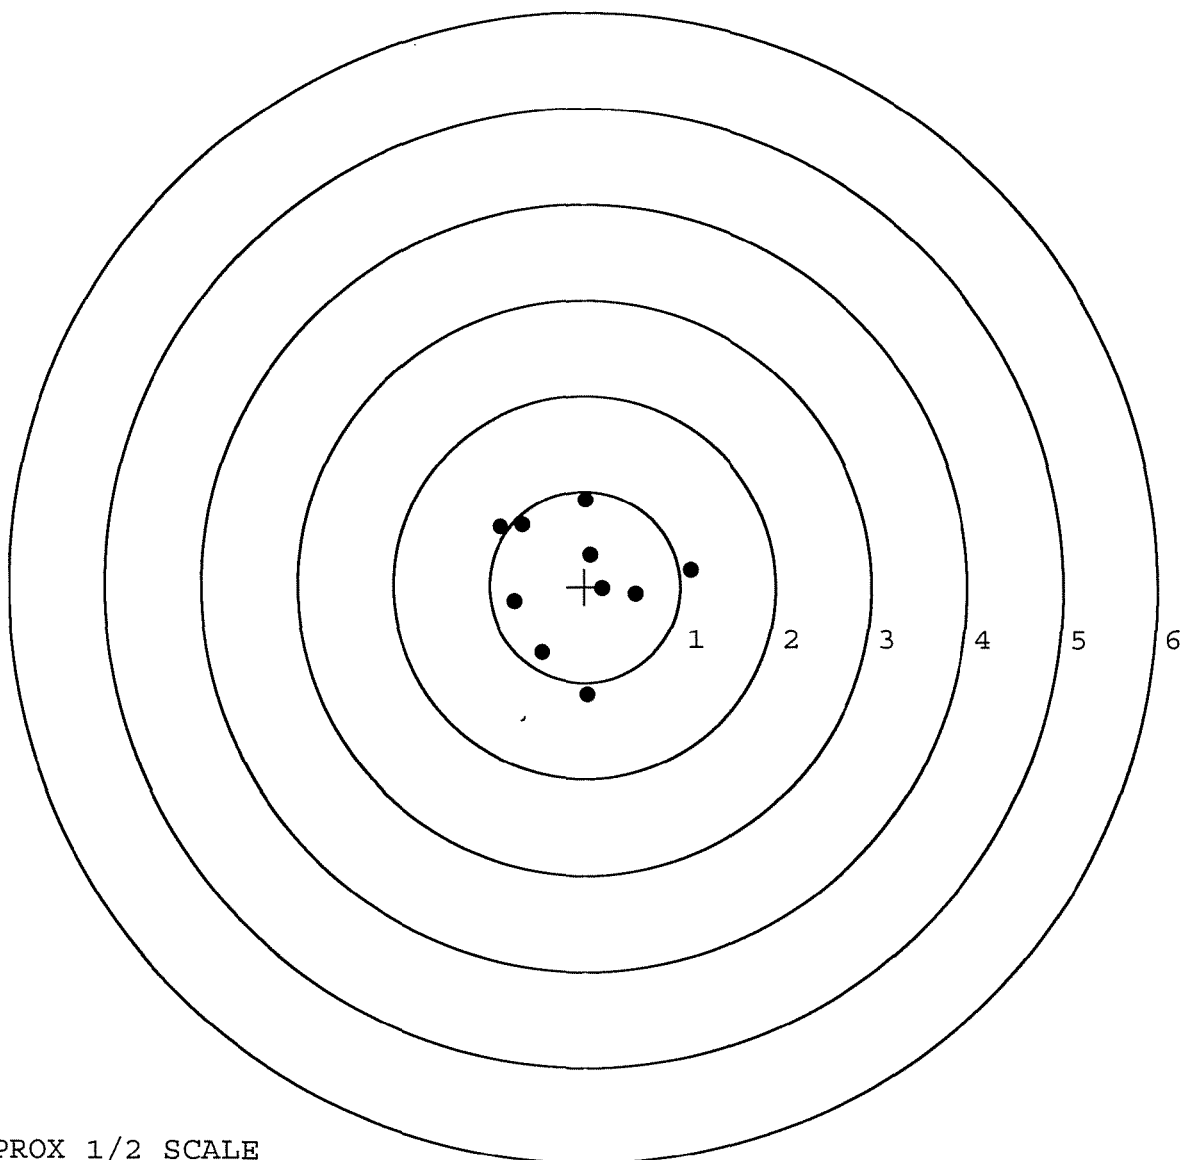

TARGET APPROX 1/2 SCALE


BARBER - M24 0179923

SERIAL NUMBER: G6695400. __0
TARGET NUMBER: 2
FILE DATE: 04/04/2009
FILE TIME: 06:40

X CENTROID: -0.113
Y CENTROID: 0.293
POA TO CENTROID: 0.314
HORZ SPREAD: 2.668
VERT SPREAD: 2.182
GROUP SPREAD: 2.677
MIN RADIUS: 0.199
MAX RADIUS: 1.638
MEAN RADIUS: 0.856

IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 9

POINT#	X	Y
1:	0.289	1.654
2:	0.282	1.411
3:	-1.750	0.225
4:	-0.187	0.646
5:	-0.234	0.135
6:	-0.558	-0.528
7:	-0.244	-0.427
8:	-0.030	-0.094
9:	0.381	-0.098
10:	0.918	0.007

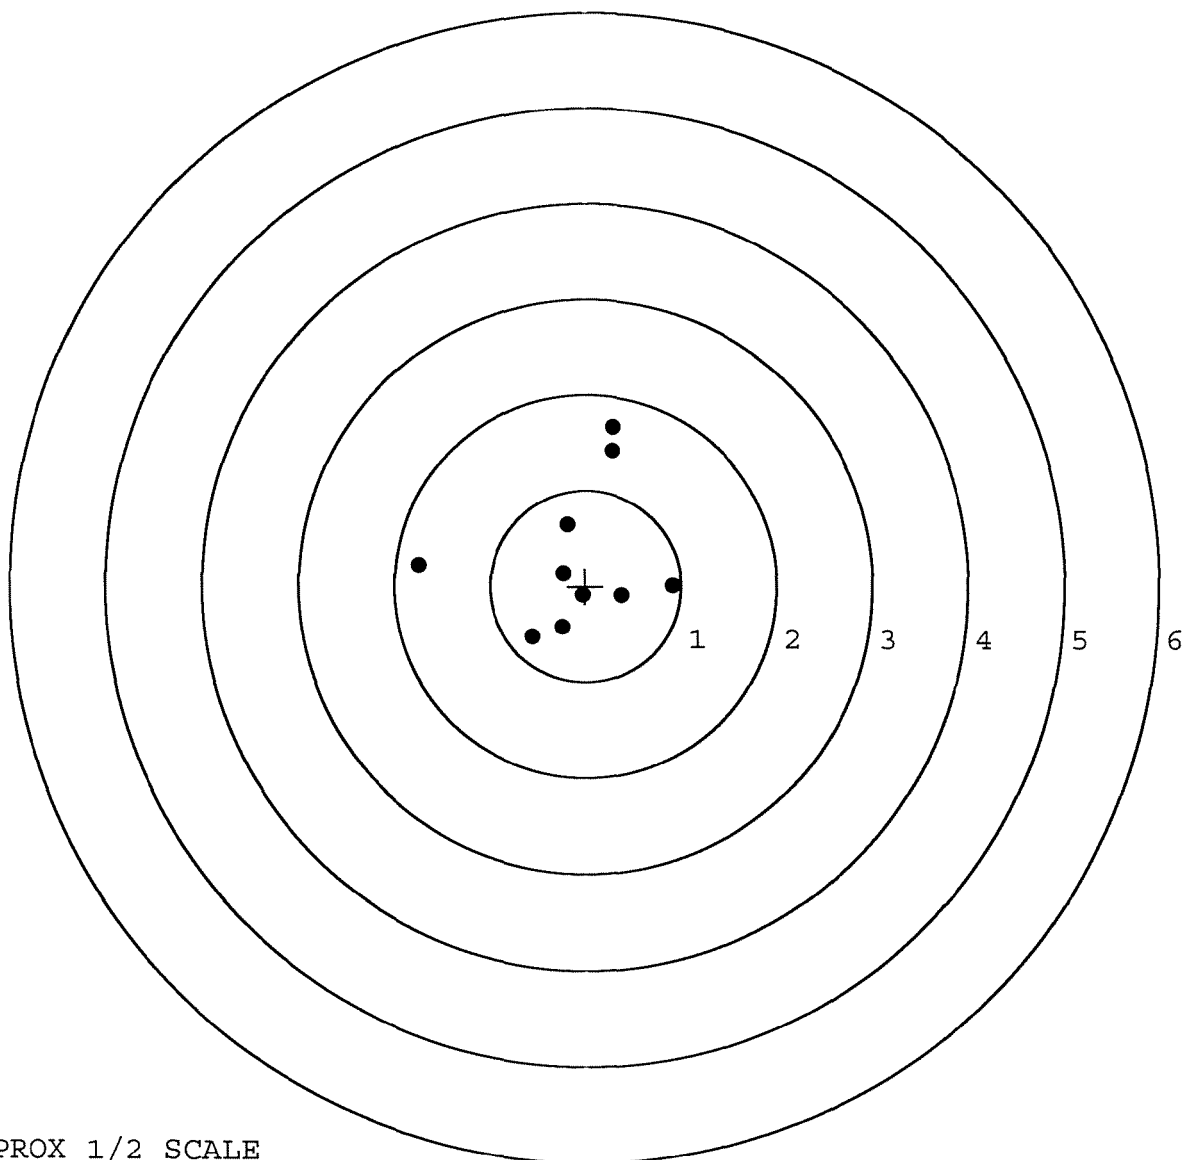


TARGET APPROX 1/2 SCALE

BARBER - M24 0179924

SERIAL NUMBER: G6695400. __0
TARGET NUMBER: 3
FILE DATE: 04/04/2009
FILE TIME: 06:40

POINT#	X	Y
1:	1.100	-0.667
2:	0.874	-0.294
3:	0.530	-0.182
4:	0.708	0.113
5:	0.248	0.660
6:	-0.355	0.699
7:	-0.373	0.296
8:	-0.378	-0.034
9:	-0.280	-0.328
10:	-0.770	-0.208

X CENTROID: 0.130
Y CENTROID: 0.005
POA TO CENTROID: 0.131
HORZ SPREAD: 1.870
VERT SPREAD: 1.366
GROUP SPREAD: 1.996
MIN RADIUS: 0.441
MAX RADIUS: 1.180
MEAN RADIUS: 0.707
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 9
in 3 IN DIAMETER: 10

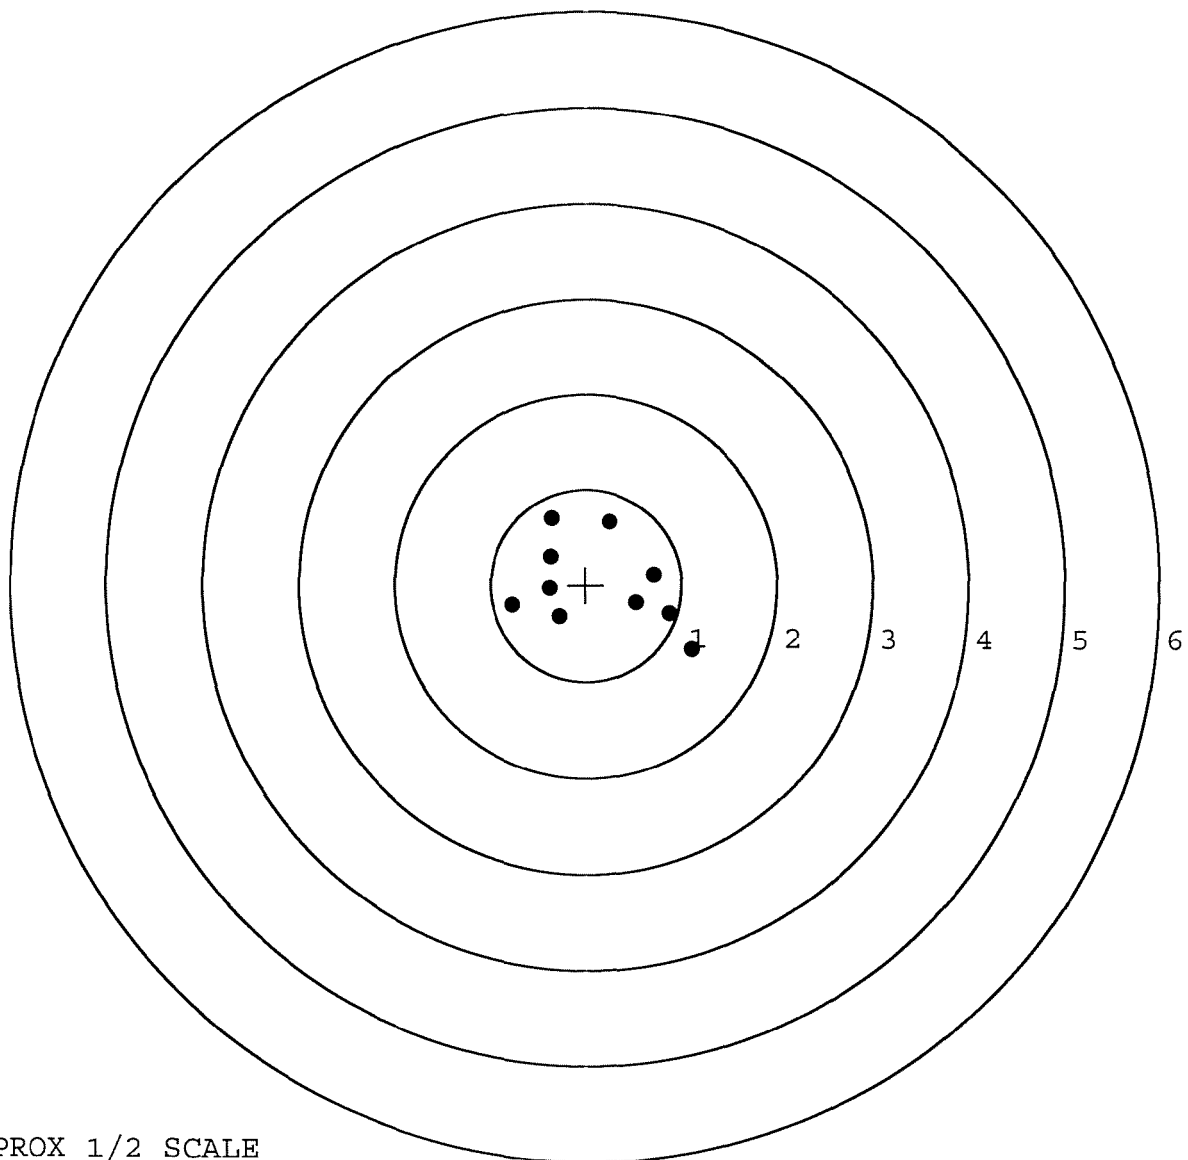


TARGET APPROX 1/2 SCALE

BARBER - M24 0179925

SERIAL NUMBER: G6695400. __0
TARGET NUMBER: 4
FILE DATE: 04/04/2009
FILE TIME: 06:40

POINT#	X	Y
1:	-0.723	0.008
2:	-0.655	-0.145
3:	-0.944	-0.613
4:	0.031	-0.566
5:	0.117	-0.410
6:	0.116	0.034
7:	-0.080	0.388
8:	0.977	0.677
9:	0.760	0.552
10:	0.444	0.386

X CENTROID: 0.004
Y CENTROID: 0.031
POA TO CENTROID: 0.031
HORZ SPREAD: 1.921
VERT SPREAD: 1.290
GROUP SPREAD: 2.314
MIN RADIUS: 0.112
MAX RADIUS: 1.168
MEAN RADIUS: 0.674
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 10

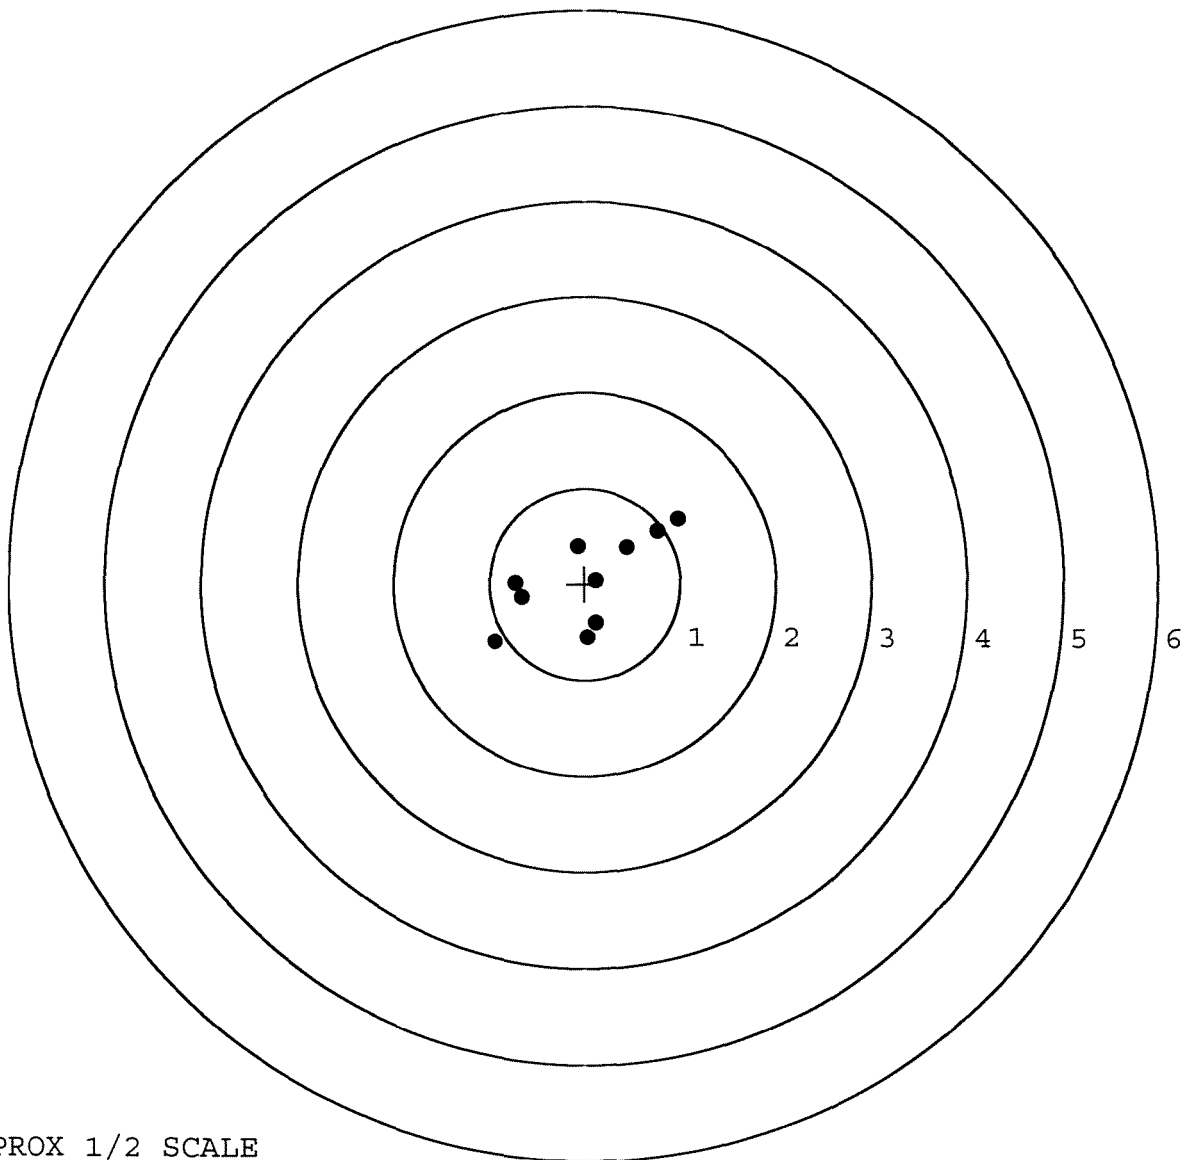


TARGET APPROX 1/2 SCALE

BARBER - M24 0179926

SERIAL NUMBER: G6695400. __0
TARGET NUMBER: 5
FILE DATE: 04/04/2009
FILE TIME: 06:40

X CENTROID: 0.108
Y CENTROID: 0.006
POA TO CENTROID: 0.108
HORZ SPREAD: 1.364
VERT SPREAD: 1.631
GROUP SPREAD: 1.794
MIN RADIUS: 0.142
MAX RADIUS: 0.930
MEAN RADIUS: 0.612
IN 1 IN DIAMETER: 3
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

POINT#	X	Y
1:	-0.051	0.917
2:	-0.531	0.483
3:	-0.641	0.185
4:	-0.450	-0.171
5:	0.696	-0.714
6:	0.335	-0.352
7:	0.579	-0.342
8:	0.723	-0.042
9:	0.038	-0.117
10:	0.383	0.217

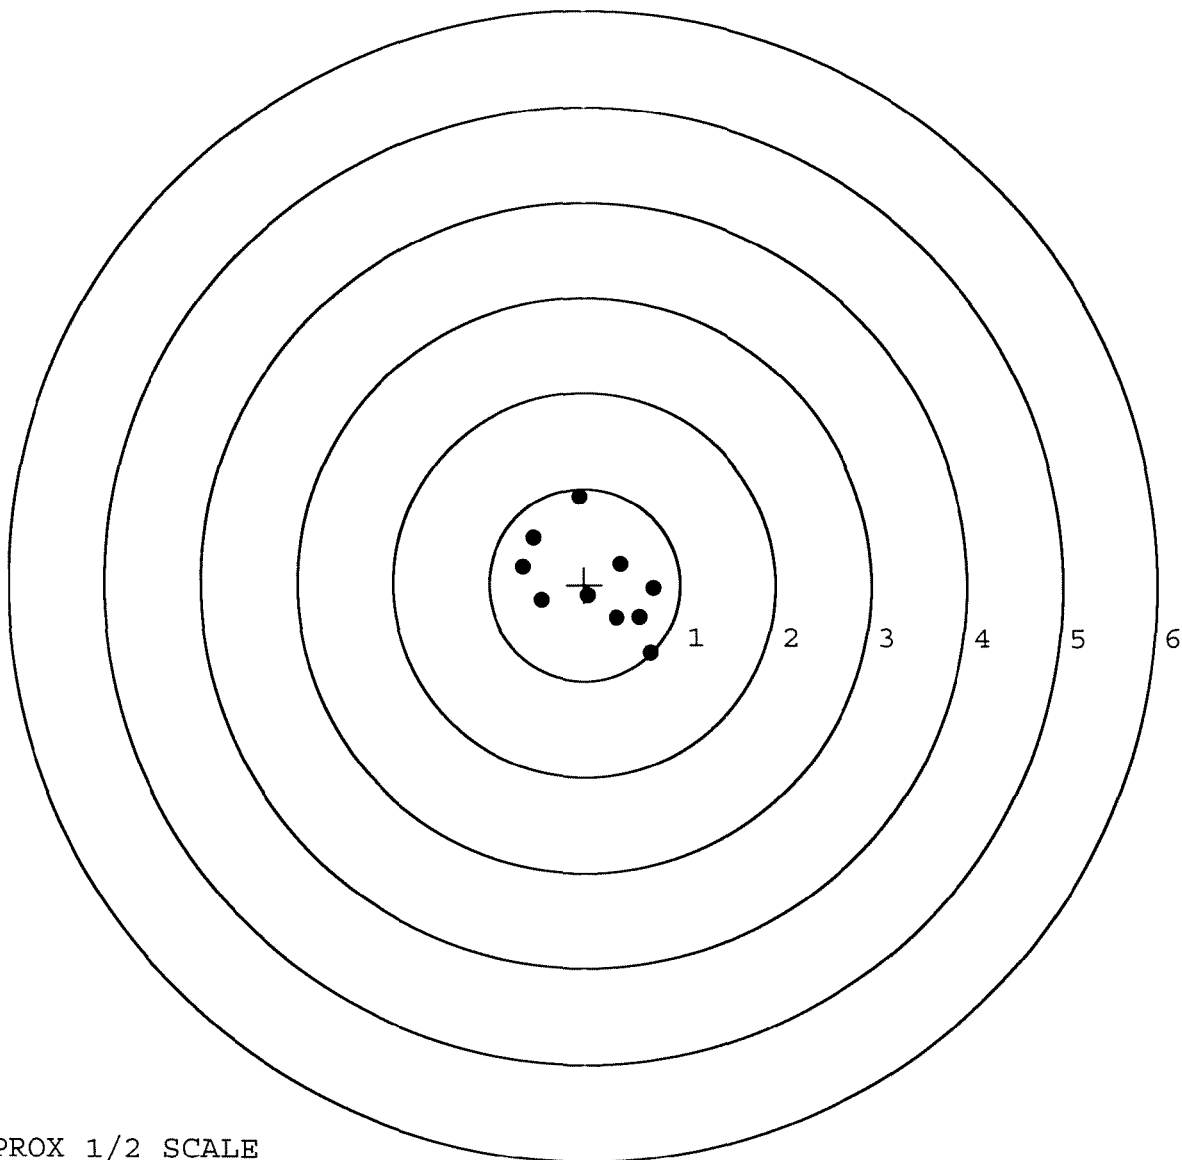

TARGET APPROX 1/2 SCALE

BARBER - M24 0179927

Arms Services Repair & Estimate System

FileAdd RepairEstimate RepairExpedite RepairInquiryRepair ToolsCSR ToolsReportsTable MaintenanceSystem MaintenanceHelp

Repair Inquiry

Repair Number:RE00099054

Verify Repair

Serial: G8360860 Model: M24 SWS Center Fire Caliber: 7.62 NATO

Repairman:

Status:Closed 7/22/2005 9:33:19 AM

Address Information

Customer:☒ Received From

Return To:☐ Received From

Name:CENTRAL RECEIVING POINTCENTRAL RECEIVING POINT

Address 1:BLDG 224BLDG 224

Address 2:UPTON AVEUPTON AVE

City:FORT BENNINGFORT BENNING

State:GAState:GA

Zip Code:31905Zip Code:31905

Country:USCountry:US

FFL:☐☐☐☐☐☐☐☐

Contact / ConditionProblemsEstimateHistory / StatusShipping / Billing

Contact Information

Phone:NA

Fax:

Email:

Comments:

Received Condition

Fair

Condition Notes:

CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Studs	3
A010	Hard Case(w/G628593	1
A017	Scope Base	1
A045	Bi Pod	1
A057	Frt and Rear Sgt Base	2

Repair Search

Refresh

Close

maglejt7/25/200510:40 AMCAPSNUMINS

SCRL

start

2

Arms Services

Serial
Number: **G6360860**

Model: **M24 SWS**



RE00099054

**CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON**

BARBER - M24 **M2400179966**

56TB47

MAINTENANCE REQUEST For use of this form, see DA PAM 738-750 and 738-751; the proponent agency is DCSLOG				PAGE NO 1	NO OF PAGES 1	REQUIREMENT CONTROL SYMBOL CSGLD-1047(R1)																					
SECTION I - CUSTOMER DATA				SECTION II - MAINTENANCE ACTIVITY DATA																							
1a. UIC CUSTOMER 42454 P		1b. CUSTOMER UNIT NAME C2/a		1c. PHONE NO 575-8256		3a. WORK ORDER NUMBER (WON) 6156 TP47		3b. SHOP 		3c. PHONE NO 																	
2a. SAMS-2 UIC/SAMS-I/TDA 		2b. UTILIZATION CODE 0		2c. MCSR 		4a. UIC SUPPORT UNIT 		4b. SUPPORT UNIT NAME 																			
SECTION III - EQUIPMENT DATA																											
5. TYPE MNT REQ CODE 1		6. ID A		7. NSN 1005012404136		15a. FAILURE DETECTED DURING/WHEN DISCOVERED CODE (Enter code) See DA Pamphlets 738-750 and 738-751 F																					
8. MODEL M-24						15b. FIRST INDICATION OF TROUBLE/HOW RECOGNIZED CODE (Enter Code) See DA Pamphlets 738-750 and 738-751 099				16. MILES/KILOMETERS/HOURS/ROUNDS M 																	
9. NOUN Signal Weapon System										K 																	
10a. ORG WON/DOC NO 				10b. EIC 						H 																	
11. SERIAL NUMBER 66360860				12. QTY 1		13. PD 03		17. PROJECT CODE (if assigned) SOP		18. ACCOUNT PROCESSING CODE m9m																	
14. MALFUNCTION DESCRIPTION (for DSU, GSU/AVIM, DEPOT use) 						19. IN WARRANTY (enter Y or N) Y		20. ADMIN NO 		21. REIMBURSABLE CUSTOMER (if Intransit customer enter Y or N) N																	
22. LEVEL OF WORK F						23. SIGNATURE 																					
24. DESCRIBE DEFICIENCIES OR SYMPTOMS ON THE BASIS OF COMPLETE CHECKOUT AND DIAGNOSTIC PROCEDURES IN EQUIPMENT TM (Do not prescribe repairs) 																											
25. REMARKS From action screen scripped 																											
26. TECHNICAL REFERENCES no scope POC SGT Dennis E-8256 																											
SECTION IV - TASK REQUIREMENTS DATA																											
27a. FILE INPUT ACT CD A		27b. TASK NO WAR		27c. ACT CODE M		27d. TASK DESCRIPTION warranty		27e. QTY TO BE RPR 1		27f. WORK CENTER KYAB		27g. FAILURE CODE 072		27h. MH PROJ 		27i. MH EXP 											
SECTION V - PART REQUIREMENTS																											
28a. FILE INPUT ACT CD 		28b. TASK NO 		28c. ID NO 		28d. NSN OR PART NUMBER 		28e. SFX CD 		28f. QTY RQD 		28g. QTY ISSUED 		28h. NMCS CD 		28i. FAILURE CODE 		28j. STORAGE LOCATION 		28k. INITIALS 		28l. COST \$ 					
28m. TOTAL MANHOURS 				28n. TOTAL MANHOURS COSTS \$ 				28o. TOTAL PARTS COSTS \$ 																			
SECTION VI - COMPLETION DATA																											
29. QTY RPR 				30. QTY CONDEMN 				31. QTY NRTS 				32. EVAC WON 				33. EVAC UNIT NAME 											
SECTION VII - ACTION SIGNATURES																											
34a. SUBMITTED BY 				35a. ACCEPTED BY 				35c. DATE 				36a. WORK STARTED BY 				37a. INSPECTED BY 				38a. PICKED UP BY 							
34b. DATE 		35b. STATUS 		35d. TIME 		36b. STATUS 		36c. DATE 		36d. TIME 		37b. STATUS 		37c. DATE 		37d. TIME 		38b. STATUS 		38c. DATE 		38d. TI 					

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-02-D-0127

R & E NUMBER	99054		
SERIAL NUMBER	G63600860		
LOG-IN DATE	7-22-05		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	N/A	
560 A	RE-BARREL		
B	DRILL AND TAP		
575	ASSEMBLE		
600	PROOF		
605	CHECK HEADSPACE		
610	DIS-ASSEMBLE GUN		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE	8-17-05	AC
D	SAFETY "OFF" FORCE	8-17-05	AC
E	FIRING PIN INDENT	8-17-05	AC
640	TEST Clean Test	8-12-05	TRW
655	FINAL INSPECT	8-17-05	AC
660	PACK	8-30-05	DA
	Replace front Guard Screw	8-8-05	RJL
		SHIP DATE	
	QAR INSPECTION DATE		

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00083410** Serial: E6413559 Model M24 SWS Center Fire
 Verify Repair Caliber: 7.62 NATO Repairman: Status: Closed 8/3/2004 12:41:16 PM

Address Information

Customer: Received From Return To: Received From
 Name: TRANSPORTATION DIV DFEL TRANSPORTATION DIV DFEL
 Address 1: BLDG 1836 BLDG 1836
 Address 2: 6759 MITCHELL AVE PO Box: 6759 MITCHELL AVE PO Box:
 City: FORT BENNING FORT BENNING
 State: GA Zip Code: 31905 Country: US State: GA Zip Code: 31905 Country: US
 FFL: ☐ ☐ ☐ ☐ ☐ ☐ ☐ ☐

Contact / Condition **Problems** **Estimate** **History / Status** **Shipping / Billing**

Date	Code	User ID	Desc1
8/3/2004 11:40:3	New	urtzdj	Repair Added
8/3/2004 12:41:1	Closed	urtzdj	Closed at Expedite

☐ Shipping Hold ☐ InterFace Hold ☐ Estimate Sent ☐ Parts Received ☐ Passed Inspection ☐ Return As Received ☐ Has been Approved ☐ Internal Repair

Current Status
 Closed
 8/3/2004 12:41:16 PM
 urtzdj
 Sniper Systems
 Repair Location
 ILN
 Current Location
 ILN
 Transfer Number

Repair Search **Refresh** **Close**

eglandit 8/4/2004 8:25 AM CAPS NUM INS SCRL

start Inbo... DMS... 2 S... SAP ... Displ... Micr... Arm... 8:25 AM

G 636 0860 New

Serial Number: **E6413559**

Model: **M24 SWS**



RE00083410

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS
BARBER - M24 0179931

SERIAL NO. _____

2.50 LBS (plus or minus 0.50 LBS)

DATE 7-19-04

3.00 LBS (plus or minus 0.75 LBS)

TESTER TRW

4.00 LBS (plus or minus 1.00 LBS)

	2.50 LBS INITIAL	2.50 LBS AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50 LBS		COMMENTS
PULL #1	2.28	2.53		2.56	
PULL #2	2.41	2.66		2.49	
PULL #3	2.27	2.82		2.42	
PULL #4	2.58	2.63		2.80	
PULL #5	2.61	2.75		2.73	
TOTAL	12.15	13.39		13.00	
AVERAGE	2.43	2.67		2.60	

	3.00 LBS INITIAL	3.00 LBS AFTER 20 CYCLES		COMMENTS
PULL #1	3.37	3.03		
PULL #2	3.19	3.03		
PULL #3	3.41	3.01		
PULL #4	3.31	3.00		
PULL #5	3.28	3.09		
TOTAL	16.56	15.16		
AVERAGE	3.31	3.03		

	4.00 LBS INITIAL	4.00 LBS AFTER 20 CYCLES	MAX SETTING GREATER THAN 4 LBS	RESET TO 4 LBS FOR TARGET & ACCURACY
PULL #1	4.31	4.37		4.41
PULL #2	4.15	3.92		4.63
PULL #3	4.40	4.13		4.65
PULL #4	4.23	3.86		4.63
PULL #5	4.25	4.02		4.68
TOTAL	21.34	20.30		23.00
AVERAGE	4.26	4.06		4.60

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: G6360860.____0
FILE DATE AND TIME: 08/17/2004 05:59

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES


The Average X Centroid of the Five Target Set:	0.024
The Average Y Centroid of the Five Target Set:	0.105
The Average Point of Impact of the Five Target Set:	0.108
The Average Mean Radius of the Five Target Set:	0.711
The Distance from POA to Centroid Target #1:	0.355
The Distance from Centroid Target #2 to Centroid Target #1:	0.373
The Distance from Centroid Target #3 to Centroid Target #1:	0.468
The Distance from Centroid Target #4 to Centroid Target #1:	0.276
The Distance from Centroid Target #5 to Centroid Target #1:	0.349

BARBER - M24 0179933

SERIAL NUMBER: G6360860. __0
TARGET NUMBER: 1
FILE DATE: 08/17/2004
FILE TIME: 05:59

POINT#	X	Y
1:	0.356	1.089
2:	-0.027	2.175
3:	-1.360	-0.552
4:	-0.776	-0.286
5:	-0.299	0.540
6:	-0.275	0.188
7:	-0.164	-0.197
8:	0.039	-0.100
9:	0.329	-0.067
10:	0.269	0.204

X CENTROID: -0.191
Y CENTROID: 0.299
POA TO CENTROID: 0.355
HORZ SPREAD: 1.716
VERT SPREAD: 2.727
GROUP SPREAD: 3.035
MIN RADIUS: 0.140
MAX RADIUS: 1.883
MEAN RADIUS: 0.758
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 8
in 3 IN DIAMETER: 9

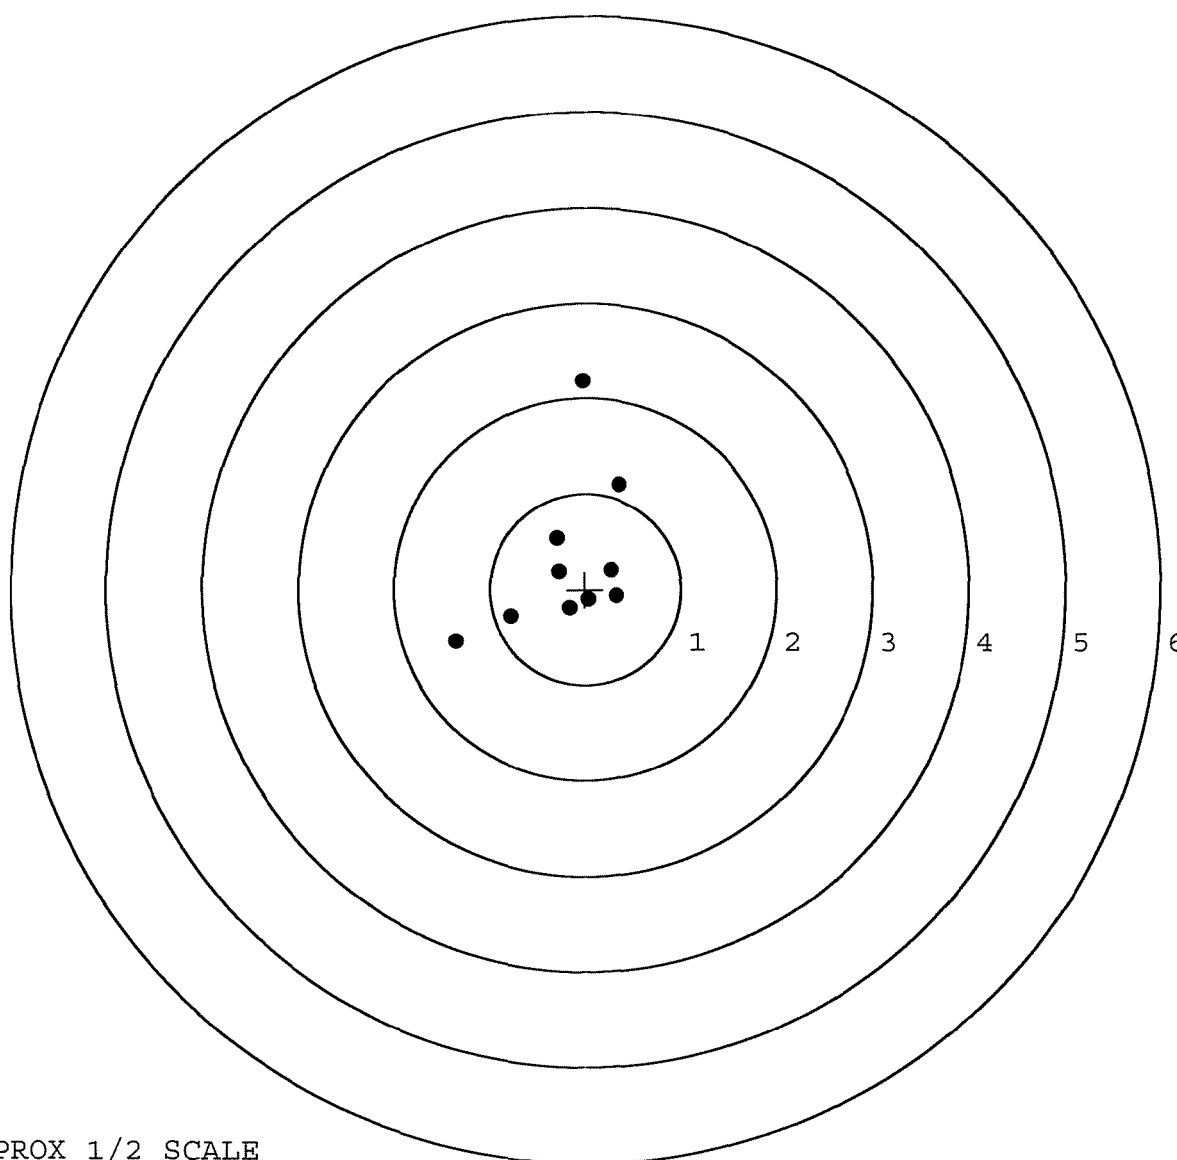


TARGET APPROX 1/2 SCALE

BARBER - M24 0179934

SERIAL NUMBER: G6360860. __0
TARGET NUMBER: 2
FILE DATE: 08/17/2004
FILE TIME: 05:59

POINT#	X	Y
1:	0.912	0.412
2:	0.182	0.593
3:	0.078	1.017
4:	0.156	-0.449
5:	-0.024	-0.483
6:	-0.415	-0.061
7:	0.507	0.177
8:	-0.055	0.204
9:	0.156	-0.136
10:	-0.139	-0.085

X CENTROID: 0.136
Y CENTROID: 0.119
POA TO CENTROID: 0.180
HORZ SPREAD: 1.327
VERT SPREAD: 1.500
GROUP SPREAD: 1.503
MIN RADIUS: 0.209
MAX RADIUS: 0.900
MEAN RADIUS: 0.516
IN 1 IN DIAMETER: 5
IN 2 IN DIAMETER: 10
in 3 IN DIAMETER: 10

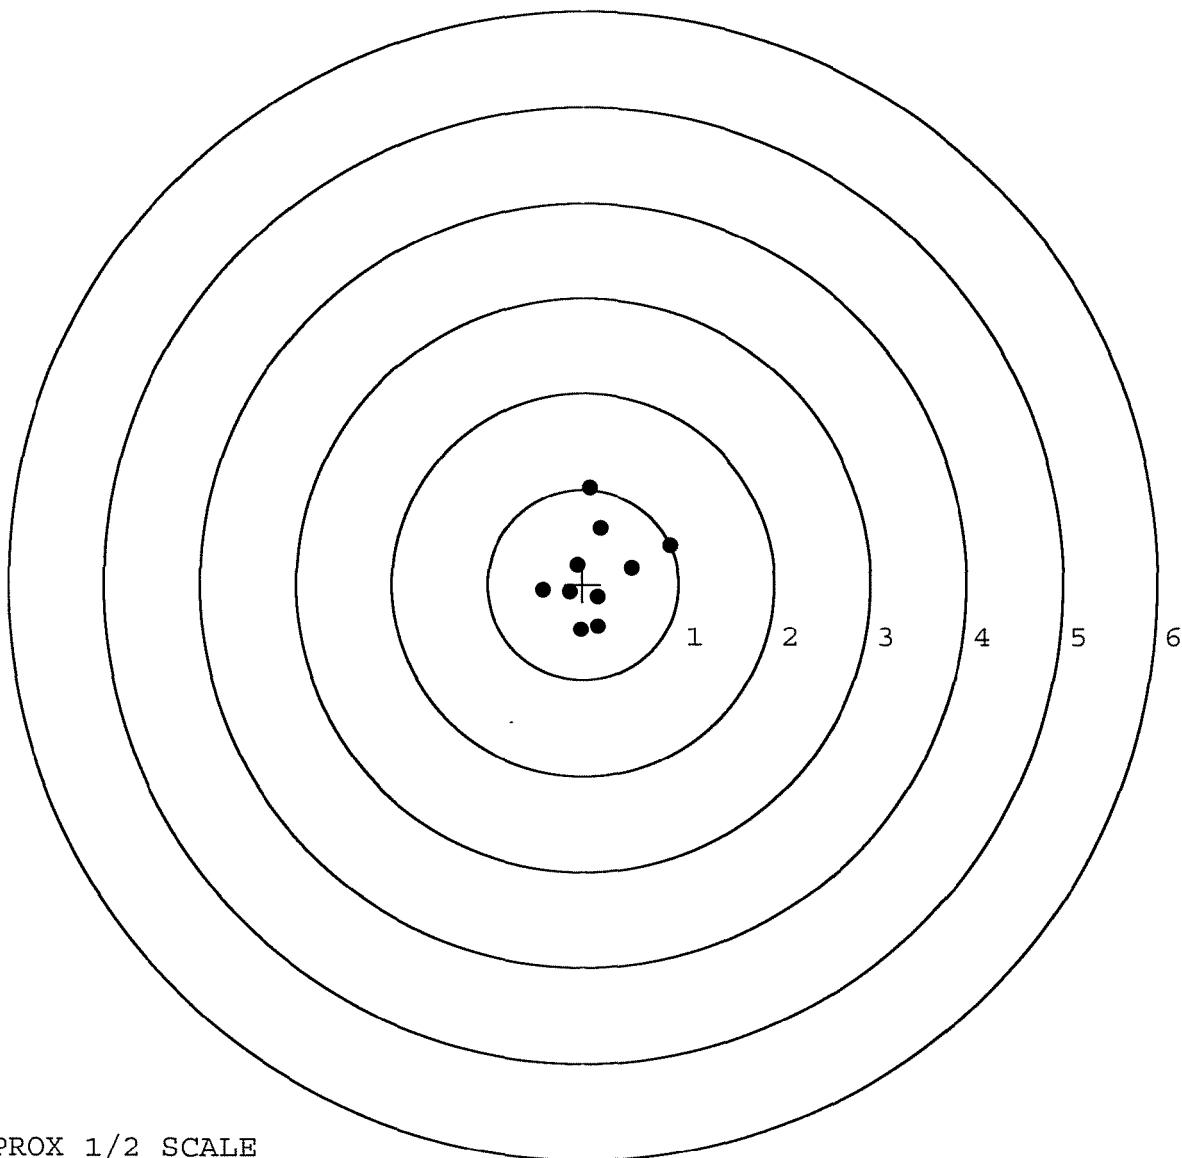


TARGET APPROX 1/2 SCALE

BARBER - M24 0179935

SERIAL NUMBER: G6360860. __0
TARGET NUMBER: 3
FILE DATE: 08/17/2004
FILE TIME: 05:59

POINT#	X	Y
1:	1.138	-0.892
2:	0.880	-0.168
3:	0.448	-0.255
4:	0.309	-0.336
5:	0.159	-0.519
6:	-0.101	-0.236
7:	-0.391	-0.158
8:	-0.346	0.431
9:	-0.752	0.562
10:	-0.220	1.003

X CENTROID: 0.112
Y CENTROID: -0.057
POA TO CENTROID: 0.126
HORZ SPREAD: 1.890
VERT SPREAD: 1.895
GROUP SPREAD: 2.385
MIN RADIUS: 0.279
MAX RADIUS: 1.323
MEAN RADIUS: 0.693
IN 1 IN DIAMETER: 4
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 10

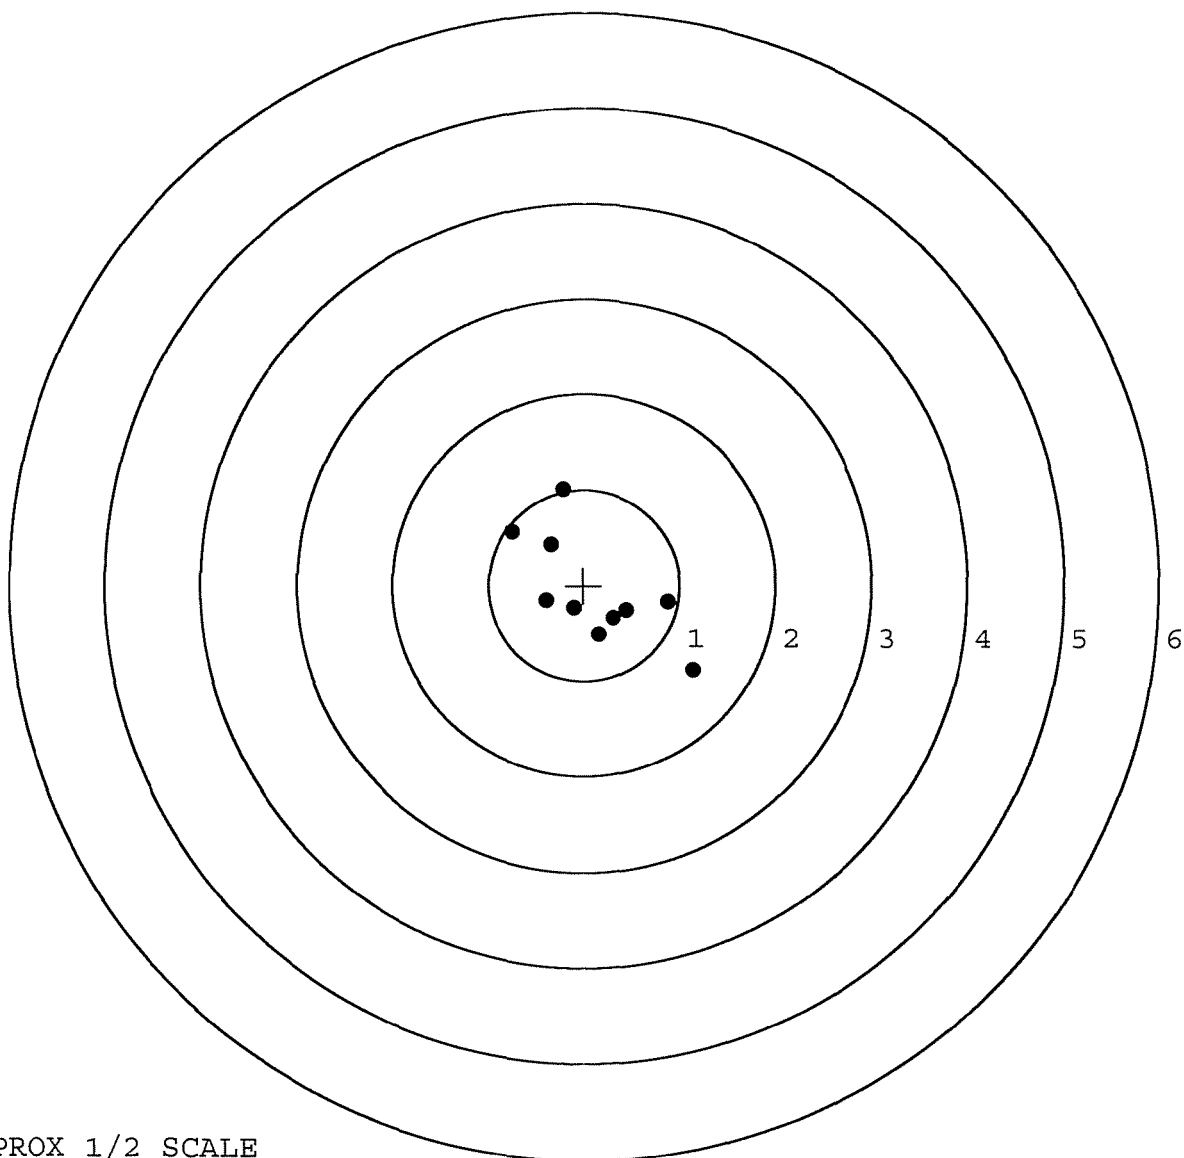


TARGET APPROX 1/2 SCALE

BARBER - M24 0179936

SERIAL NUMBER: G6360860. __0
TARGET NUMBER: 4
FILE DATE: 08/17/2004
FILE TIME: 05:59

POINT#	X	Y
1:	0.594	-0.751
2:	-0.599	-0.895
3:	-1.249	-0.776
4:	0.764	0.069
5:	0.557	0.224
6:	0.632	1.106
7:	0.286	0.741
8:	-0.581	0.503
9:	-0.358	0.513
10:	-0.251	0.093

X CENTROID: -0.021
Y CENTROID: 0.083
POA TO CENTROID: 0.085
HORZ SPREAD: 2.013
VERT SPREAD: 2.001
GROUP SPREAD: 2.661
MIN RADIUS: 0.231
MAX RADIUS: 1.499
MEAN RADIUS: 0.847
IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 6
in 3 IN DIAMETER: 10

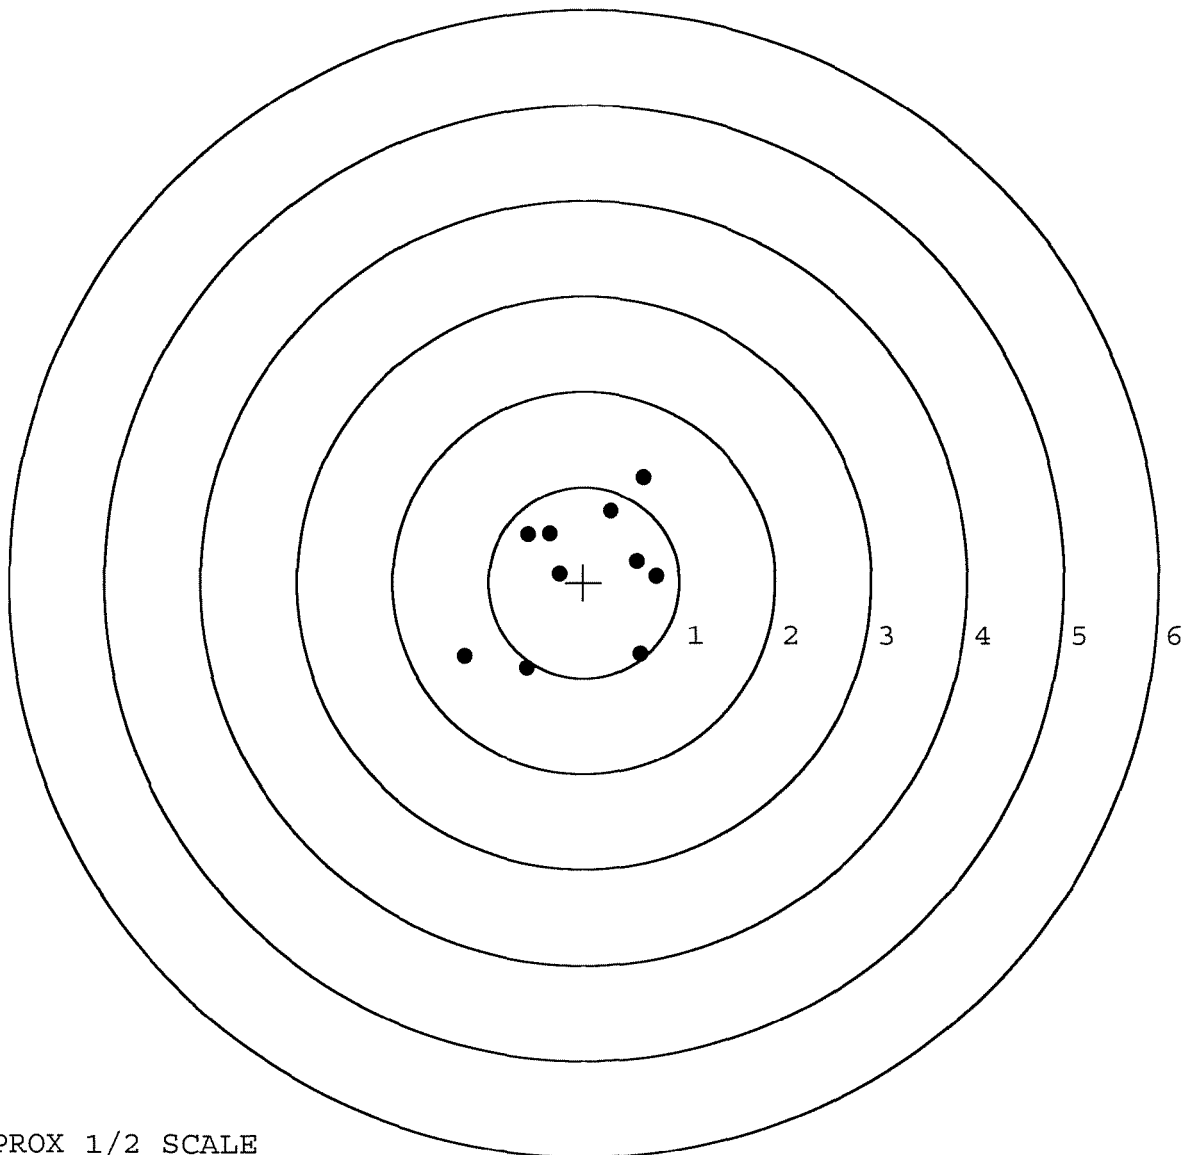


TARGET APPROX 1/2 SCALE

BARBER - M24 0179937

SERIAL NUMBER: G6360860. __0
TARGET NUMBER: 5
FILE DATE: 08/17/2004
FILE TIME: 05:59

	POINT#	X	Y
	1:	0.641	-0.370
	2:	0.397	-0.149
	3:	0.200	-0.917
	4:	-0.252	-0.772
X CENTROID:	5:	-0.040	-0.291
Y CENTROID:	6:	-0.178	0.208
POA TO CENTROID:	7:	-0.832	0.331
HORZ SPREAD:	8:	-0.088	0.612
VERT SPREAD:	9:	0.268	1.177
GROUP SPREAD:	10:	0.709	0.990
MIN RADIUS:		0.289	
MAX RADIUS:		1.111	
MEAN RADIUS:		0.743	
# IN 1 IN DIAMETER:		3	
# IN 2 IN DIAMETER:		7	
# in 3 IN DIAMETER:		10	

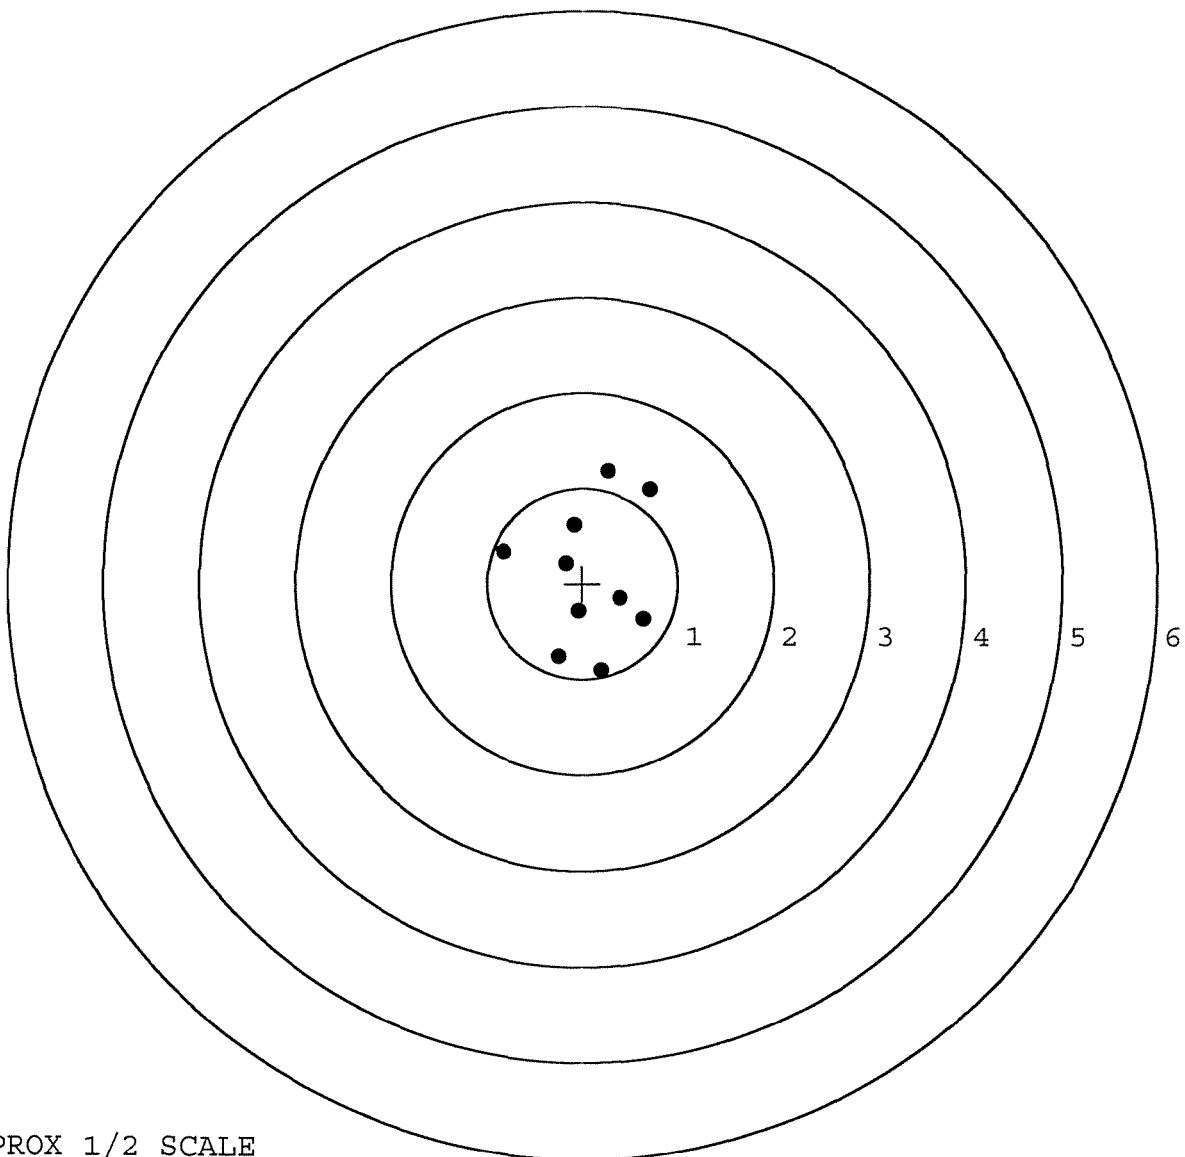

TARGET APPROX 1/2 SCALE

R & E NUMBER	83410		
SERIAL NUMBER	E6413559 G6360860 New		
LOG-IN DATE	8-3-04		
INSPECT AND VERIFY:			
OPERATION #	OPERATION NAME	DATE	INITIAL
550	DIS-ASSEMBLE GUN	8-9-04	RTL
560 A	RE-BARREL	8-9-04	RTL
B	DRILL AND TAP	8-9-04 8-9-04	TRW
575	ASSEMBLE	8-10-04	RTL
600	PROOF	8-10-04	RTL
605	CHECK HEADSPACE	8-10-04	RTL
610	DIS-ASSEMBLE GUN	8-10-04	RTL
612	MAGNAFLUX		
615	ROLLMARK CALIBER	8/11/04	AB
618	ROTO-BLAST	8/12/04	DG
620	APPLY COATINGS	8/12	HP
625 A	FINAL ASSEMBLY	8-16-04	Lu
B	TRIGGER PULL TEST		
C	SAFETY "ON" FORCE		
D	SAFETY "OFF" FORCE		
E	FIRING PIN INDENT		
640	TARGET	8-17-04	A
655	FINAL INSPECT	9-24-04	RL
660	PACK	9-24-04	RA
		SHIP DATE	
	QAR INSPECTION DATE		

Arms Services Repair & Estimate System

File Add Repair Estimate Repair Expedite Repair Inquiry Repair Tools CSR Tools Reports Table Maintenance System Maintenance Help

Repair Inquiry

Repair Number: **RE00034935** Serial: C6611669 Model 700 Center Fire Caliber 7.62 NATO M-24 (SWS) Repairman: Status: Closed 11/1/01 12:39:00 PM

Verify Repair

Address Information

Customer: Received From Return To Received From

Name: **INSTALLATION SUPPLY DIVISION** **INSTALLATION SUPPLY DIVISION**

Address 1: **BLDG 224** **BLDG 224**

Address 2: **PO Box** **PO Box**

City: **FORT BENNING** **FORT BENNING**

State: **GA** Zip Code: **31905** Country: **US** State: **GA** Zip Code: **31905** Country: **US**

FFL

Contact / Condition Problems Estimate History / Status Shipping / Billing

Contact Information

Phone: Fax: Email: Comments:

Received Condition

Condition Notes: CSR Notes:

Accessories Received

Code	Desc	Qty
A007	With Stud	3
A026	Scope	1

Repair Search Refresh Close

11/1/01 1:45 PM CAPS NUM INS SCPL

Start Inbox Calen Arm Scor Israeli INSP Thom Acro 1:45 PM

Serial Number:

~~C6611669~~

Model: 700



RE00034935

E6413559

SNIPER WEAPON SYSTEM - UNIQUE STATISTICAL INFORMATION

FIREARM SERIAL NUMBER / DATASET NAME: E6413559.___0
FILE DATE AND TIME: 11/27/2001 11:17

THE FOLLOWING DATA IS ALL REPORTED IN UNITS OF INCHES

The Average X Centroid of the Five Target Set:	0.004
The Average Y Centroid of the Five Target Set:	0.197
The Average Point of Impact of the Five Target Set:	0.197
The Average Mean Radius of the Five Target Set:	1.106
The Distance from POA to Centroid Target #1:	1.243
The Distance from Centroid Target #2 to Centroid Target #1:	1.570
The Distance from Centroid Target #3 to Centroid Target #1:	1.182
The Distance from Centroid Target #4 to Centroid Target #1:	1.511
The Distance from Centroid Target #5 to Centroid Target #1:	1.009


BARBER - M24 0179941

SERIAL NUMBER: E6413559. __0
TARGET NUMBER: 1
FILE DATE: 11/27/2001
FILE TIME: 11:17

X CENTROID: -0.042
Y CENTROID: 1.242
POA TO CENTROID: 1.243
HORZ SPREAD: 1.902
VERT SPREAD: 3.241
GROUP SPREAD: 3.262
MIN RADIUS: 0.217
MAX RADIUS: 1.692
MEAN RADIUS: 1.055

IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.355	2.805
2:	0.207	2.366
3:	-0.067	2.103
4:	-0.253	1.291
5:	0.141	1.412
6:	0.562	0.600
7:	0.053	-0.436
8:	-0.956	-0.182
9:	-1.181	0.683
10:	0.721	1.779

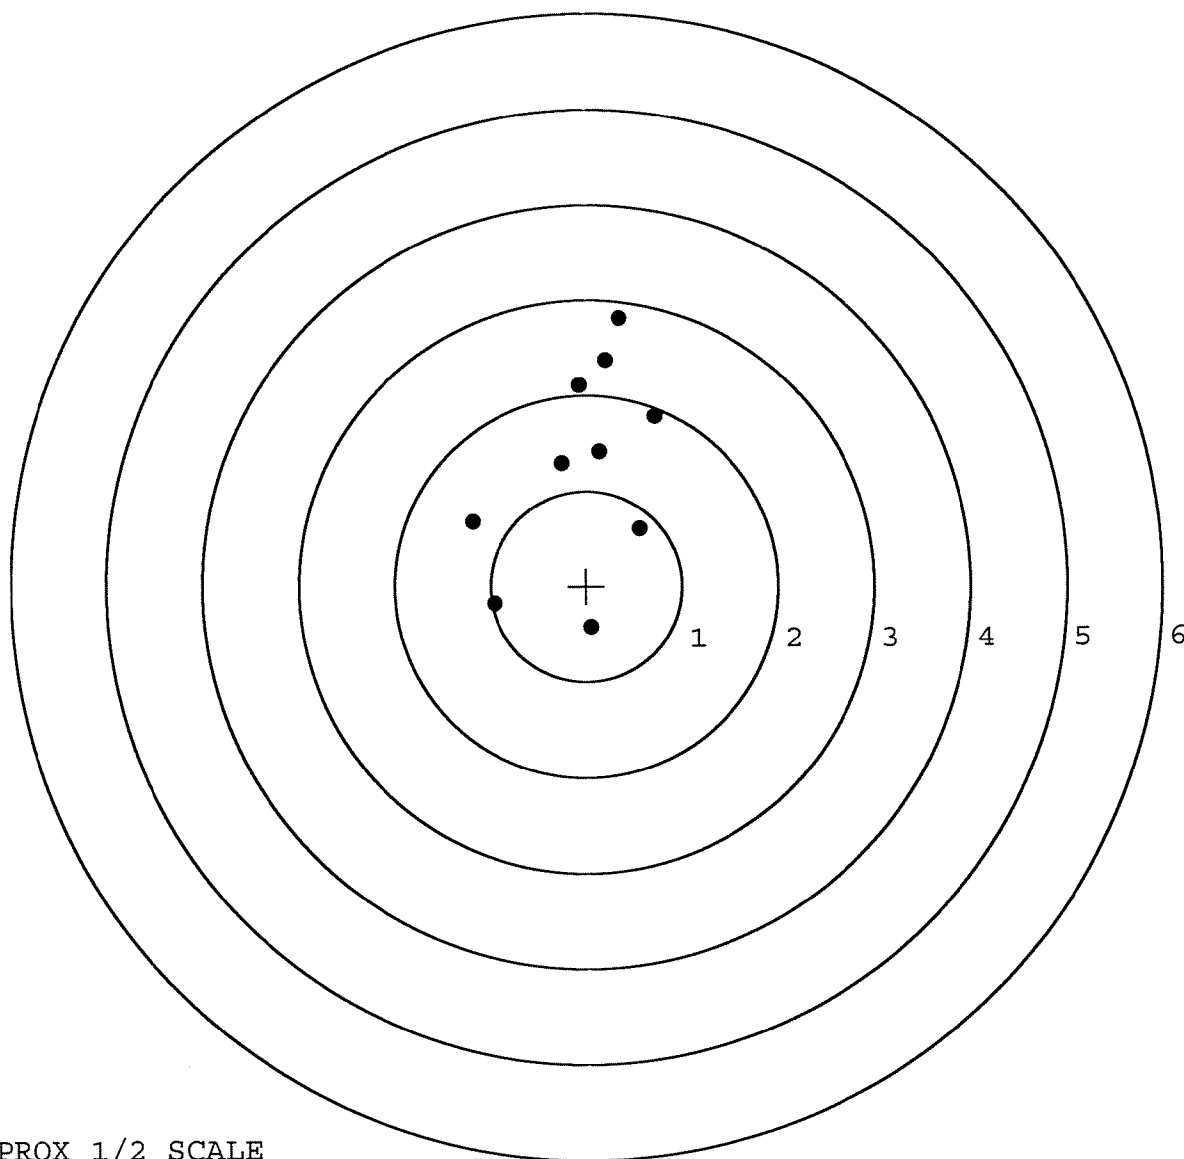


TARGET APPROX 1/2 SCALE

BARBER - M24 0179942

SERIAL NUMBER: E6413559. __0
TARGET NUMBER: 2
FILE DATE: 11/27/2001
FILE TIME: 11:17

X CENTROID: -0.270
Y CENTROID: -0.311
POA TO CENTROID: 0.412
HORZ SPREAD: 1.640
VERT SPREAD: 3.097
GROUP SPREAD: 3.171
MIN RADIUS: 0.309
MAX RADIUS: 2.183
MEAN RADIUS: 0.976
IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 7
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	0.008	0.826
2:	-0.434	0.594
3:	0.068	-0.036
4:	0.691	-0.055
5:	0.691	-2.271
6:	-0.690	-1.802
7:	-0.830	-0.579
8:	-0.569	-0.231
9:	-0.949	0.070
10:	-0.688	0.370

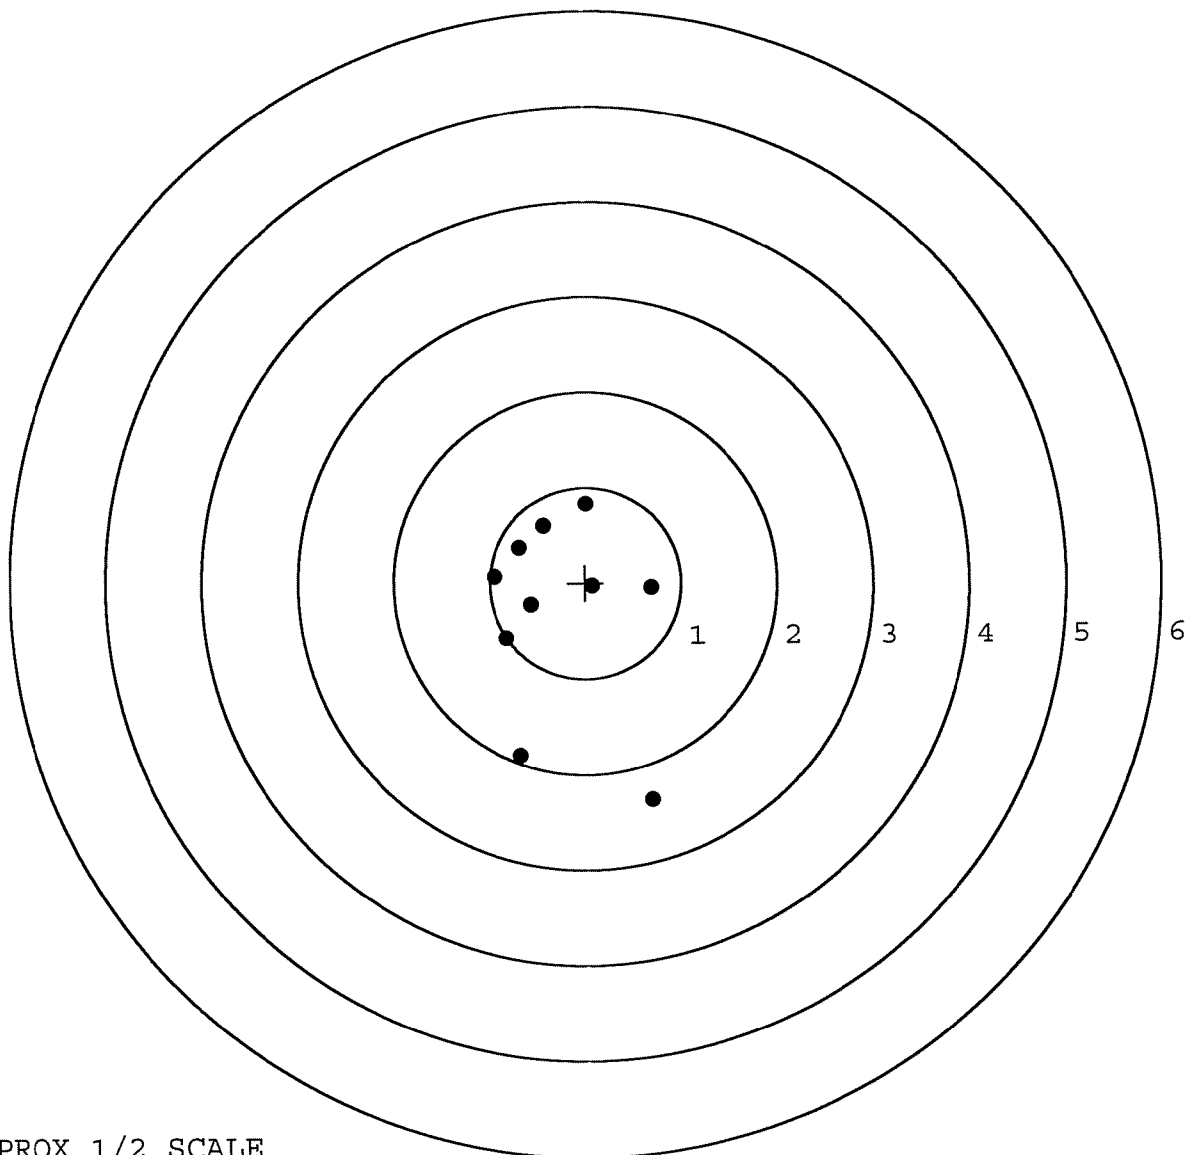

TARGET APPROX 1/2 SCALE


BARBER - M24 0179943

SERIAL NUMBER: E6413559. __0
TARGET NUMBER: 3
FILE DATE: 11/27/2001
FILE TIME: 11:17

X CENTROID: 0.161
Y CENTROID: 0.078
POA TO CENTROID: 0.179
HORZ SPREAD: 2.981
VERT SPREAD: 2.062
GROUP SPREAD: 3.609
MIN RADIUS: 0.393
MAX RADIUS: 2.175
MEAN RADIUS: 1.237

IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 8

POINT#	X	Y
1:	1.341	0.555
2:	1.395	0.819
3:	0.843	0.744
4:	0.501	0.410
5:	0.519	-0.085
6:	-0.226	-1.173
7:	-1.567	-1.243
8:	-1.538	-0.227
9:	-1.072	0.377
10:	1.414	0.599

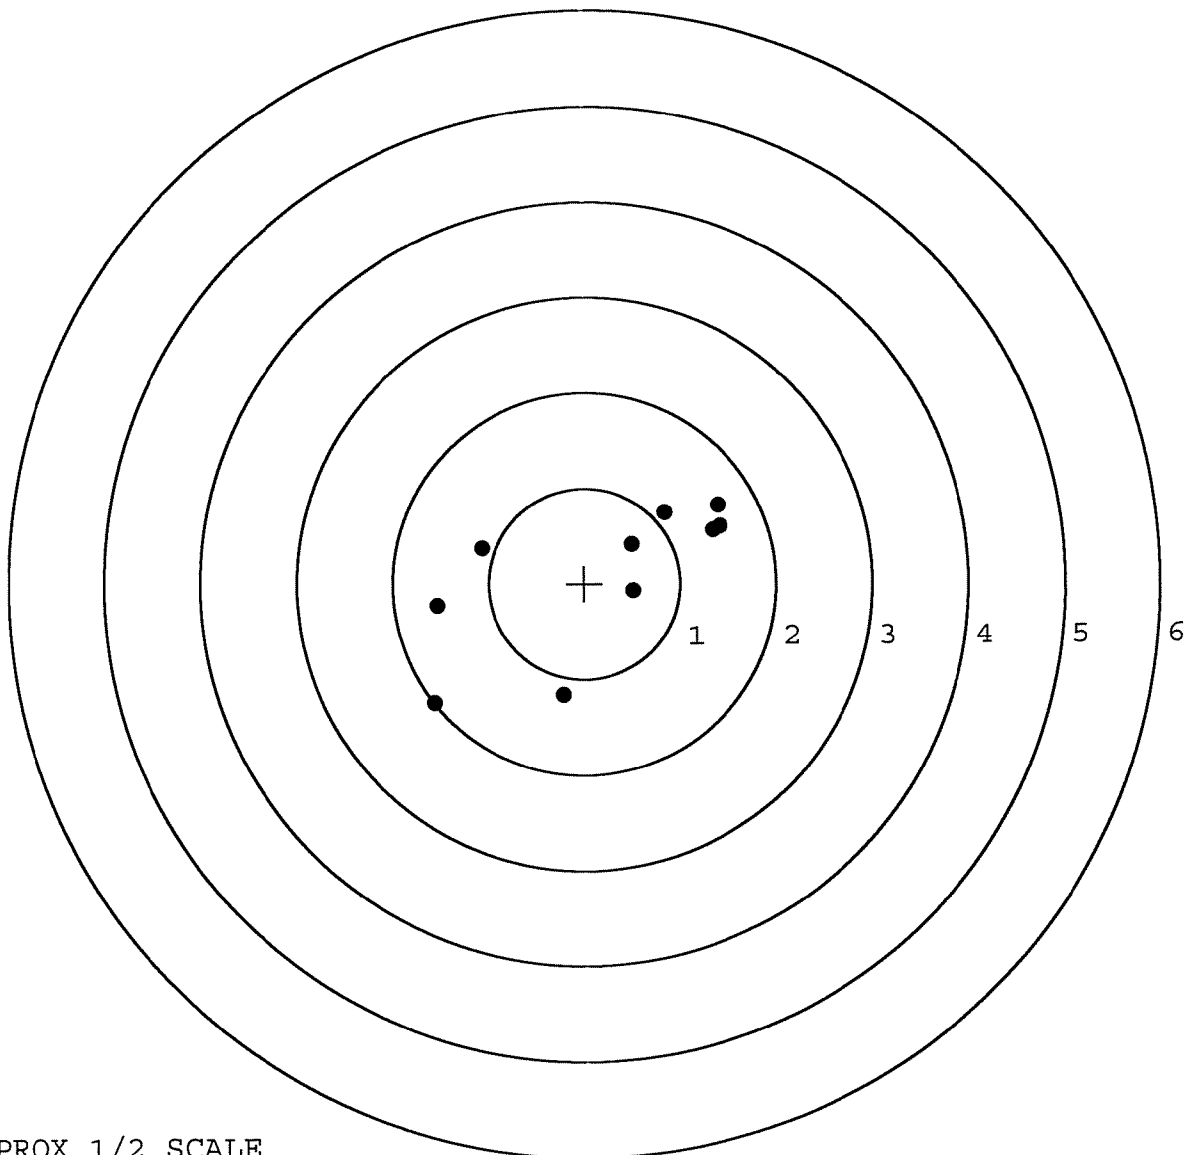

TARGET APPROX 1/2 SCALE


BARBER - M24 0179944

SERIAL NUMBER: E6413559. 0
TARGET NUMBER: 4
FILE DATE: 11/27/2001
FILE TIME: 11:17

X CENTROID: 0.155
Y CENTROID: -0.256
POA TO CENTROID: 0.300
HORZ SPREAD: 2.130
VERT SPREAD: 2.972
GROUP SPREAD: 3.306
MIN RADIUS: 0.408
MAX RADIUS: 1.836
MEAN RADIUS: 1.164

IN 1 IN DIAMETER: 2
IN 2 IN DIAMETER: 3
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	1.345	0.694
2:	0.813	0.901
3:	0.162	1.138
4:	-0.592	0.662
5:	-0.102	0.060
6:	0.599	-0.096
7:	0.413	-1.775
8:	0.042	-1.273
9:	-0.345	-1.041
10:	-0.785	-1.834

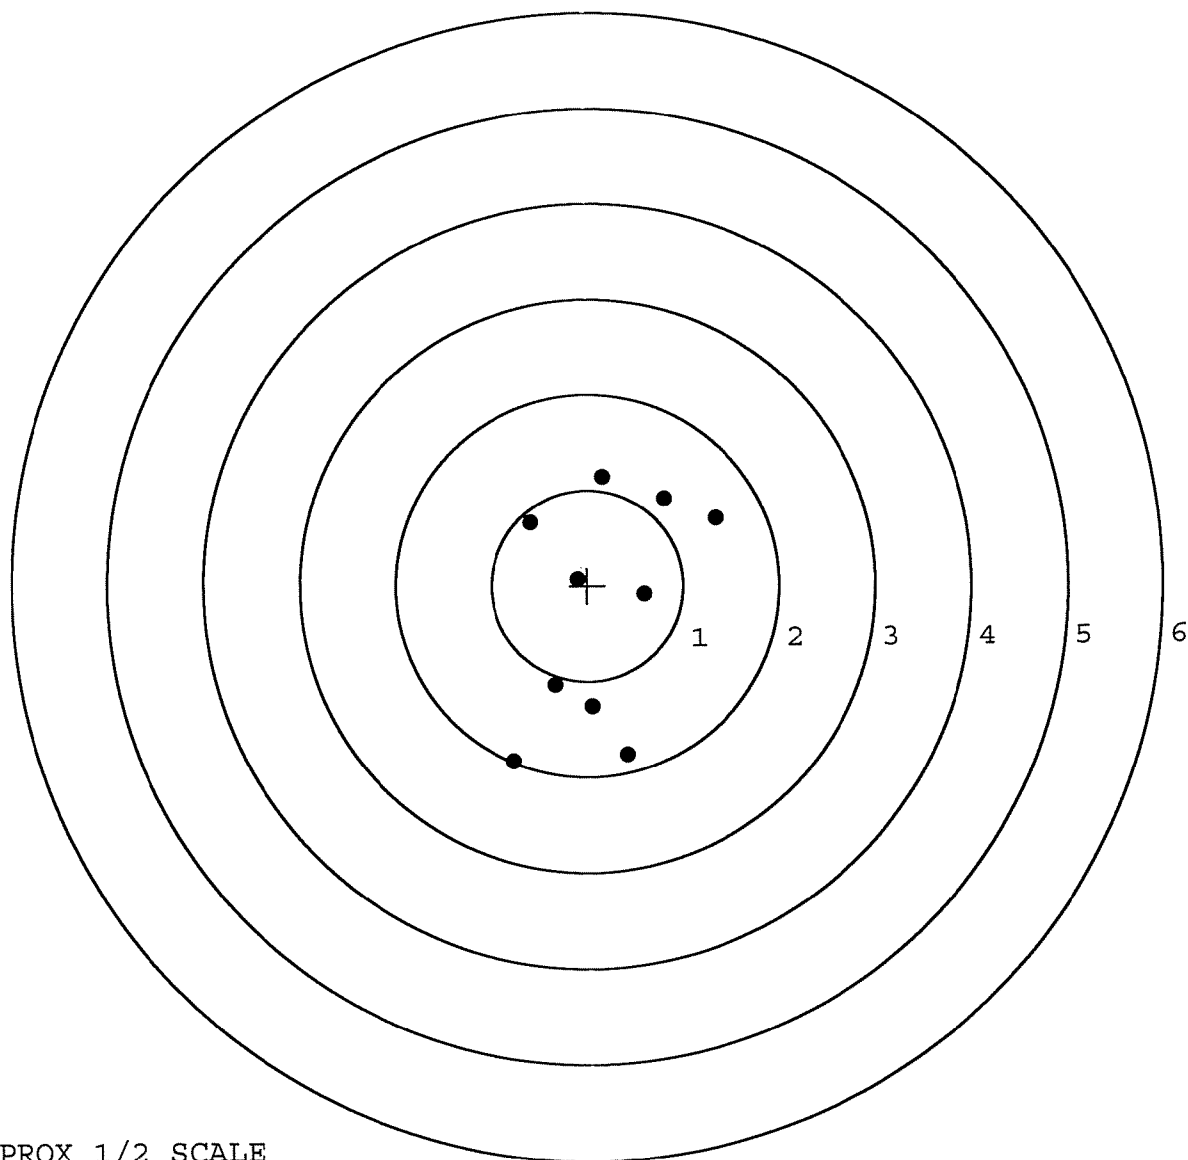

TARGET APPROX 1/2 SCALE


BARBER - M24 0179945

SERIAL NUMBER: E6413559. __0
TARGET NUMBER: 5
FILE DATE: 11/27/2001
FILE TIME: 11:17

X CENTROID: 0.014
Y CENTROID: 0.235
POA TO CENTROID: 0.235
HORZ SPREAD: 3.153
VERT SPREAD: 3.100
GROUP SPREAD: 3.404
MIN RADIUS: 0.292
MAX RADIUS: 1.901
MEAN RADIUS: 1.097

IN 1 IN DIAMETER: 1
IN 2 IN DIAMETER: 5
in 3 IN DIAMETER: 7

POINT#	X	Y
1:	0.861	1.518
2:	0.537	0.879
3:	-0.136	0.960
4:	-0.368	0.680
5:	-0.156	-0.003
6:	1.387	0.242
7:	0.690	-0.912
8:	-0.546	-1.582
9:	-1.766	-0.095
10:	-0.367	0.661

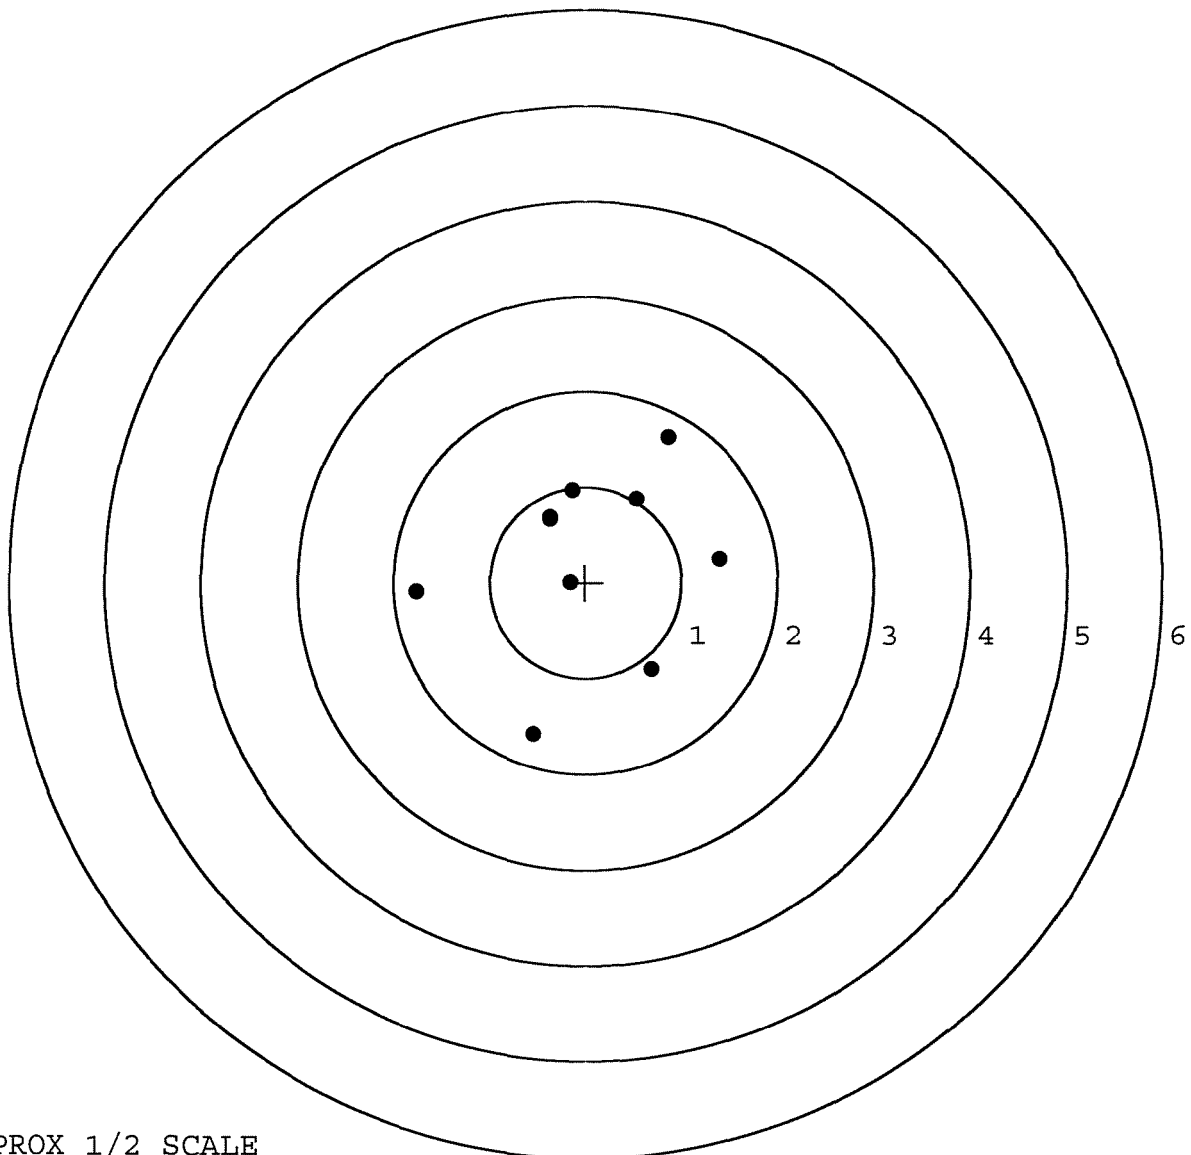

TARGET APPROX 1/2 SCALE

Final Inspection

In: E6413559

DATE REC'D: 11-1-01

DATE RET'D: 11-28-01

EDITOR: RTH

Item:

BARREL Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ SCOPE
- ☒ SCOPE RINGS
- ☒ MOUNTING SCREWS
- ☒ MOUNTING BASE
- ☒ SCREWS
- ☒ FINISH
- ☒ LOOSENESS
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

STOCK Assy.

- ☒ STOCK
- ☒ SLING SWIVEL STUDS
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ SCOPE CASE
- ☐ IRON SIGHTS
- ☐ DEPLOYMENT KIT

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments: _____

M-24 INSPECTION CHECKLIST
CONTRACT #: DAAE-20-97-C-242

[illegible]

RECEIVING AND ESTIMATING REPORT

BARBER - M24 0179948

COMMENTS

ORDER

R 99-20512

INITIAL SWS	CUSTOMER ORDER NO.		M/24 W/SCOPE, W/HARD CASE	
DATE RECEIVED 10/18/99	DATE OPENED 10/20/99	DATE CODE	SERIAL NUMBER C6611669	NEW SERIAL NUMBER
ACCESSORIES W/STUDS		W/SWIVELS	SCOPE BASE	
MODEL AND GRADE 700 7.62		NATO		

Scope S/N 87-1146

FROM:

SHIP TO:

U S ARMY
CO D 2/29 INF REGT
BLDG 73
FT BENNING

GA 31905

U S ARMY
CO D 2/29 INF REGT
BLDG 73
FT BENNING

GA

31905

CUST NO: 187354 C.O.D.

ACCOUNT NUMBER	ACCOUNT NUMBER N/C	WRITE ☐	PROM. DATE	ESTIMATED	VIA UPS
----------------	--------------------	--------------------------------	------------	-----------	------------

GUN CONDITION

- ☐ NEW
- ☐ LIGHTLY WORN
- ☐ WORN
- ☐ VERY WORN
- ☐ UNREPAIRABLE
- ☐ MARRED

REPAIR CHARGE

EXCISE

TAX

INSURANCE

UPS

PARCEL POST

TOTAL

CUSTOMER CONCERN	AMMO	FUNCTION	FINISH	ACCURACY	FIT	INSPECT
CYCLE	A1	B1				
TRIGGER GROUP		B2			E1	F1
BOLT ASSY.		B3			E2	F2
BARREL ASSY.		B4		D1	E3	F3
REC. ASSY.		B5		D2	E4	F4
WOOD			C1	D3	E5	F5
METAL			C2			

MAIN FAULT

PARTS

COMMENTS

BBL 96003
STOCK 96018
BOLT ASSY 96005
SCOPE RING ASSY (2) 96082
EXTRACTOR 91816

REPAIRMAN RW	PROOF ✓	CLEAN ✓	TEST ✓	TARGET ✓	PATTERN
GALLERY TESTER RW	DATE	DATE 1-26-00	DATE 1-31-00	DATE 1-31-00	DATE

OFFICE COPY

RD6925 REV. 7/97

CONFIDENTIAL-SUBJECT TO PROTECTIVE ORDER
KINZER V. REMINGTON

BARBER - M24 0179948 79987

BARBER - M24 0179949

Remington Test Lab, Ilion, N.Y.

Centroidal distance calculations for Rifle # c6611669
4 Feb 2000

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0318
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0848
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0905664

THE AMR FOR THIS RIFLE IS: 1.152

CENTROIDAL DISTANCES

0 TO 1	.301438
1 TO 2	.470619
1 TO 3	.146755
1 TO 4	.348488
1 TO 5	.45529

5
2⁺4 1³ <----POA

BARBER - M24 0179950

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 1
POA TO CENTROID: .302
MIN RADIUS : .189
MEAN RADIUS : 1.145
MAX RADIUS : 2.502
CENTROID X : .177
CENTROID Y : .244

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EDIT c6611669

CENTERFIRE PATTERN # 1

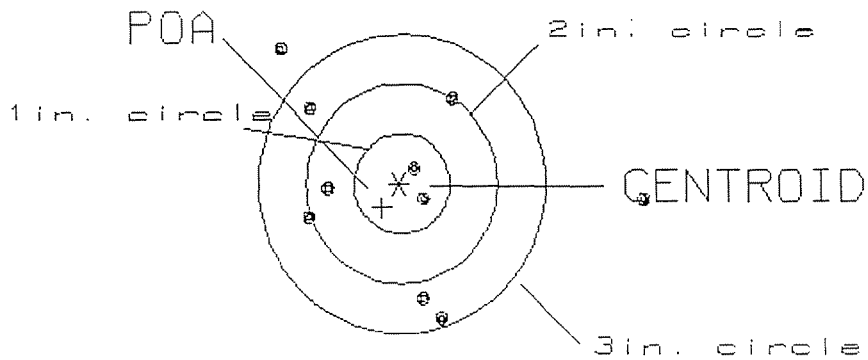

OF SHOTS= 10

IN CIRCLE

HS= 3.74
VS= 2.65
GS= 4.02

2
3
8

BARBER - M24 0179951

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: 2
POA TO CENTROID: .169
MIN RADIUS : .575
MEAN RADIUS : 1.561
MAX RADIUS : 2.893
CENTROID X : -.102
CENTROID Y : -.135

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EDIT c6611669

CENTERFIRE PATTERN # 2

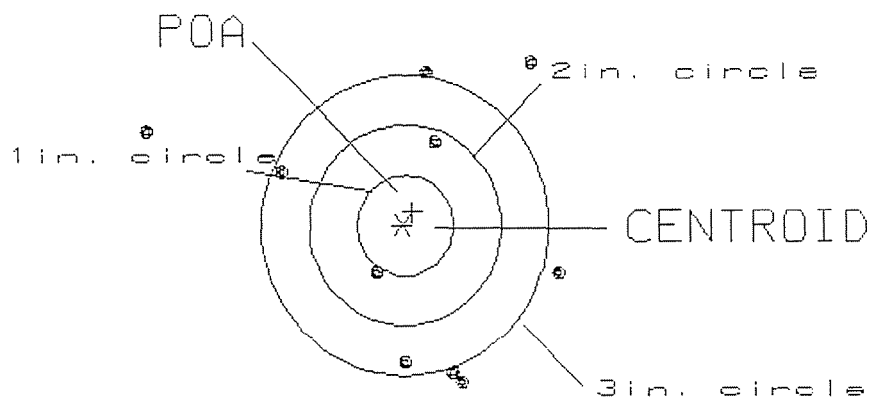

OF SHOTS= 10

IN CIRCLE

HS= 4.35

0

VS= 3.22

2

GS= 4.58

4

BARBER - M24 0179952

REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 3 ☐

POA TO CENTROID: .448

MIN RADIUS : .200

MEAN RADIUS : .833

MAX RADIUS : 1.977


CENTROID X : .273

CENTROID Y : .355

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EDIT c6611669

CENTERFIRE PATTERN # 3

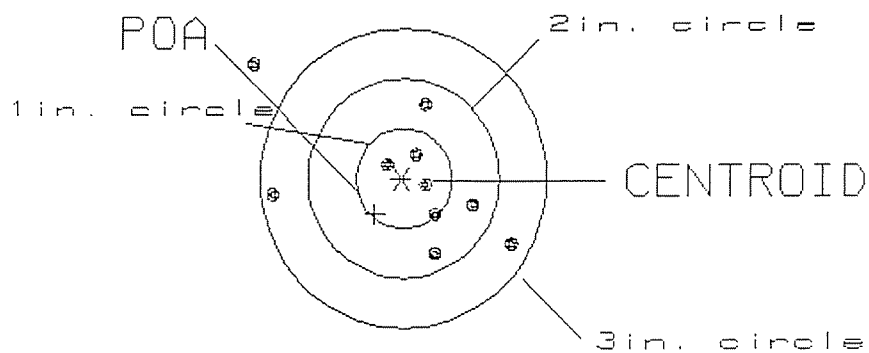

OF SHOTS= 10

IN CIRCLE

HS= 2.72

3

VS= 1.69

7

GS= 3.25

9

BARBER - M24 0179953

REMINGTON CENTERFIRE ACCURACY TEST


REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 4 ☐
POA TO CENTROID: .085
MIN RADIUS : .637
MEAN RADIUS : 1.268
MAX RADIUS : 2.199
CENTROID X : .039
CENTROID Y : -.076

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EDIT c6611669

CENTERFIRE PATTERN # 4

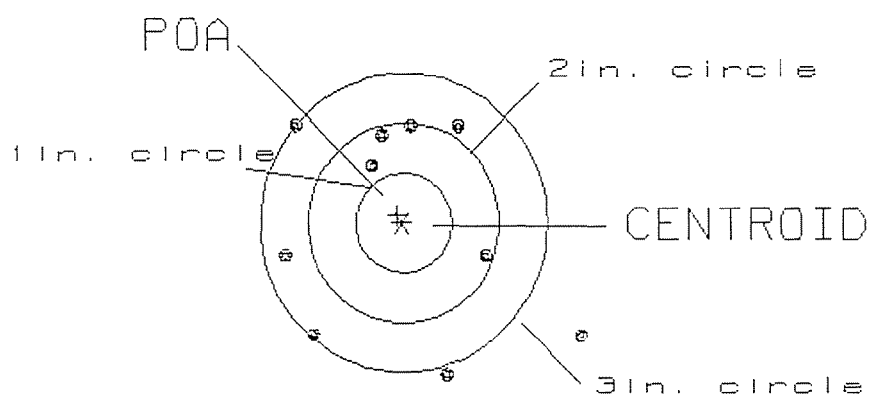

OF SHOTS= 10

IN CIRCLE

HS= 3.13

0

VS= 2.54

4

GS= 3.72

7

BARBER - M24 0179954


REMINGTON CENTERFIRE ACCURACY TEST

REMINGTON TEST LAB, ILION, N.Y.

PATTERN #: ☐ 5 ☐
POA TO CENTROID: .230
MIN RADIUS : .212
MEAN RADIUS : .955
MAX RADIUS : 2.028
CENTROID X : -.228
CENTROID Y : .036

4 Feb 2000

FILE:/Hpbasic/Accuracy/Patterning/Centerfire_Patt/EDIT c6611669

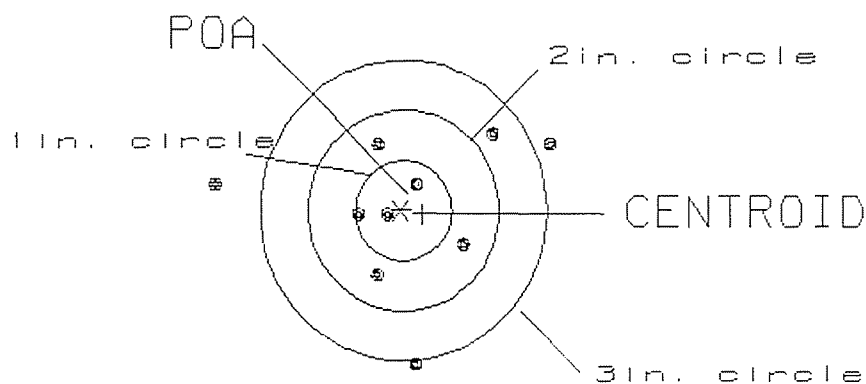CENTERFIRE PATTERN # 5

OF SHOTS= 10

IN CIRCLE

HS= 3.56

2

VS= 2.28

6

GS= 3.58

7

21 DAY TURN - AROUND

M-24

CONTRACT # DAAA09-92-C-0834

R&E NO.

SERIAL NO.

C6611669

LOG IN DATE: / /		DATE	INIT.
INSPECT & VERIFY:			
OP. #	OP. NAME		
550	DIS-ASSEMBLE GUN		
560 A	RE-BARREL AT CUSTOM SHOP		
B	DRILL & TAP		
C	POLISH		
575	ASSEMBLE		
600	PROOF	12-12-99	RW
605	CHECK HEADSPACE	12-12-99	RW
610	DIS-ASSEMBLE		
612	MAGNAFLUX		
615	ROLLMARK CALIBER		
618	ROTO-BLAST		
620	APPLY COATINGS		
625 A	FINAL ASSEMBLY		
B	TRIGGER PULL TEST		
C	SAFETY ON FORCE		
D	SAFETY OFF FORCE		
E	FIRING PIN INDENT		
640	TARGET	1-31-00	RW
655	FINAL INSPECT	2-8-00	RW
660	PACK		

QAR INSPECTION

SHIP DATE

Final Inspection

Sn: C6611669

DATE REC'D: 10-18-99

DATE RET'D:

Auditor: RW

Item:

Barrel Assy.

- ☒ BARREL
- ☒ RECEIVER
- ☒ FRONT SIGHT BLOCK
- ☒ REAR SIGHT BLOCK
- ☒ SCREWS
- ☒ FINISH

Scope Assy.

- ☒ Scope
- ☒ Scope Rings
- ☒ Mounting Screws
- ☒ Mounting Base
- ☒ SCREWS
- ☒ FINISH
- ☒ Looseness
- ☒ CLARITY

Misc.

- ☐ DD-250
- ☐ BAR CODE
- ☐ PACKAGING

Item:

Stock Assy.

- ☒ Stock
- ☒ Sling Swivel Studs
- ☒ ADJUSTABLE BUTT PLATE
- ☒ LOCK NUTS
- ☒ BARREL CLEARANCE
- ☒ COLOR/FINISH

Systems Case

- ☐ Scope Case
- ☐ Iron SIGHTS
- ☐ Deployment Kit

Trigger

- ☒ SAFETY OPERATION
- ☒ SET

Comments:

MOD.		GA. CAL.	GUN #
			1669
# TEST	DATE	MALFUNCTION/DEFECT	ASSEM. #
	1st		
NF	4/3	Ejector Binds <u>Back</u> Bran Building!	KS
	2nd	POLISHED EJECTOR OK OH BENCH TEST	4/4/ KS
	3rd	100 Rd test OK 4-9-91 OK	
	4th	AC	
		FUNCTION	RD 6654 Rev 1

TEST INIT. ACTION TO CORRECT		ASSEM. #
PROOF		
TEST		
TGT		
PROOF		
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		
PROOF	ENGINEER	
TEST		
TGT		

 		VERY IMPORTANT: Instruction Book enclosed to assure safe use of this firearm.
MODEL 700™ M24		SERIAL NO. C6611669
MADE IN ILION, N.Y. U.S.A. Reg. U.S. Pat & Tm. Off, Marca Registrada Marque Deposee.		ORDER NO. 5716



5716 C6611669

UPC



0 47700 25716 7

CONTRACT # DAAA21-87-C-0086

GUN SERIAL #

C 6611669

OP. #	OP. NAME	READINGS	DATE	INIT
575 & 580	Assemble Action and Stock		1/15/91	KS
600	Proof		1/15/91	KS
607	Check Headspace		1/15/91	KS
610	Dis-assemble Gun		1/15/91	KS
612	Magnaflux Barrel Action	1 18	91	KR
	Magnaflux Bolt	1 18	91	KR
615	Rollmark Caliber	1 1	91	YB
617	Drill and Tap Sight Holes	1 24	91	FB
618	Polish Barrel	1 24	91	WB
620	Apply Coatings (Barrel Action)		1-15-91	KA
	Apply Coating (Bolt)		8-15-91	KA
625	Final Assembly A) Clean inside of Bolt Assembly		3/8/91	KA
	B) Inspect Rear Firing Pin Hole for Chamfer in Bolt Head		3/8/91	KA
	C) Inspect Ejector Hole for Chamfer		3/8/91	KA
	D) Oil Firing Pin Ass'y		3/8/91	KA
	E) Adjust Trigger Pull to Min Setting and Stake		3/25/91	WB

op. #	BARBER - M24 0179961		READINGS					DATE	INIT
	OP. NAME								
625 cont.	F) Safety On Force		4	4	4			3-28-91	Kr
	G) Safety Off Force		2	2	2			3-28-91	AT
	H) Trigger Pull Test & Retainability							3/25/91	WB
	I) Firing Pin Indent		.020	.020	.020			3-28-91	AC
	J) Assemble Stock							4-2-91	KS
	K) Assemble Swivel Studs							4-8-91	DH
	L) Attach Front and Rear Sight Assemblies							4-2-91	KS
	M) Iron Sight Alignment							4-2-91	KS
	N) Detach Front & Rear Sights & place in numbered container							4-2-91	KS
	O) Attach Scope to Rifle							4-2-91	KS
	P) Detach & Attach Scope 20 Times							4-2-91	KS
640	Gallery Target & Test							4-3-91	NF
	A) Time								NF
	B) Malfunctions								NF
	C) Pierced Primers								NF
	D) Optical Clarity of Scope								NF
645	Inspect for Live Ammo							4-3-91	NF
655	Final Inspection								
	A) Headspace							4-8-91	DH
	B) Trigger Pull		2.30	2.18	2.19	2.18	2.16	4/5/91	JK
	C) Function							4-8-91	DH
660	Pack							6-14-91	NF

AVERAGE PULL FORCE BETWEEN
INITIAL & CYCLE TESTS

2.50# + .50#

3.00# + .75#

4.00# + 1.00#

SERIAL NO. C6611669

DATE 3/25/91

TESTER WB

	2.50# INITIAL	2.50# AFTER 50 CYCLES	FINAL TEST & TO RESET 2.50#		COMMENTS
PULL #1	2.25	2.32	2.33	2.30	MIN. SETTING, NO AVG. OF 5 READINGS ACCEPT- ABLE LESS THAN 2#
PULL #2	2.26	2.34	2.31	2.18	
PULL #3	2.30	2.21	2.29	2.19	
PULL #4	2.27	2.32	2.25	2.18	
PULL #5	2.24	2.23	2.32	2.16	
TOTAL	11.32	11.42	11.48		
AVG.	2.26	2.38	2.30		

	3.00# INITIAL	3.00# AFTER 20 CYCLES		COMMENTS
PULL #1	3.39	3.32		
PULL #2	3.37	3.28		
PULL #3	3.27	3.30		
PULL #4	3.25	3.32		
PULL #5	3.26	3.22		
TOTAL	16.48	16.44		
AVG.	3.29	3.29		

	4.00# INITIAL	4.00# AFTER 20 CYCLES	MAX SETTING GREATER THAN 4#	RESET TO 4# FOR TARGET & ACCURACY
PULL #1	4.14	4.07		4.07
PULL #2	4.20	4.10		4.12
PULL #3	4.04	4.22		4.09
PULL #4	4.19	4.05		4.12
PULL #5	4.11	4.00		4.09
TOTAL	20.68	20.44		20.49
AVG.	4.13	4.09		4.10

CENTROIDAL DISTANCE CALCULATIONS
FOR RIFLE # C6611669
4 Apr 1991

CENTROIDAL DISTANCES

0 TO 1	.0960052
1 TO 2	.293061
1 TO 3	.0880057
1 TO 4	.243091
1 TO 5	.275327


←----POB

THE AVERAGE X-COORDINATE FOR THIS RIFLE IS: .0604
THE AVERAGE Y-COORDINATE FOR THIS RIFLE IS: .0706
THE RESULTING AVERAGE POI RADIUS FOR THIS RIFLE IS: .0929114
THE DOP FOR THIS RIFLE IS: .9082

3 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/ C5611669

CENTERFIRE PATTERNS # 1

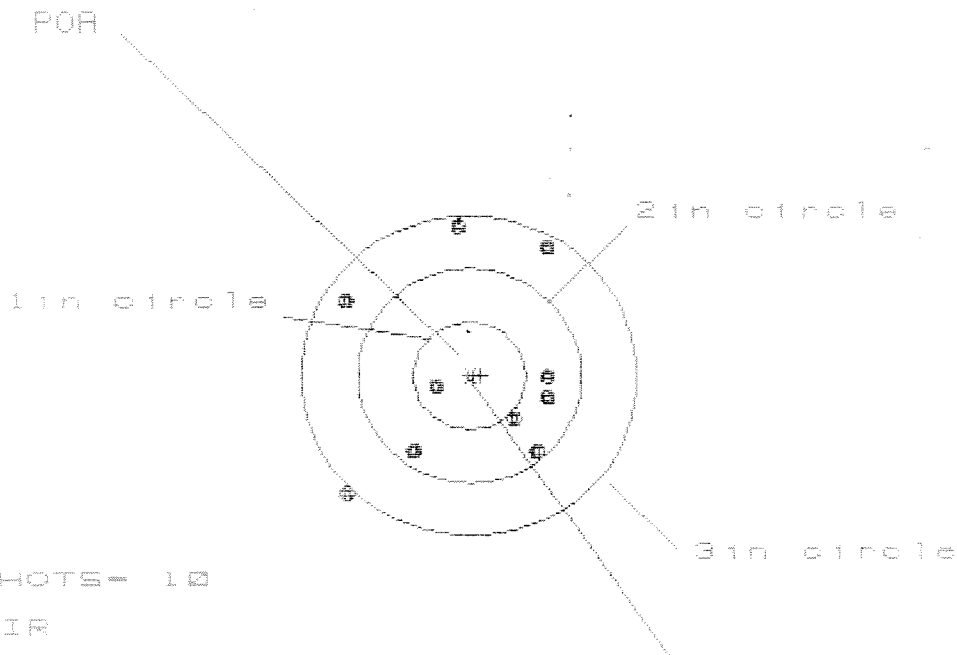

OF SHOTS- 10

IN CIR

1 in = 1

2 in = 6

3 in = 9

HS= 1.851

VS= 2.467


GS= 2.937

PATTERN #	1	2	3
SHOTS (BEST OF)	10	9	8
MAXIMUM X	.731	.607	.675
MINIMUM X	-1.121	-1.244	-1.176
MAXIMUM Y	1.354	1.230	1.367
MINIMUM Y	-1.113	-.866	-.729
CENTROID X	-.096	.028	-.040
CENTROID Y	.001	.125	-.012
POA TO CENTROID in.	.096	.128	.042
MIN RADIUS	.280	.445	.329
MEAN RADIUS	.977	.911	.843
MAX RADIUS	1.574	1.366	1.377
HORIZONTAL SPREAD	1.851	1.851	1.851
VERTICAL SPREAD	2.467	2.096	2.096
EXTREME SPREAD	2.937	2.261	2.243
NUMBER IN ONE INCH CIRCLE	= 1		
NUMBER IN TWO INCH CIRCLE	= 6		
NUMBER IN THREE INCH CIRCLE	= 9		

3 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/ C6811669

CENTERFIRE PATTERNS # 2

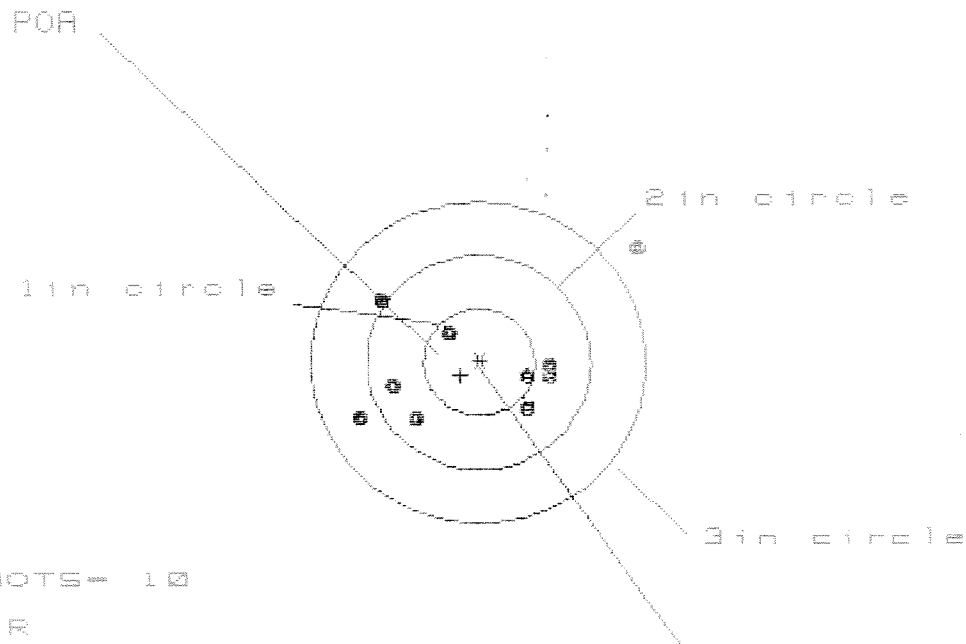

OF SHOTS= 10

IN CIR

1in = 2

2in = 7

3in = 9

HS= 2.578

VS= 1.597

GS= 3.033

PATTERN #	2	2	2
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.473	.816	.698
MINIMUM X	-1.105	-.942	-.819
MAXIMUM Y	1.053	.660	.606
MINIMUM Y	-.544	-.427	-.466
CENTROID X	.170	.007	.124
CENTROID Y	.124	.007	.061
POA TO CENTROID in.	.211	.010	.138
MIN RADIUS	.404	.444	.432
MEAN RADIUS	.834	.719	.663
MAX RADIUS	1.810	1.034	1.019
HORIZONTAL SPREAD	2.578	1.758	1.518
VERTICAL SPREAD	1.597	1.087	1.072
EXTREME SPREAD	3.033	1.836	1.617
NUMBER IN ONE INCH CIRCLE =	2		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	9		

3 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/ CB611663

CENTERFIRE PATTERNS # 3

POA

1in circle

2in circle

3in circle

CENTROID *

OF SHOTS= 10

IN CIR

1in = 2

2in = 5

3in = 8

HS= 3.255

VS= 2.105


GS= 3.573

PATTERN #	10	9	8
SHOTS (BEST OF)	10	9	8
MAXIMUM X	1.452	1.251	1.006
MINIMUM X	-1.803	-1.299	-1.143
MAXIMUM Y	1.166	1.062	1.116
MINIMUM Y	-.939	-1.043	-.989
CENTROID X	-.008	.193	.036
CENTROID Y	.000	.104	.050
POA TO CENTROID in.	.008	.219	.062
MIN RADIUS	.238	.301	.212
MEAN RADIUS	1.008	.874	.808
MAX RADIUS	2.033	1.399	1.234
HORIZONTAL SPREAD	3.255	2.550	2.149
VERTICAL SPREAD	2.105	2.105	2.105
EXTREME SPREAD	3.573	2.722	2.238
NUMBER IN ONE INCH CIRCLE	= 2		
NUMBER IN TWO INCH CIRCLE	= 5		
NUMBER IN THREE INCH CIRCLE	= 8		

3 Apr 1991

FILE:/PATTERNING/CENTERFIRE_PATT/ CB611663

CENTERFIRE PATTERNS # 4

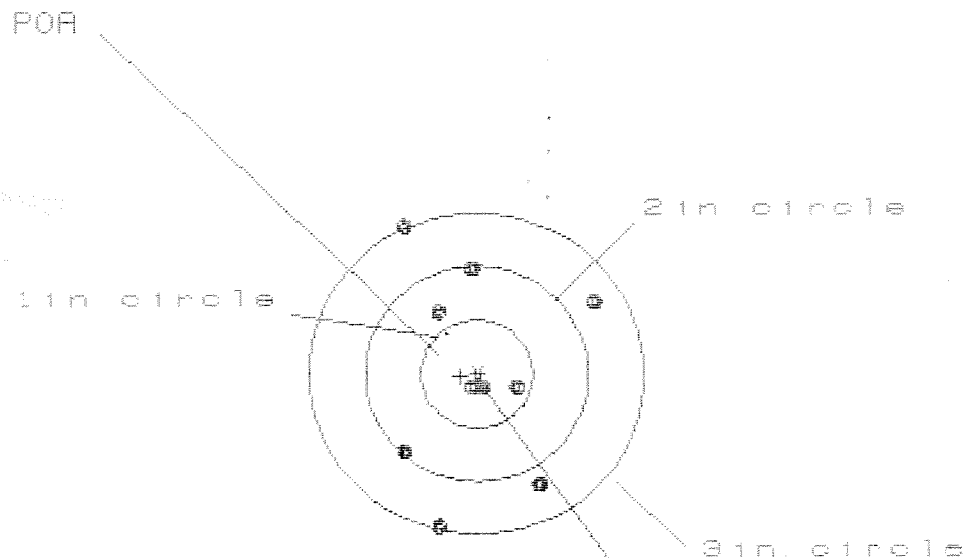

OF SHOTS= 10

IN CIR

1in = 3

2in = 6

3in = 9

HS= 1.723

VS= 2.774

GS= 2.802

CENTROID *

PATTERN #	:	10	9	8
SHOTS (BEST OF)	:	10	9	8
MAXIMUM X	:	1.030	.953	.906
MINIMUM X	:	-.693	-.751	-.798
MAXIMUM Y	:	1.383	1.120	.965
MINIMUM Y	:	-1.391	-1.237	-1.028
CENTROID X	:	.146	.223	.270
CENTROID Y	:	.024	-.130	.025
POA TO CENTROID in.	:	.148	.258	.271
MIN RADIUS	:	.159	.022	.155
MEAN RADIUS	:	.865	.757	.704
MAX RADIUS	:	1.547	1.293	1.121
HORIZONTAL SPREAD	:	1.723	1.704	1.704
VERTICAL SPREAD	:	2.774	2.357	1.993
EXTREME SPREAD	:	2.802	2.419	2.151
NUMBER IN ONE INCH CIRCLE	=	3		
NUMBER IN TWO INCH CIRCLE	=	6		
NUMBER IN THREE INCH CIRCLE	=	9		

3 Apr 1991

FILE:/PATTERNING/CENTERFIRE PATT/ CB811663

CENTERFIRE PATTERNS # 5

POB

1 in circle

2 in circle

3 in circle

OF SHOTS = 10

IN CIR

1 = 1

2 = 7

3 = 10

H = 1.974

V = 2.338

G = 2.439

CENTROID #

PATTERN # : 5

SHOTS (BEST OF)	10	9	8
MAXIMUM X	.962	1.023	.659
MINIMUM X	-1.012	-.951	-.823
MAXIMUM Y	.977	.826	.892
MINIMUM Y	-1.360	-.964	-.898
CENTROID X	.090	.029	-.099
CENTROID Y	.204	.356	.290
POB TO CENTROID in.	.223	.357	.307
MIN RADIUS	.225	.299	.410
MEAN RADIUS	.857	.768	.722
MAX RADIUS	1.468	1.150	1.081
HORIZONTAL SPREAD	1.974	1.974	1.482
VERTICAL SPREAD	2.338	1.790	1.790
EXTREME SPREAD	2.439	2.270	1.874
NUMBER IN ONE INCH CIRCLE =	1		
NUMBER IN TWO INCH CIRCLE =	7		
NUMBER IN THREE INCH CIRCLE =	10		