


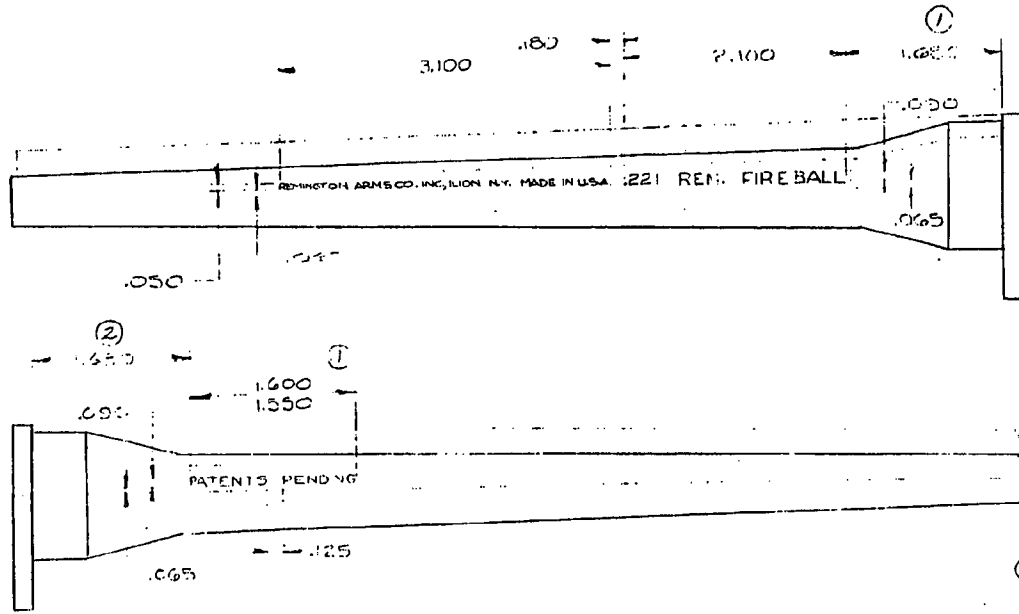

NOTE:
DIMENSIONS ARE TO OUTSIDE
EDGE OF IMPRESSION

UNLESS OTHERWISE NOTED, TOLERANCES
ON DECIMAL DIMENSIONS ARE $\pm .005$
& ON FRACTIONAL DIMENSIONS $\pm \frac{1}{64}$
& ON ANGULAR DIMENSIONS $\pm 60''-30'$
FINISHES ARE DESIGNATED BY ROOT MEAN
SQUARE (R.M.S.) MICRO-INCH ROUGHNESS
VALUES AND ARE THE MAXIMUM ROUGH-
NESS ACCEPTABLE. UNLESS OTHERWISE
SPECIFIED, FINISH ROUGHNESS TO BE
125 OR BETTER.

LET.	WAS	REFERENCE	BY	DATE
1	1.430	4570	HL	3-19-62
2	1.430	4570	HL	3-19-62
3	KP-100	4570	HL	3-19-62
4	ADDED	4570	HL	3-19-62
5	.221 REM SHEET 21061	4636	HL	2-8-62

XP 720 BARREL MARKING			
MODEL	PART USE	QUAN	SEE
DESIGN DATE	DRAWN BY DATE	CHECK BY DATE	APPR BY DATE
HL 1-11-61			HL 2/27/62
EVALUATE MARKING			
NUMBER	SCALE	SUPERSEDES - REFERENCE	
B-15486	FULL	REMINGTON ARMS CO. INC.	
RESEARCH & DEV. DEPT.			