

AIR FORCE PROTOTYPE
STD RIFLE

Pictured Std Rifle
Remington 40X Std wt
barreled action, hand made
stock

ISU STD RIFLE


"Factory make"
specifications

Dimensions of factory make
approved by the ISU
Technical Committee

Metric	English		Metric	English
5.0 kg	11 lbs.	*Max. weight	5.0 kg	11 lbs.
None	None	*Min. trigger wt		
6x6 cm	2.362" x 2.362"	I Max. dimen. of foreend; max. distance from center of barrel to lowest point:	5.372 cm x 5.969 cm or 2.115" x 2.350"	
8 cm	3.149"	D In front of trigger guard	6.147 cm	2.420"
13 cm	5.118"	E Bottom of pistol grip	12.700 cm	5.0"
18 cm	7.088"	F Of stock or back plate.	15.405 cm	6.065"
4 cm	1.574"	J Width of cheek piece from center line of stock	3.492 cm	1.375"
15 cm	5.905"	H Height of butt end	13.970 cm	5.500"
2 cm	.797"	G Depth of butt plate	1.905 cm	.750"
3 cm	1.181"	K Movement of butt plate in each direction, up and down only	3 cm total 6 cm	1.181"total 2.
5 cm	1.968"	A Max. length of front sight	3.451 cm	1.360"
2.5 cm	.984"	B Max. diameter of front sight	2.463 cm	.970"
4 cm	1.574"	C Max. height of center of front sight ring from center of barrel	3.296 cm	1.298"

* Minimum Trigger Weight: No trigger weight limit (free trigger-set triggers not allowed).

Enclosure 1A

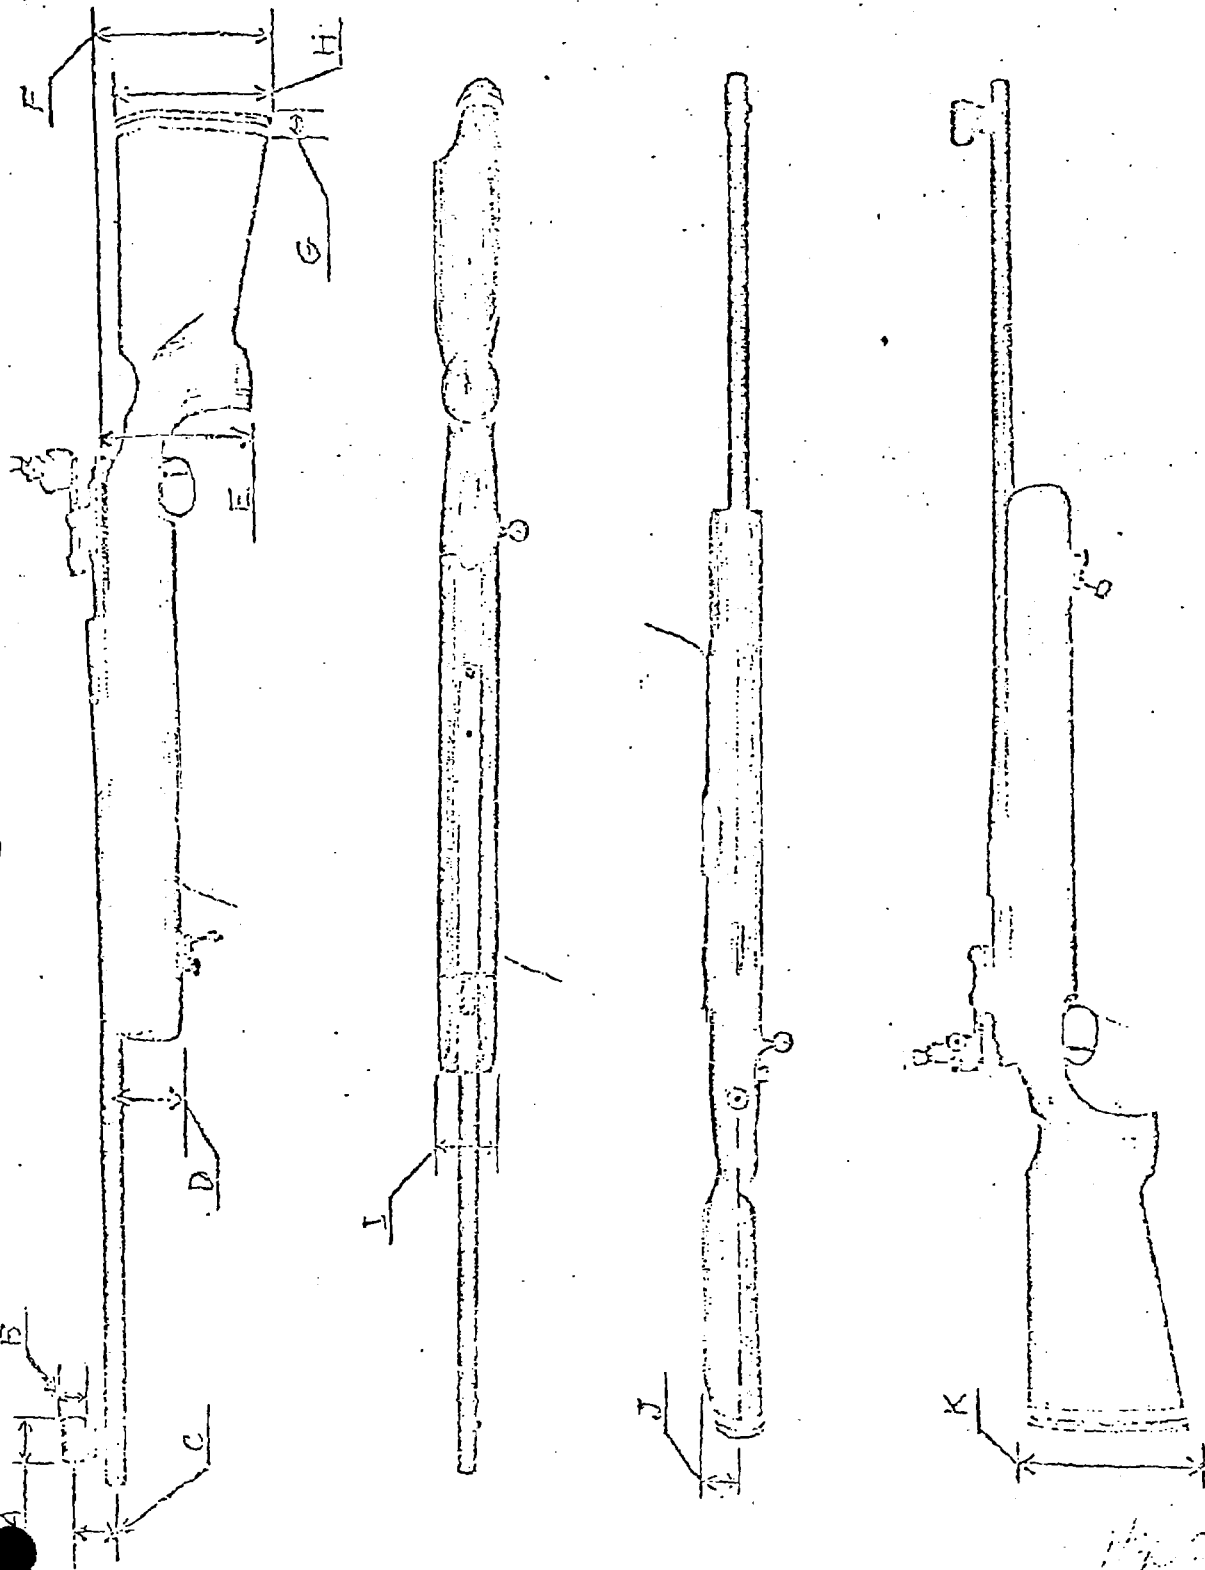

Enclosure 1B